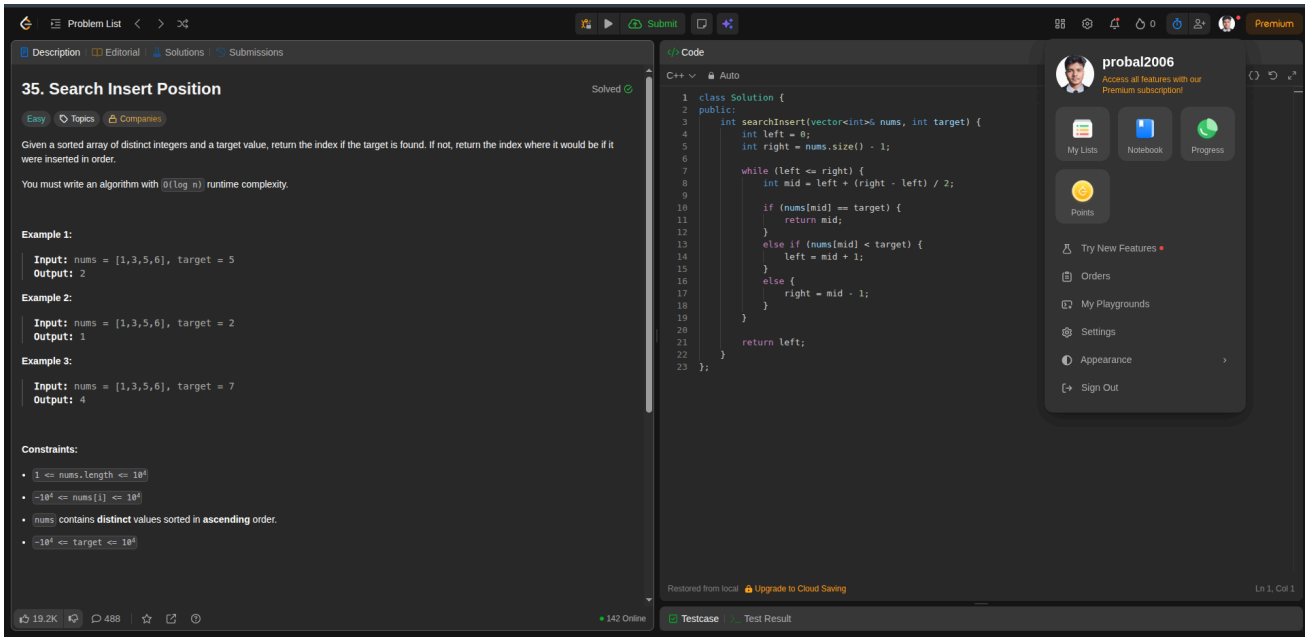
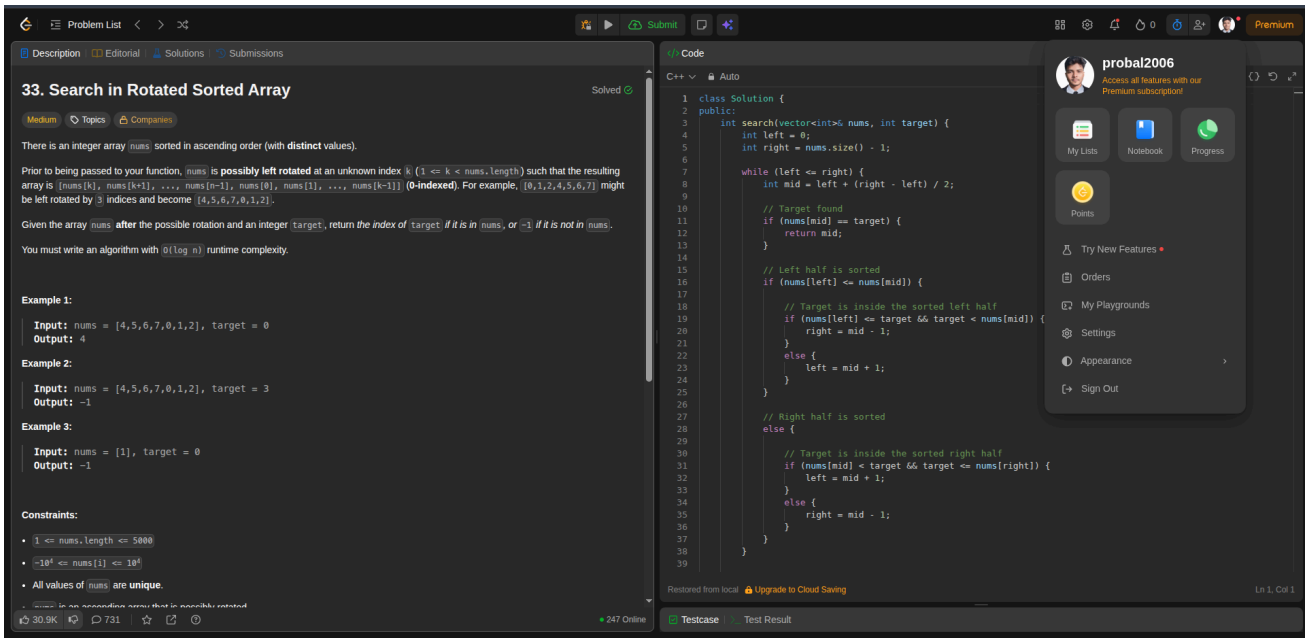

Problem List
Submit
Premium
Description
Editorial
Solutions
Submissions
35. Search Insert Position
Solved
Easy
Topics
Companies
Given a sorted array of distinct integers and a target value, return the index if the target is found. If not, return the index where it would be if it were inserted in order.
You must write an algorithm with O(log n) runtime complexity.
Example 1:
Input: nums = [1,3,5,6], target = 5
Output: 2
Example 2:
Input: nums = [1,3,5,6], target = 2
Output: 1
Example 3:
Input: nums = [1,3,5,6], target = 7
Output: 4
Constraints:
1 <= nums.length <= 10^4
-10^4 <= nums[i] <= 10^4
nums contains distinct values sorted in ascending order.
-10^4 <= target <= 10^4
19.2K
488
142 Online
Code
C++
Auto
class Solution {
public:
int searchInsert(vector<int>& nums, int target) {
int left = 0;
int right = nums.size() - 1;
while (left <= right) {
int mid = left + (right - left) / 2;
if (nums[mid] == target) {
return mid;
}
else if (nums[mid] < target) {
left = mid + 1;
}
else {
right = mid - 1;
}
}
return left;
}
};
probal2006
Access all features with our Premium subscription!
My Lists
Notebook
Progress
Points
Try New Features
Orders
My Playgrounds
Settings
Appearance
Sign Out
Restored from local
Upgrade to Cloud Saving
Ln 1, Col 1
Testcase
Test Result


Problem List
Submit
Premium
Description
Editorial
Solutions
Submissions
33. Search in Rotated Sorted Array
Solved
Medium
Topics
Companies
There is an integer array nums sorted in ascending order (with distinct values).
Prior to being passed to your function, nums is possibly left rotated at an unknown index k (1 <= k < nums.length) such that the resulting array is [nums[k], nums[k+1], ..., nums[n-1], nums[0], nums[1], ..., nums[k-1]] (0-indexed). For example, [0,1,2,4,5,6,7] might be left rotated by 3 indices and become [4,5,6,7,0,1,2].
Given the array nums after the possible rotation and an integer target, return the index of target if it is in nums, or -1 if it is not in nums.
You must write an algorithm with O(log n) runtime complexity.
Example 1:
Input: nums = [4,5,6,7,0,1,2], target = 0
Output: 4
Example 2:
Input: nums = [4,5,6,7,0,1,2], target = 3
Output: -1
Example 3:
Input: nums = [1], target = 0
Output: -1
Constraints:
1 <= nums.length <= 5000
-10^4 <= nums[i] <= 10^4
All values of nums are unique.
30.9K
731
247 Online
Code
C++
Auto
class Solution {
public:
int search(vector<int>& nums, int target) {
int left = 0;
int right = nums.size() - 1;
while (left <= right) {
int mid = left + (right - left) / 2;
// Target found
if (nums[mid] == target) {
return mid;
}
// Left half is sorted
if (nums[left] <= nums[mid]) {
// Target is inside the sorted left half
if (nums[left] <= target && target < nums[mid]) {
right = mid - 1;
}
else {
left = mid + 1;
}
}
// Right half is sorted
else {
// Target is inside the sorted right half
if (nums[mid] < target && target <= nums[right]) {
left = mid + 1;
}
else {
right = mid - 1;
}
}
}
probal2006
Access all features with our Premium subscription!
My Lists
Notebook
Progress
Points
Try New Features
Orders
My Playgrounds
Settings
Appearance
Sign Out
Restored from local
Upgrade to Cloud Saving
Ln 1, Col 1
Testcase
Test Result