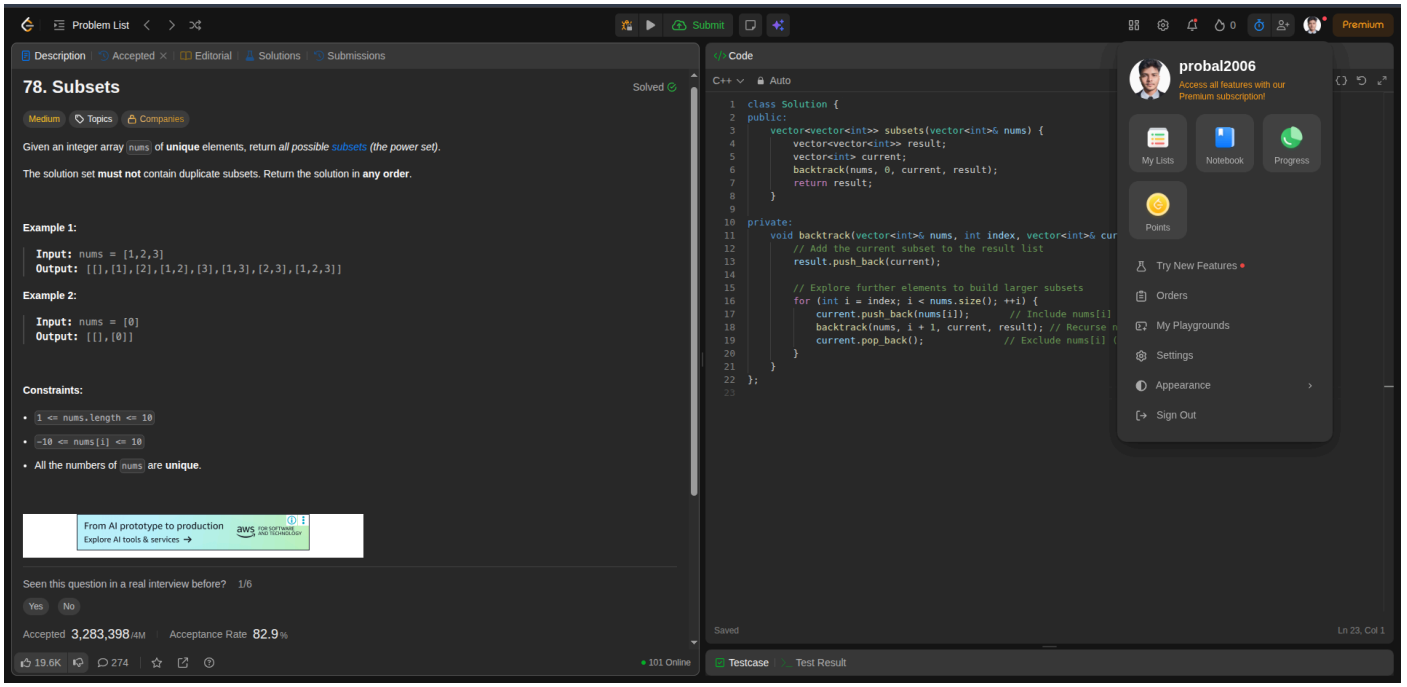
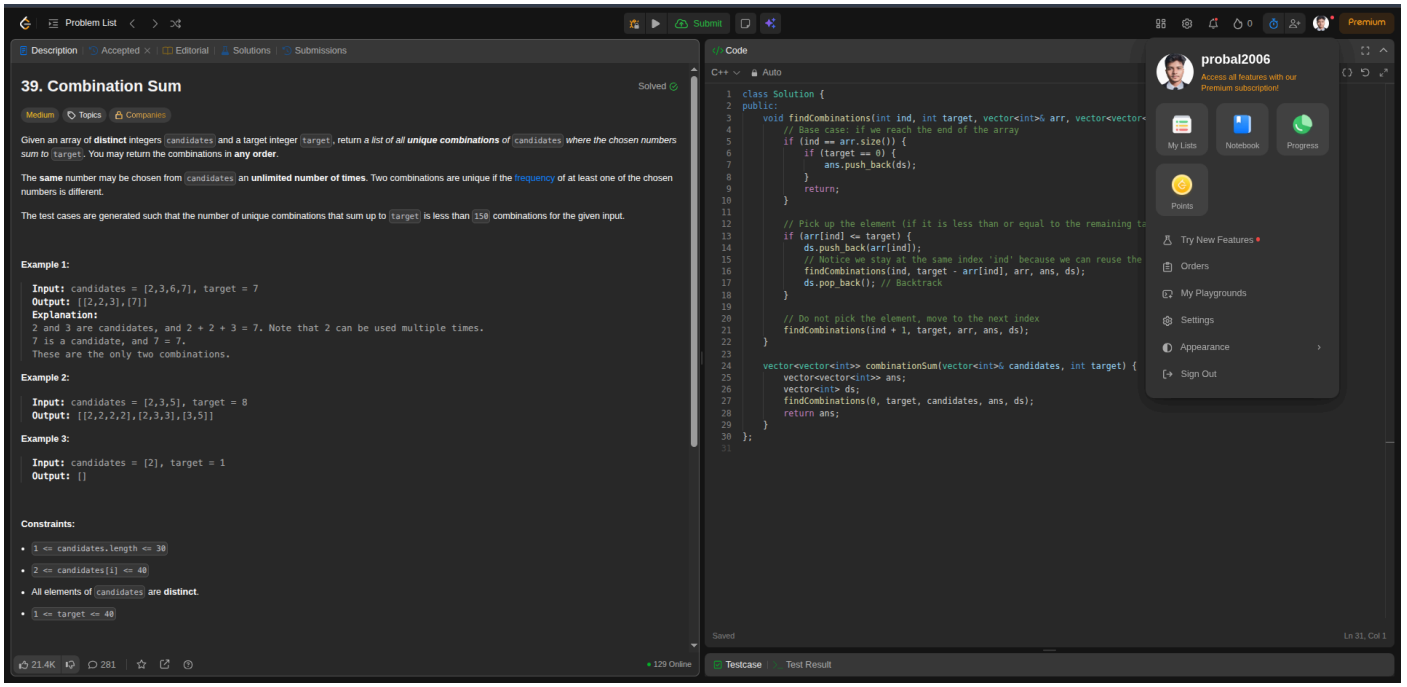

Problem List
Submit
Premium
Description
Accepted
Editorial
Solutions
Submissions
78. Subsets
Solved
Medium
Topics
Companies
Given an integer array nums of unique elements, return all possible subsets (the power set).
The solution set must not contain duplicate subsets. Return the solution in any order.
Example 1:
Input: nums = [1,2,3]
Output: [[],[1],[2],[1,2],[3],[1,3],[2,3],[1,2,3]]
Example 2:
Input: nums = [0]
Output: [[],[0]]
Constraints:
1 <= nums.length <= 10
-10 <= nums[i] <= 10
All the numbers of nums are unique.
From AI prototype to production
Explore AI tools & services
Seen this question in a real interview before? 1/6
Yes
No
Accepted 3,283,398/4M
Acceptance Rate 82.9%
19.6K
274
101 Online
Code
C++
Auto
class Solution {
public:
vector<vector<int>> subsets(vector<int>& nums) {
vector<vector<int>> result;
vector<int> current;
backtrack(nums, 0, current, result);
return result;
}
private:
void backtrack(vector<int>& nums, int index, vector<int>& cur
// Add the current subset to the result list
result.push_back(current);
// Explore further elements to build larger subsets
for (int i = index; i < nums.size(); ++i) {
current.push_back(nums[i]);
backtrack(nums, i + 1, current, result); // Recurse
current.pop_back();
}
}
};
probal2006
Access all features with our Premium subscription!
My Lists
Notebook
Progress
Points
Try New Features
Orders
My Playgrounds
Settings
Appearance
Sign Out
Saved
Ln 23, Col 1
Testcase
Test Result


Problem List
Submit
Premium
Description
Accepted
Editorial
Solutions
Submissions
39. Combination Sum
Solved
Medium
Topics
Companies
Given an array of distinct integers candidates and a target integer target, return a list of all unique combinations of candidates where the chosen numbers sum to target. You may return the combinations in any order.
The same number may be chosen from candidates an unlimited number of times. Two combinations are unique if the frequency of at least one of the chosen numbers is different.
The test cases are generated such that the number of unique combinations that sum up to target is less than 150 combinations for the given input.
Example 1:
Input: candidates = [2,3,6,7], target = 7
Output: [[2,2,3],[7]]
Explanation:
2 and 3 are candidates, and 2 + 2 + 3 = 7. Note that 2 can be used multiple times.
7 is a candidate, and 7 = 7.
These are the only two combinations.
Example 2:
Input: candidates = [2,3,5], target = 8
Output: [[2,2,2,2],[2,3,3],[3,5]]
Example 3:
Input: candidates = [2], target = 1
Output: []
Constraints:
1 <= candidates.length <= 30
2 <= candidates[i] <= 40
All elements of candidates are distinct.
1 <= target <= 40
21.4K
281
129 Online
Code
C++
Auto
class Solution {
public:
void findCombinations(int ind, int target, vector<int>& arr, vector<vector<
// Base case: if we reach the end of the array
if (ind == arr.size()) {
if (target == 0) {
ans.push_back(ds);
}
return;
}
// Pick up the element (if it is less than or equal to the remaining ta
if (arr[ind] <= target) {
ds.push_back(arr[ind]);
// Notice we stay at the same index 'ind' because we can reuse the
findCombinations(ind, target - arr[ind], arr, ans, ds);
ds.pop_back(); // Backtrack
}
// Do not pick the element, move to the next index
findCombinations(ind + 1, target, arr, ans, ds);
}
vector<vector<int>> combinationSum(vector<int>& candidates, int target) {
vector<vector<int>> ans;
vector<int> ds;
findCombinations(0, target, candidates, ans, ds);
return ans;
}
};
probal2006
Access all features with our Premium subscription!
My Lists
Notebook
Progress
Points
Try New Features
Orders
My Playgrounds
Settings
Appearance
Sign Out
Saved
Ln 31, Col 1
Testcase
Test Result