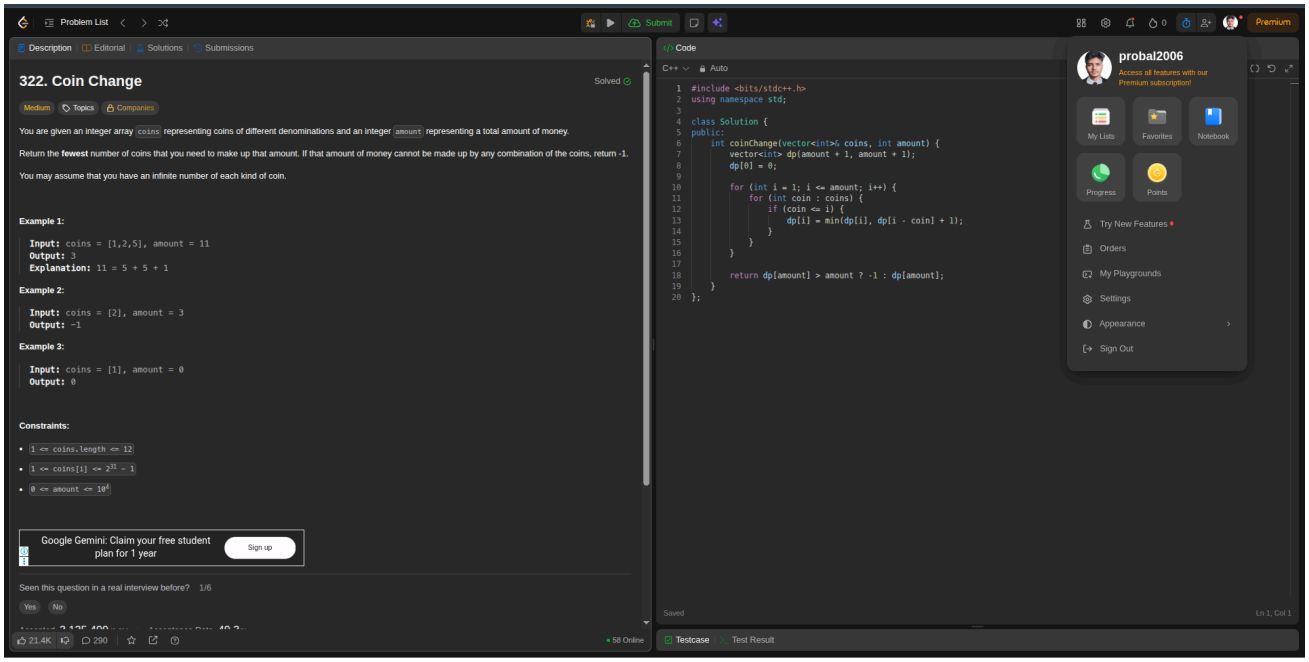
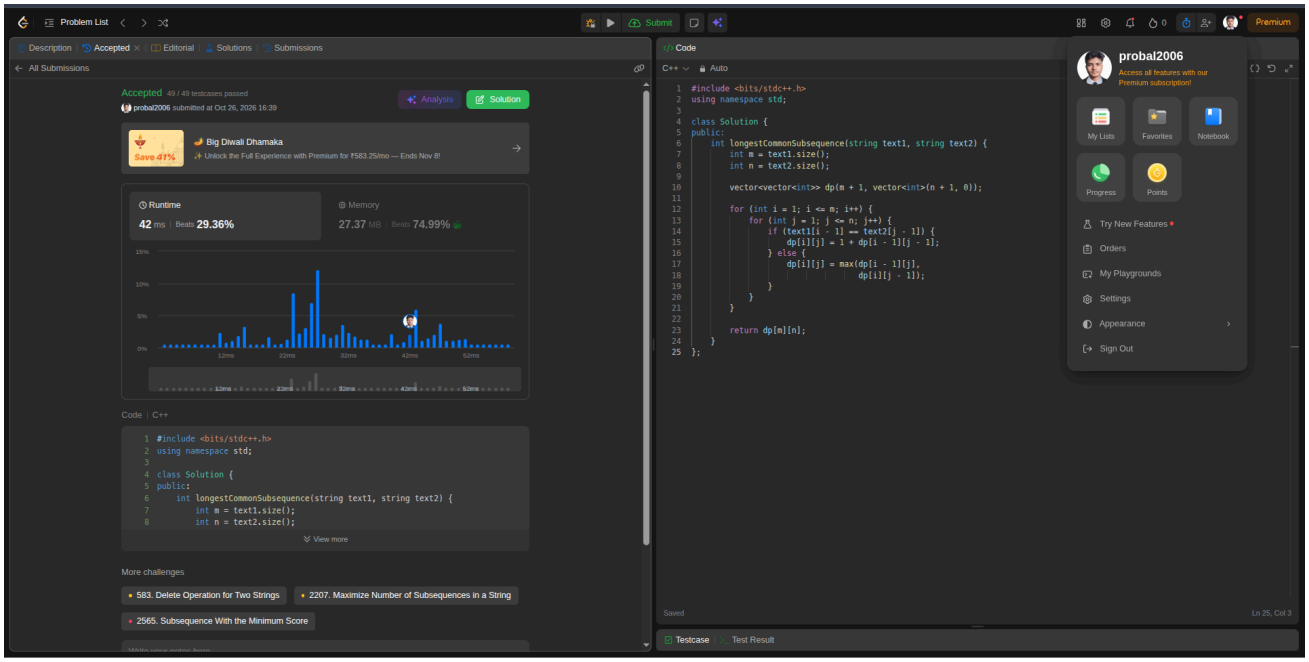

Problem List
Submit
Premium
Description
Editorial
Solutions
Submissions
322. Coin Change
Solved
Medium
Topics
Companies
You are given an integer array coins representing coins of different denominations and an integer amount representing a total amount of money.
Return the fewest number of coins that you need to make up that amount. If that amount of money cannot be made up by any combination of the coins, return -1.
You may assume that you have an infinite number of each kind of coin.
Example 1:
Input: coins = [1,2,5], amount = 11
Output: 3
Explanation: 11 = 5 + 5 + 1
Example 2:
Input: coins = [2], amount = 3
Output: -1
Example 3:
Input: coins = [1], amount = 0
Output: 0
Constraints:
1 <= coins.length <= 12
1 <= coins[i] <= 2^31 - 1
0 <= amount <= 10^4
Google Gemini: Claim your free student plan for 1 year
Sign up
Seen this question in a real interview before? 1/6
Yes
No
21.4K
290
58 Online
Code
C++
Auto
#include <bits/stdc++.h>
using namespace std;
class Solution {
public:
int coinChange(vector<int>& coins, int amount) {
vector<int> dp(amount + 1, amount + 1);
dp[0] = 0;
for (int i = 1; i <= amount; i++) {
for (int coin : coins) {
if (coin <= i) {
dp[i] = min(dp[i], dp[i - coin] + 1);
}
}
}
return dp[amount] > amount ? -1 : dp[amount];
}
};
probal2006
Access all features with our Premium subscription!
My Lists
Favorites
Notebook
Progress
Points
Try New Features
Orders
My Playgrounds
Settings
Appearance
Sign Out
Saved
Ln 1, Col 1
Testcase
Test Result


Problem List
Submit
Premium
Description
Accepted
Editorial
Solutions
Submissions
All Submissions
Accepted 49 / 49 testcases passed
probal2006 submitted at Oct 26, 2026 16:39
Analysis
Solution
Big Diwali Dhamaka
Unlock the Full Experience with Premium for ₹583.25/mo — Ends Nov 8!
Save 41%
Runtime
42 ms | Beats 29.36%
Memory
27.37 MB | Beats 74.99%
Code | C++
#include <bits/stdc++.h>
using namespace std;
class Solution {
public:
int longestCommonSubsequence(string text1, string text2) {
int m = text1.size();
int n = text2.size();
View more
More challenges
583. Delete Operation for Two Strings
2207. Maximize Number of Subsequences in a String
2565. Subsequence With the Minimum Score
Code
C++
Auto
#include <bits/stdc++.h>
using namespace std;
class Solution {
public:
int longestCommonSubsequence(string text1, string text2) {
int m = text1.size();
int n = text2.size();
vector<vector<int>> dp(m + 1, vector<int>(n + 1, 0));
for (int i = 1; i <= m; i++) {
for (int j = 1; j <= n; j++) {
if (text1[i - 1] == text2[j - 1]) {
dp[i][j] = 1 + dp[i - 1][j - 1];
} else {
dp[i][j] = max(dp[i - 1][j],
dp[i][j - 1]);
}
}
}
return dp[m][n];
}
};
probal2006
Access all features with our Premium subscription!
My Lists
Favorites
Notebook
Progress
Points
Try New Features
Orders
My Playgrounds
Settings
Appearance
Sign Out
Saved
Ln 25, Col 3
Testcase
Test Result