




- * The position encoded embedding vectors x_1, x_2, x_3 & x_4 are then passed to the Masked Multi-Head Attention.
- * The Masked Multi-Head Attention converts the embedding vectors x_1, x_2, x_3 & x_4 into contextual embedding vectors z_1, z_2, z_3 & z_4 ; such that in calculating z_1 there is only contribution of x_1 ; in calculating z_2 there is only contribution of x_1 & x_2 ; in calculating z_3 there is only contribution of x_1, x_2 & x_3 ; & in calculating z_4 there is contribution of x_1, x_2, x_3 & x_4 .

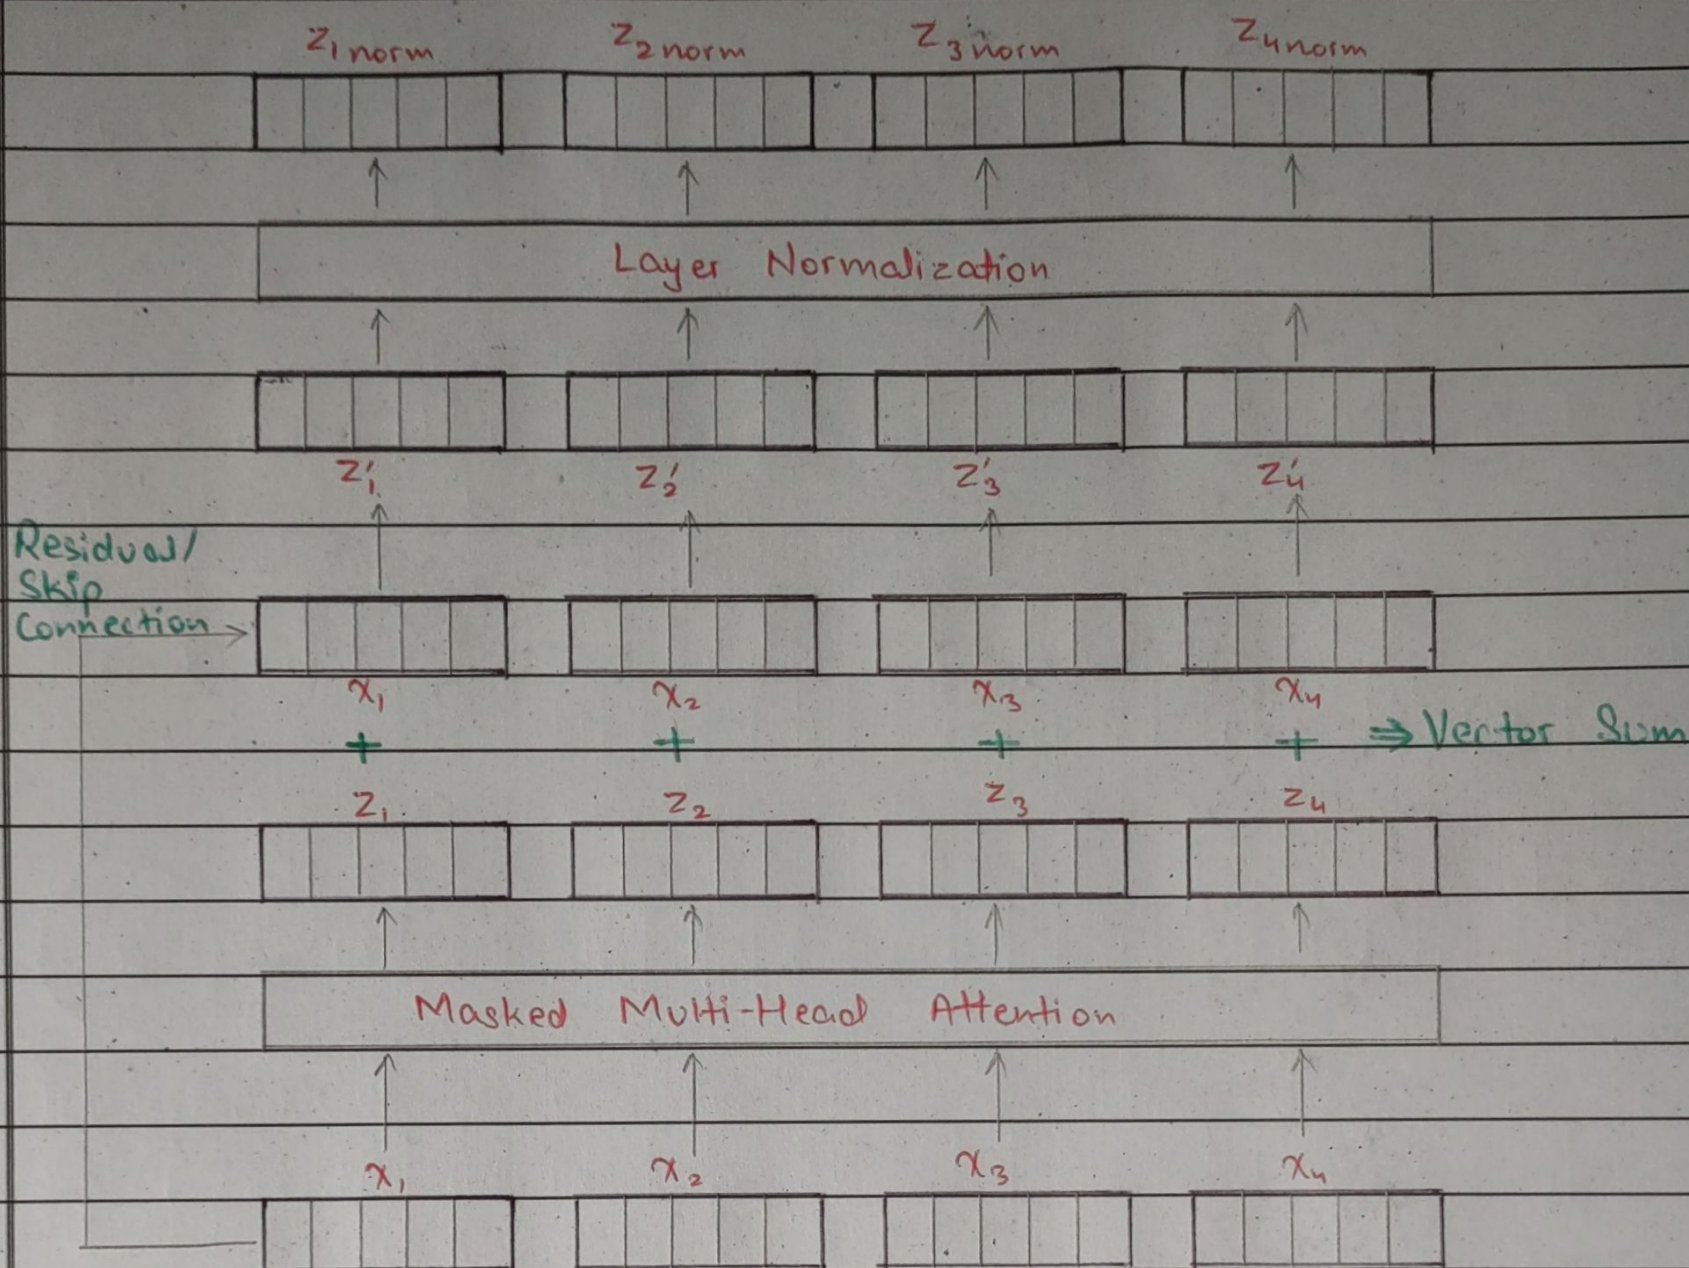

* Through a residual/skip connection original x_1, x_2, x_3 & x_4 are added to z_1, z_2, z_3 & z_4 using vector addition resulting in z'_1, z'_2, z'_3 & z'_4 .

* z'_1, z'_2, z'_3 & z'_4 are then passed through Layer Normalization to normalize embedding values, resulting in $z_{1\text{norm}}, z_{2\text{norm}}, z_{3\text{norm}}$ & $z_{4\text{norm}}$.

* Dimensions of all the vectors in this stage is 512.