



RAISONI GROUP
— a vision beyond —

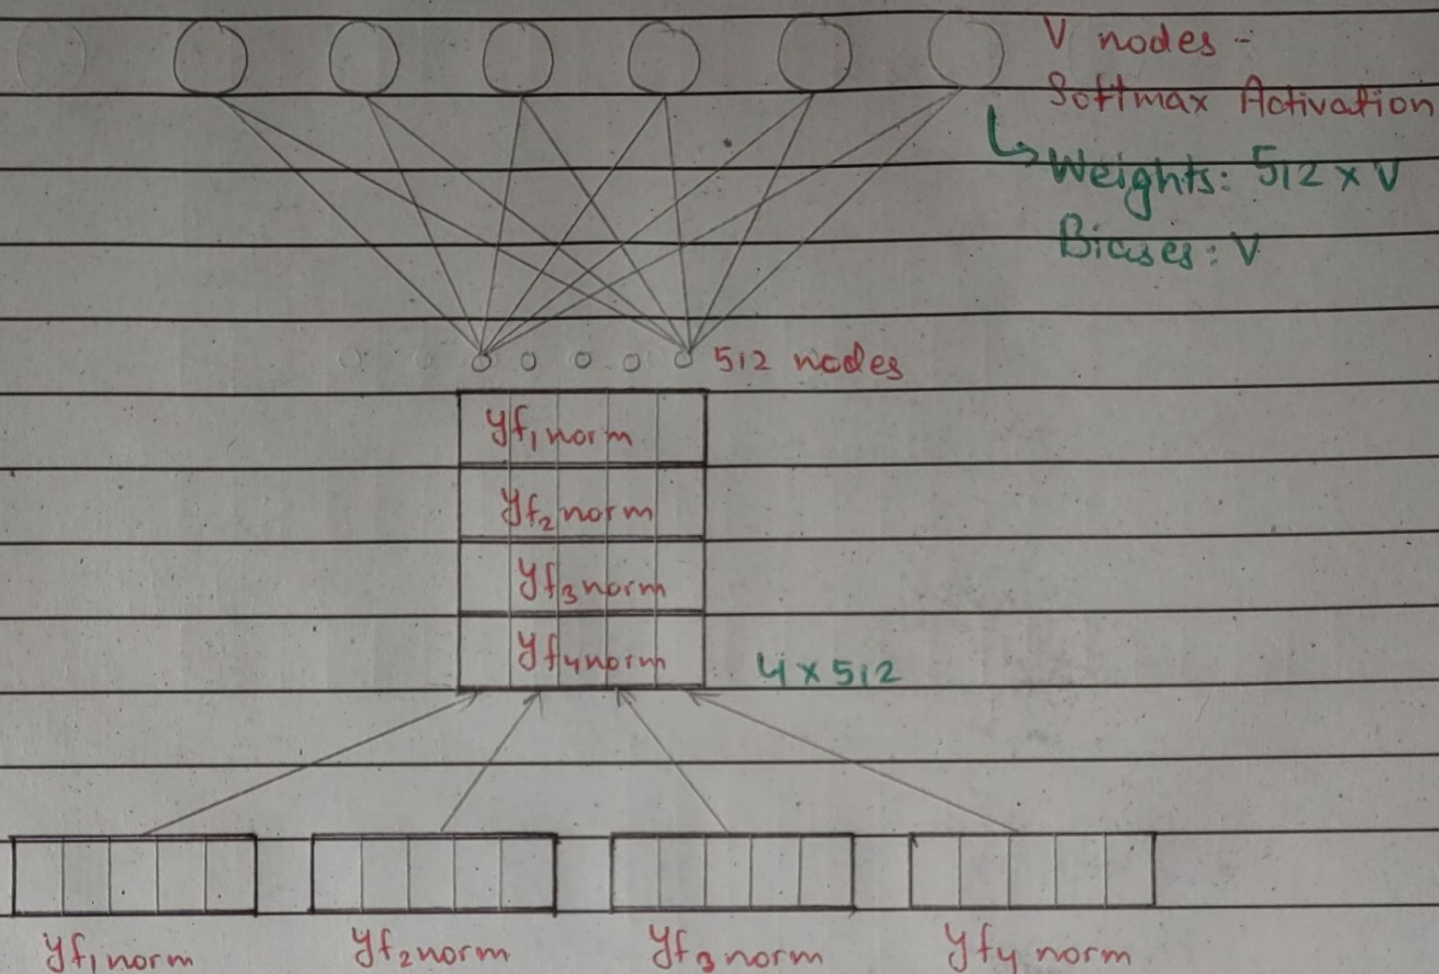

- * In the output stage of the decoder architecture, y_{f1}^{norm} , y_{f2}^{norm} , y_{f3}^{norm} & y_{f4}^{norm} are stacked to form a 4×512 dimensional matrix which is passed in a single layered (excluding input layer) feed forward NN.
- * The layer in the NN has V no. of neurons in it where V is the total no. of unique words present in the vocabulary of the target sequence in the dataset.
- * All the neurons have Softmax activation which normalizes the output & help present it in the form of a probability distribution.



- * Output with the highest probability is taken as the output corresponding to the provided embedding vector to the NN. For eg. - For $y_{f, \text{norm}}$ which is the final embedding vector of $\langle \text{START} \rangle$, if the generated outputs with their probabilities are $\hat{y}_1: 0.1$, $\hat{y}_2: 0.05$, $\hat{y}_3: 0.1$, $\hat{y}_4: 0.5$, $\hat{y}_5: 0.15$, $\hat{y}_6: 0.05$, $\langle \text{END} \rangle: 0.05$, then $\hat{y}_4$ will be chosen as the desired output corresponding to the input embedding of $\langle \text{START} \rangle$ as it has the highest probability.
- * This process continues until $\langle \text{END} \rangle$ is generated as an output, in that case the Decoder is signaled to stop generating outputs further.