


CRN1s

Parts List & Kits

Contents

Parts List
Spare Part Kits
Accessories
Special Tools
Standard Tools
Tools for Torques

Exploded View **CRN1s**

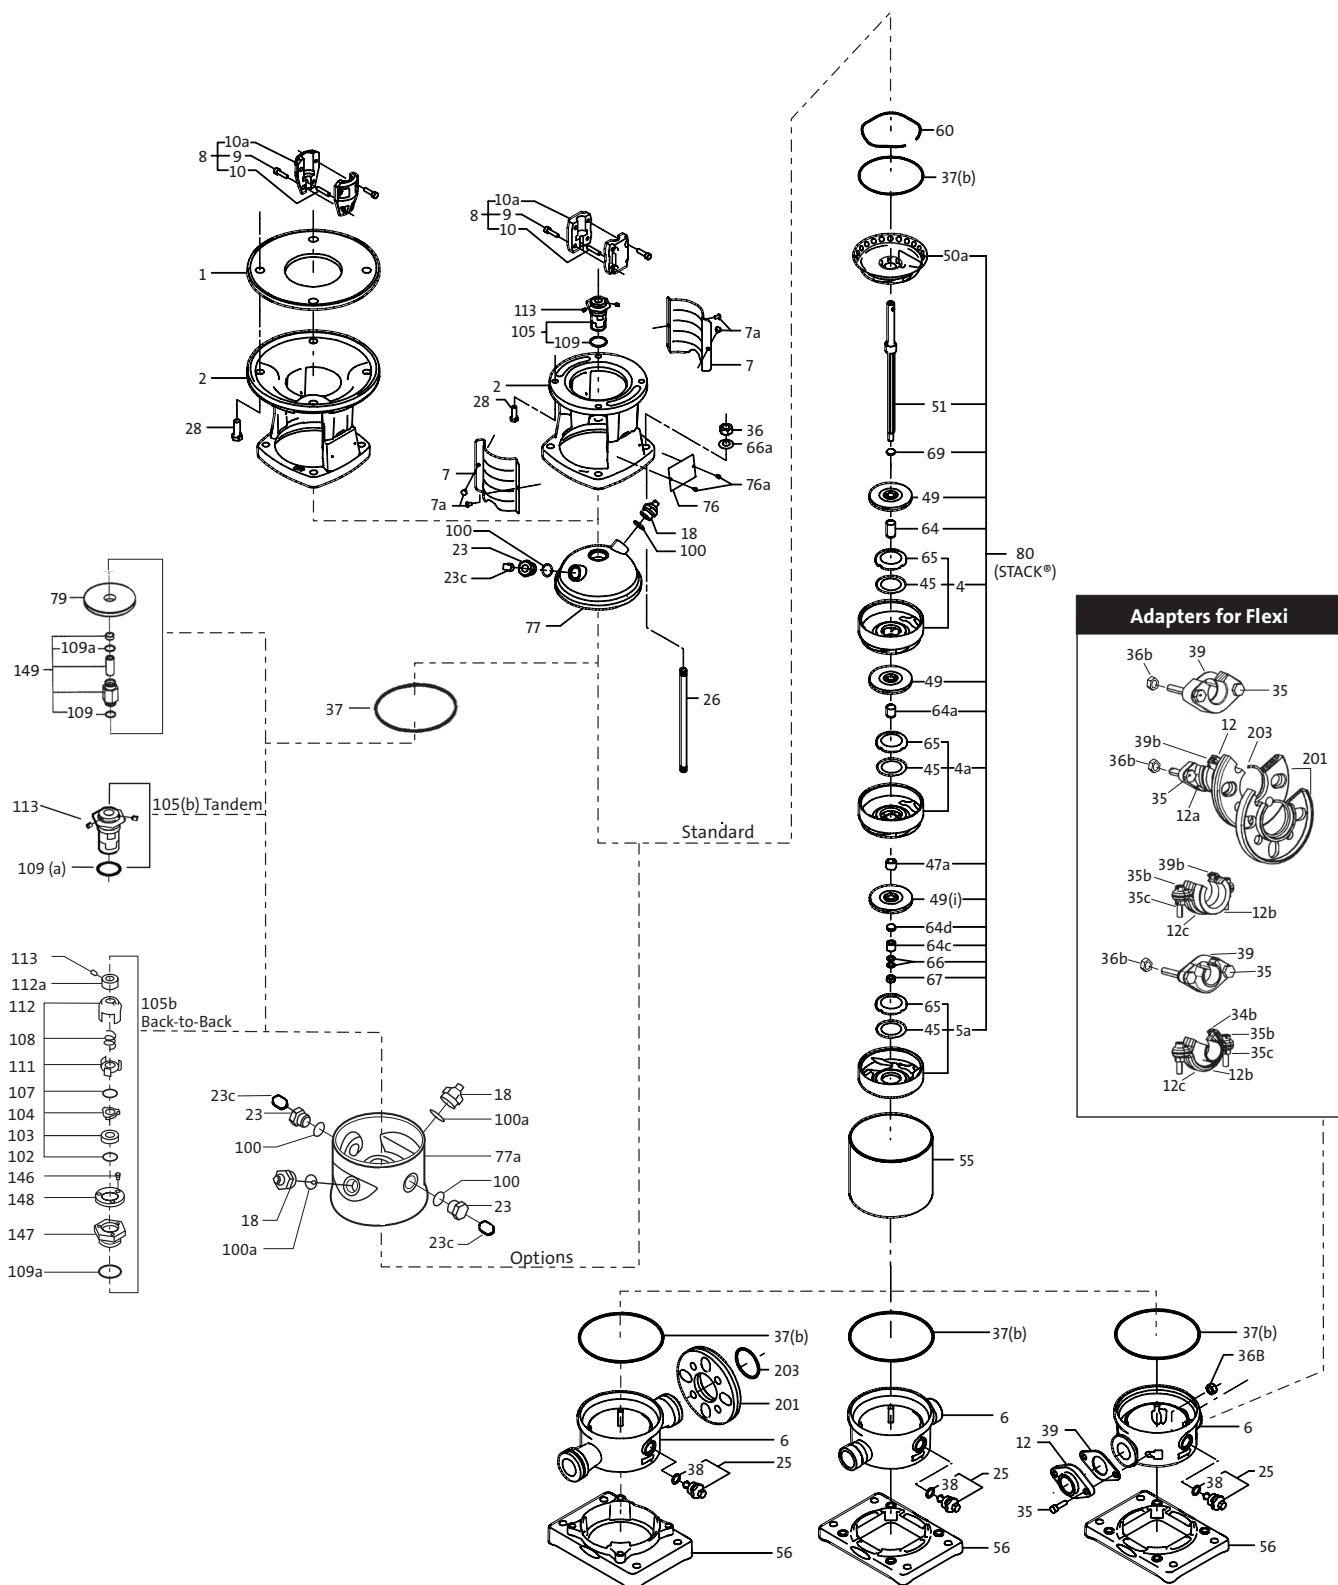

Parts List & Kits CRN1s

| Pos. No. | Part Description | Model | Stages | No. Used | Comments/Dimensions | B.O.M. Ref. No. | Material No. | Included in kits ? |
|-------------------|---|-------|--------|----------|---|-----------------|--------------|--------------------|
| PARTS LIST | | | | | | | | |
| 1 | Adapter for Motor Stool | | | | For NEMA, 213/215TC, 7.5 - 10HP | 96476208 | | No |
| 2 | Motor Stool | | 3/2-27 | 1 | NEMA, 56C, 1/3 - 2HP | 96436510 | | No |
| | | | | | NEMA, 182/184TC, 3 - 5HP | 96436511 | | No |
| | | | | | Add Pos. 1, NEMA, 213TC, 7.5 - 10HP | 96436511 | | No |
| | | | 3/2-19 | 1 | IEC, F85, MG 71, .37 - .55kW | 96436506 | | No |
| | | | 21-36 | 1 | IEC, F100, MG 80, .75 - 1.1kW | 96436507 | | No |
| | | | | | IEC, F115, MG 90, 1.5 - 2.2kW | 96436508 | | No |
| | | | | | IEC, F130, MG 100/112, 3.0 - 4.0 kW | 96436509 | | No |
| | | | | | IEC, F265, MG132, 5.5 - 7.5kW | 96436514 | | No |
| 4 | Chamber, Complete with Pos.45 & 65 | | 3/2-36 | ^^^ | PTFE Pos.45 | 96439481 | | No |
| 4a | Chamber Cpl. w/Pos.45 & 65 & Bearing | | 3/2-36 | ^^^^ | Silicon Carbide Bearing, PTFE Pos.45 | 96439476 | | YES |
| | Chamber Cpl. w/Pos.45 & 65 & Brg. (option) | | 3/2-36 | ^^^^ | Graflon Bearing, PTFE Pos.45 | 96440615 | | YES |
| 5a | Chamber, Bottom Complete with Pos.45 & 65 | | 3/2-36 | 1 | PTFE Pos.45 | 96439485 | | No |
| 6 | Base | | 3/2-17 | 1 | Flexi -Clamp / Oval, Stainless (max 232 PSI) | 96438394 | | No |
| | | | 3/2-36 | 1 | For Flanges JIS, FGJ, ANSI, Stainless (max 362 PSI) | 96438328 | | No |
| | | | 3/2-36 | 1 | Victualic (PJE) 1.25", Stainless (max 232 PSI) | 96436851 | | No |
| 7 | Coupling Guard | | | 2 | IEC, F85-F100 | 96438136 | | No |
| | | | | 2 | NEMA-56C, IEC-F115,130, & 265 | 96438137 | | No |
| | | | | | NEMA, 182-215TC | 96438138 | | No |
| 7a | Screw for Coupling Guard | | 3/2-36 | 4 | M4 x 8mm | 96488481 | | No |
| 9 | Allen Screw | | 3/2-27 | 4 | M6 x 20mm, Delta Seal | 00ID7899 | | YES |
| | | | | 4 | M8 x 25mm, Delta Seal | 00ID7900 | | YES |
| | | | | | M10 x 25mm, Delta Seal | 00ID7901 | | YES |
| 10 | Shaft Pin | | 3/2-36 | 1 | ø5 x 26mm | 310192 | | YES |
| 10a | Coupling Half | | 3/2-27 | 2 | NEMA, 56C, 1/3 - 2HP. ø15.8 / ø12 | 410108 | | YES |
| | | | | 2 | NEMA, 182/184TC, 3-5HP. ø28.5/ø12 | 410109 | | YES |
| | | | | | NEMA, 213TC, 7.5-10HP. ø34.9/ø12 | 96472175 | | YES |
| | | | 3/2-19 | 2 | IEC, F85, MG71, .37-.55kW. ø14/ø12 | 410041 | | YES |
| | | | 21-36 | 2 | IEC, F100, MG80,.75-1.1kW. ø19/ø12 | 410043 | | YES |
| | | | | 2 | IEC, F115, MG 90, 1.5-2.2kW. ø24/ø12 | 410045 | | YES |
| | | | | | IEC, F130, MG100/112, 3-4 kW.ø28/ø12 | 410047 | | YES |
| | | | | | IEC, F265, MG132, 5.5-7.5kW. ø38/ø12 | 410115 | | YES |
| 12 | Oval Flange for Flexi Base | | 3/2-17 | 2 | Stainless, 1" -11.5 NPT (max 232 PSI) | 96468336 | | YES |
| | | | 3/2-23 | 2 | Stainless, RP 1" BSP DIN (max 232 PSI) | 96437814 | | No |
| 12a | Adapter Flg. for ANSI pos.201/Flexi Base (option) | | 3/2-17 | 2 | Stainless, (max 232 PSI) | 96437818 | | YES |
| 12b | Pipe Stub for Clamp/Flexi Base (option) | | 3/2-17 | 2 | Stainless, Internal 1" -11.5 NPT (max 232 PSI) | 400182 | | YES |
| | | | 3/2-17 | 2 | Stainless, Internal 1.25" -11.5 NPT (max 232 PSI) | 410279 | | YES |
| | | | 3/2-17 | 2 | Stainless, External 2" -11.5 NPT (max 232 PSI) | 96468338 | | YES |
| 12c | Clamp for Flexi Base & pos.12b (option) | | 3/2-17 | 4 | Stainless, (max 232 PSI) | 00ID7194 | | YES |
| 18 | Priming/Vent Plug | | 3/2-36 | * | G 1/2A, NV24 with NV9 x M8 stem | 405150 | | No |
| 23 | Plug | | 3/2-36 | ** | G 1/2A, w/1/4" port, NV24 | 91120659 | | No |
| | Plug (option) | | 3/2-36 | ** | G 1/2A, Solid no port, NV24 | 370025 | | No |
| 23c | Pipe Plug for Pos.23 & 25 with hollow stem | | 3/2-36 | ** | 1/4" NPT,SS SQHD | 00ID7216 | | No |
| 25 | Drain/Priming Plug Cpl. with O-rings | | 3/2-36 | 1 | G 1/2A, NV24 w/NV9 x M8 stem, EPDM | 96440611 | | No |
| | | | 3/2-36 | 1 | G 1/2A, NV24 w/NV9 x M8 stem, FKM | 96446891 | | No |
| | Drain/Priming Plug Cpl. with O-rings (option) | | 3/2-36 | 1 | G 1/2A, NV24 w/NV9 x M8 stem, FXM | 96460009 | | No |
| | | | 3/2-36 | 1 | G 1/2A, NV24 w/NV9 x M8 stem, FFKM | 96475474 | | No |
| | | | 3/2-36 | 1 | G 1/2A, NV24 w/NV9 x M8 hollow stem, EPDM | 96527050 | | No |
| | | | 3/2-36 | 1 | G 1/2A, NV24 w/NV9 x M8 hollow stem, FKM | 96527051 | | No |
| | | | 3/2-36 | 1 | G 1/2A, NV24 w/NV9 x M8 hollow stem, FXM | 96549174 | | No |
| | | | 3/2-36 | 1 | G 1/2A, NV24 w/NV9 x M8 hollow stem, FFKM | 96527052 | | No |
| 26 | Staybolt | | 3/2-3 | 4 | M12 x 151mm | 96487020 | | No |
| | | | 4 | 4 | M12 x 169mm | 96442055 | | No |
| | | | 5 | 4 | M12 x 187mm | 414103 | | No |
| | | | 6 | 4 | M12 x 209mm | 404135 | | No |
| | | | 7 | 4 | M12 x 227mm | 414134 | | No |
| | | | 8 | 4 | M12 x 241mm | 414105 | | No |
| | | | 9 | 4 | M12 x 259mm | 96459210 | | No |
| | | | 10 | 4 | M12 x 281mm | 414136 | | No |
| | | | 11 | 4 | M12 x 295mm | 414107 | | No |
| | | | 12 | 4 | M12 x 313mm | 96463414 | | No |
| | | | 13 | 4 | M12 x 335mm | 414138 | | No |
| | | | 15 | 4 | M12 x 367mm | 96459214 | | No |
| | | | 17 | 4 | M12 x 403mm | 414111 | | No |
| | | | 19 | 4 | M12 x 439mm | 96442118 | | No |
| | | | 21 | 4 | M12 x 475mm | 414143 | | No |
| | | | 23 | 4 | M12 x 511mm | 414115 | | No |
| | | | 25 | 4 | M12 x 547mm | 96442119 | | No |
| | | | 27 | 4 | M12 x 587mm | 404156 | | No |
| | | | 30 | 4 | M12 x 637mm (50 Hz.) | 96461557 | | No |
| | | | 33 | 4 | M12 x 691mm (50 Hz.) | 96442122 | | No |
| | | | 36 | 4 | M12 x 745mm (50 Hz.) | 96442123 | | No |

Due to part changes over time, all position numbers (1-203) may not be used.

These columns indicates which model uses the spare part. If blank, the part is used in all models.

Parts List & Kits CRN1s

| Pos. No. | Part Description | Model | Stages | No. Used | Comments/Dimensions | B.O.M. Ref. No. | Material No. | Included in kits ? |
|------------|--|---------------------|----------|------------------------|--|-----------------|--------------|--------------------|
| PARTS LIST | | | | | | | | |
| 26 | Staybolt (Cool Top®, Back-to-Back & Tandem Seal option) | | 3/2-3 | 4 | M12 x 263mm | 404138 | | No |
| | | | 4 | 4 | M12 x 281mm | 414136 | | No |
| | | | 5 | 4 | M12 x 295mm | 414107 | | No |
| | Staybolt (Cool Top®, Back-to-Back & Tandem Seal Option) | | 6 | 4 | M12 x 317mm | 404141 | | No |
| | | | 7 | 4 | M12 x 335mm | 414138 | | No |
| | | | 8 | 4 | M12 x 349mm | 414109 | | No |
| | | | 9 | 4 | M12 x 367mm | 96459214 | | No |
| | | | 10 | 4 | M12 x 385mm | 96458503 | | No |
| | | | 11 | 4 | M12 x 403mm | 414111 | | No |
| | | | 12 | 4 | M12 x 425mm | 404147 | | No |
| | | | 13 | 4 | M12 x 439mm | 96442118 | | No |
| | | | 15 | 4 | M12 x 475mm | 414143 | | No |
| | | | 17 | 4 | M12 x 511mm | 414115 | | No |
| | | | 19 | 4 | M12 x 547mm | 96442119 | | No |
| | | | 21 | 4 | M12 x 587mm | 404156 | | No |
| | | | 23 | 4 | M12 x 619mm | 414119 | | No |
| | | | 25 | 4 | M12 x 659mm | 414160 | | No |
| | | | 27 | 4 | M12 x 691mm | 96442122 | | No |
| | | | 30 | 4 | M12 x 745mm (50Hz.) | 96442123 | | No |
| 33 | 4 | M12 x 799mm (50Hz.) | 414155 | No | | | | |
| 36 | 4 | M12 x 853mm (50Hz.) | 96458507 | No | | | | |
| 28 | Motor Bolt | | 3/2-27 | 4 | NEMA, 56C, 1/3 - 2HP. UNC 3/8” x 25mm | 001D1839 | | No |
| | | | | | NEMA, 182/184TC, 3 - 5HP.UNC1/2” x 25mm | 001D1840 | | No |
| | | | | | NEMA, 213TC, 7.5 -10HP. UNC 1/2” x 1.25” | 91128631 | | No |
| | | | 3/2-19 | 4 | IEC, F85, MG71, .37-.55kW. M6 x 20mm | 001D8022 | | No |
| | | | 21-36 | 4 | IEC, F100, MG80,.75-1.1kW. M6 x 25mm | 001D8023 | | No |
| | | | | | IEC, F115, MG 90, 1.5-2.2kW. M8 x 20mm | 001D8024 | | No |
| | | | | | IEC, F130, MG100/112, 3-4 kW. M8 x 25mm | 001D8025 | | No |
| | | | | | IEC, F265, MG132, 5.5-7.5kW. M12 x 45mm | 001D7914 | | No |
| 35 | Hex. Head Screw for Oval “CI” Flange (Flexi option) | | 3/2-17 | 4 | M10 x70mm, 8.8, A4, DIN931 | 96447227 | | YES |
| | Hex. Head Screw for Oval “N” Flange (Flexi option) | | 3/2-17 | 4 | M10 x 60mm, A4, DIN931 | 96447228 | | YES |
| 35b | Screw for Clamp Pos.12c (Flexi option) | | 3/2-17 | 4 | M8 x 40mm - A2, RR DIN933 | 001D7188 | | YES |
| 35c | Nut for Screw Pos.35b for Clamp Pos.12c (Flexi option) | | 3/2-17 | 4 | M8, 304SS | 001D7187 | | YES |
| 36 | Staybolt Nut | | 3/2-36 | 4 | 19mm x M12, 316SS | 001D0876 | | No |
| 36b | Nut for Screw Pos.35 Oval Flange (Flexi option) | | 3/2-17 | 4 | M10, 316SS w/Delta Seal | 96438757 | | YES |
| 37 | Sleeve O-ring | | 3/2-36 | ◆◆ | EPDM, ø137.5 x 3.3mm | 96438743 | | YES |
| | | | 3/2-36 | ◆◆ | FKM, ø137.5 x 3.3mm | 96438744 | | YES |
| 37b | Sleeve O-ring (option) | | 3/2-36 | ◆◆ | FXM, ø137.5 x 3.3mm | 96458109 | | YES |
| | | | 3/2-36 | ◆◆ | FFKM, ø136.12 x 3.53mm | 96466718 | | YES |
| 38 | Drain Plug O-ring | | 3/2-36 | 1 | EPDM, ø16.3 x 2.4mm | 001D1288 | | YES |
| | | | 3/2-36 | 1 | FKM, ø16.3 x 2.4mm | 001D2231 | | YES |
| | | | 3/2-36 | 1 | FFKM, ø16.3 x 2.4mm | 96428162 | | YES |
| | | | 3/2-36 | 1 | FXM, ø16.3 x 2.4mm | 96442869 | | YES |
| | | | 39 | Gasket for Oval Flange | | 3/2-17 | | 2 |
| 39b | O-ring for Clamp,Thread stub-Union-& FGJ - Flange (option) | | 3/2-17 | 2 | EPDM, ø44.45 x 3.53mm | 96407726 | | YES |
| | | | 3/2-17 | 2 | FKM, ø44.45 x 3.53mm | 96411713 | | YES |
| 45 | Neck Ring | | 3/2-36 | # stgs | ø41.3 x ø30.6 x .75mm, PTFE | 400003 | | YES |
| 47a | Bearing Ring/Spacer | | 3/2-36 | ^^^^ | SiC 150, ø17.37 x ø13.10 x ø10.9 x 13mm | 96437488 | | YES |
| | Brg. Ring/Spacer (option for Graflon Pos.4a) | | 3/2-36 | ^^^^ | TC, ø15.92 x ø13.10 x ø10.9 x 9.7mm | 400041 | | YES |
| 49 | Impeller | | 3/2-36 | # stgs | ø73.0 x ø30.6 x 9.0mm (back-plate .5mm) | 96433166 | | No |
| 50a | Top Guide Vane | | 3-36 | 1 | | 96457638 | | No |
| | Top Guide Vane Plate (option for destaging) | | 3/2 | 1 | | 96478562 | | No |
| 51 | Shaft, Complete | | 3/2-3 | 1 | ø12 x 160.5mm | 96439607 | | No |
| | | | 4 | 1 | ø12 x 180.5mm | 96440386 | | No |
| | | | 5 | 1 | ø12 x 196.5mm | 96440387 | | No |
| | | | 6 | 1 | ø12 x 214.5mm | 96440388 | | No |
| | | | 7 | 1 | ø12 x 234.5mm | 96440389 | | No |
| | | | 8 | 1 | ø12 x 250.5mm | 96440390 | | No |
| | | | 9 | 1 | ø12 x 268.5mm | 96440391 | | No |
| | | | 10 | 1 | ø12 x 288.5mm | 96440392 | | No |
| | | | 11 | 1 | ø12 x 304.5mm | 96440393 | | No |
| | | | 12 | 1 | ø12 x 322.5mm | 96440394 | | No |
| | | | 13 | 1 | ø12 x 342.5mm | 96440395 | | No |
| | | | 15 | 1 | ø12 x 376.5mm | 96440396 | | No |
| | | | 17 | 1 | ø12 x 412.5mm | 96440398 | | No |
| | | | 19 | 1 | ø12 x 450.5mm | 96440400 | | No |
| | | | 21 | 1 | ø12 x 484.5mm | 96440401 | | No |
| | | | 23 | 1 | ø12 x 520.5mm | 96440403 | | No |
| | | | 25 | 1 | ø12 x 556.5mm | 96440405 | | No |
| | | | 27 | 1 | ø12 x 592.5mm | 96440406 | | No |
| | | | 30 | 1 | ø12 x 646.5mm (50 Hz.) | 96440408 | | No |
| | | | 33 | 1 | ø12 x 700.5mm (50 Hz.) | 96440410 | | No |

Due to part changes over time, all position numbers (1-203) may not be used.

These columns indicates which model uses the spare part. If blank, the part is used in all models.

Parts List & Kits CRN1s

| Pos. No. | Part Description | Model | Stages | No. Used | Comments/Dimensions | B.O.M. Ref. No. | Material No. | Included in kits ? |
|------------|---|------------------------|----------|----------|--|-----------------|--------------|--------------------|
| PARTS LIST | | | | | | | | |
| 51 | Shaft, Complete Shaft, Cpl. (Cool Top®, Back-to-Back & Tandem Seal option) | | 36 | 1 | ø12 x 754.5mm (50 Hz.) | 96440411 | | No |
| | | | 3/2-3 | 1 | ø12 x 265.5mm | 96457560 | | No |
| | | | 4 | 1 | ø12 x 285.5mm | 96457561 | | No |
| | | | 5 | 1 | ø12 x 301.5mm | 96457562 | | No |
| | | | 6 | 1 | ø12 x 319.5mm | 96457563 | | No |
| | | | 7 | 1 | ø12 x 339.5mm | 96457564 | | No |
| | | | 8 | 1 | ø12 x 355.5mm | 96457565 | | No |
| | | | 9 | 1 | ø12 x 373.5mm | 96457566 | | No |
| | | | 10 | 1 | ø12 x 393.5mm | 96457567 | | No |
| | | | 11 | 1 | ø12 x 409.5mm | 96457568 | | No |
| | Shaft, Cpl. (Cool Top®, Back-to-Back & Tandem Seal option) | | 12 | 1 | ø12 x 427.5mm | 96457569 | | No |
| | | | 13 | 1 | ø12 x 447.5mm | 96457570 | | No |
| | | | 15 | 1 | ø12 x 481.5mm | 96457571 | | No |
| | | | 17 | 1 | ø12 x 517.5mm | 96457573 | | No |
| | | | 19 | 1 | ø12 x 555.5mm | 96457575 | | No |
| | | | 21 | 1 | ø12 x 589.5mm | 96457576 | | No |
| | | | 23 | 1 | ø12 x 625.5mm | 96457578 | | No |
| | | | 25 | 1 | ø12 x 661.5mm | 96457580 | | No |
| | | | 27 | 1 | ø12 x 697.5mm | 96457581 | | No |
| | | | 30 | 1 | ø12 x 751.5mm (50 Hz.) | 96457583 | | No |
| 33 | 1 | ø12 x 805.5mm (50 Hz.) | 96457585 | | No | | | |
| 36 | 1 | ø12 x 859.5mm (50 Hz.) | 96457586 | | No | | | |
| 55 | Outer Sleeve | | 3/2-3 | 1 | ø138 x 44.6mm | 96439996 | | No |
| | | | 4 | 1 | ø138 x 62.6mm | 96440025 | | No |
| | | | 5 | 1 | ø138 x 80.6mm | 96441528 | | No |
| | | | 6 | 1 | ø138 x 98.6mm | 96440014 | | No |
| | | | 7 | 1 | ø138 x 116.6mm | 96441529 | | No |
| | | | 8 | 1 | ø138 x 134.6mm | 96441531 | | No |
| | | | 9 | 1 | ø138 x 152.6mm | 96440015 | | No |
| | | | 10 | 1 | ø138 x 170.6mm | 96441532 | | No |
| | | | 11 | 1 | ø138 x 188.6mm | 96441534 | | No |
| | | | 12 | 1 | ø138 x 206.6mm | 96440016 | | No |
| | | | 13 | 1 | ø138 x 224.6mm | 96441535 | | No |
| | | | 15 | 1 | ø138 x 260.6mm | 96440017 | | No |
| | | | 17 | 1 | ø138 x 296.6mm | 96441538 | | No |
| | | | 19 | 1 | ø138 x 332.6mm | 96441539 | | No |
| | | | 21 | 1 | ø138 x 368.6mm | 96440019 | | No |
| | | | 23 | 1 | ø138 x 404.6mm | 96441542 | | No |
| | | | 25 | 1 | ø138 x 440.6mm | 96441543 | | No |
| | | | 27 | 1 | ø138 x 476.6mm | 96440021 | | No |
| | | | 30 | 1 | ø138 x 530.6mm (50Hz.) | 96440022 | | No |
| | | | 33 | 1 | ø138 x 584.6mm (50Hz.) | 96440023 | | No |
| 36 | 1 | ø138 x 638.6mm (50Hz.) | 96439997 | | No | | | |
| 56 | Base Plate (Low) for PJE / Flexi-clamp Pos.6 B. P. (High) for Flexi-clamp w/ANSI/DIN/JIS Pos.6 Base Plate N (Low) for PJE / Flexi-clamp Pos.6 B. P. N. (High) for Flexi-clamp w/ANSI/DIN/JIS Pos.6 | | 2-36 | 1 | Cast Iron | 96438133 | | No |
| | | | 2-36 | 1 | Cast Iron | 96438132 | | No |
| | | | 2-36 | 1 | Cast Stainless | 96437870 | | No |
| | | | 2-36 | 1 | Cast Stainless | 96437868 | | No |
| 60 | Stack Compression Spring | | 3/2-36 | 1 | ø136 x 3.5mm | 96439662 | | No |
| 64 | Spacing Pipe | | 2-36 | ^^^ | ø15.85 x ø12.85 x 17.52mm | 400035 | | No |
| 64a | Spacing Pipe | | 3/2-36 | ^^^^ | ø15.85 x ø12.85 x 4.5mm | 96440292 | | YES |
| | Spacing Pipe (option for Graflon Pos. 4a) | | 3/2-36 | ^^^^ | Use with TC Pos.47a, ø15 x ø12.7 x 7.8mm | 400016 | | YES |
| 64c | Clamp, Splined | | 3/2-36 | 1 | ø15 x ø13.10 x ø10.9 x 13mm | 96439668 | | YES |
| 65 | Neck Ring Retainer | | 3/2-36 | # stgs | ø43.5 x ø34.0 x 3.6mm | 96438746 | | YES |
| 66 | Lock Washer Set for Shaft | | 3/2-36 | 1 | ø13.5 x ø8.2 x 2.6mm | 96417297 | | YES |
| 66a | Washer for Staybolt | | 3/2-36 | 4 | DIN 125A, ø24 x ø13 x 2.5mm | 001D3103 | | No |
| 67 | Lock Nut for Shaft | | 3/2-36 | 1 | 13mm x M8 | 001D2061 | | YES |
| 69 | Spacing Pipe | | 3/2 | 1 | ø15.85 x 12.85 x 18.0mm | 400125 | | No |
| 76 | Nameplate | | 3/2-36 | 1 | 304SS, 60 x 45mm | 96439820 | | No |
| 76a | Rivet for Nameplate | | 3/2-36 | 2 | 304SS, ø3 x 5mm | 96022882 | | No |
| 77 | Pump Head Cover for Motor Stool Pos.2 | | 3/2-36 | 1 | Cast Stainless | 96436340 | | No |
| 77a | Pump Head Cover for Back-to-Back & Tand. Seal | | 3/2-36 | 1 | Cast Stainless | 96456293 | | No |
| | Pump Head Cover for Cool Top® (option) | | 3/2-36 | 1 | Cast Stainless | 96456294 | | No |
| 79 | Disc / Plate for Cool Top® | | 3/2-36 | ■ | Stainless | 96456296 | | No |
| 100 | Priming/Vent Plug O-ring | | 3/2-36 | ■ | EPDM, ø16.3 x 2.4mm | 001D1288 | | YES |
| | | | 3/2-36 | ■ | FKM, ø16.3 x 2.4mm | 001D2231 | | YES |
| 100a | Priming/Vent Plug O-ring (option) | | 3/2-36 | ■ | FFKM, ø16.3 x 2.4mm | 96428162 | | YES |
| | | | 3/2-36 | ■ | FXM, ø16.3 x 2.4mm | 96442869 | | YES |
| 102 | O-ring for Pos.105b Back-to-Back | | 3/2-36 | 1 | EPDM, ø18 x 2.5mm | 001D2041 | | YES |
| | | | 3/2-36 | 1 | FKM, ø17.86 x 2.62mm | 001D2187 | | YES |
| | | | 3/2-36 | 1 | FFKM, ø17.86 x 2.62mm | 96440281 | | No |
| | | | 3/2-36 | 1 | FXM, ø17.86 x 2.62mm | 96472584 | | No |
| 103 | Station. Seal Ring for 105b Back-to-Back Station. Seal Ring for 105b Back-to-Back (option) | | 3/2-36 | 1 | TC, 12mm | 980190 | | No |
| | | | 3/2-36 | 1 | SiC,12mm | 980746 | | YES |

Due to part changes over time, all position numbers (1-203) may not be used.

These columns indicates which model uses the spare part. If blank, the part is used in all models.

Parts List & Kits **CRN1s**

| Pos. No. | Part Description | Model | Stages | No. Used | Comments/Dimensions | B.O.M. Ref. No. | Material No. | Included in kits ? |
|-------------------|---|-------|--------|----------|--|-----------------|--------------|--------------------|
| PARTS LIST | | | | | | | | |
| 104 | Rotating Seal Ring for 105b Back-to-Back | | 3/2-36 | 1 | TC, 12mm | 980163 | | No |
| | Rotating Seal Ring for 105b Back-to-Back (opt.) | | 3/2-36 | 1 | SiC, 12mm | 980733 | | YES |
| 105(b) | Shaft Seal HQBE | | 3/2-36 | *** | SiC, Carbon with resin-impregnated, EPDM | 96441879 | | YES |
| | Shaft Seal HQBV | | 3/2-36 | *** | SiC, Carbon with resin-impregnated, FKM | 96441880 | | YES |
| | Shaft Seal HQBK (option) | | 3/2-36 | *** | SiC, Carbon with resin-impregnated, FFKM | 96489537 | | YES |
| | Shaft Seal HQQE | | 3/2-36 | *** | SiC, SiC, EPDM | 96441877 | | YES |
| | Shaft Seal HQQV | | 3/2-36 | *** | SiC, SiC, FKM | 96441878 | | YES |
| | Shaft Seal HQQF (option) | | 3/2-36 | *** | SiC, SiC, FXM | 96472620 | | YES |
| | Shaft Seal HQQK (option) | | 3/2-36 | *** | SiC, SiC, FFKM | 96464381 | | YES |
| | Shaft Seal HUBE | | 3/2-36 | *** | TC, Carbon with resin-impregnated, EPDM | 96441873 | | YES |
| | Shaft Seal HUBV | | 3/2-36 | *** | TC, Carbon with resin-impregnated, FKM | 96441874 | | YES |
| | Shaft Seal HUBF (option) | | 3/2-36 | *** | TC, Carbon with resin-impregnated, FXM | 96481464 | | YES |
| | Shaft Seal HUBK (option) | | 3/2-36 | *** | TC, Carbon with resin-impregnated, FFKM | 96481463 | | YES |
| | Shaft Seal HUUE | | 3/2-36 | *** | TC, TC, EPDM | 96441875 | | YES |
| | Shaft Seal HUUV | | 3/2-36 | *** | TC, TC, FKM | 96441876 | | YES |
| | Shaft Seal HUUF (option) | | 3/2-36 | *** | TC, TC, FXM | 96475542 | | YES |
| | Shaft Seal HUUK (option) | | 3/2-36 | *** | TC, TC, FFKM | 96467885 | | YES |
| 105b | Shaft Seal/inboard for Back-to-Back OQQE | | 3/2-36 | 1 | SiC, SiC, EPDM | 985200 | | YES |
| | Shaft Seal/inboard for Back to Back OQQV | | 3/2-36 | 1 | SiC, SiC, FKM | 985760 | | YES |
| | Shaft Seal/inboard for Back-to-Back OUUE | | 3/2-36 | 1 | TC, TC, EPDM | 985189 | | No |
| | Shaft Seal/inboard for Back-to-Back OUUV | | 3/2-36 | 1 | TC, TC, FKM | 985190 | | No |
| 107 | O-ring for Pos.105b Back-to-Back | | 3/2-36 | 1 | EPDM, ø11.5 x 4.3mm | 00ID2040 | | YES |
| | | | 3/2-36 | 1 | FKM, ø11.5 x 4.3mm | 00ID2186 | | YES |
| | O-ring for Pos.105b Back-to-Back (option) | | 3/2-36 | 1 | FFKM, ø11.5 x 4.3mm | 96440282 | | No |
| | | | 3/2-36 | 1 | FXM, ø11.5 x 3.18mm | 96472618 | | No |
| 108 | Spring for Pos.105b Back-to-Back | | 3/2-36 | 1 | 12mm | 980195 | | YES |
| 109(a) | O-ring for Shaft Seal Pos.105 | | 3/2-36 | 1 | EPDM, ø21.3 x 3.0mm | 00ID1798 | | YES |
| | | | 3/2-36 | 1 | FKM, ø21.2 x 3.0mm | 00ID2339 | | YES |
| 109b | O-ring for Shaft Seal Pos.105 (option) | | 3/2-36 | 1 | FXM, ø22 x 2.75mm | 96458111 | | YES |
| | | | 3/2-36 | 1 | FFKM, ø23.47 x 2.62mm | 96464384 | | YES |
| 111 | Seal Driver (small) for Pos.105b Back-to-Back | | 3/2-36 | 1 | | 980192 | | YES |
| 112 | Seal Driver (large) for Pos.105b Back-to-Back | | 3/2-36 | 1 | | 980191 | | YES |
| 112a | Seal Drv thread. for 112, Pos.105b Back-to-Back | | 3/2-36 | 1 | | 400203 | | YES |
| 113 | Set Screw for 112a, for Pos.105b Back-to-Back | | 3/2-36 | 1 | 3mm x M5 x 6mm | 00ID7392 | | YES |
| 117 | Pipe for Air Vent (option) | | 3/2-36 | 1 | R 1/2", 316 Stainless | 330272 | | YES |
| 118 | Automatic Air Vent (option) | | 3/2-36 | 1 | Type AE50S 1/2" BSP, Stainless | 96498508 | | YES |
| 146 | Allen Bolt for 147/148, for Pos.105b Back-to-Back | | 3/2-36 | 1 | 2.5mm x M3 x 5mm | 96462639 | | YES |
| 147 | Stationary Seal Retainer - Pos.105b Back-to-Back | | 3/2-36 | 1 | NV36, 316SS | 96457354 | | No |
| 148 | Seal Retainer Washer - Pos.105b Back-to-Back | | 3/2-36 | 1 | 316SS, ø36.0 x ø21.6 x 5.0mm | 96457355 | | No |
| 149 | Connecting Pipe for Cool Top® | | 3/2-36 | 1 | NV36, 316SS, FXM & EPDM | 96460414 | | No |
| | | | 3/2-36 | 1 | NV36, 316SS, FXM & FKM | 96460415 | | No |
| 201 | Flange | | 3/2-36 | 1 | ANSI, DIN, JIS PN40/30K, Cast Iron | 96439203 | | YES |
| | | | 3/2-36 | 1 | ANSI, DIN, JIS PN40/30K, Stainless | 96439492 | | YES |
| 203 | Lock Ring for Flange | | 3/2-36 | 1 | Stainless | 96439718 | | YES |

Due to part changes over time, all position numbers (1-203) may not be used.

These columns indicates which model uses the spare part. If blank, the part is used in all models.

Notes:

- ^^^ 3/2 to 9 stage= # of Stages less 2
10 to 19 stage= # of stages less 3
21 to 27 stage = # of stages less 4
29 to 36 stage = # of stages less 5
- ^^^^ 3/2 to 9 stage= use 1
10 to 19 stage= use 2
21 to 27 stage = use 3
29 to 36 stage = use 4
- * Standard use 1. Back-to-Back or Tandem pump version use 3
- ** Standard use 1. Back-to-Back or Tandem pump version use 3
- *** 1 used in Hxxx (Standard), 2 used in Pxxx (Tandem) pump version
- ◆◆ Standard use 2. Back-to-Back or Tandem pump version use 3
- Standard use 2. Back-to-Back or Tandem pump version use 6

Cool Top® is a registered trademark of Grundfos Pumps

Keys to Symbol

- KITS (YES) Recommended spare part**
- Ø Diameter
 - ANSI American National Standards Institute
 - CPL Complete Assembly – these parts consist of more than one component
 - EPDM Ethylene Propylene (also known as EPR and EPT) – an elastic substance similar to rubber
 - FFKM Kalrez Elastomer made by DuPont
 - FKM Fluoro Elastomer (generic for Viton)
 - FXM Fluoraz Elastomer made by Greene Tweed
 - M International standard thread size designation (thread diameter in mm)
 - mm Millimeter
 - MG Identifies Grundfos motor type/size
 - N Stainless
 - NBR Buna - N (also known as Nitrile) – an elastic substance similar to rubber
 - NEMA National Electrical Manufacturers Association
 - PTFE Teflon
 - SiC Silicon Carbide
 - TC Tungsten Carbide
 - UNC Unified National Coarse – a standard for threads on bolts

Spare Part Kits

Since certain pump parts can be expected to exhibit wear at the same time as related pump parts, they have been grouped into the following kits for your convenience. The numbers indicate the quantity of the part within each kit. Please order these kits using the kit material number at the top of the columns.

| CR(I, N)1S, 1, & 3 SiC Bearing | | | | | | |
|--------------------------------|--|--------------|---------------------------|----|----|----|
| WEAR PARTS KIT 2-9 | | Kit No. | 96455095 | | | |
| WEAR PARTS KIT 10-19 | | Kit No. | 96455092 | | | |
| WEAR PARTS KIT 20-27 | | Kit No. | 96455093 | | | |
| WEAR PARTS KIT 28-36 | | Kit No. | 96455094 | | | |
| Pos. No. | Description | Material No. | Qty. Included in each Kit | | | |
| 4a | Chamber N Cpl. w/Pos.45 & 65 & SiC Bearing | 96439476 | 1 | 2 | 3 | 4 |
| 39 | Gasket for Oval Flange, 95 x 55 x ø35 x 2mm | 400189 | 2 | 2 | 2 | 2 |
| 45 | Neck Ring, ø41.3 x ø30.6 x .75mm, PTFE | 400003 | 8 | 17 | 24 | 32 |
| 47a | Bearing Ring/Spacer, SiC 150, 13mm | 96437488 | 1 | 2 | 3 | 4 |
| 64a | Spacing Pipe, ø15.85 x ø12.85 x 4.5mm | 96440292 | 1 | 2 | 3 | 4 |
| 64c | Clamp, Splined, ø15 x ø13.10 x ø10.9 x 13mm | 96439668 | 1 | 1 | 1 | 1 |
| 65 | Neck Ring Retainer, N, ø43.5 x ø34.0 x 3.6mm | 96438746 | 8 | 17 | 24 | 32 |
| 66 | Lock Washer Set of 2, ø13.5 x ø8.2 x 2.6mm | 96417297 | 1 | 1 | 1 | 1 |
| 67 | Lock Nut, 13mm x M8 | 00ID2061 | 1 | 1 | 1 | 1 |

| CR(I, N)1S, 1, & 3 Graflon Bearing | | | | | | |
|------------------------------------|--|--------------|---------------------------|----|----|----|
| WEAR PARTS KIT 2-9 | | Kit No. | 96460140 | | | |
| WEAR PARTS KIT 10-19 | | Kit No. | 96455110 | | | |
| WEAR PARTS KIT 20-27 | | Kit No. | 96455111 | | | |
| WEAR PARTS KIT 28-36 | | Kit No. | 96455112 | | | |
| Pos. No. | Description | Material No. | Qty. Included in each Kit | | | |
| 4a | Chamber N Cpl. w/Pos.45 & 65 & Graflon Brg. | 96440615 | 1 | 2 | 3 | 4 |
| 39 | Gasket for Oval Flange, 95 x 55 x ø35 x 2mm | 400189 | 2 | 2 | 2 | 2 |
| 45 | Neck Ring, ø41.3 x ø30.6 x .75mm, PTFE | 400003 | 8 | 17 | 24 | 32 |
| 47a | Bearing Ring/Spacer, TC, 9.7mm | 400041 | 1 | 2 | 3 | 4 |
| 64a | Spacing Pipe, ø15.85 x ø12.85 x 7.8mm | 400016 | 1 | 2 | 3 | 4 |
| 64c | Clamp, Splined, ø15 x ø13.10 x ø10.9 x 13mm | 96439668 | 1 | 1 | 1 | 1 |
| 65 | Neck Ring Retainer, N, ø43.5 x ø34.0 x 3.6mm | 96438746 | 8 | 17 | 24 | 32 |
| 66 | Lock Washer Set of 2, ø13.5 x ø8.2 x 2.6mm | 96417297 | 1 | 1 | 1 | 1 |
| 67 | Lock Nut, 13mm x M8 | 00ID2061 | 1 | 1 | 1 | 1 |

| STACK KITS | |
|--------------|--------------|
| Model | Material No. |
| CRN1S-3/2 | 96479078 |
| CRN1S-3 | 96479079 |
| CRN1S-4 | 96479080 |
| CRN1S-5 | 96479081 |
| CRN1S-6 | 96479082 |
| CRN1S-7 | 96479083 |
| CRN1S-8 | 96479084 |
| CRN1S-9 | 96479085 |
| CRN1S-10 | 96479086 |
| CRN1S-11 | 96479087 |
| CRN1S-12 | 96479088 |
| CRN1S-13 | 96479089 |
| CRN1S-15 | 96479090 |
| CRN1S-17 | 96479091 |
| CRN1S-19 | 96479092 |
| CRN1S-21 | 96479093 |
| CRN1S-23 | 96479094 |
| CRN1S-25 | 96479095 |
| CRN1S-27 | 96479096 |
| *** CRN1S-30 | 96479097 |
| *** CRN1S-33 | 96479098 |
| *** CRN1S-36 | 96479099 |

***For 50 Hz operation only.

| GASKET KIT (EPDM) | | Kit No. | 96455090 | | | | | | | |
|---|--|--------------|---------------------------|---|---|---|---|---|---|---|
| GASKET KIT (FKM) | | Kit No. | 96455091 | | | | | | | |
| GASKET KIT (FKM) | | Kit No. | 96463944 | | | | | | | |
| GASKET KIT (FFKM) | | Kit No. | 96533328 | | | | | | | |
| GASKET KIT (EPDM)-Double Seal option. | | Kit No. | 96533362 | | | | | | | |
| GASKET KIT (FKM)-Double Seal option. | | Kit No. | 96533363 | | | | | | | |
| GASKET KIT (FFKM)-Double Seal option. | | Kit No. | 96533364 | | | | | | | |
| GASKET KIT (FKM, & EPDM)- Cool-Top option | | Kit No. | 96533329 | | | | | | | |
| Pos. No. | Description | Material No. | Qty. Included in each Kit | | | | | | | |
| 37 | Sleeve O-ring, EPDM, ø137.5 x 3.3mm | 96438743 | 2 | | | | 3 | | | 1 |
| | Sleeve O-ring, FKM, ø137.5 x 3.3mm | 96438744 | | 2 | | | | 3 | | |
| 37b | Sleeve O-ring, FKM, ø137.5 x 3.3mm | 96458109 | | | 2 | | | | | 2 |
| | Sleeve O-ring, FFKM, ø136.12 x 3.53mm | 96466718 | | | | 2 | | | 3 | |
| 38, 100(a) | Drain Plug O-ring, EPDM, ø16.3 x 2.4mm | 00ID1288 | 3 | | | | 7 | | | 4 |
| | Drain Plug O-ring, FKM, ø16.3 x 2.4mm | 00ID2231 | | 3 | | | | 7 | | |
| 38, 100a | Drain Plug O-ring, FFKM, ø16.3 x 2.4mm | 96442869 | | | 3 | | | | | 3 |
| | Drain Plug O-ring, FFKM, ø16.3 x 2.4mm | 96428162 | | | | 3 | | | 7 | |
| 109(a) | O-ring for Pos.105(b) & 149, EPDM, Ø21.3 x 3.0mm | 00ID1798 | 1 | | | | 1 | | | |
| | O-ring for Pos.105(b) & 149, FKM, Ø21.2 x 3.0mm | 00ID2339 | | 1 | | | | 1 | | |
| 109b | O-ring for Pos.105(b) & 149, FFKM, Ø22.0 x 2.75mm | 96458111 | | | 1 | | | | | 2 |
| | O-ring for Pos.105(b) & 149, FFKM, Ø23.47 x 2.62mm | 96464384 | | | | 1 | | | 2 | |

| STANDARD SHAFT SEAL KIT, BALANCED CARTRIDGE | | Kit No. | 96455088 | | | | | | | |
|---|--------------------------------------|--------------|---------------------------|---|---|---|---|---|---|---|
| (Maximum allowed working PSI is 435) | | Kit No. | 96455089 | | | | | | | |
| (Tandem Seal option Pumps require 2 of each Seal Kit) | | Kit No. | 96455086 | | | | | | | |
| | | Kit No. | 96455087 | | | | | | | |
| | | Kit No. | 96455082 | | | | | | | |
| | | Kit No. | 96455083 | | | | | | | |
| | | Kit No. | 96455084 | | | | | | | |
| | | Kit No. | 96455085 | | | | | | | |
| Pos. No. | Description | Material No. | Qty. Included in each Kit | | | | | | | |
| 105 | HQBE | 96441879 | 1 | | | | | | | |
| | HQBV | 96441880 | | 1 | | | | | | |
| | HQQE | 96441877 | | | 1 | | | | | |
| | HQQV | 96441878 | | | | 1 | | | | |
| | HUBE | 96441873 | | | | | 1 | | | |
| | HUBV | 96441874 | | | | | | 1 | | |
| | HUUE | 96441875 | | | | | | | 1 | |
| | HUUV | 96441876 | | | | | | | | 1 |
| N/A | Grinding Device Tool for Emery Cloth | 370711 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 |
| N/A | Emery Cloth | 370712 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 |

Spare Part Kits **CRN1s**

Spare Part Kits (continued)

| | | | | | | | | | | |
|--|--------------------------------------|--------------|---------------------------|---|----------|---|---|---|---|--|
| OPTIONAL SHAFT SEAL KIT, BALANCED CARTRIDGE (Maximum allowed working PSI is 435) (Tandem Seal option Pumps require 2 of each Seal Kit) | | | Kit No. | | 96491375 | | | | | |
| | | | Kit No. | | 96533327 | | | | | |
| | | | Kit No. | | 96533326 | | | | | |
| | | | Kit No. | | 96533323 | | | | | |
| | | | Kit No. | | 96533322 | | | | | |
| | | | Kit No. | | 96533325 | | | | | |
| | | | Kit No. | | 96533324 | | | | | |
| Pos. No. | Description | Material No. | Qty. Included in each Kit | | | | | | | |
| 105 | HQBK | 96489537 | 1 | | | | | | | |
| | HQQF | 96472620 | | 1 | | | | | | |
| | HQQK | 96498109 | | | 1 | | | | | |
| | HUBF | 96481464 | | | | 1 | | | | |
| | HUBK | 96481463 | | | | | 1 | | | |
| | HUUF | 96475542 | | | | | | 1 | | |
| | HUUK | 96498108 | | | | | | | 1 | |
| N/A | Grinding Device Tool for Emery Cloth | 370711 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | |
| N/A | Emery Cloth | 370712 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | |

| INBOARD SHAFT SEAL & Gasket KIT, Back to Back OQQE | | Kit No. | 96533360 | |
|--|--|--------------|---------------------------|----------|
| INBOARD SHAFT SEAL & Gasket KIT, Back to Back OQQV | | Kit No. | | 96533361 |
| (An HQQx seal kit must also be used for a seal repair) | | | | |
| Pos. No. | Description | Material No. | Qty. Included in each Kit | |
| 37 | Sleeve O-ring, EPDM, ø137.5 x 3.3mm | 96438743 | 3 | |
| | Sleeve O-ring, FKM, ø137.5 x 3.3mm | 96438744 | | 3 |
| 38, 100(a) | Drain Plug O-ring, EPDM, ø16.3 x 2.4mm | 00ID1288 | 7 | |
| | Drain Plug O-ring, FKM, ø16.3 x 2.4mm | 00ID2231 | | 7 |
| 102 | O-ring, EPDM, ø18 x 2.5mm | 00ID2041 | 1 | |
| | O-ring, FKM, ø17.86 x 2.62mm | 00ID2187 | | 1 |
| 103 | Stationary Seal Ring, SiC, 12mm | 980746 | 1 | |
| 104 | Rotating Seal Ring, SiC, 12mm | 980733 | 1 | 1 |
| 107 | O-ring, EPDM, ø11.5 x 4.3mm | 00ID2040 | 1 | |
| | O-ring, FKM, ø11.5 x 4.3mm | 00ID2186 | | 1 |
| 108 | Spring, 12mm | 980195 | 1 | 1 |
| 109a | O-ring, EPDM, ø21.3 x 3.0mm | 00ID1798 | 1 | |
| | O-ring, FKM, ø21.2 x 3.0mm | 00ID2339 | | 1 |
| 111 | Driver for pos.104 | 980192 | 1 | 1 |
| 112 | Driver for pos.111 | 980191 | 1 | 1 |
| 112a | Driver for pos.112 | 400203 | 1 | 1 |
| 113 | Set Screw for pos.112a | 00ID7392 | 2 | 2 |
| 146 | Allen Bolt for pos.147 & 148, 2.5mm x M3 x 5mm | 96462639 | 3 | 3 |

| IEC COUPLING KIT | | ø14/ø12 | Kit No. | 415060 | | | | | |
|------------------|--|--------------|---------------------------|--------|---|---|---|---|--|
| | | ø19/ø12 | Kit No. | 415061 | | | | | |
| | | ø24/ø12 | Kit No. | 415062 | | | | | |
| | | ø28/ø12 | Kit No. | 415063 | | | | | |
| | | ø38/ø12 | Kit No. | 415065 | | | | | |
| Pos. No. | Description | Material No. | Qty. Included in each Kit | | | | | | |
| 9 | Allen Screw, M6 x 20mm, Delta Seal | 00ID7899 | 4 | | | | | | |
| | Allen Screw, M8 x 25mm, Delta Seal | 00ID7900 | | 4 | 4 | 4 | | | |
| | Allen Screw, M10 x 25mm, Delta Seal | 00ID7901 | | | | | | 4 | |
| 10 | Shaft Pin, ø5 x 26mm, Stainless | 310192 | 1 | 1 | 1 | 1 | 1 | 1 | |
| 10a | Coupling Half, F85, MG71, .37-.55kW. ø14/ø12 | 410041 | 2 | | | | | | |
| | Coupling Half, F100, MG80, 75-1.1kW. ø19/ø12 | 410043 | | 2 | | | | | |
| | Coupling Half, F115, MG 90, 1.5-2.2kW. ø24/ø12 | 410045 | | | 2 | | | | |
| | Coupling Half, F130, MG100/112, 3-4 kW.ø28/ø12 | 410047 | | | | 2 | | | |
| | Coupling Half, F265, MG132, 5.5-7.5kW. ø38/ø12 | 410115 | | | | | | 2 | |

| NEMA COUPLING KIT | | ø15.8/ø12 | Kit No. | 415314 | | |
|-------------------|--|--------------|---------------------------|----------|--|---|
| | | ø28.5/ø12 | Kit No. | 415315 | | |
| | | ø34.9/ø12 | Kit No. | 96478700 | | |
| | | | | | | |
| Pos. No. | Description | Material No. | Qty. Included in each Kit | | | |
| 9 | Allen Screw, M6 x 20mm, Delta Seal | 00ID7899 | 4 | | | |
| | Allen Screw, M8 x 25mm, Delta Seal | 00ID7900 | | 4 | | 4 |
| | Allen Screw, M10 x 25mm, Delta Seal | 00ID7901 | | | | |
| 10 | Shaft Pin, ø5 x 26mm, Stainless | 310192 | 1 | 1 | | 1 |
| 10a | Coupling Half, 56C, 1/3 - 2HP. ø15.8 / ø12 | 410108 | 2 | | | |
| | Coupling Half, 182/184TC, 3-5HP. ø28.5/ø12 | 410109 | | 2 | | |
| | Coupling Half, 213TC, 7.5-10HP. ø34.9/ø12 | 96472175 | | | | 2 |

Spare Part Kits (continued)

| FLEXI FLANGE KIT FOR SMALL CR1S, 1, & 3 1" Threaded Stainless (232 PSI Max.) | | Kit No. 964680850 | |
|--|--|-------------------|---------------------------|
| Pos. No. | Description | Material No. | Qty. Included in each Kit |
| 12 | Flange, Stainless, 1" - 11.5 NPT | 96468336 | 2 |
| 35 | Hex Head Bolt, M10 x 60mm, A4, DIN931 | 96447228 | 4 |
| 36b | Nut, M10, 316SS w/Delta Seal | 96438757 | 4 |
| 39 | Gasket, 95 x 55 x 35 x 2mm, KLINGERSIL C4430 | 400189 | 2 |

| FLEXI FLANGE KIT FOR SMALL CR1S, 1, 3, & 5 1-1/4" Threaded Stainless (232 PSI Max.) | | Kit No. 96480851 | |
|---|--|------------------|---------------------------|
| Pos. No. | Description | Material No. | Qty. Included in each Kit |
| 12 | Flange, Stainless, 1" - 11.5 NPT | 96468337 | 2 |
| 35 | Hex Head Bolt, M10 x 60mm, A4, DIN931 | 96447228 | 4 |
| 36b | Nut, M10, 316SS w/Delta Seal | 96438757 | 4 |
| 39 | Gasket, 95 x 55 x 35 x 2mm, KLINGERSIL C4430 | 400189 | 2 |

| FLEXI CLAMP FLANGE KIT FOR SMALL CR(N)1S, 1, 3, & 5 1-1/4" Stainless Flange (Conversion max. allowable operating pressure 232) | | EPDM FKM | Kit No. 96480858 | Kit No. 96480859 | |
|---|--|--------------|---------------------------|------------------|--|
| Pos. No. | Description | Material No. | Qty. Included in each Kit | | |
| 12a | Adapter Flg. for ANSI pos.201/Flexi Base (232 PSI) | 96437818 | 2 | 2 | |
| 35 | Hex Head Bolt, M10 x 60mm, A4, DIN931 | 96447228 | 4 | 4 | |
| 36b | Nut, M10, 316SS w/Delta Seal | 96438757 | 4 | 4 | |
| 39b | O-ring, EPDM, 44.45 x 3.53mm | 96407726 | 2 | | |
| | O-ring, FKM, 44.45 x 3.53mm | 96411713 | | 2 | |
| 201 | Flange, ANSI, DIN, JIS PN40/30K, Stainless | 96439492 | 2 | 2 | |
| 203 | Lock Ring, Stainless | 96439718 | 2 | 2 | |

| FLEXI CLAMP KIT FOR SMALL CR1S, 1, & 3 1" Internal Threaded SS Pipe Stub (232 PSI Max.) | | EPDM FKM | Kit No. 96480854 | Kit No. 96480855 | |
|---|---|--------------|---------------------------|------------------|--|
| Pos. No. | Description | Material No. | Qty. Included in each Kit | | |
| 12b | Stainless, Internal 1" -11.5 NPT | 400182 | 2 | 2 | |
| 12c | Clamp for Flexi Base & pos.12b | 00ID7194 | 4 | 4 | |
| 35b | Screw for Pos. 12c, M8 x 40mm - A2, RR DIN933 | 00ID7188 | 4 | 4 | |
| 35c | Nut for Pos. 35b, M8, 304SS | 00ID7187 | 4 | 4 | |
| 39b | O-ring, EPDM, 44.45 x 3.53mm | 96407726 | 2 | | |
| | O-ring, FKM, 44.45 x 3.53mm | 96411713 | | 2 | |

| FLEXI CLAMP KIT FOR SMALL CR1S, 1, 3, & 5 1-1/4" Internal Threaded SS Pipe Stub (232 PSI Max.) | | EPDM FKM | Kit No. 96480856 | Kit No. 96480857 | |
|--|---|--------------|---------------------------|------------------|--|
| Pos. No. | Description | Material No. | Qty. Included in each Kit | | |
| 12b | Stainless, Internal 1-1/4" -11.5 NPT | 410279 | 2 | 2 | |
| 12c | Clamp for Flexi Base & pos.12b | 00ID7194 | 4 | 4 | |
| 35b | Screw for Pos. 12c, M8 x 40mm - A2, RR DIN933 | 00ID7188 | 4 | 4 | |
| 35c | Nut for Pos. 35b, M8, 304SS | 00ID7187 | 4 | 4 | |
| 39b | O-ring, EPDM, 44.45 x 3.53mm | 96407726 | 2 | | |
| | O-ring, FKM, 44.45 x 3.53mm | 96411713 | | 2 | |

| FLEXI CLAMP KIT FOR SMALL CR1S, 1, 3, & 5 2" External Threaded SS Pipe Stub (232 PSI Max.) | | EPDM FKM | Kit No. 96480852 | Kit No. 96480853 | |
|--|---|--------------|---------------------------|------------------|--|
| Pos. No. | Description | Material No. | Qty. Included in each Kit | | |
| 12b | Stainless, Internal 2" -11.5 NPT | 96468338 | 2 | 2 | |
| 12c | Clamp for Flexi Base & pos.12b | 00ID7194 | 4 | 4 | |
| 35b | Screw for Pos. 12c, M8 x 40mm - A2, RR DIN933 | 00ID7188 | 4 | 4 | |
| 35c | Nut for Pos. 35b, M8, 304SS | 00ID7187 | 4 | 4 | |
| 39b | O-ring, EPDM, 44.45 x 3.53mm | 96407726 | 2 | | |
| | O-ring, FKM, 44.45 x 3.53mm | 96411713 | | 2 | |

| AIR VENT FOR SMALL CR | | Kit No. 91128708 | |
|-----------------------|--|------------------|---------------------------|
| Pos. No. | Description | Material No. | Qty. Included in each Kit |
| 117 | Pipe for Air Vent, R1/2", 316SS | 330272 | 1 |
| 118 | Automatic Air Vent, Type AE50S 1/2" BSP, SS. | 96498508 | 1 |

Accessories









| ANSI COMPANION FLANGES FOR SMALL CR 1-1/4" Threaded Stainless, 300 Lb. Class | | Kit No. 91129013 | |
|---|---|------------------|---------------------------|
| Pos. No. | Description | Material No. | Qty. Included in each Kit |
| N/A | Nut, HEX 5/8"-11 UNC, 18-8SS | 01D00164 | 8 |
| N/A | Bolt, HEX 5/8" x 2-3/4", UNC 18-8SS | 00ID7241 | 8 |
| N/A | Flange 1-1/4" Stainless, ANSI, DIN, JIS PN40/30K, | 00ID7239 | 2 |
| N/A | Gasket Full Face Flange, 1-1/4", 300#, Cut Ring | 400201 | 2 |

| VICTAULIC TYPE COMPANION CONNECTIONS FOR SMALL CR(N) | | EPDM FKM | Kit No. 4013010 | Kit No. 01D00118 | |
|--|---|--------------|---------------------------|------------------|--|
| Pos. No. | Description | Material No. | Qty. Included in each Kit | | |
| N/A | Victaulic Type Coupling, 1-1/4", EPDM | 01D17810 | 2 | | |
| N/A | Victaulic Type Coupling, 1-1/4", 77 FKM | 01D00112 | | 2 | |
| N/A | 1-1/4" Stainless NPT Nipple | 4000011 | 2 | 2 | |

Spare Part Kits • Special Tools **CRN1s**








Special Tools

Tools not generally available from normal sources.

| Mat. No. | Description and Use | |
|----------|---|---|
| 00SV0040 | Shaft Holder for Dismantling/Assembly Used to hold and protect the shaft during dismantling and assembly. |  |
| 00SV2007 | Tubular Box Spanner for Shaft Seal 36.1 mm Used to install and remove the shaft seal. Fits a 1/2" drive ratchet. |  |
| 00SV0239 | Puller for Neck Ring Used to remove the Neck Ring from Chamber. |  |
| 00SV2014 | Circlip Pliers for Flange Lock Ring Used to remove the Lock Ring for the Flange. |  |
| 00SV2066 | Tool for Outer Sleeve Used to press sleeve into base. |  |
| 00SV2011 | Bit Holder Used with Bits Kit, 1/4" |  |
| 00SV2010 | Bits Kit NV 5 mm for M6, 1/4" NV 6 mm for M8, 1/4" NV 8 mm for M10, 1/4" |  |
| 00SV2012 | Hexagon Socket Bit Used for Shaft Seal NV 2.5 mm for M5, 1/4" |  |

Standard Tools

In addition to being available from Grundfos, comparable tools can be purchased through normal sources.

| Mat. No. | Description and Use | |
|--|--|---|
| 00SV0083 00SV0055 00SV0056 00SV0054 00SV0122 | Wrenches Used to tighten various nuts. NV 10 mm for M6 NV 13 mm for M8 NV 17 mm for M10 NV 19 mm for M12 NV 24 mm for M16 |  |
| 00SV0292 00SV0269 00SV0400 | Torque Wrench Used to torque various screws. 4-20 Nm, 9 x 12 20-100 Nm, 9 x 12 40-200 Nm, 14x18 |  |
| 00SV0438 | Torque Screwdriver Used to tighten various nuts. 1-6 Nm, 1/4" |  |
| 00SV0295 | Ratchet Spanner for all Adapters 9 mm x 12 mm, 1/2" |  |
| 00SV0296 00SV0297 00SV0298 | Socket Spanner with Inside Hex NV 5 mm for M6, 1/2" x 1/2" NV 6 mm for M8, 1/2" x 1/2" NV 8 mm for M10, 1/2" x 1/2" |  |
| 00SV0310 00SV0294 00SV0270 00SV0271 00SV0524 | Ring Spanner NV 10 mm for M6 NV 13 mm for M8 NV 17 mm for M10 NV 19 mm for M12 NV 24 mm for M16 |  |
| 00SV2013 | Socket Spanner NV 13 mm for M8, 9 x 12 |  |

be think innovate

Being responsible is our foundation
Thinking ahead makes it possible
Innovation is the essence



L-CR-SM-029|05/04
PRINTED IN USA

Subject to alterations.

GRUNDFOS Pumps Corporation
17100 W. 118th Terrace
Olathe, Kansas 66062
Phone: 913.227.3400
Fax: 913.227.3500
www.grundfos.com

GRUNDFOS Canada, Inc.
2941 Brighton Road
Oakville, Ontario L6H 6C9 Canada
Phone: 905.829.9533
Fax: 905.829.9512

Bombas GRUNDFOS de Mexico S.A. de C.V.
Boulevard TLC No. 15
Parque Industrial Stiva Aeropuerto
Apodaca, N.L. Mexico 66600
Phone: 52.81.8144.4000
Fax: 52.81.8144.4010

GRUNDFOS 