

Production Supporting Systems in Factories

ระบบสนับสนุนการผลิตในโรงงานอุตสาหกรรม

HTTP `Get` Request

- Send a `get` request to `http://google.com`.
- Display a response to a `debug` panel.
- Write a response to `index.html`

HTTP Server

- Create a server that responds to the `GET` request to `/hello`.
 - Respond with a static string.
 - Respond with a dynamic string.

```
const date = new Date();  
msg.time = date.toLocaleTimeString();  
return msg;
```

- Reponse to `/home` with an HTML document.
 - Create flow `http in`, `read file`, `http response`, `debug`



- `http in node`
 - `Method = GET`
 - `URL = home`
- `read file node`
 - `Filename = html/index.html`
 - See next page.

Edit read file node

Delete

Cancel

Done

⚙️ Properties

⚙️

📄

🔗

📄 Filename

html/index.html

➡️ Output

a single utf8 string

▼

🚩 Encoding

default

▼

🏷️ Name

Name


Tip: The filename should be an absolute path, otherwise it will be relative to the working directory of the Node-RED process.

- http response node
 - No need to do anything.

- Create a folder `html`
- Place an `index.html` in the folder
- Use web browser to the url `/home`

Public server

- Get `ngrok`
 - Create an account at <https://ngrok.com/>
 - **Verify email.**
 - Download the program.
 - Extract the program to the project folder.
 - Copy the command below.

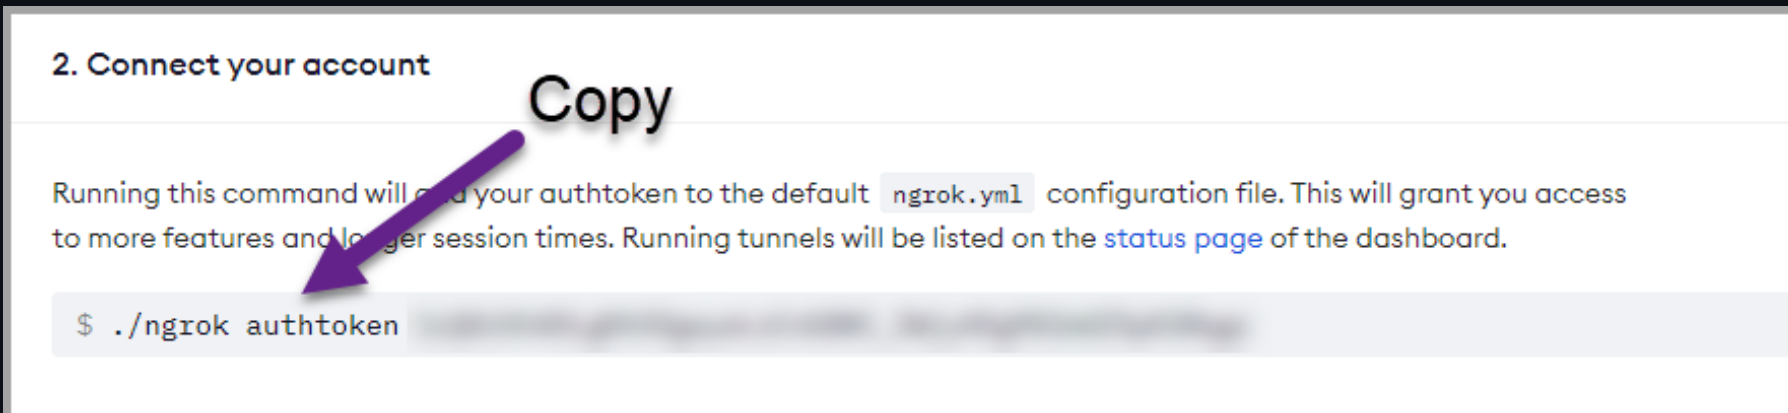

2. Connect your account

Copy

Running this command will add your authtoken to the default `ngrok.yml` configuration file. This will grant you access to more features and longer session times. Running tunnels will be listed on the [status page](#) of the dashboard.


```
$ ./ngrok authtoken [redacted]
```

- VSCode
 - Create New Terminal
 - Run `ngrok authtoken <YOUR AUTHTOKEN>` (Remove `./` from what you just copied.)
 - Run `ngrok http 1880`
- Copy the `https` address (`ctrl` + `shift` + `c`)


```
ngrok by @inconshreveable (Ctrl+C to quit)

Session Status      online
Account             nnnpooh (Plan: Free)
Version             2.3.40
Region              United States (us)
Web Interface       http://127.0.0.1:4040
Forwarding           http://3fe2-2405-9800-b900-fda2-2d0a-b28f-a42c-1971.ngrok.io -> h
Forwarding           https://3fe2-2405-9800-b900-fda2-2d0a-b28f-a42c-1971.ngrok.io ->

Connections         ttl    opn    rt1    rt5    p50    p90
                   0      0      0.00   0.00   0.00   0.00
```

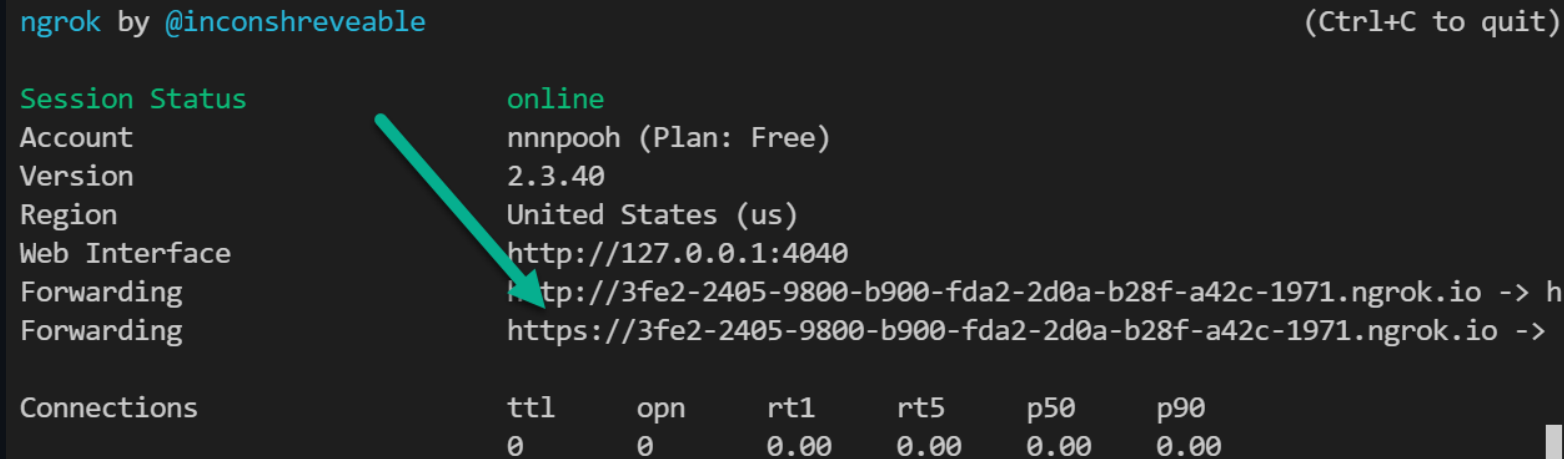

- Paste the address in the browser.
 - Don't forget to add the url in the end.

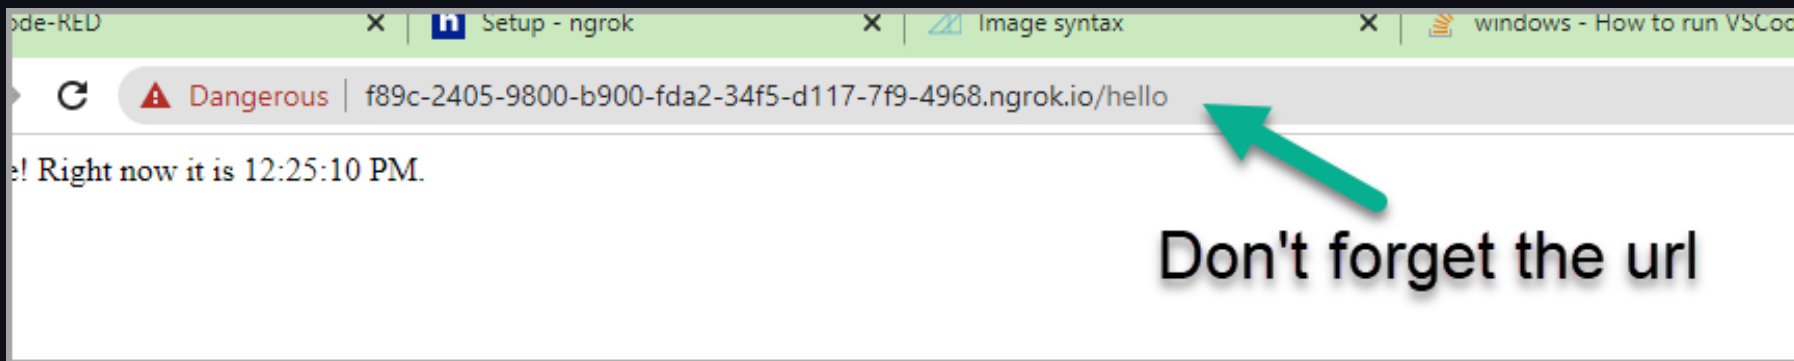

- Try sharing this link to your friends.