Production Supporting Systems in Factories

ระบบสนับสนุนการผลิตในโรงงานอุตสาหกรรม

Cloud database


Setup node-red

• pnpm install node-red-contrib-cloud-firestore

Setup database

- Go to Google Firebase.
- Create new project.
- Create firestore database.
- Obtain a service-account json.

M6-1: Writing to database

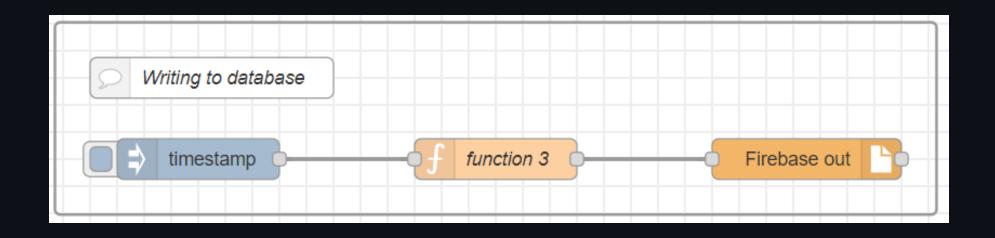

function node


```
const timestamp = new Date().getTime();
const value = msg.payload;
msg.payload = {
  value: value,
  timestamp: timestamp,
};
return msg;
```

inject node

• Try changing data type.


firebase out node

• Input service account data.

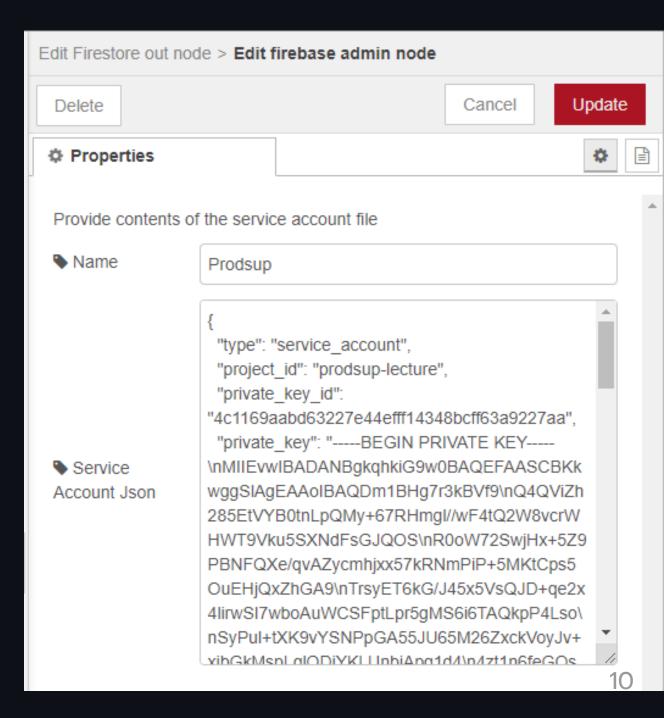


• Operation: Add

• Collection: data

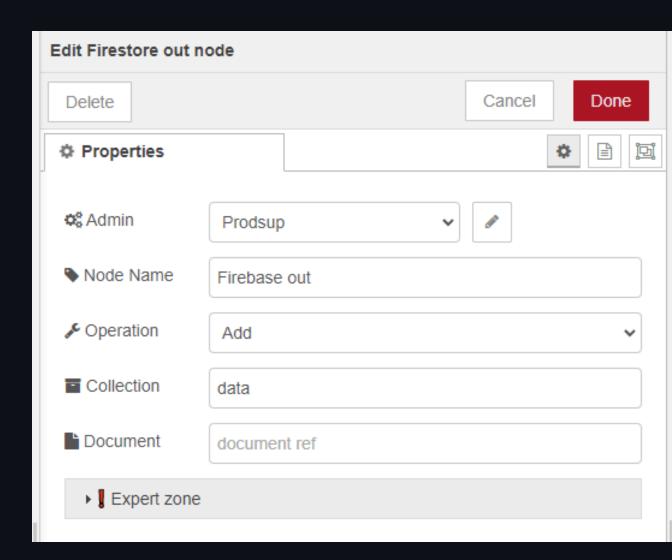


M6-2: Reading from database

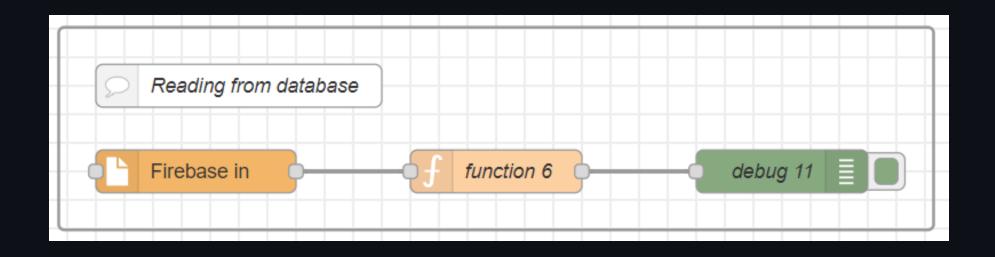

firestore out node

- Collection: data
- Realtime: enabled
- Query
 - OrderBy: timestamp
 - Direction: descending
 - O Limit: 5

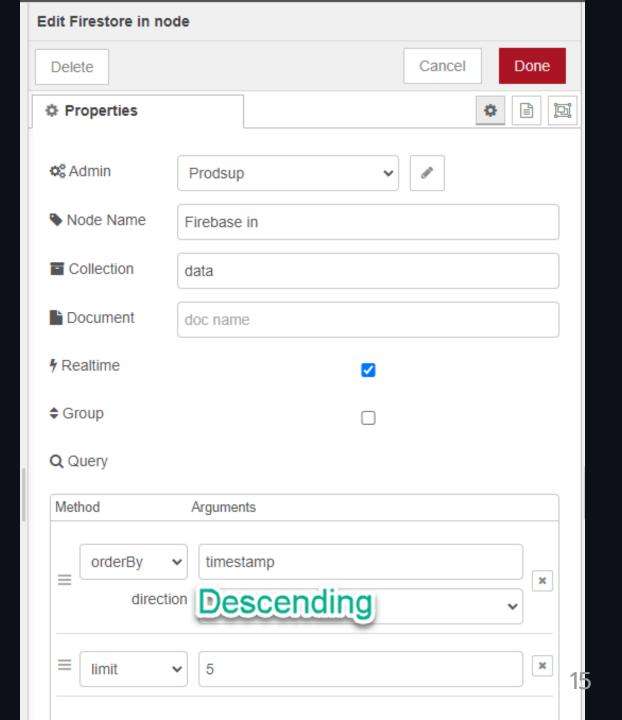

function node

```
let payload = msg.payload;
let textOut = "";
for (const [key, value] of Object.entries(payload)) {
  const _date = value?.timestamp ? new Date(value.timestamp) : new Date();
  let reading = value.value;
  if (parseFloat(value.value)) {
    reading = parseFloat(value.value).toFixed(2);
  const datestring = date.toLocaleDateString();
  const timestring = date.toLocaleTimeString();
  textOut += ` to ${datestring} ( $\$\{\textOut += \) $\} $\{\textOut += \) $\} $\]
msg.payload = textOut;
return msg;
```