

Production Supporting Systems in Factories

ระบบสนับสนุนการผลิตในโรงงานอุตสาหกรรม

Telegram Notify

Information Needed

```
TOKEN=  
URL_NOTIFY=https://api.telegram.org/bot${TOKEN}/sendMessage  
URL_GETUPDATES=https://api.telegram.org/bot${TOKEN}/getUpdates  
CHAT_ID=
```

Steps (1/2)


- Sign up for telegram.
- Talk to `@BotFather`
 - Type `/newbot` to get `TOKEN`
- Construct `URL_NOTIFY`

Steps (2/2)

- Talk to the bot.
- Construct `URL_GETUPDATES`
- Get `CHAT_ID` by visiting `URL_GETUPDATES`


Using Telegram Node in Node-RED

Flow

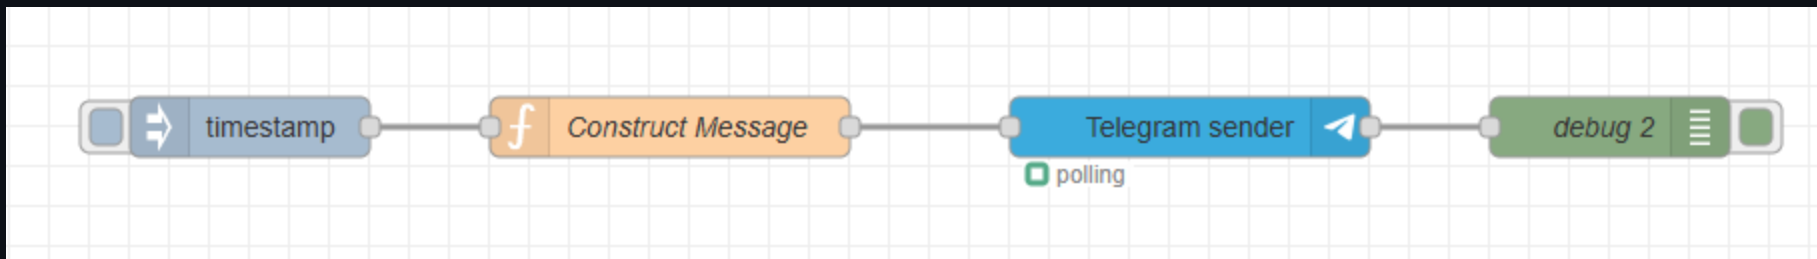

```
CHAT_ID = XXXXXXXX; // Your chat ID here
const data = {
  chatId: CHAT_ID,
  content: msg.payload,
  type: "message",
};
msg.payload = data;
return msg;
```



Receive Notification

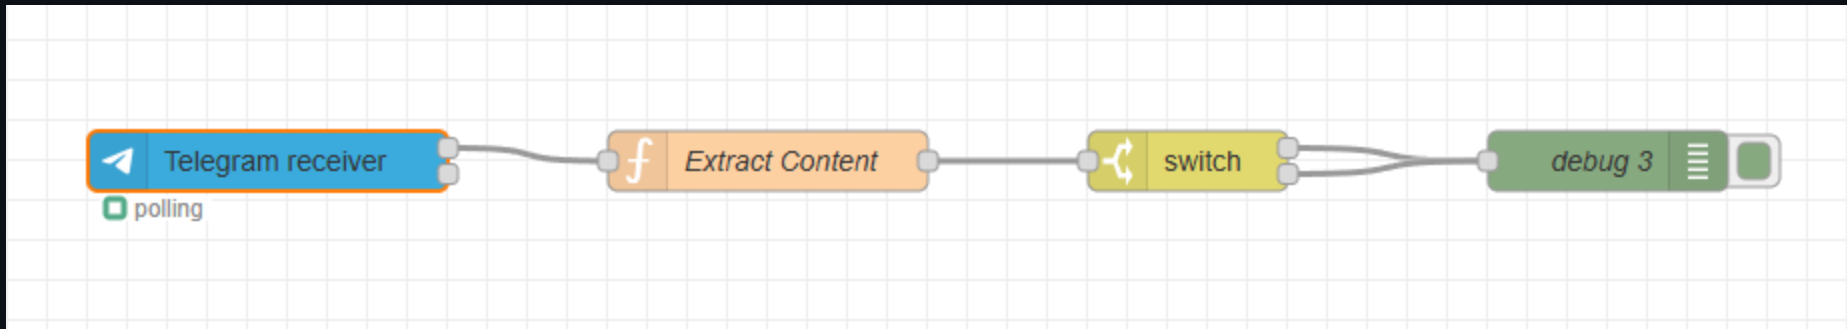

```
const content = msg.payload?.content ?? "";  
msg.payload = content;  
return msg;
```

Using HTTP Request Node in Node-RED

Flow

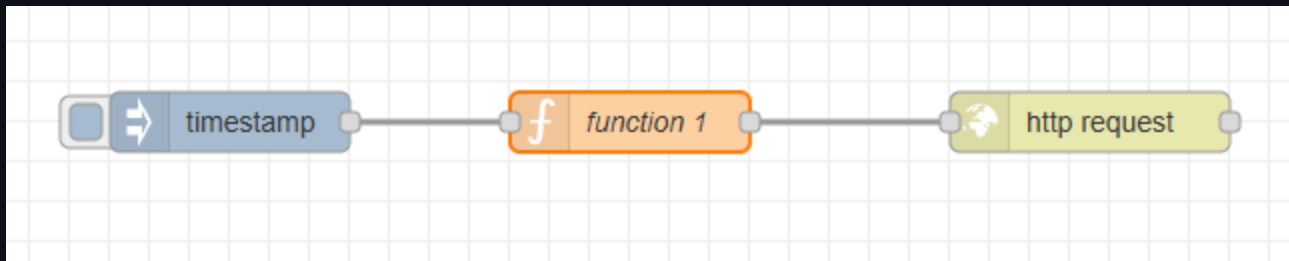

Construct Payload node

```
// Input your info here
const TOKEN = "";
const CHAT_ID = "";

// Store incoming message
const value = msg.payload;

// Construct "JSON"
msg.payload = {
  chat_id: CHAT_ID,
  text: value,
  type: "message",
};
msg.url = `https://api.telegram.org/bot${TOKEN}/sendMessage`;
return msg;
```

HTTP Request Node Configuration

Edit http request node

Delete Cancel Done

⚙ Properties

Method POST

🌐 URL https://

☐ Enable secure (SSL/TLS) connection

☐ Use authentication

Note on Performance

- Telegram Notify via HTTP Request Node may be slower than using Telegram Node.
- This is because each HTTP Request Node execution involves establishing a new connection to the Telegram servers.
 - This overhead can add latency, especially if multiple messages are sent in quick succession.
- In contrast, the Telegram Node maintains a persistent connection, allowing for faster message delivery.

Note on Developer Experience

- Each time you deploy changes in Node-RED, the Telegram Node may take longer to initialize compared to standard nodes.
 - This is due to the need to re-establish the connection with the Telegram servers.
- Recommendation:
 - Use the HTTP Request Node.
 - Use Telegram Node but disable it during development and enable it only when needed.

Using Webhook in ERPNext

ERPNext Webhook

- **Webhook** is a way for an application to provide other applications with real-time information.
- It delivers data to other applications as it happens, meaning you get data immediately.
- ERPNext supports **Webhook** to send data to other systems when certain events occur.

Create Webhook in ERPNext

- Go to Frappe Framework > Integration > Webhook
- Create a new Webhook with the following details:
 - Document Type: Sales Order
 - Doc Event: on_update
 - Request URL: URL_NOTIFY
 - Request Method: POST
 - Request Structure: JSON
 - Webhook Data: See below

Webhook Data

```
{  
  "chat_id": 6094132297,  
  "text": "Updated: {{ doc.name }}",  
  "type": "message"  
}
```

Test Webhook

- Create and Update a `Sales Order` document in ERPNext.
- See notification in Telegram.
- Note
 - Once you submit the Sales Order, further updates will not trigger the webhook.
 - `on_update` event is only triggered when the document is modified in the draft state.