


Production Supporting Systems in Factories

ระบบสนับสนุนการผลิตในโรงงานอุตสาหกรรม

Context (Advanced)

Selecting Entry from Table

Flow

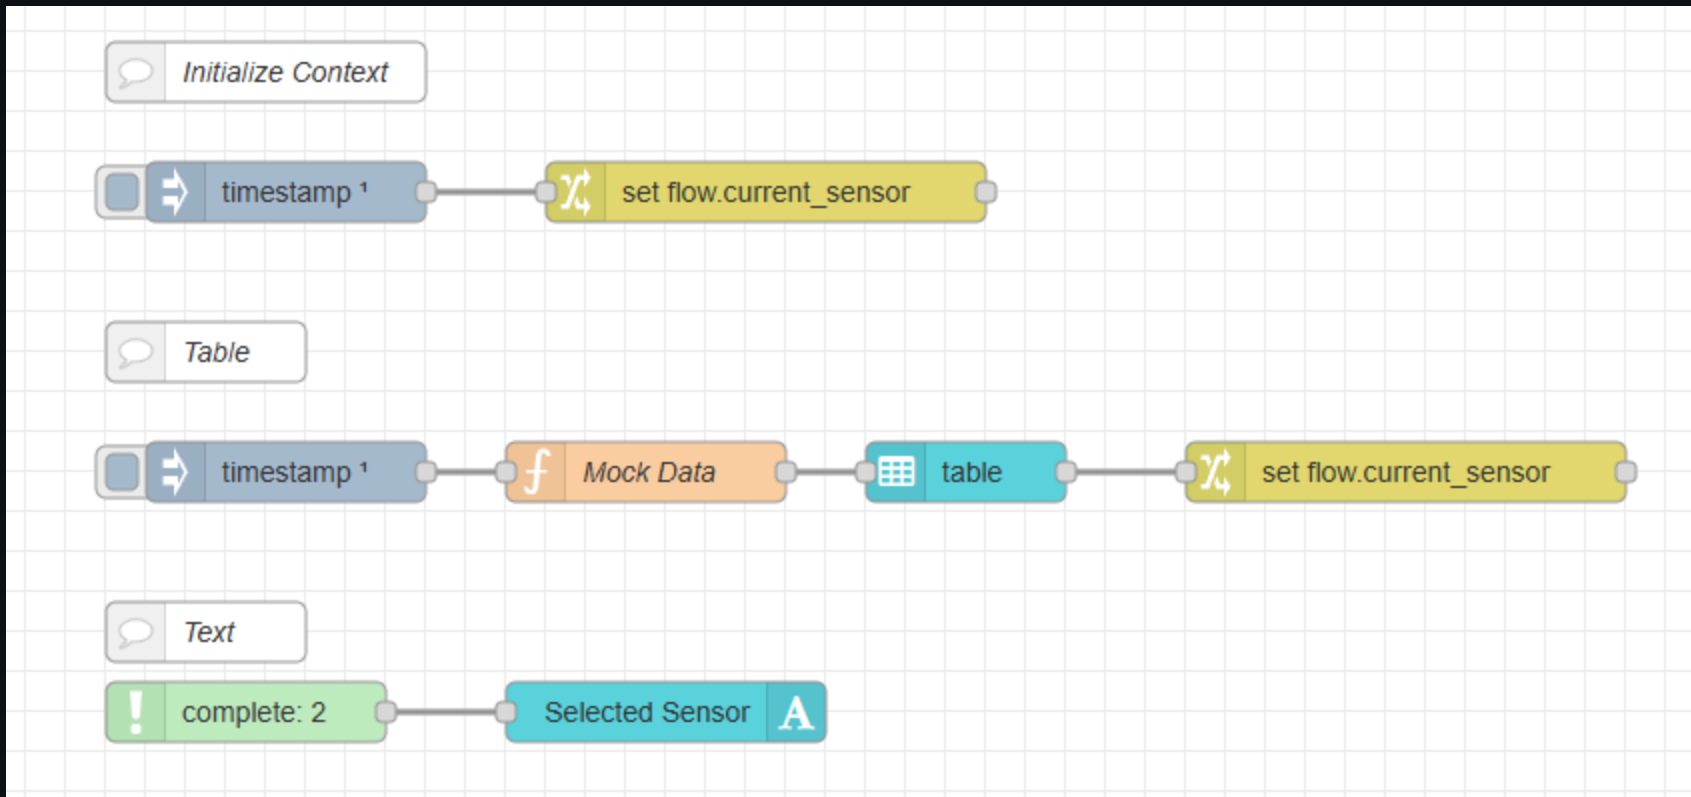


Initialize Context Variable

The image shows a workflow editor interface. On the left, a workflow is displayed on a grid. A node labeled 'set flow.current_sensor' is highlighted with a red rectangle. Below it, another workflow segment is visible, starting with a 'Mock Data' node followed by a 'table' node. On the right, the 'Properties' panel is open. It has tabs for 'Delete', 'Cancel', and 'Done'. The 'Properties' tab is active. Under the 'Rules' section, a configuration is shown with a red border. It includes a 'Set' dropdown, a field for 'flow. current_sensor', and a 'to the value' dropdown set to 'a_z NONE'.


Mock Data Function Node

```
const data = [  
  { id: 1, name: "Sensor A", status: "Active", value: 23.5 },  
  { id: 2, name: "Sensor B", status: "Inactive", value: 18.2 },  
  { id: 3, name: "Sensor C", status: "Active", value: 27.1 },  
  { id: 4, name: "Sensor D", status: "Active", value: 19.8 },  
  { id: 5, name: "Sensor E", status: "Inactive", value: 22.3 },  
];  
  
msg.payload = data;  
return msg;
```


Table Node Configuration

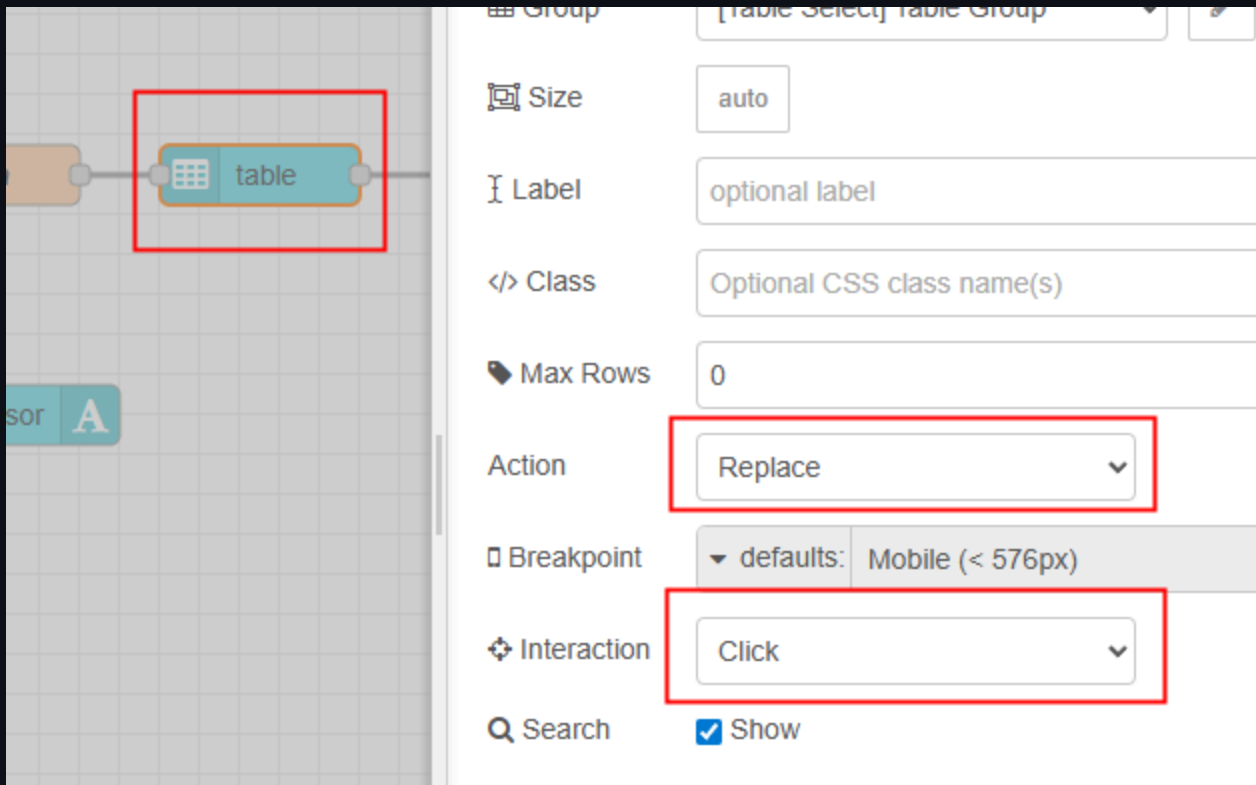

Change Node to Set Context

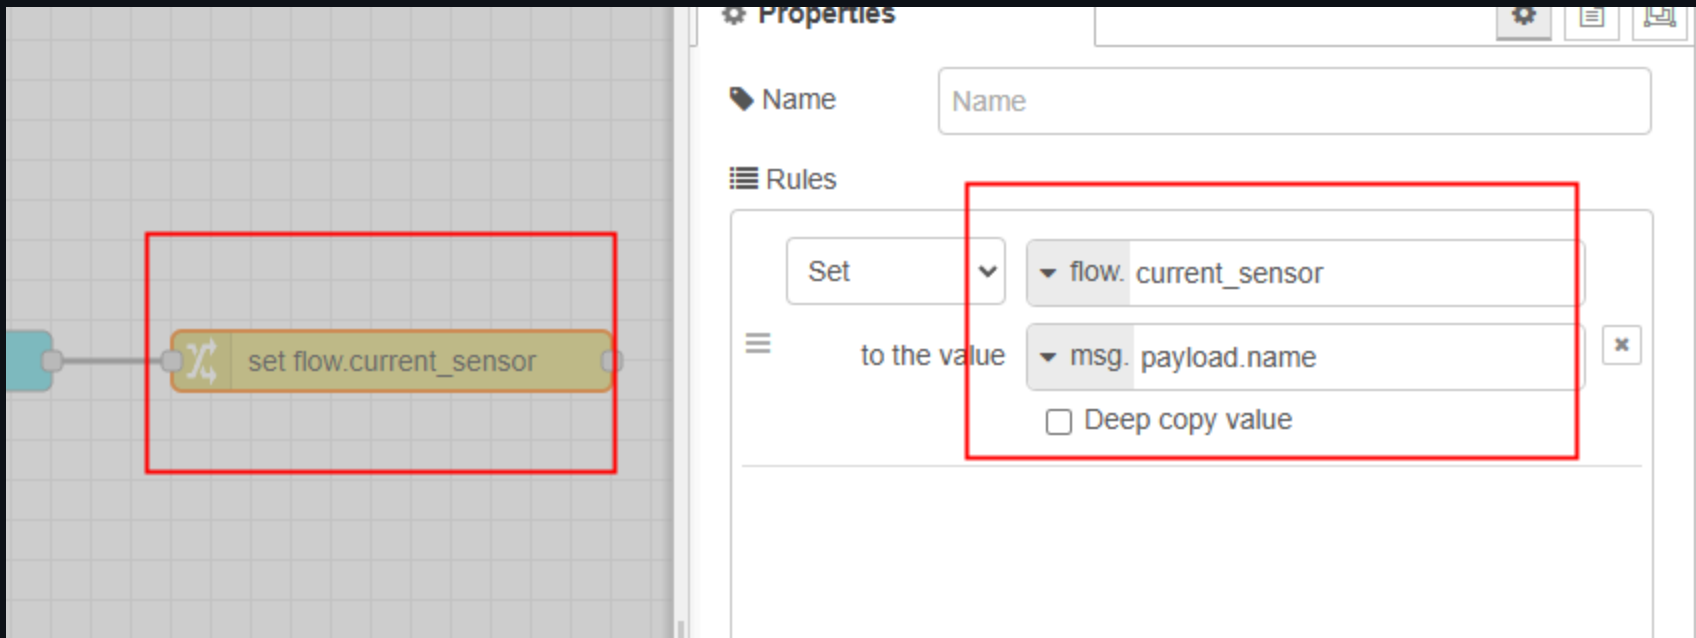

Complete Node

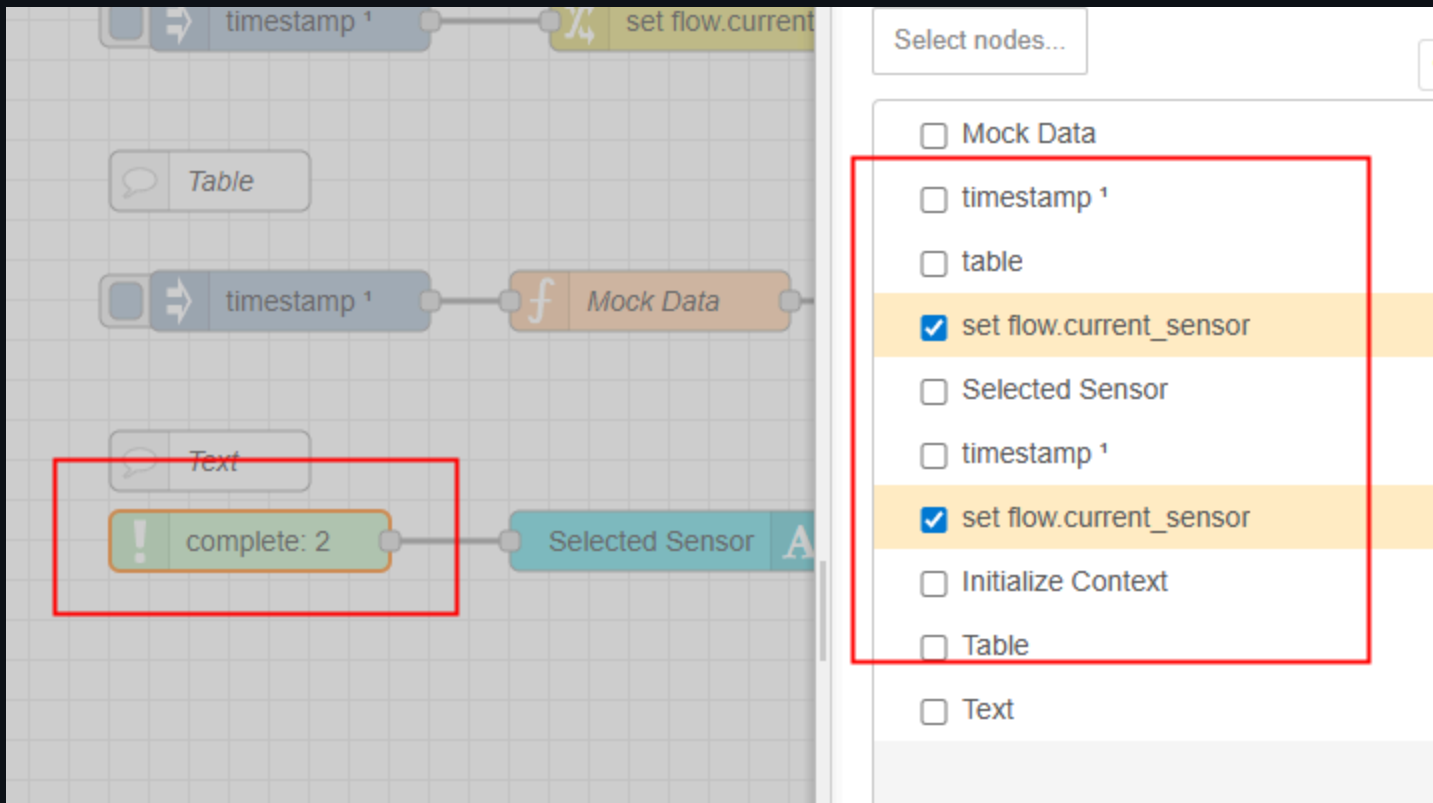

Text Node

