

Vulnerability Assessment Report



10.242.76.45

Reported on 2019-10-15

The information contained herein is considered privileged, confidential and the property of National Informatics Centre (NIC).

TABLE OF CONTENTS


1. Executive Summary	3
2. Discovered Systems	6
3. Discovered and Potential Vulnerabilities	7
4. Host wise Discovered Services	8
5 Detailed Vulnerability Report	9
5.2.1. Critical Vulnerabilities	10
5.2.2. High Vulnerabilities	11
5.2.3. Medium Vulnerabilities	12
5.2.4. Low Vulnerabilities	13
5.2.5. Informative Vulnerabilities	14

1. Executive Summary

This report represents a security audit performed by Nexpose from Rapid7 LLC. It contains confidential information about the state of your network. Access to this information by unauthorized personnel may allow them to compromise your network

Asset IP	Start Time	End Time	Total Time	Status
10.242.76.45	2019-10-15 12:16:15	2019-10-15 12:27:01	11.0 minutes	Successful


The audit was performed on 1 systems, 1 of which were found to be active and were scanned.

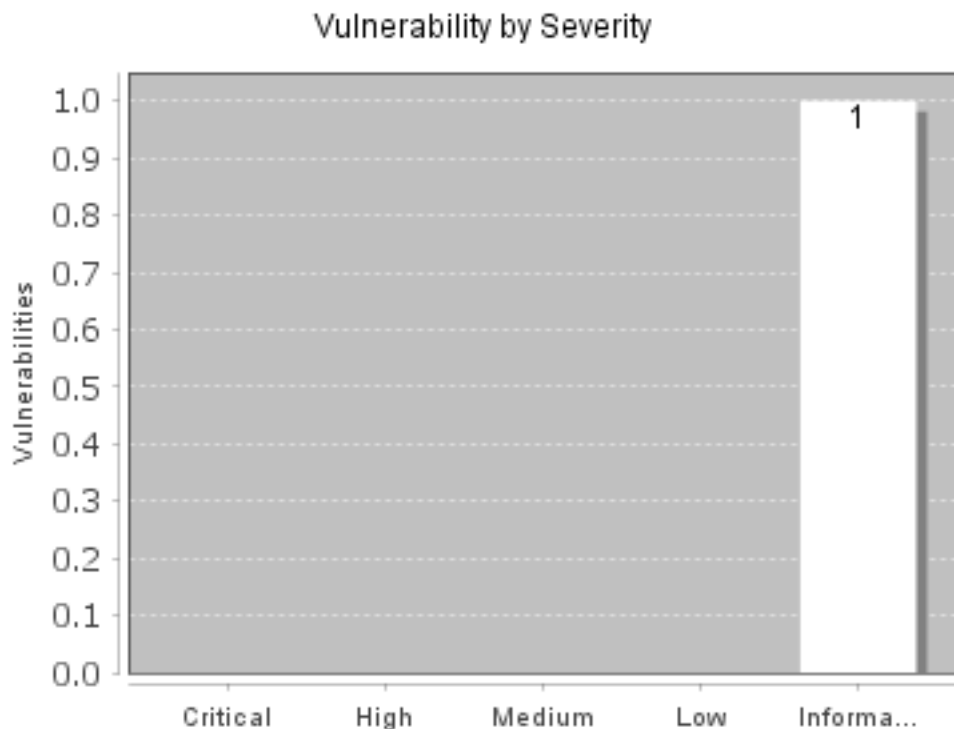

VA Score


99

Most Common Vulnerabilities

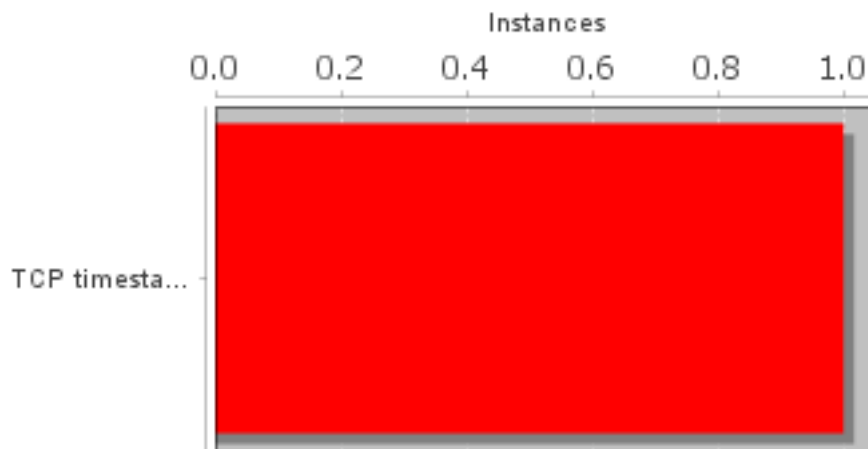


There were 1 occurrences of the TCP timestamp response vulnerability, making it the most common vulnerability.

Most Common Vulnerabilities Categories

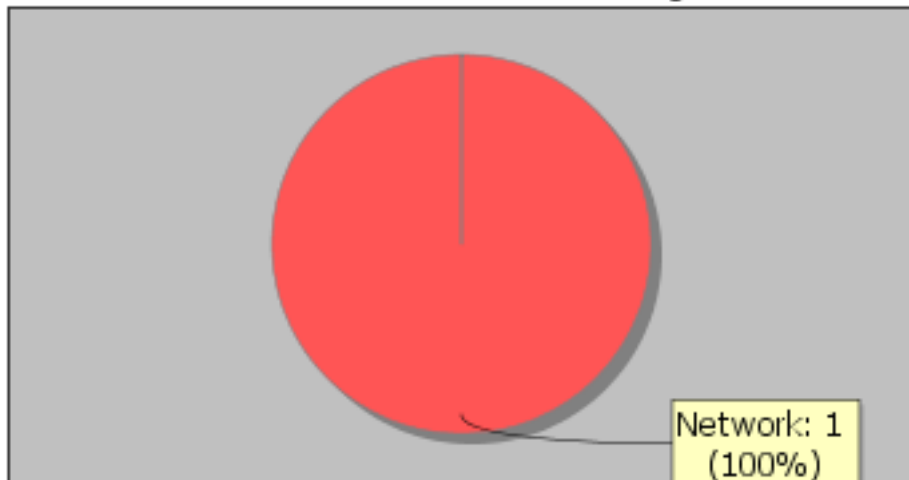

There were 1 vulnerability instances in the Network category, making it the most common vulnerability category.

Highest Risk Vulnerabilities

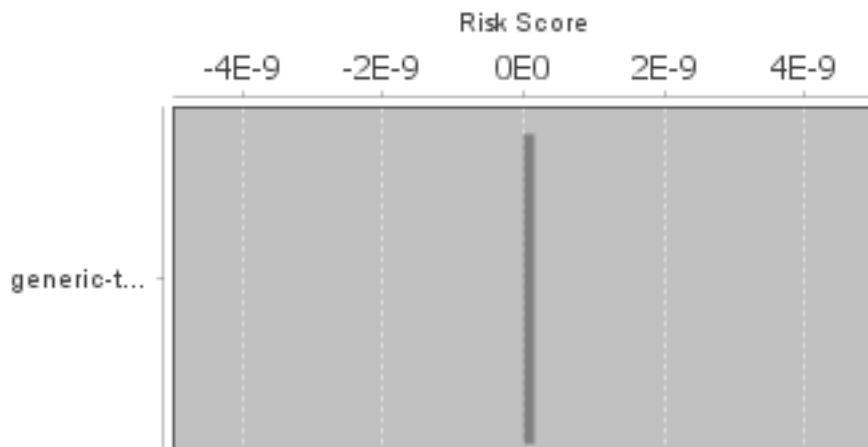

The generic-tcp-timestamp vulnerability poses the highest risk to the organization with a risk score of 0. VA scores are based on the types and numbers of vulnerabilities on affected assets



Score Formula:

A. Vulnerability Severity Range is as follows

This is a link to <https://github.com/ralfstuckert/pdfbox-layout>

2. Vulnerabilities are labeled "Low" severity if they have a CVSS base score of 0.1-2.9
3. Vulnerabilities are labeled "Medium" severity if they have a CVSS base score of 3.0-6.9
4. Vulnerabilities are labeled "High" severity if they have a CVSS base score of 7.0-8.9
5. Vulnerabilities are labeled "Critical" severity if they have a CVSS base score of 9.0-10.0

B. Risk Score Calculated as follows

1. Any critical, high and medium vulnerabilities will invite a deduction of 30, 26, 22 points respectively from a score of 100.
2. Any low vulnerabilities will invite a deduction of 1 per vulnerability with a maximum ceiling of 21.

2. Discovered Systems

Host IP	Operating System	VA Score	Aliases
10.242.76.45	CentOS Linux 7.7.1908	99	iccr-dbt2.novalocal

3. Discovered and Potential Vulnerabilities

3.1 Vulnerabilities List

No.	Vulnerability Title	Severity	CVSS Score	Count
1	TCP timestamp response	Informative	0.00	1

4. Host wise Discovered Services Details

Host IP	Host Name	Port	Protocol	Services	Product	Version
10.242.76.45	iccr-dbt2.novalocal	22	TCP	SSH	OpenSSH	7.4
10.242.76.45	iccr-dbt2.novalocal	1720	TCP	H.323 Call Setup Protocol	Unknown	Unknown

5. Detailed Vulnerability Report

Host Details

Host IP Address	Host Name	Operating System	VA Score
10.242.76.45	iccr-dbt2.novalocal	CentOS Linux 7.7.1908	99

CRITICAL VULNERABILITIES

Asset has no reported critical vulnerabilities.

HIGH VULNERABILITIES

Asset has no reported high vulnerabilities.

MEDIUM VULNERABILITIES

Asset has no reported medium vulnerabilities.

LOW VULNERABILITIES

Asset has no reported low vulnerabilities.

INFORMATIVE VULNERABILITIES

TCP timestamp response

CVSS Score: 0.00

Description

The remote host responded with a TCP timestamp. The TCP timestamp response can be used to approximate the remote host's uptime potentially aiding in further attacks. Additionally some operating systems can be fingerprinted based on the behavior of their TCP timestamps.

Proof

Port: N/A

Service: N/A

Able to determine system boot time.

Vulnerability Solution

OpenBSD

Disable TCP timestamp responses on OpenBSD

Set the value of `net.inet.tcp.rfc1323` to 0 by running the following command: `sysctl -w net.inet.tcp.rfc1323=0`
Additionally, put the following value in the default sysctl configuration file, generally `sysctl.conf`:
`net.inet.tcp.rfc1323=0`

Microsoft Windows Server 2008, Microsoft Windows Server 2008 Standard Edition, Microsoft Windows Server 2008 Enterprise Edition, Microsoft Windows Server 2008 Datacenter Edition, Microsoft Windows Server 2008 HPC Edition, Microsoft Windows Server 2008 Web Edition, Microsoft Windows Server 2008 Storage Edition, Microsoft Windows Small Business Server 2008, Microsoft Windows Essential Business Server 2008, Microsoft Windows Server 2008 R2, Microsoft Windows Server 2008 R2, Standard Edition, Microsoft Windows Server 2008 R2, Enterprise Edition, Microsoft Windows Server 2008 R2, Datacenter Edition, Microsoft Windows Server 2008 R2, Web Edition, Microsoft Windows Server 2012, Microsoft Windows Server 2012 Standard Edition, Microsoft Windows Server 2012 Foundation Edition, Microsoft Windows Server 2012 Essentials Edition, Microsoft Windows Server 2012 Datacenter Edition, Microsoft Windows Storage Server 2012, Microsoft Windows Vista, Microsoft Windows Vista Home, Basic Edition, Microsoft Windows Vista Home, Basic N Edition, Microsoft Windows Vista Home, Premium Edition, Microsoft Windows Vista Ultimate Edition, Microsoft Windows Vista Enterprise Edition, Microsoft Windows Vista Business Edition, Microsoft Windows Vista Business N Edition, Microsoft Windows Vista Starter Edition, Microsoft Windows 7, Microsoft Windows 7 Home, Basic Edition, Microsoft Windows 7 Home, Basic N Edition, Microsoft Windows 7 Home, Premium Edition, Microsoft Windows 7 Home, Premium N Edition, Microsoft Windows 7 Ultimate Edition, Microsoft Windows 7 Ultimate N Edition, Microsoft Windows 7 Enterprise Edition, Microsoft Windows 7 Enterprise N Edition, Microsoft Windows 7 Professional Edition, Microsoft Windows 7 Starter Edition, Microsoft Windows 7 Starter N Edition, Microsoft Windows 8, Microsoft Windows 8 Enterprise Edition, Microsoft Windows 8 Professional Edition, Microsoft Windows 8 RT, Microsoft Windows Longhorn Server Beta

Disable TCP timestamp responses on Windows versions since Vista

TCP timestamps cannot be reliably disabled on this OS. If TCP timestamps present enough of a risk, put a firewall

capable of blocking TCP timestamp packets in front of the affected assets.

Microsoft Windows NT, Microsoft Windows NT Workstation, Microsoft Windows NT Server, Microsoft Windows NT Advanced Server, Microsoft Windows NT Server, Enterprise Edition, Microsoft Windows NT Server, Terminal Server Edition, Microsoft Windows 95, Microsoft Windows 98, Microsoft Windows 98SE, Microsoft Windows ME, Microsoft Windows 2000, Microsoft Windows 2000 Professional, Microsoft Windows 2000 Server, Microsoft Windows 2000 Advanced Server, Microsoft Windows 2000 Datacenter Server, Microsoft Windows XP, Microsoft Windows XP Home, Microsoft Windows XP Professional, Microsoft Windows XP Tablet PC Edition, Microsoft Windows CE, Microsoft Windows Server 2003, Microsoft Windows Server 2003, Standard Edition, Microsoft Windows Server 2003, Enterprise Edition, Microsoft Windows Server 2003, Datacenter Edition, Microsoft Windows Server 2003, Web Edition, Microsoft Windows Small Business Server 2003, Microsoft Windows Server 2003 R2, Microsoft Windows Server 2003 R2, Standard Edition, Microsoft Windows Server 2003 R2, Enterprise Edition, Microsoft Windows Server 2003 R2, Datacenter Edition, Microsoft Windows Server 2003 R2, Web Edition, Microsoft Windows Small Business Server 2003 R2, Microsoft Windows Server 2003 R2, Express Edition, Microsoft Windows Server 2003 R2, Workgroup Edition

Disable TCP timestamp responses on Windows versions before Vista

Set the Tcp1323Opts value in the following key to 1:

HKEY_LOCAL_MACHINE\System\CurrentControlSet\Services\Tcpip\Parameters

Linux

Disable TCP timestamp responses on Linux

Set the value of net.ipv4.tcp_timestamps to 0 by running the following command: `sysctl -w`

`net.ipv4.tcp_timestamps=0` Additionally, put the following value in the default sysctl configuration file, generally

`sysctl.conf`: `net.ipv4.tcp_timestamps=0`

FreeBSD

Disable TCP timestamp responses on FreeBSD

Set the value of `net.inet.tcp.rfc1323` to 0 by running the following command: `sysctl -w net.inet.tcp.rfc1323=0`

Additionally, put the following value in the default `sysctl` configuration file, generally `sysctl.conf`:

`net.inet.tcp.rfc1323=0`

Cisco

Disable TCP timestamp responses on Cisco

Run the following command to disable TCP timestamps: `no ip tcp timestamp`

Services

Port	Service	Product
	N/A	OpenSSH 7.4

References

Source	Reference
URL	http://www.ietf.org/rfc/rfc1323.txt
URL	http://uptime.netcraft.com
URL	http://www.forensicswiki.org/wiki/TCP_timestamps