



1. Create a logically named folder (e.g. projectname) on your local drive.

2. Unzip content of the  folder into the folder you created.


3. Open application/bootstrap.php

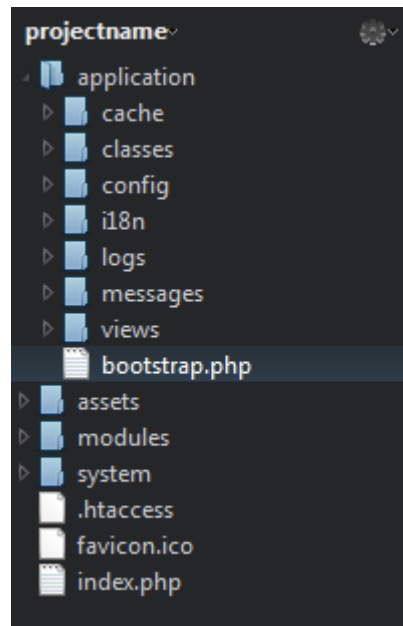


and set the base_url in the Kohana::init call to reflect the location of the application folder on your server relative to the document root.

```
102 * - boolean caching      enable or disable internal caching
103 * - boolean expose       set the X-Powered-By header
104 */
105 Kohana::init(array(
106     'base_url' => 'http://yourappdirectory/',
107     'index_file' => FALSE,
108 ));
109
```

4. Choose the file dump.sql with schema and data for app, and import it in your postgresql database.

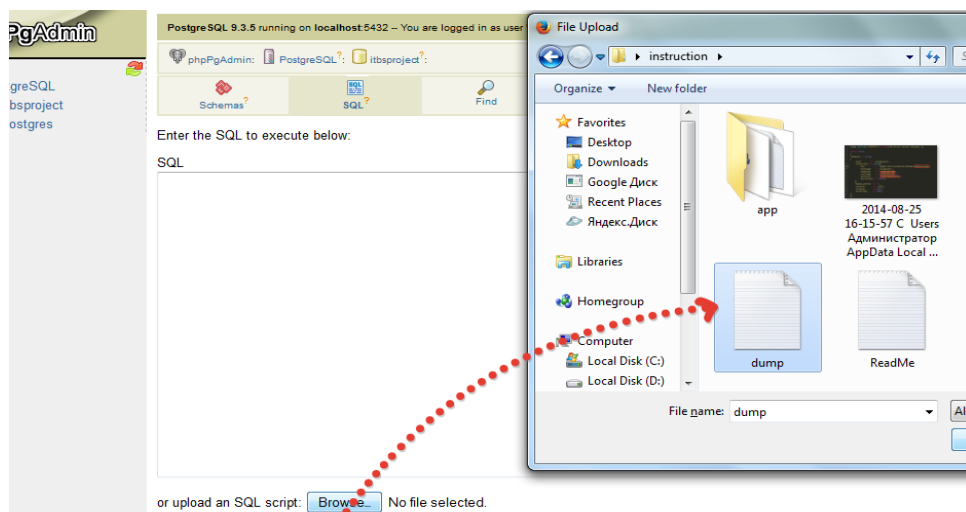

5. Open application/config/database.php

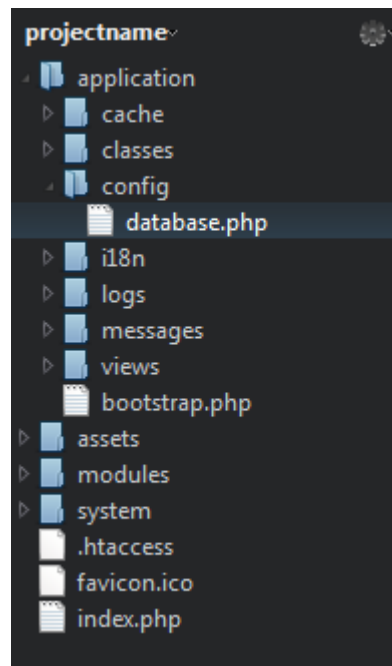

and fill in the PostgreSQL information for your host server.

```
8      'connection' => array(  
9          'dsn'       => 'pgsql:host=localhost;dbname=databasename',  
10         'hostname'  => 'localhost',  
11         'database'  => 'databasename',  
12         'username'  => 'databaseuser',  
13         'password'  => 'databasepassword',  
14         'persistent' => FALSE,
```

6. Test your installation by opening the URL you set as the base_url(e.g. <http://projectname/>) in your favorite browser.