

^{*} The report title has been cropped to fit in the available space.

| Feature | | Scenario | | | | Step | | | |
|------------------------------|----------|----------|---|---|---|------|---|---|---|
| Name | Duration | T | P | F | S | T | P | F | S |
| User can access sign-up page | 1.006 s | 1 | 0 | 1 | 0 | 6 | 0 | 0 | 6 |

FAIL & SKIP SCENARIOS -- 3 --

| # | Feature Name | Scenario Name |
|---|------------------------------|-------------------------------------|
| 1 | User can access sign-up page | Customer can access the signup page |


| TAG | Scenario | | | Feature | | | | |
|---------|----------|---|---|---------|---|---|---|---|
| Name | T | P | F | S | T | P | F | S |
| @TestDB | 1 | 0 | 1 | 0 | 1 | 0 | 1 | 0 |

FEATURES SUMMARY -- 5 --



| # | Feature Name | T | P | F | S | Duration |
|---|------------------------------|---|---|---|---|----------|
| 1 | User can access sign-up page | 1 | 0 | 1 | 0 | 1.006 s |

SCENARIOS SUMMARY -- 6 --

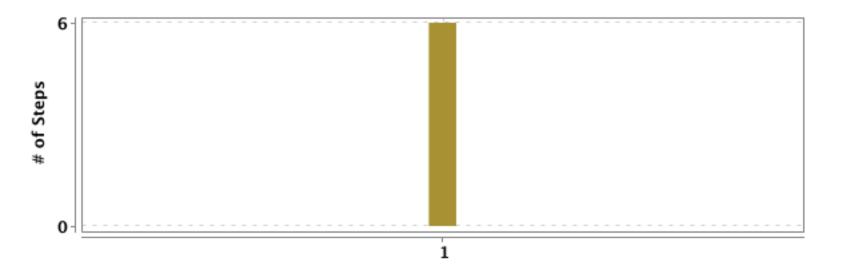


| # | Feature Name | Scenario Name | T | P | F | S | Duration |
|---|------------------------------|-------------------------------------|---|---|---|---|----------|
| 1 | User can access sign-up page | Customer can access the signup page | 6 | 0 | 0 | 6 | 1.004 s |

DETAILED SECTION -- 7 --

User can access sign-up page

| FAILED | DURATION - 1.006 s | Scenarios | | Steps | |
|---------------------|--------------------|-----------|---|-----------|---|
| | | Total - 1 | | Total - 6 | |
| / 5:28:14.328 am // | 5:28:15.334 am / | Pass - 0 | 1 | Pass - 0 | 6 |
| | | Fail - 1 | | Fail - 0 | |
| | | Skip - 0 | | Skip - 6 | |
| | | | | | |

Customer can access the signup page

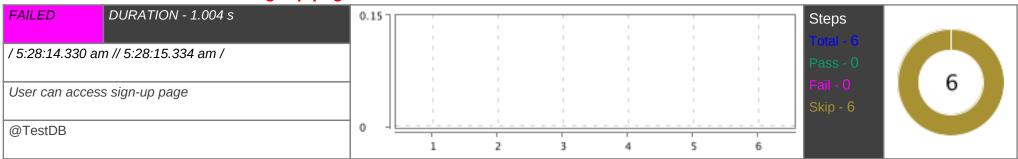

| # | Step / Hook Details | Status | Duration |
|---|---|--------|----------|
| | BEFORE - com.automationpractice.hook.Hook.setUp() | FAILED | 0.959 s |
| | io.github.bonigarcia.wdm.config.WebDriverManagerException: io.github.bonigarcia.wdm.config.WebDriverManagerException: java.net. UnknownHostException: chromedriver.storage.googleapis.com | | |
| | at io.github.bonigarcia.wdm.WebDriverManager.handleException(WebDriverManager.java:1404) | | |
| | at io.github.bonigarcia.wdm.WebDriverManager.manage(WebDriverManager.java:1178) | | |
| | at io.github.bonigarcia.wdm.WebDriverManager.fallback(WebDriverManager.java:1420) | | |
| | at io.github.bonigarcia.wdm.WebDriverManager.handleException(WebDriverManager.java:1401) | | |
| | at io.github.bonigarcia.wdm.WebDriverManager.manage(WebDriverManager.java:1178) | | |
| | at io.github.bonigarcia.wdm.WebDriverManager.handleException(WebDriverManager.java:1394) | | |
| | at io.github.bonigarcia.wdm.WebDriverManager.manage(WebDriverManager.java:1178) | | |
| | at io.github.bonigarcia.wdm.WebDriverManager.setup(WebDriverManager.java:420) | | |
| | at com.automationpractice.common.Browser.initChrome(Browser.java:18) | | |
| | at com.automationpractice.common.Browser.launchBrowser(Browser.java:63) | | |
| | at com.automationpractice.hook.Hook.setUp(Hook.java:10) | | |
| | Caused by: io.github.bonigarcia.wdm.config.WebDriverManagerException: java.net.UnknownHostException: chromedriver.storage.googleapis. | | |
| | com | | |
| | at io.github.bonigarcia.wdm.WebDriverManager.getDriversFromXml(WebDriverManager.java:1558) | | |
| | at io.github.bonigarcia.wdm.managers.ChromeDriverManager.getDriverUrls(ChromeDriverManager.java:108) | | |

| # | Step / Hook Details | Status | Duration |
|---|---|--------|----------|
| | at io.github.bonigarcia.wdm.WebDriverManager.createUrlHandler(WebDriverManager.java:1425) | | |
| | at io.github.bonigarcia.wdm.WebDriverManager.download(WebDriverManager.java:1253) | | |
| | at io.github.bonigarcia.wdm.WebDriverManager.manage(WebDriverManager.java:1172) | | |
| | at io.github.bonigarcia.wdm.WebDriverManager.fallback(WebDriverManager.java:1420) | | |
| | at io.github.bonigarcia.wdm.WebDriverManager.handleException(WebDriverManager.java:1401) | | |
| | at io.github.bonigarcia.wdm.WebDriverManager.manage(WebDriverManager.java:1178) | | |
| | at io.github.bonigarcia.wdm.WebDriverManager.handleException(WebDriverManager.java:1394) | | |
| | at io.github.bonigarcia.wdm.WebDriverManager.manage(WebDriverManager.java:1178) | | |
| | at io.github.bonigarcia.wdm.WebDriverManager.setup(WebDriverManager.java:420) | | |
| | at com.automationpractice.common.Browser.initChrome(Browser.java:18) | | |
| | at com.automationpractice.common.Browser.launchBrowser(Browser.java:63) | | |
| | at com.automationpractice.hook.Hook.setUp(Hook.java:10) | | |
| | at java.base/jdk.internal.reflect.DirectMethodHandleAccessor.invoke(DirectMethodHandleAccessor.java:104) | | |
| | at java.base/java.lang.reflect.Method.invoke(Method.java:578) | | |
| | at io.cucumber.java.Invoker.doInvoke(Invoker.java:66) | | |
| | at io.cucumber.java.Invoker.invoke(Invoker.java:24) | | |
| | at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) | | |
| | at io.cucumber.java.JavaHookDefinition.execute(JavaHookDefinition.java:64) | | |
| | at io.cucumber.core.runner.CoreHookDefinition.execute(CoreHookDefinition.java:46) | | |
| | at io.cucumber.core.runner.HookDefinitionMatch.runStep(HookDefinitionMatch.java:21) | | |
| | at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) | | |
| | at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:84) | | |
| | at io.cucumber.core.runner.TestStep.run(TestStep.java:56) | | |
| | at io.cucumber.core.runner.TestCase.run(TestCase.java:78) | | |
| | at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) | | |
| | at io.cucumber.junit.PickleRunners\$NoStepDescriptions.lambda\$run\$0(PickleRunners.java:151) | | |
| | at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:137) | | |
| | $at\ io. cucumber. core. runtime. Rethrowing Throwable Collector. execute And Throw (Rethrowing Throwable Collector. java: 23)$ | | |
| | at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:137) | | |
| | at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:148) | | |
| | at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) | | |
| | at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) | | |
| | at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) | | |
| | at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) | | |
| | at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) | | |
| | at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) | | |
| | at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) | | |
| | at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) | | |
| | at org.junit.runners.ParentRunner.run(ParentRunner.java:413) | | |
| | at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) | | |
| | at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196) | | |

| # | Step / Hook Details | Status | Duration |
|---|---|--------|----------|
| | at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) | | |
| | at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) | | |
| | at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) | | |
| | at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) | | |
| | at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) | | |
| | at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) | | |
| | at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runFeatures\$6(CucumberExecutionContext.java:148) | | |
| | at io.cucumber.core.runtime.CucumberExecutionContext.execute(CucumberExecutionContext.java:163) | | |
| | at io.cucumber.core.runtime.CucumberExecutionContext.runFeatures(CucumberExecutionContext.java:146) | | |
| | at io.cucumber.junit.Cucumber\$StartAndFinishTestRun.evaluate(Cucumber.java:226) | | |
| | at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) | | |
| | at org.junit.runners.ParentRunner.run(ParentRunner.java:413) | | |
| | at org.junit.runner.JUnitCore.run(JUnitCore.java:137) | | |
| | at com.intellij.junit4.JUnit4IdeaTestRunner.startRunnerWithArgs(JUnit4IdeaTestRunner.java:69) | | |
| | at com.intellij.rt.junit.IdeaTestRunner\$Repeater\$1.execute(IdeaTestRunner.java:38) | | |
| | at com.intellij.rt.execution.junit.TestsRepeater.repeat(TestsRepeater.java:11) | | |
| | at com.intellij.rt.junit.IdeaTestRunner\$Repeater.startRunnerWithArgs(IdeaTestRunner.java:35) | | |
| | at com.intellij.rt.junit.JUnitStarter.prepareStreamsAndStart(JUnitStarter.java:235) | | |
| | at com.intellij.rt.junit.JUnitStarter.main(JUnitStarter.java:54) | | |
| | Caused by: java.net.UnknownHostException: chromedriver.storage.googleapis.com | | |
| | at java.base/java.net.InetAddress\$CachedAddresses.get(InetAddress.java:953) | | |
| | at java.base/java.net.InetAddress.getAllByName0(InetAddress.java:1673) | | |
| | at java.base/java.net.InetAddress.getAllByName(InetAddress.java:1533) | | |
| | at org.apache.hc.client5.http.SystemDefaultDnsResolver.resolve(SystemDefaultDnsResolver.java:43) | | |
| | at org.apache.hc.client5.http.impl.io.DefaultHttpClientConnectionOperator.connect(DefaultHttpClientConnectionOperator.java:141) | | |
| | at org.apache.hc.client5.http.impl.io.PoolingHttpClientConnectionManager.connect(PoolingHttpClientConnectionManager.java:447) | | |
| | at org.apache.hc.client5.http.impl.classic.InternalExecRuntime.connectEndpoint(InternalExecRuntime.java:162) | | |
| | at org.apache.hc.client5.http.impl.classic.InternalExecRuntime.connectEndpoint(InternalExecRuntime.java:172) | | |
| | at org.apache.hc.client5.http.impl.classic.ConnectExec.execute(ConnectExec.java:142) | | |
| | at org.apache.hc.client5.http.impl.classic.ExecChainElement.execute(ExecChainElement.java:51) | | |
| | at org.apache.hc.client5.http.impl.classic.ProtocolExec.execute(ProtocolExec.java:192) | | |
| | at org.apache.hc.client5.http.impl.classic.ExecChainElement.execute(ExecChainElement.java:51) | | |
| | at org.apache.hc.client5.http.impl.classic.HttpRequestRetryExec.execute(HttpRequestRetryExec.java:96) | | |
| | at org.apache.hc.client5.http.impl.classic.ExecChainElement.execute(ExecChainElement.java:51) | | |
| | at org.apache.hc.client5.http.impl.classic.ContentCompressionExec.execute(ContentCompressionExec.java:152) | | |
| | at org.apache.hc.client5.http.impl.classic.ExecChainElement.execute(ExecChainElement.java:51) | | |
| | at org.apache.hc.client5.http.impl.classic.RedirectExec.execute(RedirectExec.java:115) | | |
| | at org.apache.hc.client5.http.impl.classic.ExecChainElement.execute(ExecChainElement.java:51) | | |
| | at org.apache.hc.client5.http.impl.classic.InternalHttpClient.doExecute(InternalHttpClient.java:170) | | |
| | at org.apache.hc.client5.http.impl.classic.CloseableHttpClient.execute(CloseableHttpClient.java:87) | | |
| | at org.apache.hc.client5.http.impl.classic.CloseableHttpClient.execute(CloseableHttpClient.java:55) | | |

DETAILED SECTION -- 10 --

| # | Step / Hook Details | Status | Duration |
|---|---|---------|----------|
| | at org.apache.hc.client5.http.classic.HttpClient.executeOpen(HttpClient.java:183) at io.github.bonigarcia.wdm.online.HttpClient.execute(HttpClient.java:162) at io.github.bonigarcia.wdm.WebDriverManager.getDriversFromXml(WebDriverManager.java:1543) | | |
| 1 | Given i navigate to Home Page | SKIPPED | 0.000 s |
| 2 | And I can click on Sign-Up or Login link | SKIPPED | 0.000 s |
| 3 | When I enter the Name | SKIPPED | 0.000 s |
| 4 | And I enter the Email Address | SKIPPED | 0.000 s |
| 5 | And I click on Sign-up button | SKIPPED | 0.000 s |
| 6 | Then sing-up page should be dispaly | SKIPPED | 0.000 s |