
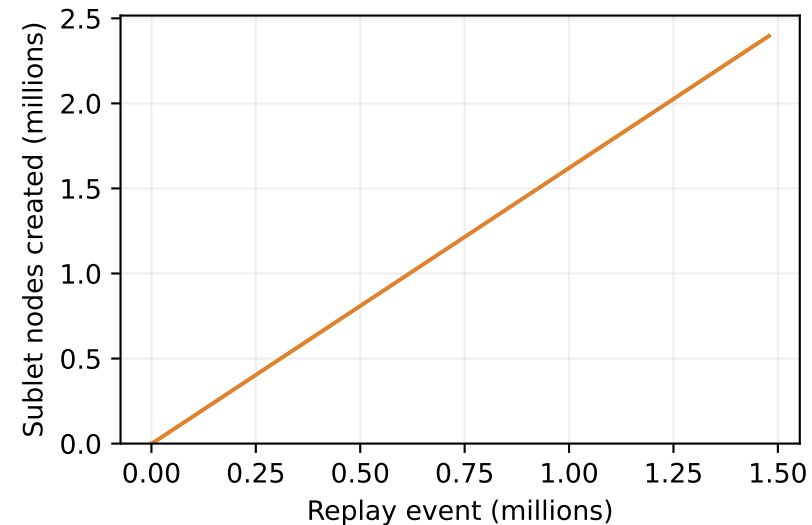
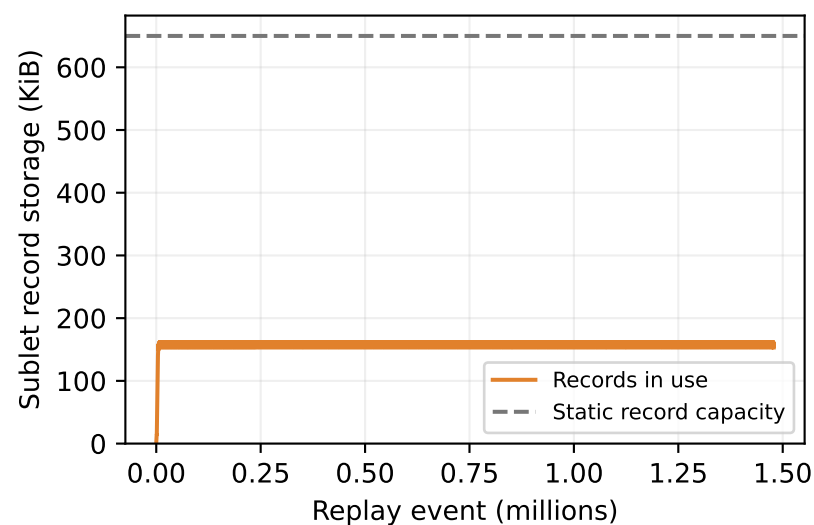
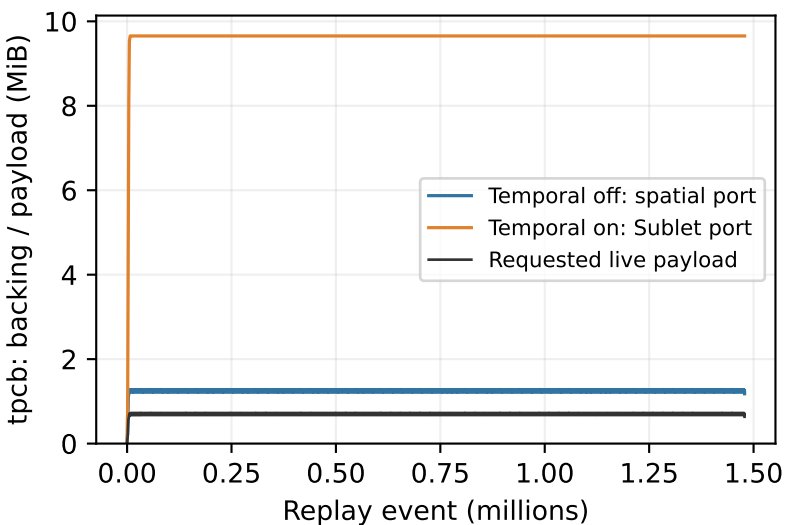
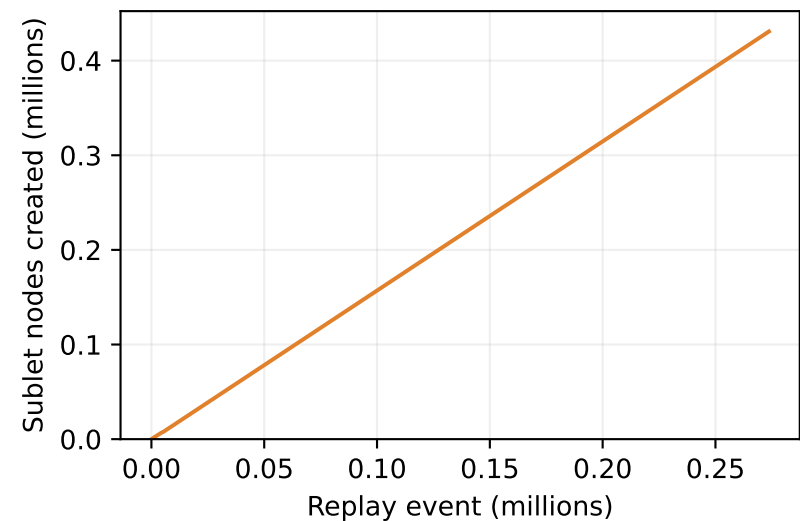
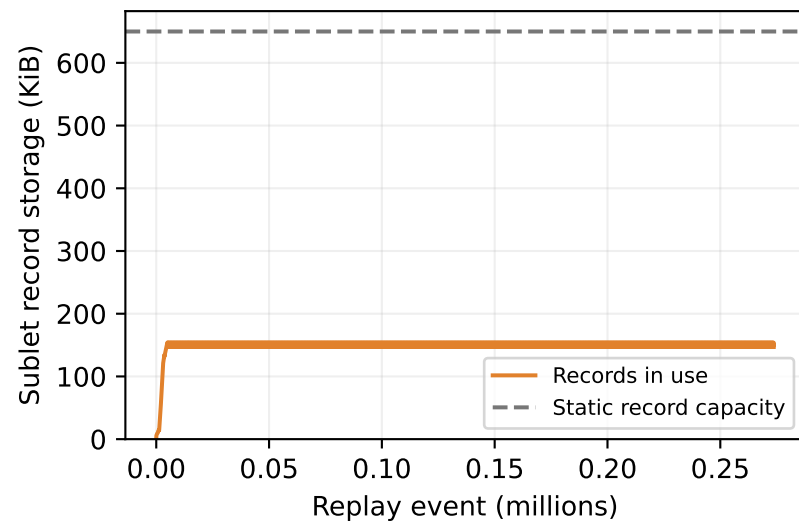


PostgreSQL allocator memory behaviour in QEMU

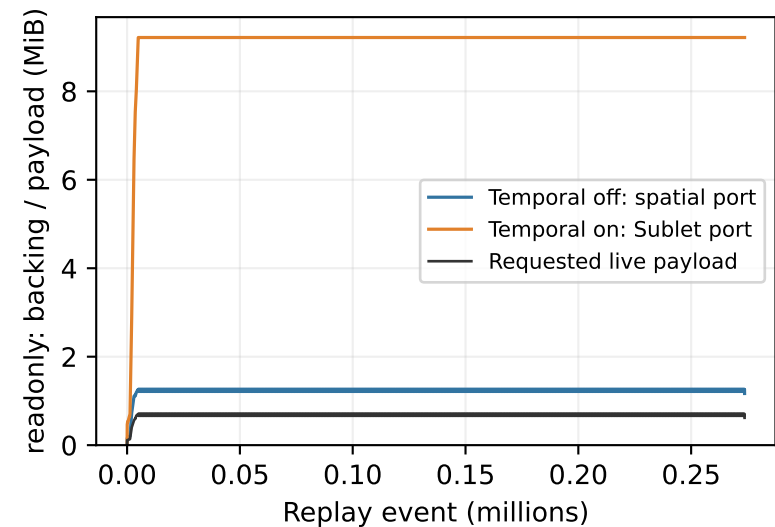

3 repetitions per arm; identical profiles. Backing definitions differ by port; arena reservation is 64 MiB in both.
Node creation is cumulative demand. Replay buffers and global node/tag storage are outside these curves.