


Capstone spatial Sublet PoisonCap spatial PoisonCap temporal

1 · Reuse across applications

SQLite · memsys5

speedtest1 main

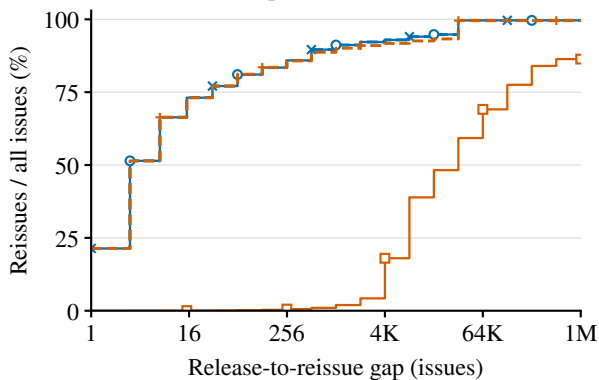


Same axes for every workload.

Curves: three coinciding repetitions.

Rows: SQLite, mruby, FFmpeg.


mruby · GC slots

AO, width 8

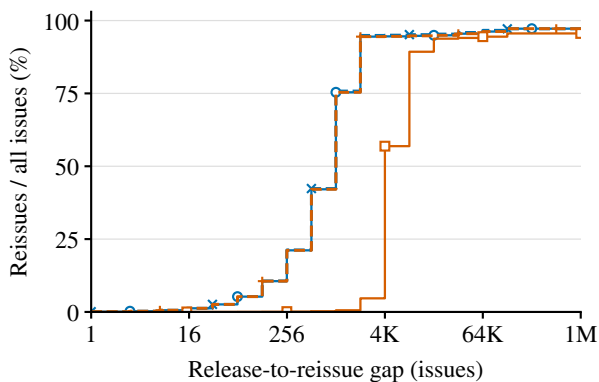


mruby · GC slots

AO, width 16

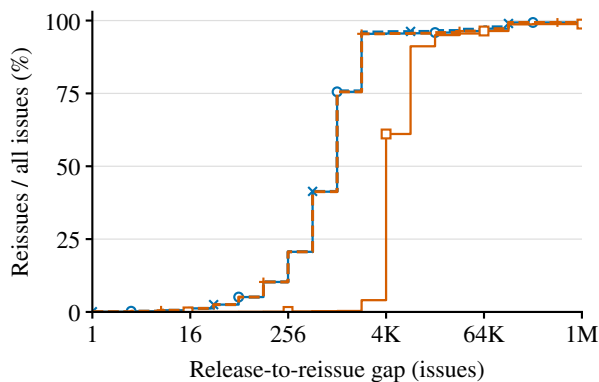


FFmpeg · pool leases

FATE Xvid, 20 frames

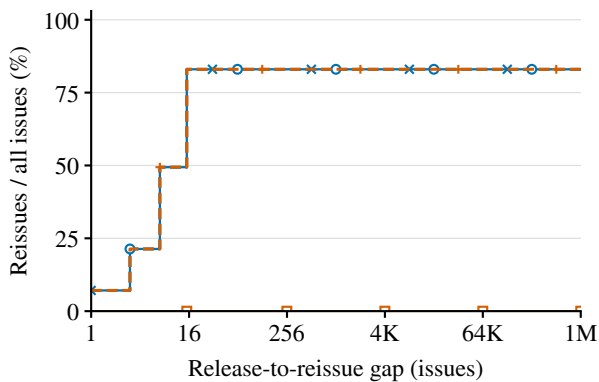

FFmpeg · pool leases

FATE resize, 150 frames

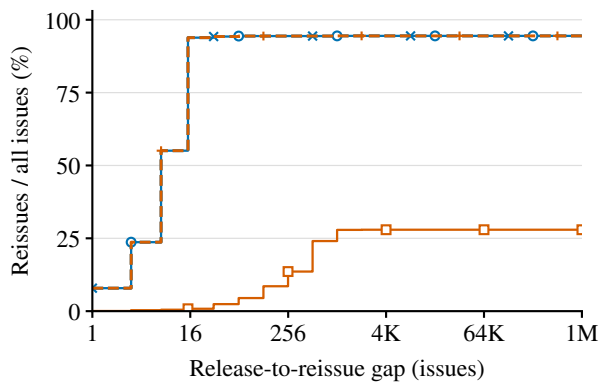

Published SQLite thresholds; transferred to mruby/FFmpeg. Correctness repairs; FFmpeg teardown sweeps.


Outer revocation on in both PoisonCap arms. Three repeats. Selected allocators; no RSS or timing claims.

—○— Sublet —□— PoisonCap temporal

2 · Address footprint — application-specific quantities


SQLite 3.22.0 · speedtest1 main

Address coverage: allocated interval union

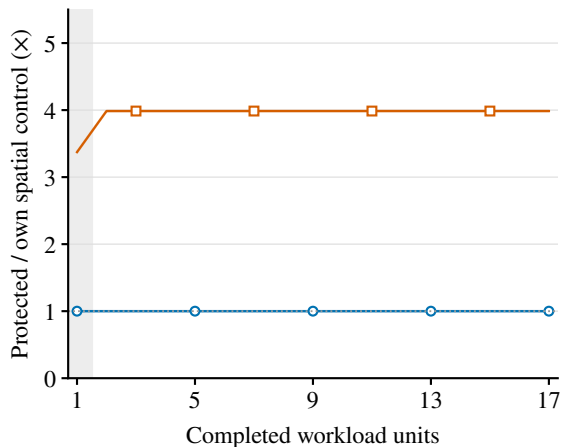

FFmpeg · pool leases

Carved address extent (including padding)

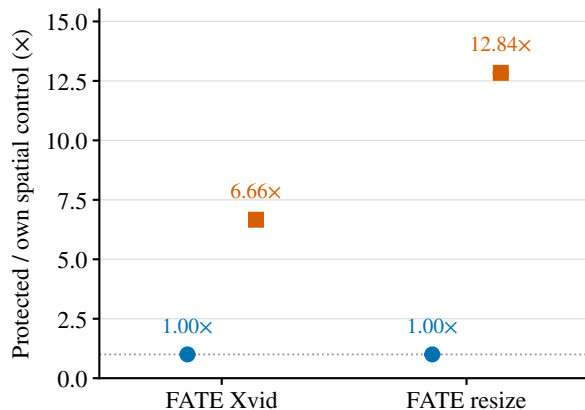


Published SQLite thresholds; transferred to mruby/FFmpeg. Correctness repairs; FFmpeg teardown sweeps.

Outer revocation on in both PoisonCap arms. Three repeats. Selected allocators; no RSS or timing claims.

3 · Selected allocator memory

SQLite 3.22.0 · speedtest1 main

Allocator bytes: peak held + metadata

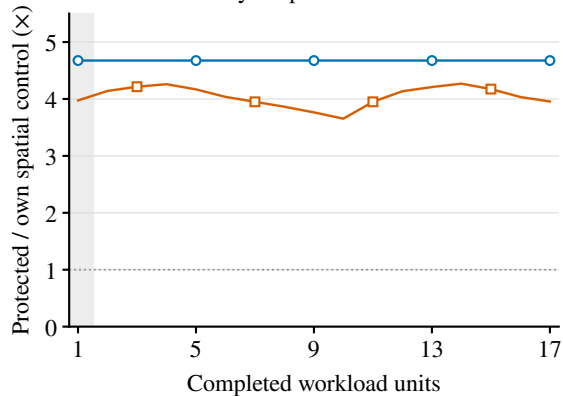


Ratios use each platform's own control.

Lower ratios mean less added cost.

Selected allocator bytes, not total RSS.

mruby · GC backing
Peak

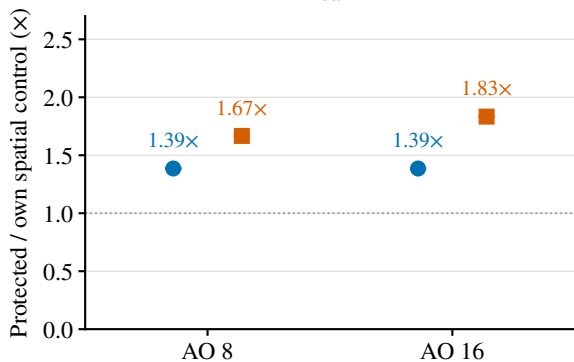

mruby · GC backing
After render

