

# API Football

Import terlebih dahulu databsnya yang berada di folder database.

Dengan nama database **test\_tic**.

## 1. Recordgame

Url : [http://localhost/test\\_tci/football/recordgame.php](http://localhost/test_tci/football/recordgame.php)

Method : POST

Body Parameter :


clubhomename : NOT NULL (TEXT)

clubawayname : NOT NULL (TEXT)

score : NOT NULL (format(1 : 2))

```
{  
  
  "clubhomename": "Barcelona",  
  
  "clubawayname": "Real Madrid",  
  
  "score": "5 : 5"  
}
```

Success :

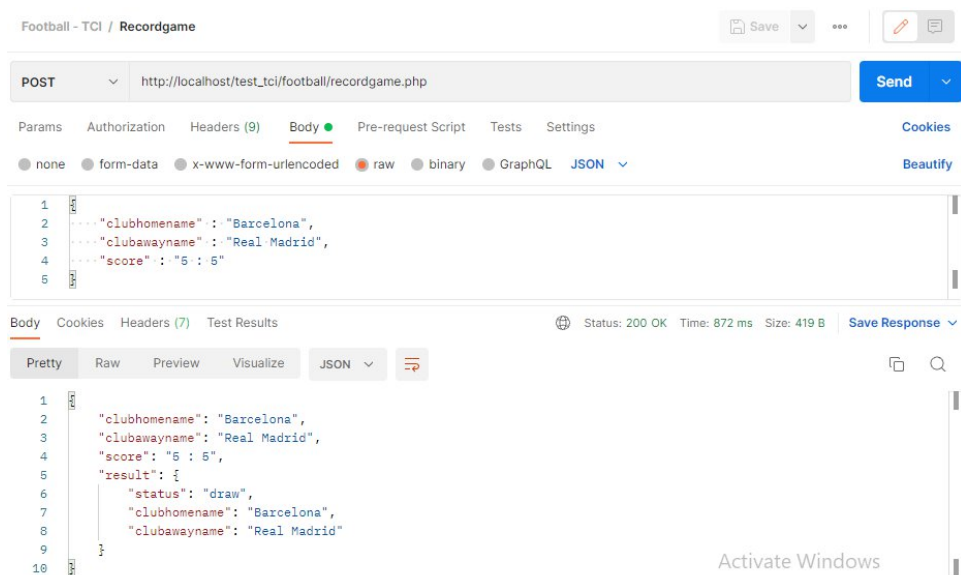

Activate Windows  
Go to Settings to activate Windows.

## 2. League Standing

Url : [http://localhost/test\\_tci/football/leaguestanding.php](http://localhost/test_tci/football/leaguestanding.php)

Method : GET

Success:

The screenshot displays a REST client interface for a request to `http://localhost/test_tci/football/leaguestanding.php`. The request method is GET. The response status is 200 OK, with a time of 64 ms and a size of 341 B. The response body is shown in JSON format, containing an array of two objects representing football clubs.

Football - TCI / League Standing

GET `http://localhost/test_tci/football/leaguestanding.php` Send

Params Authorization Headers (7) Body Pre-request Script Tests Settings Cookies

Query Params

KEY	VALUE	DESCRIPTION	...	Bulk Edit
Key	Value	Description		

Body Cookies Headers (7) Test Results Status: 200 OK Time: 64 ms Size: 341 B Save Response

Pretty Raw Preview Visualize JSON

```
1 [
2   {
3     "clubname": "Barcelona",
4     "points": "3"
5   },
6   {
7     "clubname": "Real Madrid",
8     "points": "6"
9   }
10 ]
```

Activate Windows  
Go to Settings to activate Windows.

## 3. Rank

Url : [http://localhost/test\\_tci/football/rank.php?clubname=Barcelona](http://localhost/test_tci/football/rank.php?clubname=Barcelona)

Method : GET

Params :

clubname : NOT NULL (TEXT)

Football - TCI / Rank

Save ...

GET http://localhost/test\_tci/football/rank.php?clubname=Barcelona Send

Params Authorization Headers (7) Body Pre-request Script Tests Settings Cookies

Query Params

KEY	VALUE	DESCRIPTION	...	Bulk Edit
<input checked="" type="checkbox"/> clubname	Barcelona			
Key	Value	Description		

Body Cookies Headers (7) Test Results

Status: 200 OK Time: 100 ms Size: 301 B Save Response

Pretty Raw Preview Visualize JSON

```
1 {
2   "clubname": "Barcelona",
3   "standing": 2
4 }
5
6
```

Activate Windows  
Go to Settings to activate Windows.

#### 4. Contain Letter

Url : [http://localhost/test\\_tci/is-contain-letters.php](http://localhost/test_tci/is-contain-letters.php)

Method : POST

Body Parameter :

first\_word : NOT NULL (TEXT)

second\_word : NOT NULL (TEXT)

```
{
    "first_word": "cat",
    "second_word": "antartica"
}
```

Success :



POST http://localhost/test\_tci/is-contain-letters.php

Send

Params Authorization Headers (9) Body Pre-request Script Tests Settings

Cookies

none form-data x-www-form-urlencoded raw binary GraphQL JSON

Beautify

```
1 {
2   "first_word": "cat",
3   "second_word": "antartica"
4 }
```

Body Cookies Headers (7) Test Results

Status: 200 OK Time: 2.15 s Size: 265 B Save Response

Pretty Raw Preview Visualize JSON



1 true

Activate Windows  
Go to Settings to activate Windows.