

Vector: One Agent to Rule Them All?

One agent. One community. All your observability.

Pavlos Rontidis

Senior Software Engineer

github.com/pront



DATADOG

N agents → N problems



If you are using more than one...




Different Configs



Different Failure Modes



Different Resource Profiles

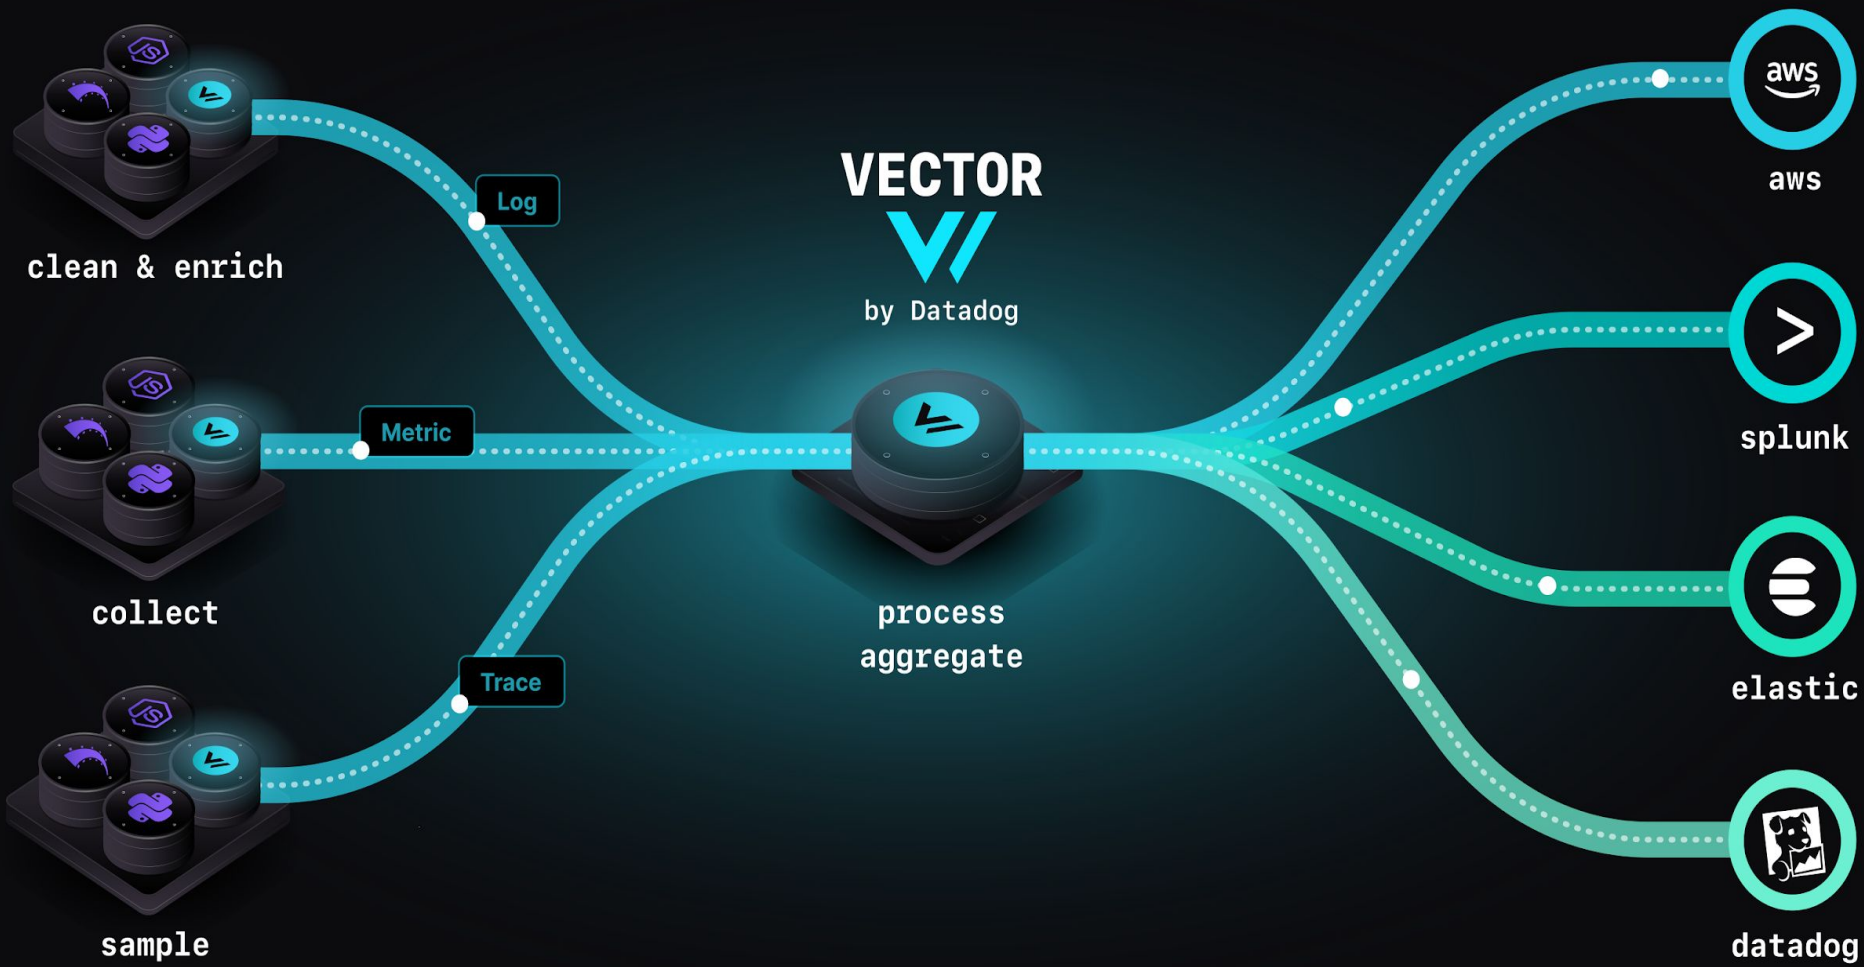

Open Source, Truly



GitHub Repository

github.com/vectordotdev/vector



Zero closed source components

Fork and ship your own



Stewardship

Datadog's Community Open Source Engineering team (COSE)

Vector, in a nutshell

Written in Rust

Memory safe, high performance

Config-driven

Declarative and high level

Unified Pipeline

Logs, metrics, and traces

Deploy Anywhere

Kubernetes, containers, VMs, bare metal

100+ sources, transforms, and sinks

Processing Tools



Parse and enrich

remap

Vector Remap Language offers 200+ functions



Aggregate over time

aggregate, reduce



Sample and rate-limit

sample, throttle, dedupe



Split by content

route, filter, exclusive_route



Tame cardinality

tag_cardinality_limit



Convert data types

log to metric, trace to log, etc.

All in one Vector pipeline


```
sources:
  app_logs:
    type: file
    include: ["/var/log/app/*.log"]

  syslog_in:
    type: syslog
    address: "0.0.0.0:514"
    mode: tcp

transforms:
  parse:
    type: remap
    inputs: ["app_logs"]
    source: |
      . = parse_json!(.message)

sinks:
  datadog:
    type: datadog_logs
    inputs: ["parse"]

  s3_archive:
    type: aws_s3
    inputs: ["syslog_in"]
    bucket: "logs-archive"
    region: "us-east-1"
```

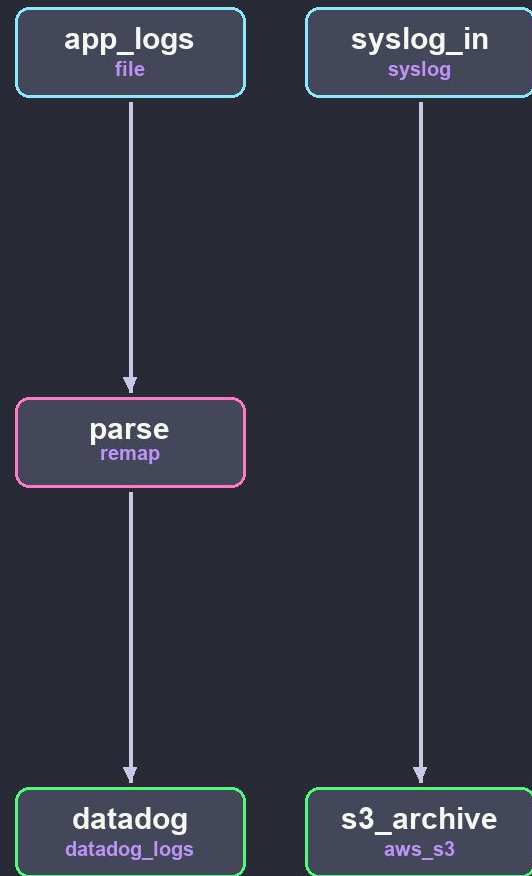

```
sources:
  otlp:
    type: opentelemetry
    grpc:
      address: "0.0.0.0:4317"
    http:
      address: "0.0.0.0:4318"

sinks:
  dd_logs:
    type: datadog_logs
    inputs: ["otlp.logs"]

  dd_metrics:
    type: datadog_metrics
    inputs: ["otlp.metrics"]

  otlp_traces:
    type: opentelemetry
    inputs: ["otlp.traces"]
    protocol:
      type: http
      uri: "http://tempo:4318/v1/traces"
```

```
transforms:
  parse_logs:
    type: remap
    inputs: ["otlp.logs"]
    source: '. = parse_json!(.message)'

  sample_debug:
    type: sample
    inputs: ["parse_logs"]
    rate: 100

  route_by_severity:
    type: route
    inputs: ["parse_logs"]
    route:
      errors: '.severity == "error"'
      warnings: '.severity == "warn"'
```


Case Study: Quad9



Before Vector

4 Go repos · custom dnstap tooling · 2012 hardware



Contributing

They assigned one engineer on implementing various Vector features

Case Study: Quad9



Before Vector

4 Go repos · custom dnstap tooling · 2012 hardware



Contributing

They assigned one engineer on implementing various DNS features



After

- Vector only
- 5x faster ingestion
- New features now available for all Vector users

Vector is alive and thriving



Release Schedule

every 6 weeks



Broad Adoption


Used by thousands of orgs in prod 



Vibrant Community

~160 PR contributors in the last 12 months

Unique Contributors

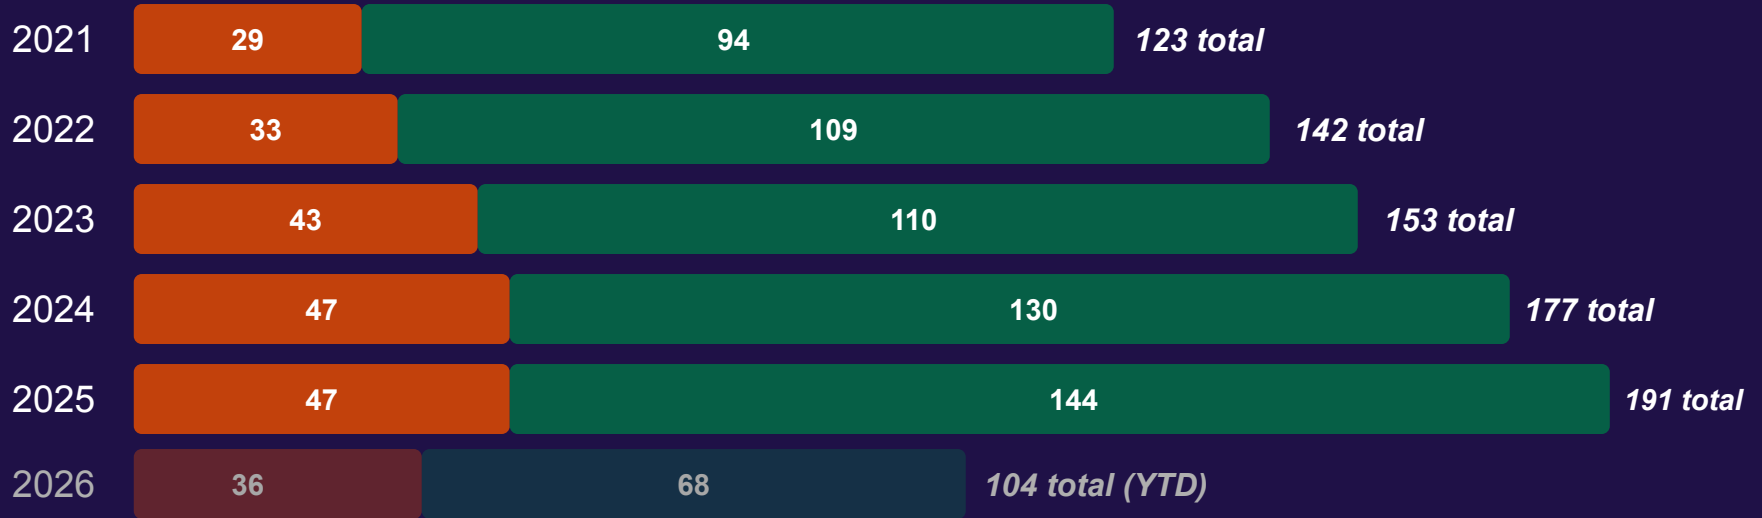

Returning

New

Get involved!



`pront.github.io/maintainer-month-vector-2026`

Thank You!

Please come find us after this talk
if you have any questions.

We are hiring 🎉 Scan to apply:

