Azure API Key

Advanced required

Configure provider

Azure

Azure provider docs

Name

AZURE_DEFAULT_CREDENTIALS

Authentication

API Key
Use an Azure OpenAI API key

Entra API
Use Microsoft Entra ID for authentication

Enter API key

This secret will be encrypted at rest using transparent data encryption with a unique 256-bit key and nonce.

Form | Advanced

API base URL: Enter API base URL

API version: 2024-12-01-preview

Deployment: Enter deployment

Headers: No headers configured

Models: No custom models configured

Use the deployment name in the request path

This endpoint supports streaming

Include the default registry of Azure models

If multiple providers provide the same model ID, requests for that model ID will be load balanced among all the providers for that model ID.

Add a header | Add a model | Save

Azure Entra API
Advanced rqired

Configure provider

Azure

Azure provider docs

Name

AZURE_DEFAULT_CREDENTIALS

Authentication

API Key
Use an Azure OpenAI API key

Entra API
Use Microsoft Entra ID for authentication

Client ID: Enter client ID

Client secret: Enter client secret

Tenant ID: Enter tenant ID

Scope: Enter scope

This secret will be encrypted at rest using transparent data encryption with a unique 256-bit key and nonce.

Form | Advanced

API base URL: Enter API base URL

API version: 2024-12-01-preview

Deployment: Enter deployment

Headers: No headers configured

Models: No custom models configured

Use the deployment name in the request path

This endpoint supports streaming

Include the default registry of Azure models

If multiple providers provide the same model ID, requests for that model ID will be load balanced among all the providers for that model ID.

Add a header | Add a model | Save

Bedrock IAM credientials
- Advanced Form needs to be acquired

Configure provider

Bedrock

Bedrock provider docs

Name

AWS_DEFAULT_CREDENTIALS

Authentication

IAM credentials
Use AWS access key and secret access key

API key
Use Amazon Bedrock API key (bearer token)

Enter secret access key

This secret will be encrypted at rest using transparent data encryption with a unique 256-bit key and nonce.

Form | Advanced

Region Enter region

Region cannot be empty

Access Key Enter access key

Access key cannot be empty

Session Token Enter session token

Endpoint URL Enter API base URL

Models No custom models configured

This endpoint supports streaming

Include the default registry of Bedrock models

If multiple providers provide the same model ID, requests for that model ID will be load balanced among all the providers for that model ID.

Add a model | Save

bedrock API Key
Advanced form needs to be acquired

Configure provider

Bedrock

Bedrock provider docs

Name

AWS_DEFAULT_CREDENTIALS

Authentication

IAM credentials
Use AWS access key and secret access key

API key
Use Amazon Bedrock API key (bearer token)

Enter API key

This secret will be encrypted at rest using transparent data encryption with a unique 256-bit key and nonce.

Form | Advanced

Region Enter region

Endpoint URL Enter API base URL

Models No custom models configured

This endpoint supports streaming

Include the default registry of Bedrock models

If multiple providers provide the same model ID, requests for that model ID will be load balanced among all the providers for that model ID.

Add a model | Save

Grok - Basic “Set API key”

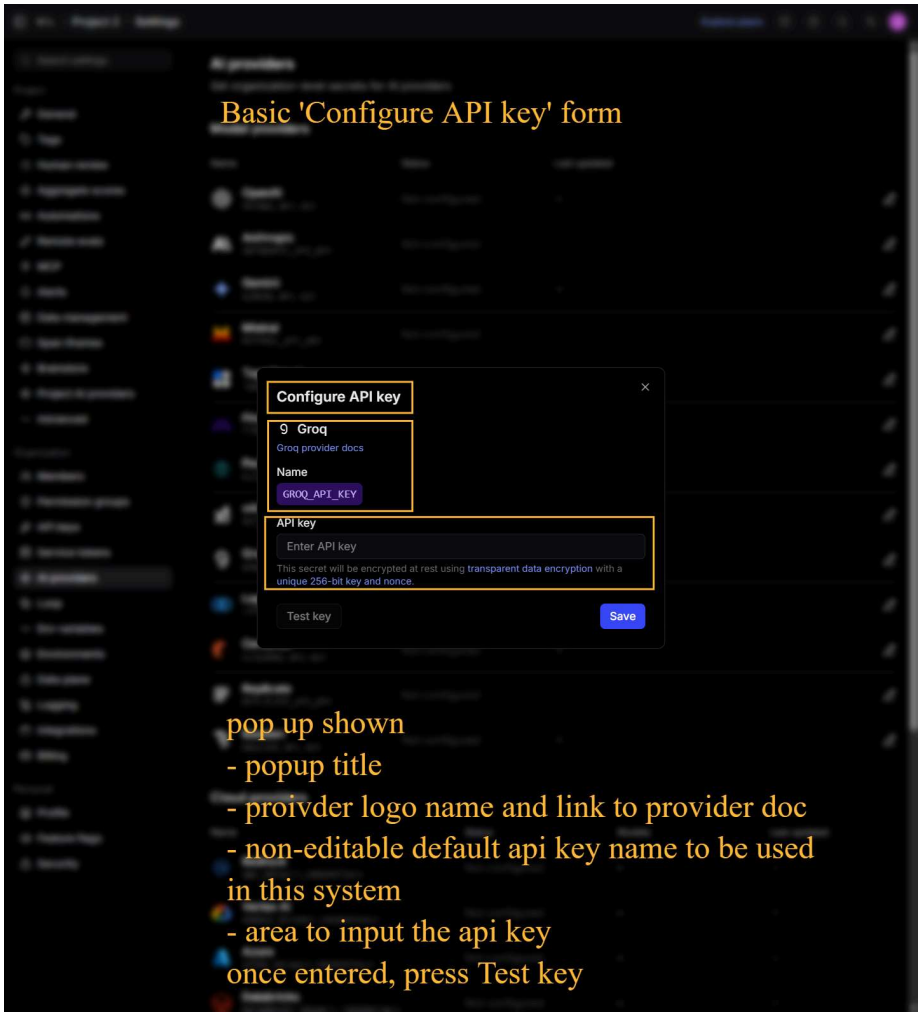

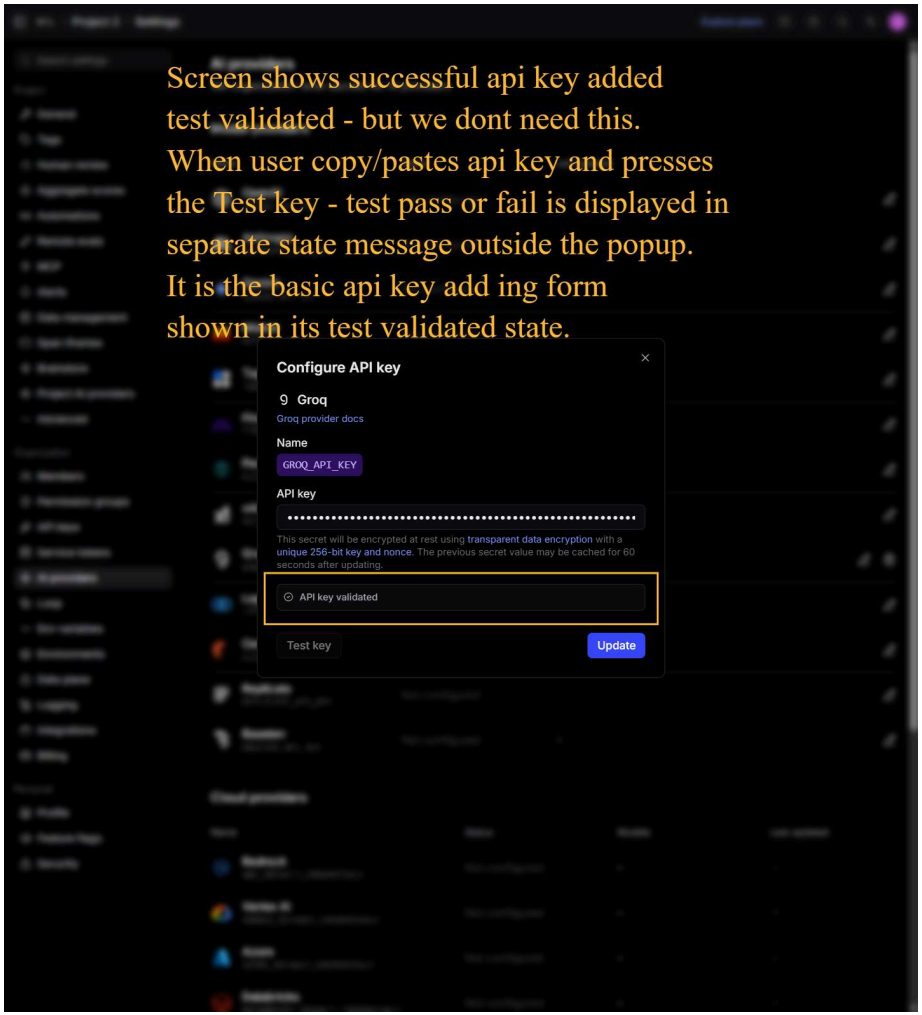

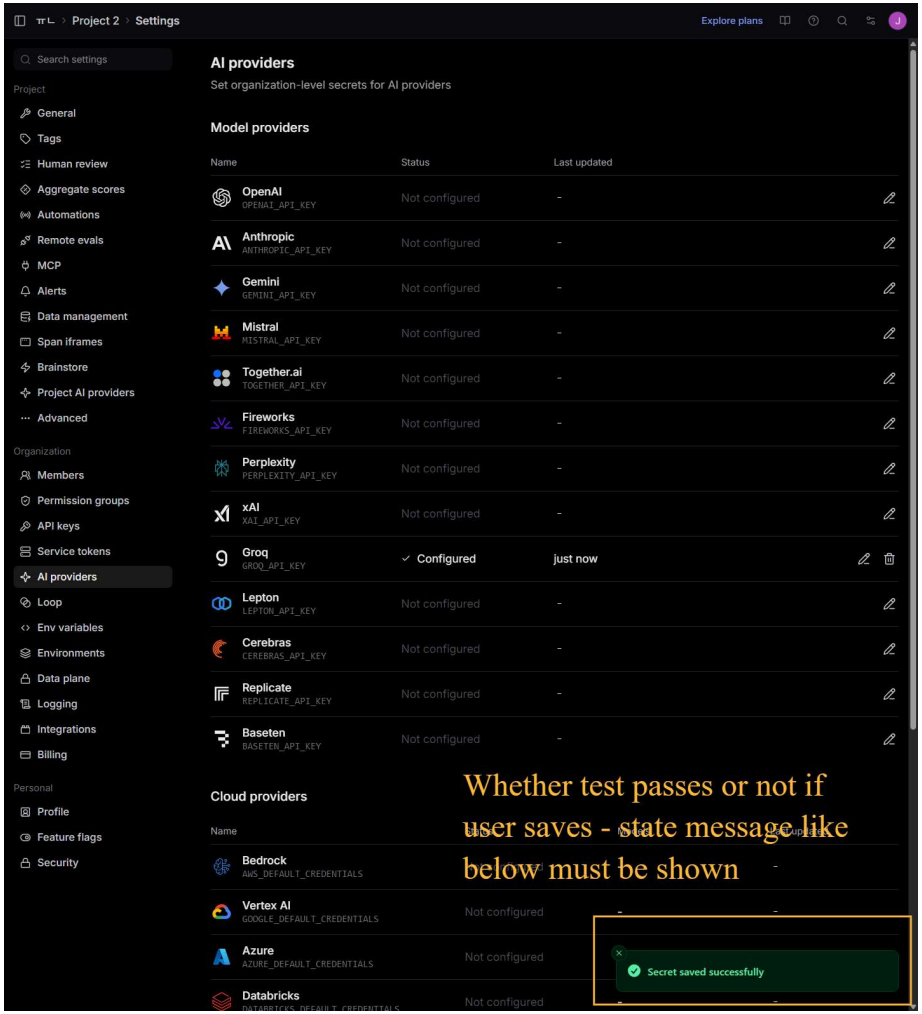

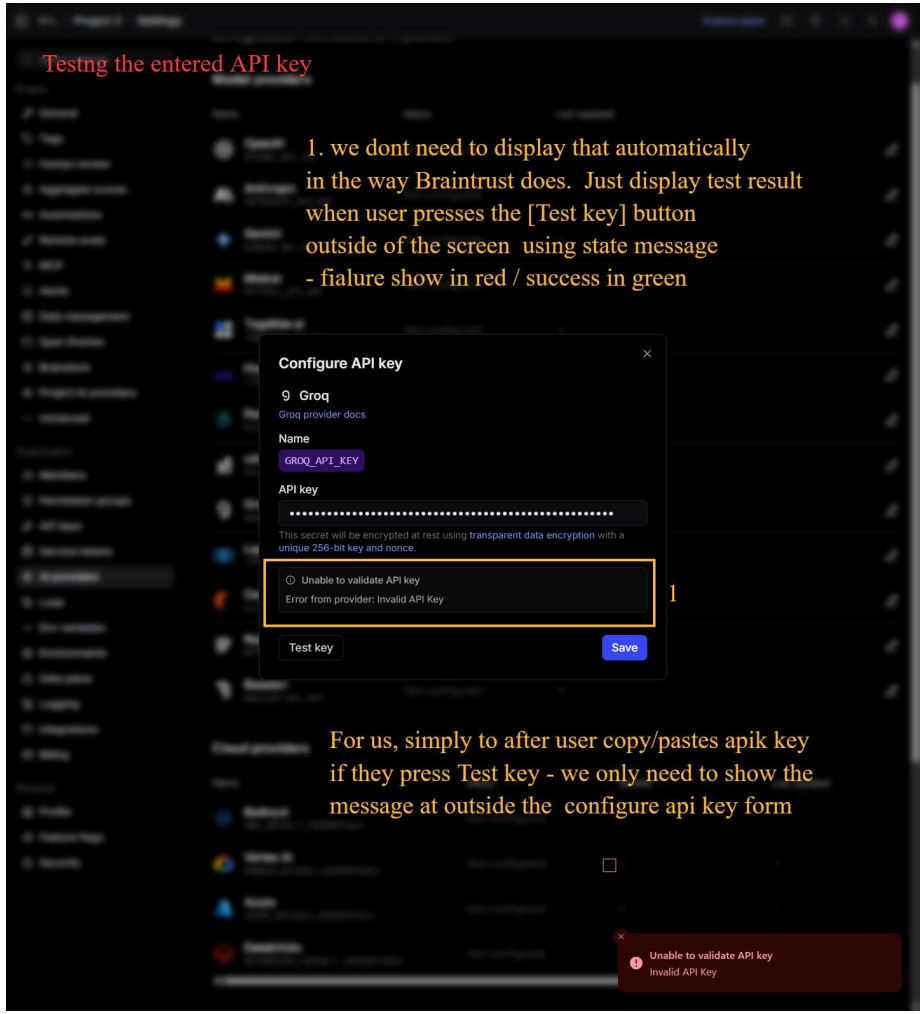

Saving the Key

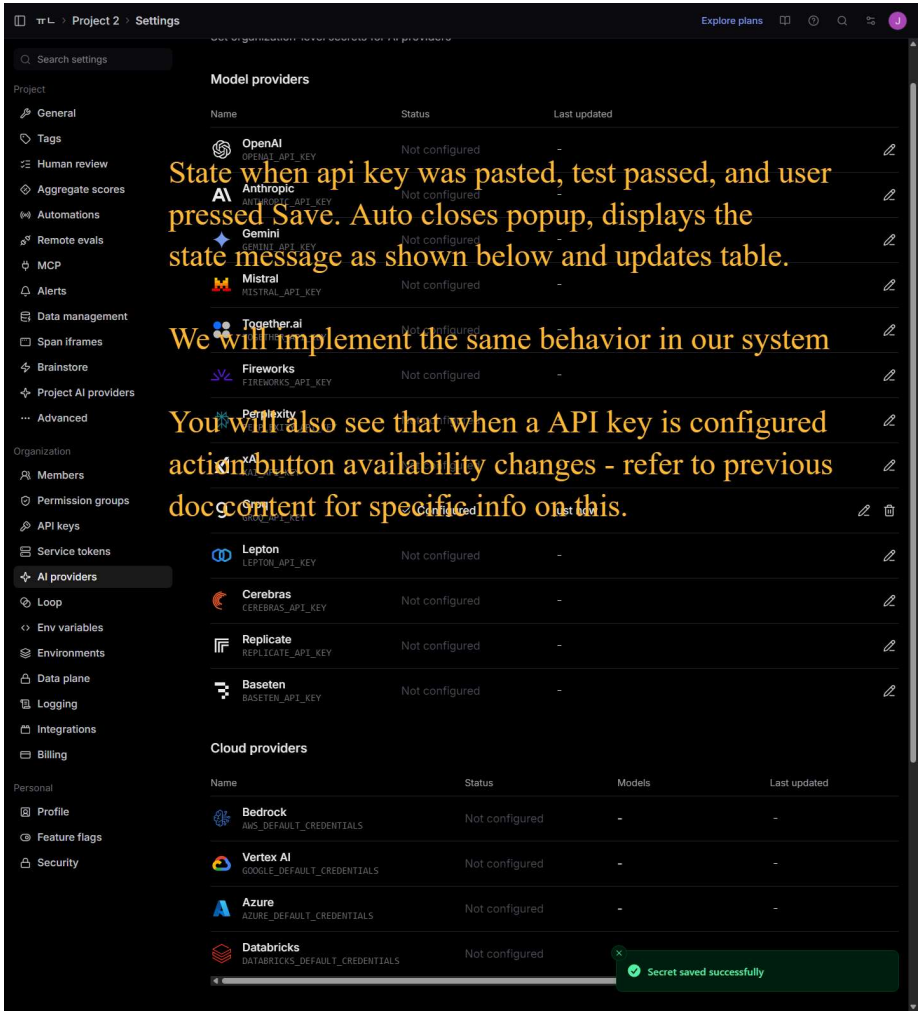

State when api key was pasted, test passed, and user pressed Save. Auto closes popup, displays the state message as shown below and updates table.

We will implement the same behavior in our system

You will also see that when a API key is configured action button availability changes - refer to previous doc content for specific info on this.

The same state message is used regardless of whether the api key passed test or not.