

Analysing MaxQuant Output with R

FGC Zurich

30 September 2015


Contents

| | |
|----------------------------------|----|
| Prepare mrm table | 1 |
| Analysed Dataset is MPI_VE | 2 |
| Looking at measurement error | 3 |
| Looking at MSQC 1 peptide counts | 4 |
| Look at Intensities (by species) | 5 |
| Looking at intensities msqc1 | 6 |
| Looking at retention time | 8 |
| Log fold change | 10 |


Prepare mrm table

- nr of assigned spectra (MS2) / versus total spectra
- How many H/L target peptides are identified
- Ratio among H/L of the target peptides
- Intensity of heavy or light over the runs


Analysed Dataset is MPI_VE

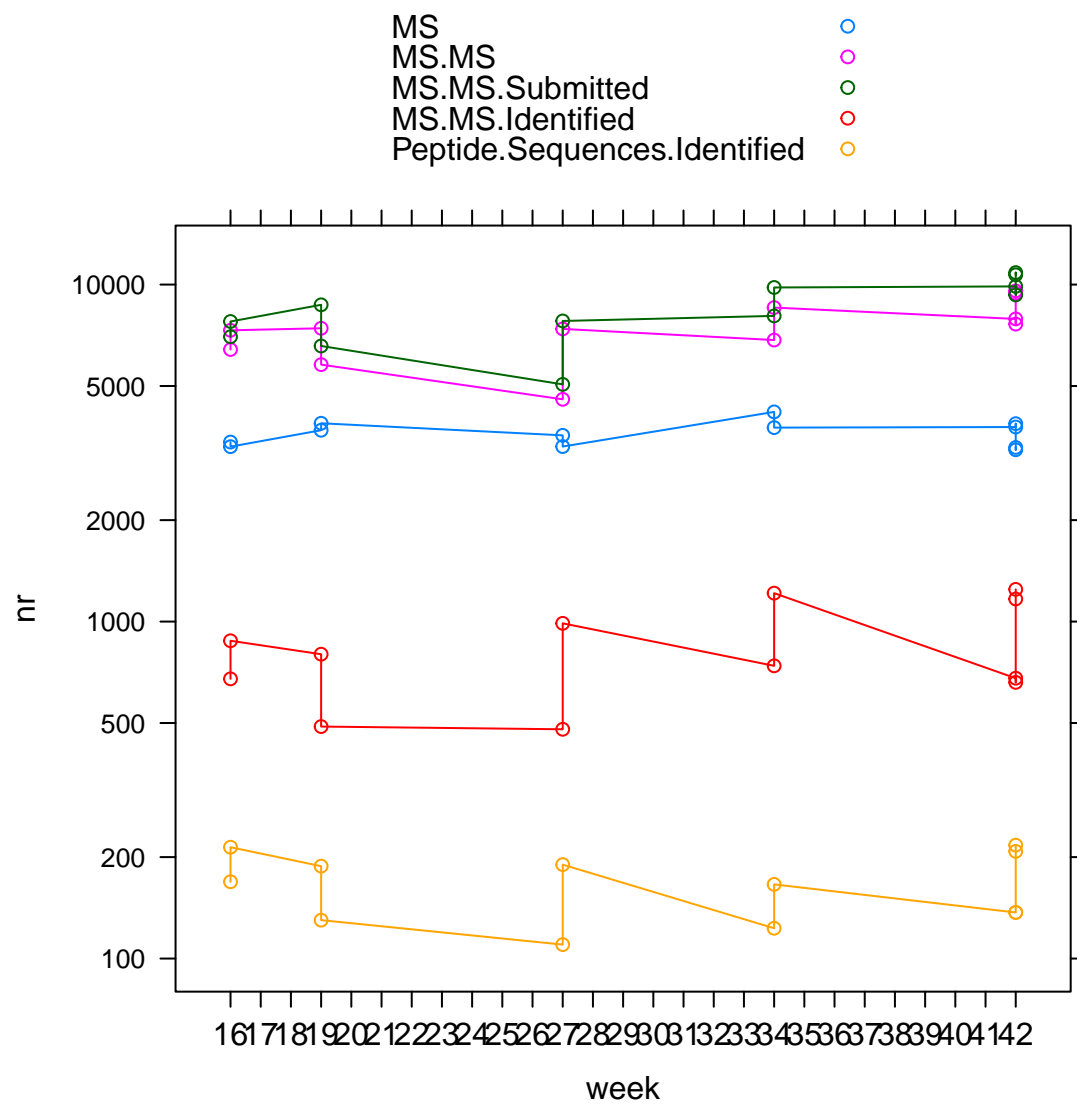


Looking at measurement error

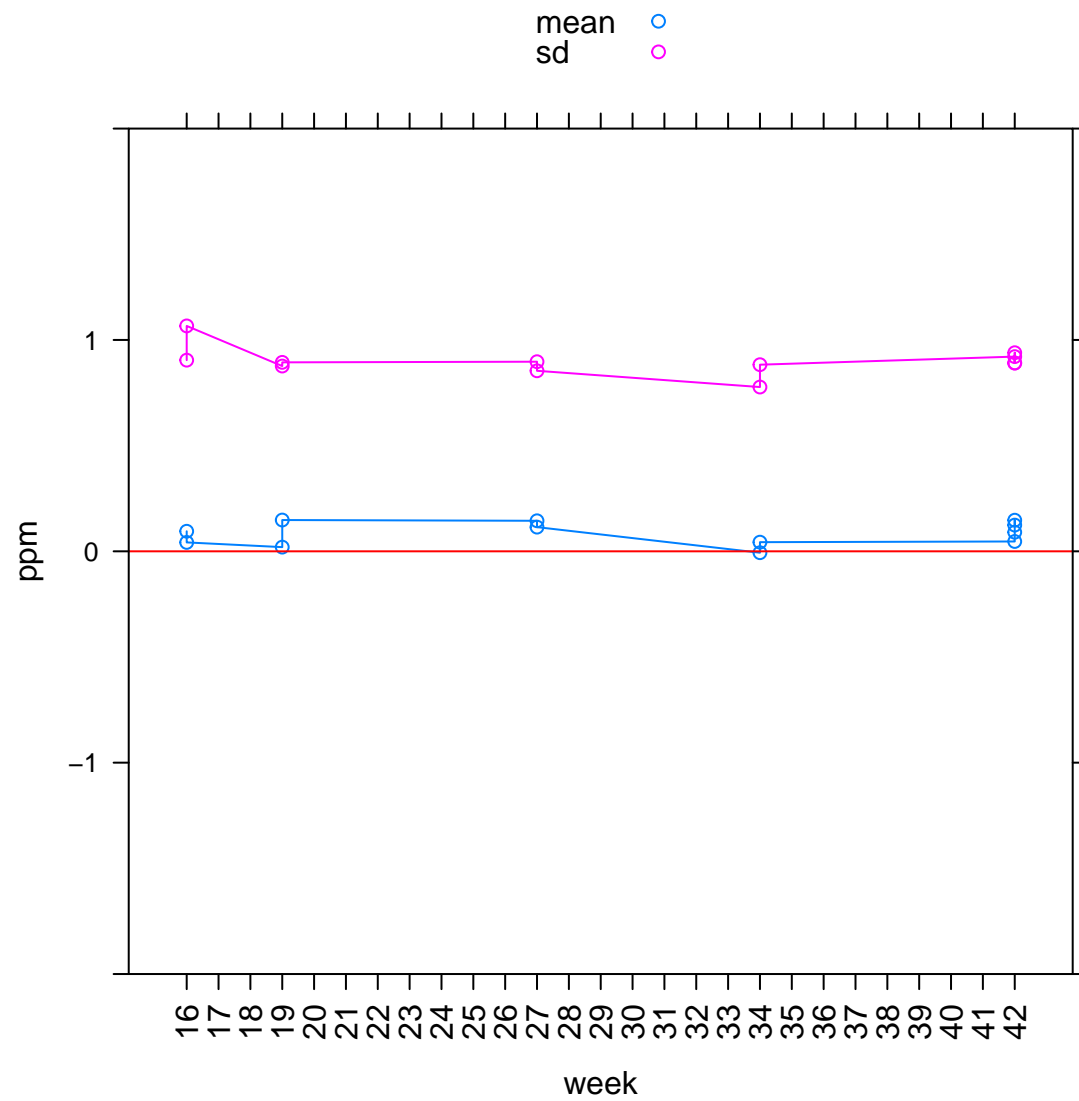


Looking at MSQC 1 peptide counts

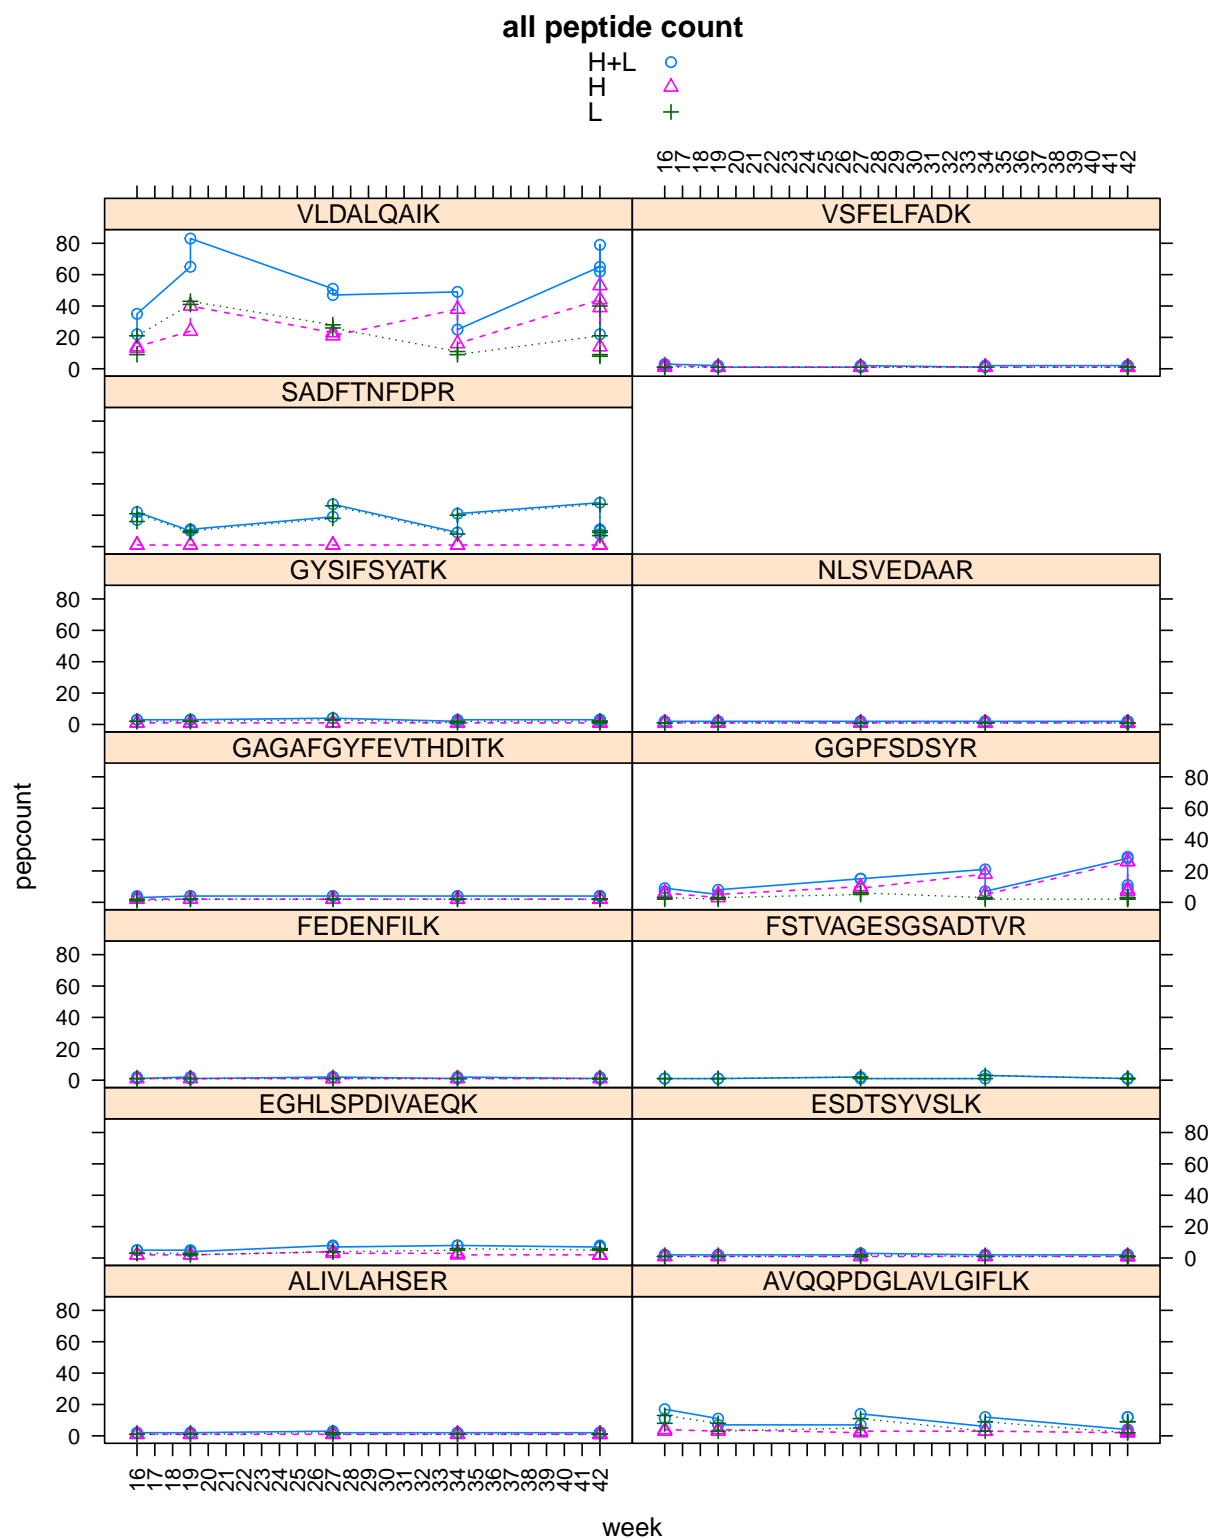


Look at Intensities (by species)

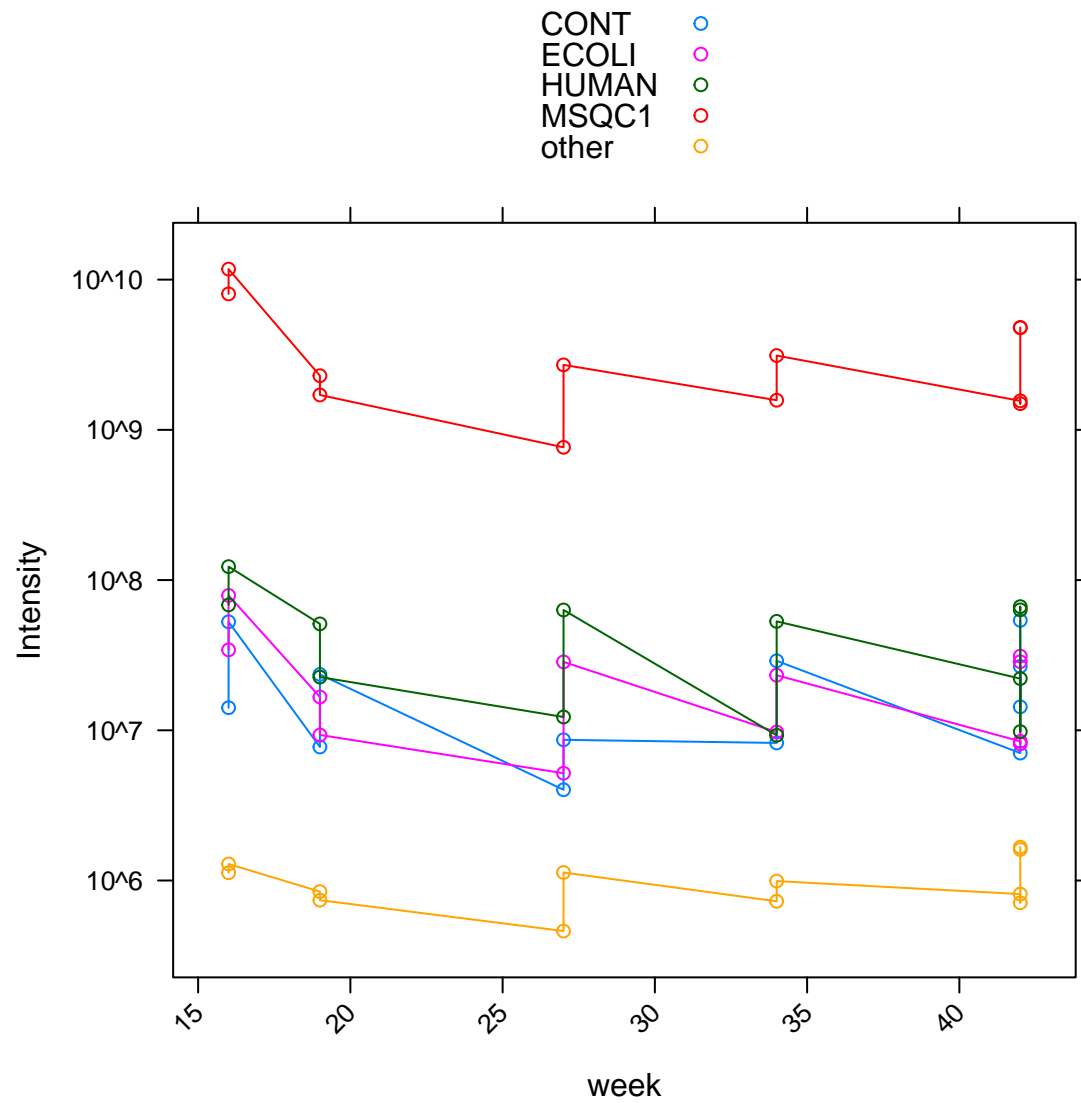



Looking at intensities msqc1

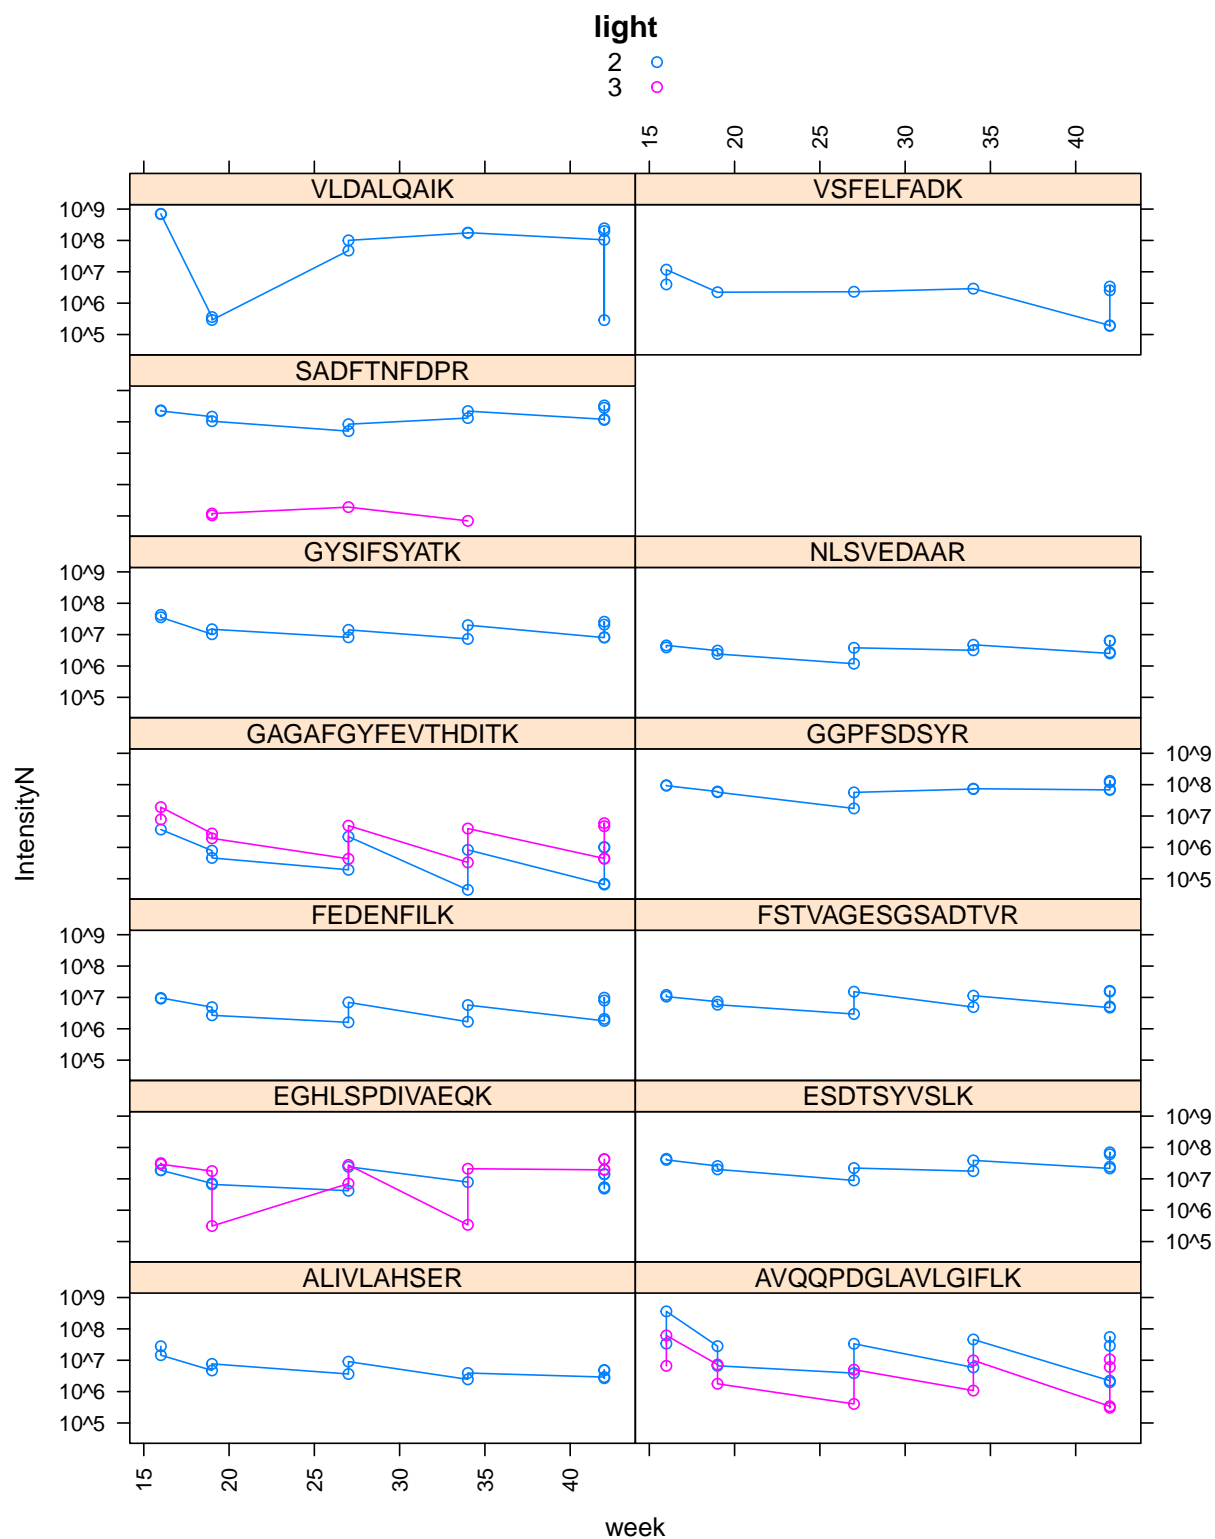

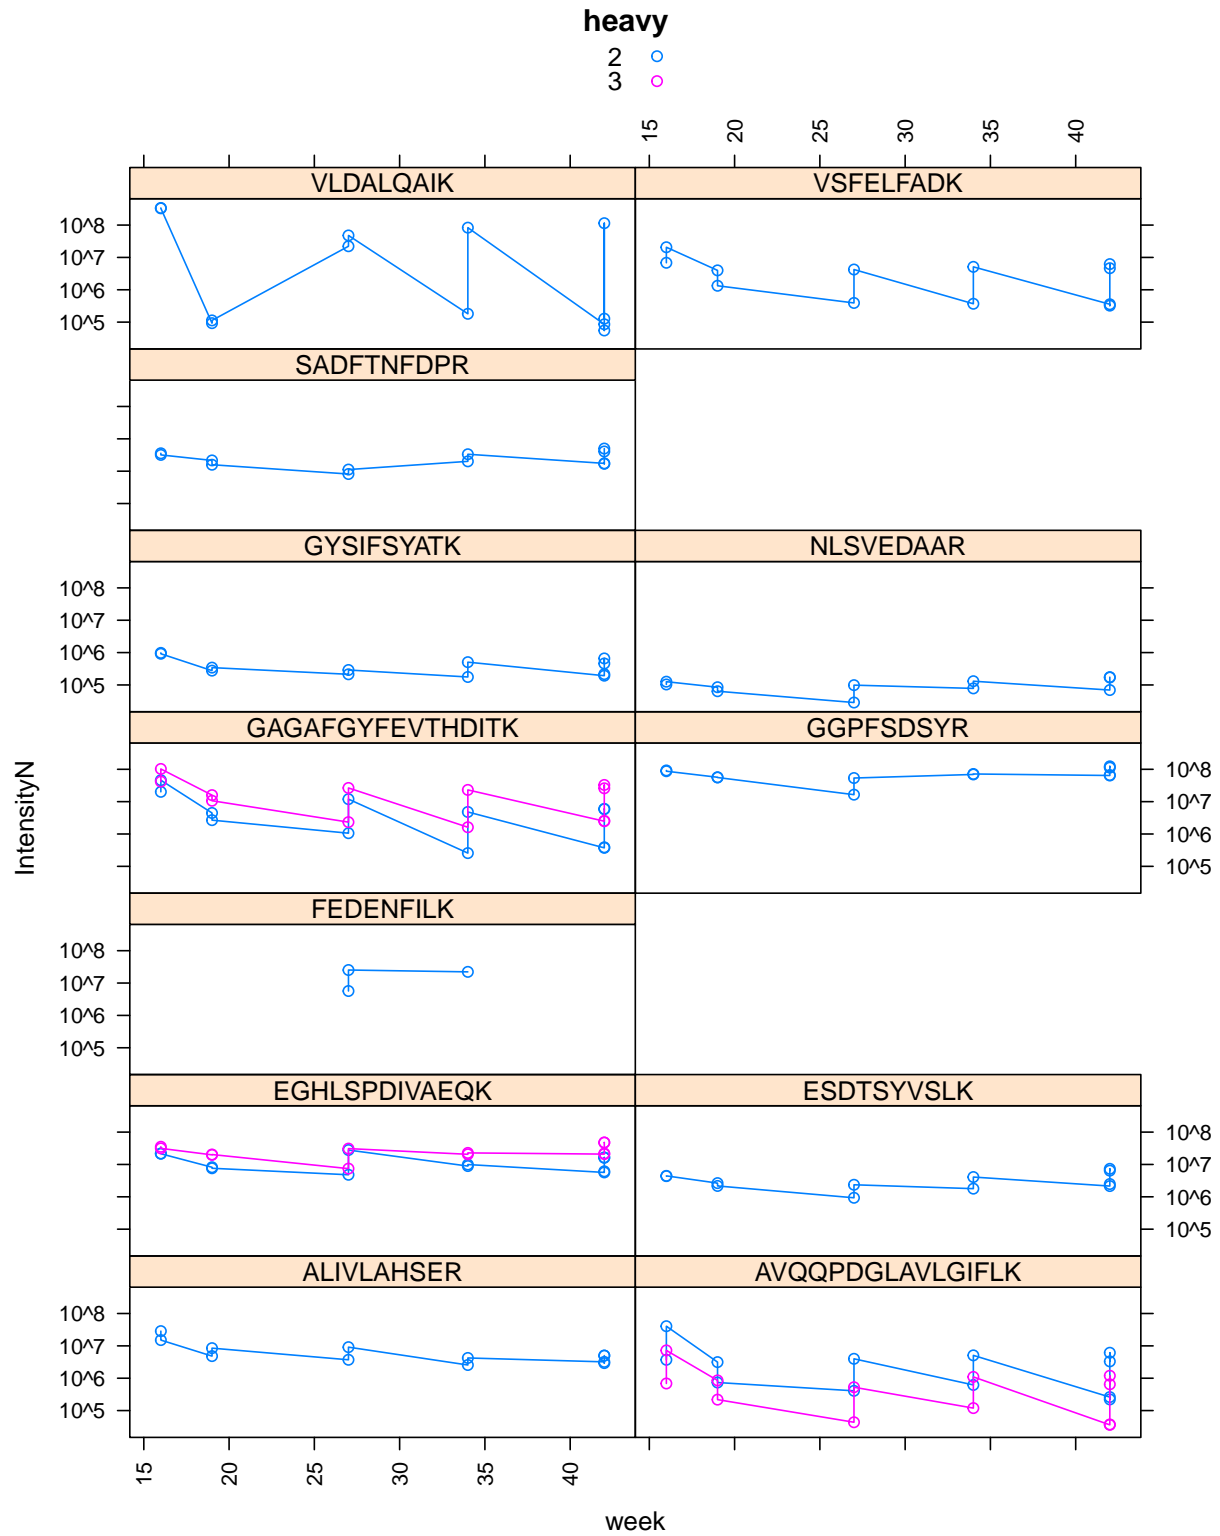

Looking at retention time

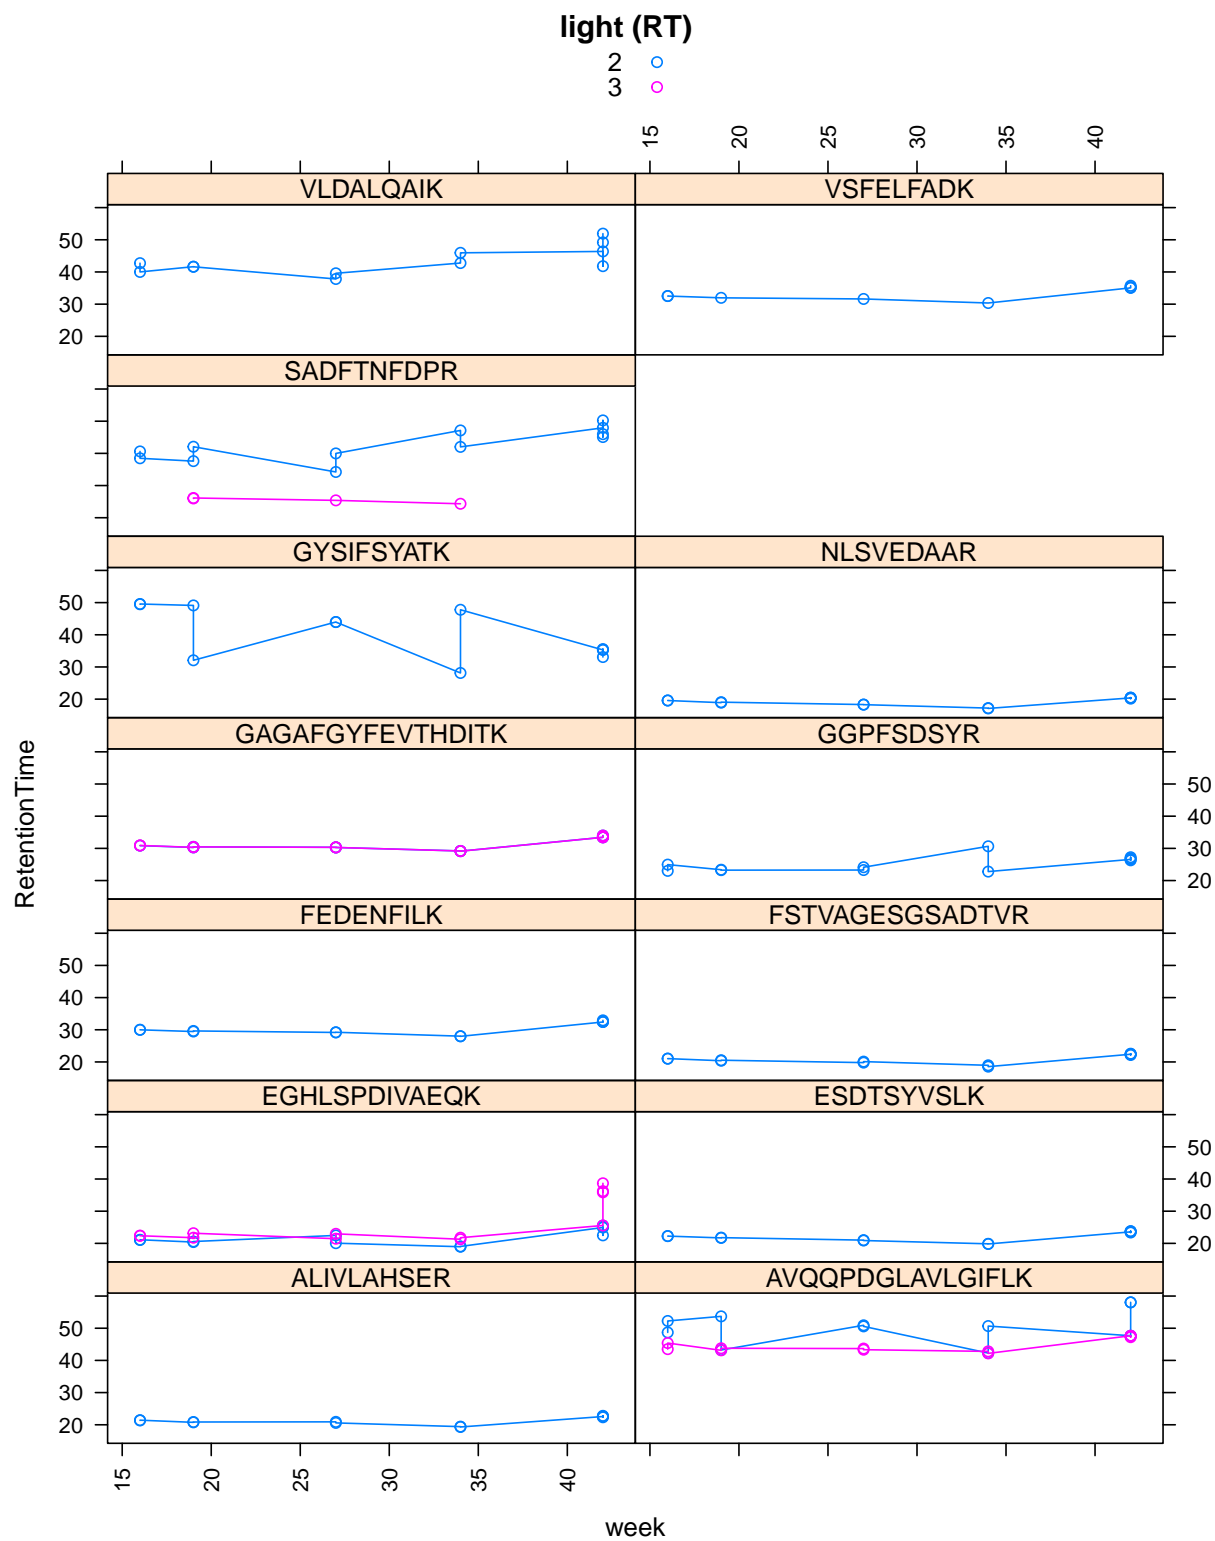

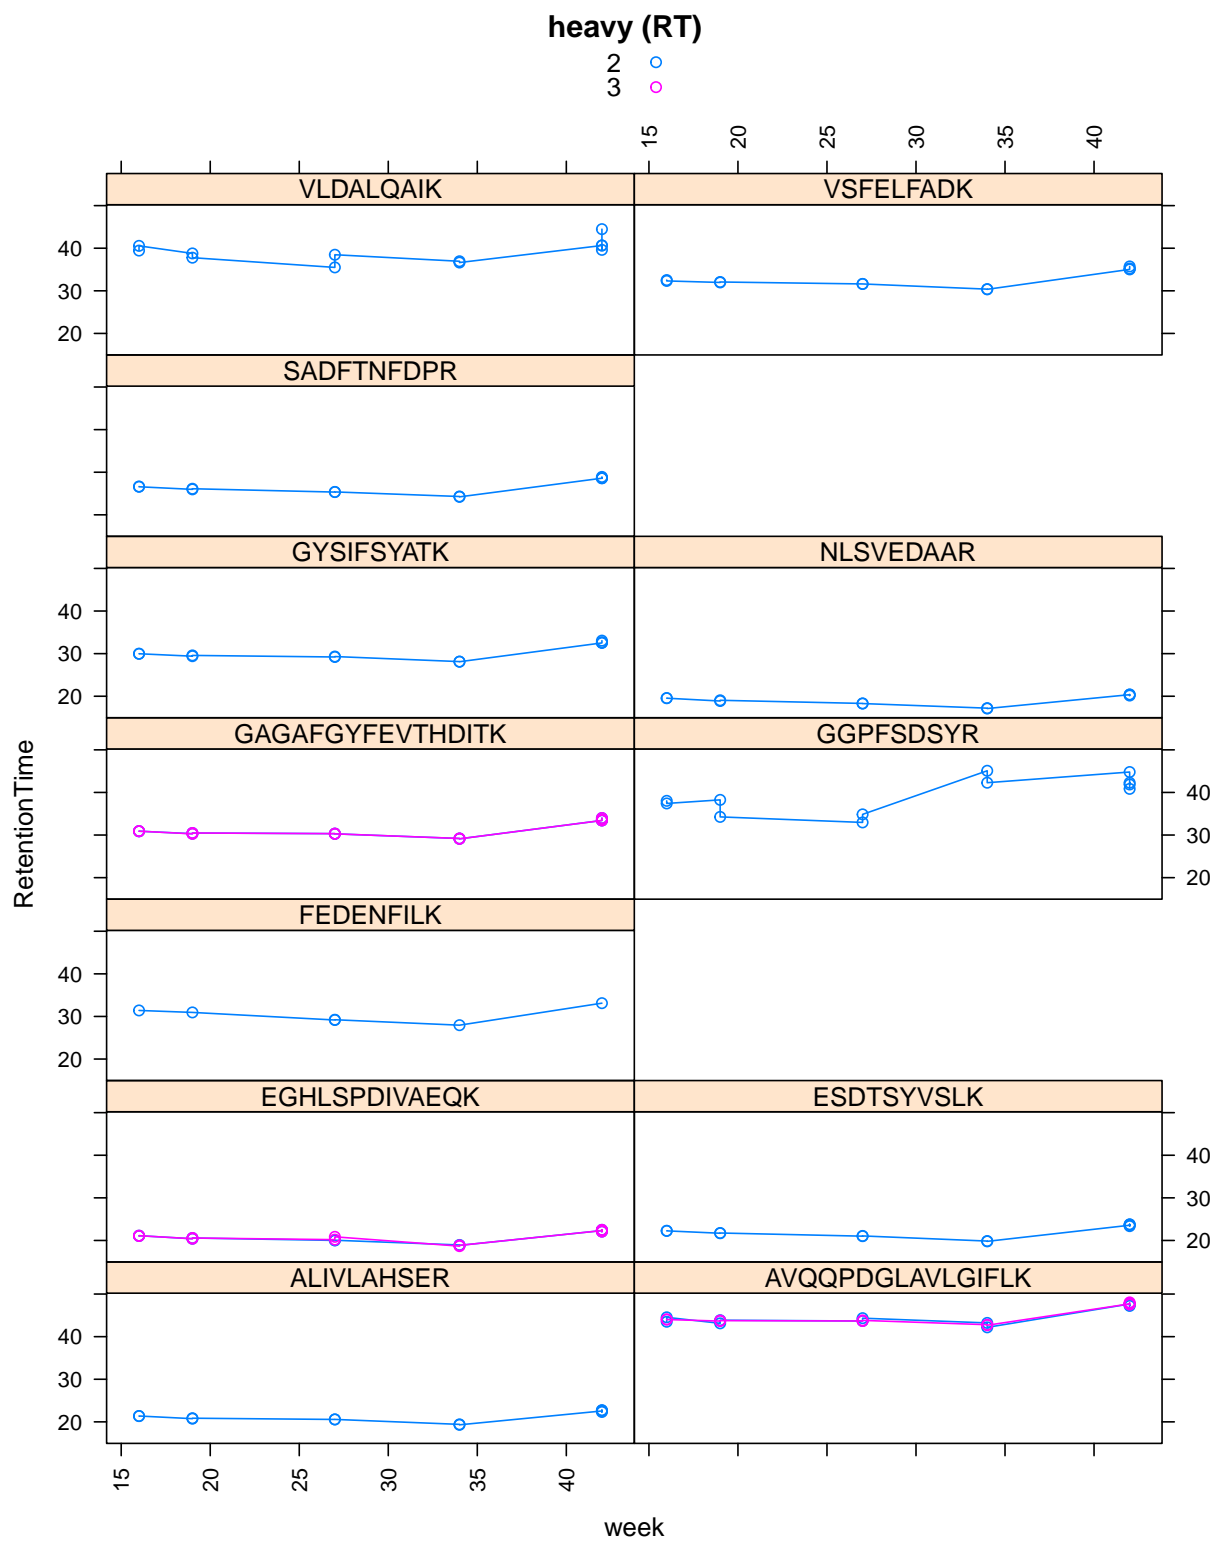

Log fold change

```
## Warning in inner_join_impl(x, y, by$x, by$y): joining factors with
## different levels, coercing to character vector
```

