


```
P * `Tinder_Account_user_ID` INTEGER


P * `Etiquetascomida_etiqueta_ID` INTEGER


KEY UNKNOWN


IFv1_PK (`Tinder_Account_user_ID`, `Etiquetascomida_etiqueta_ID`)
```

IFv2	
* `user_ID`	VARCHAR2 (64)
* `user_ID_of_liked_user`	VARCHAR2 (64)
* `like_or_not_interested`	CHAR (16)
P * `Tinder_Account_user_id`	INTEGER
P * `Match_match_id`	INTEGER
KEY	UNKNOWN
□ IFv2_PK (`Tinder_Account_user_id`, `Match_match_id`)	

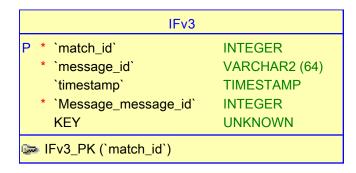

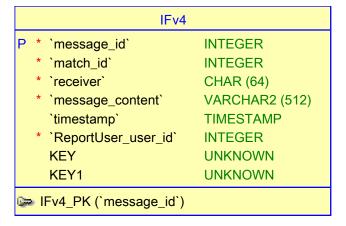

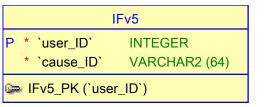



```
IFv7

P * `user_ID` INTEGER

* `cause_ID` VARCHAR2 (64)

IFv7_PK (`user_ID`)
```