



New Server



Define a New Server

Choose the type of server to create



Select the server type:



- ▼ Red Hat JBoss Middleware
 - JBoss AS, WildFly, & EAP Server Tools

Provides WTP server adapters for JBoss installations. These adapters are capable of deployment and providing classpaths for projects. Zipped or exploded deployments, JMX integration, and other extensions are included.







< Back

Next >

Finish

Cancel

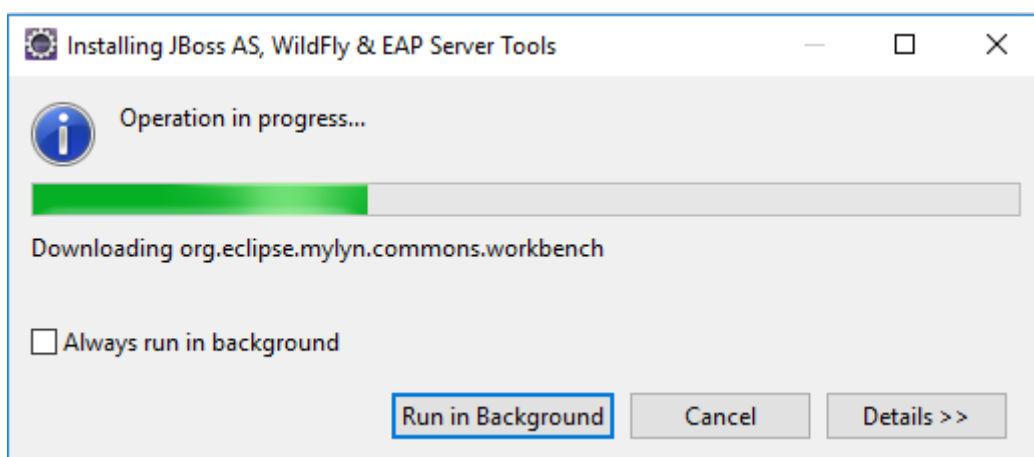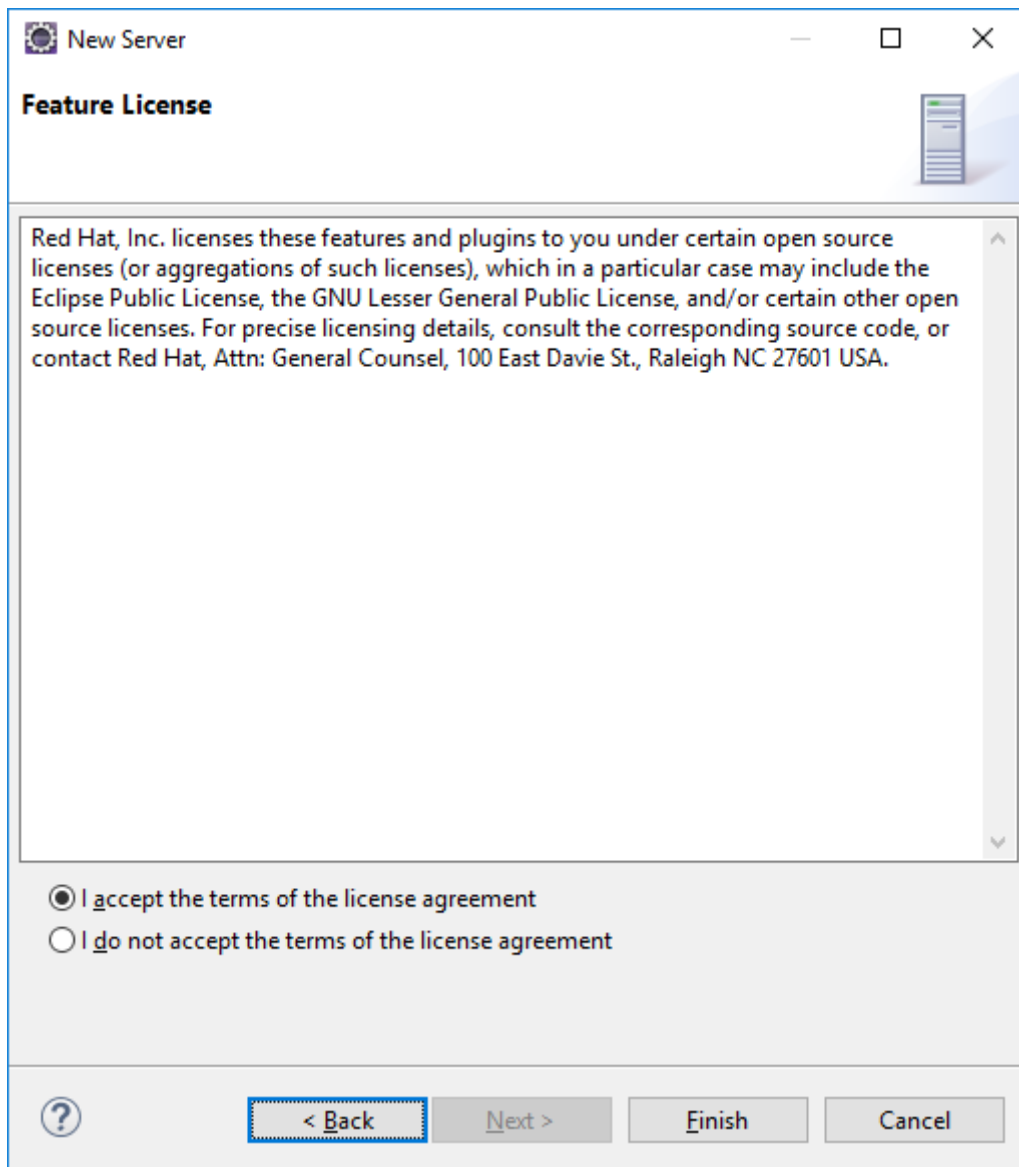

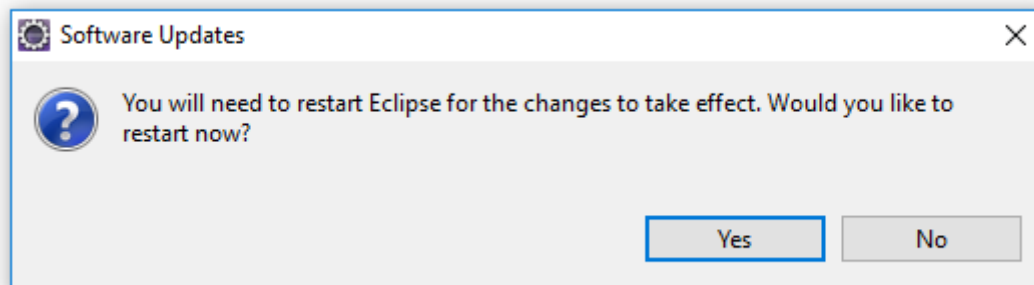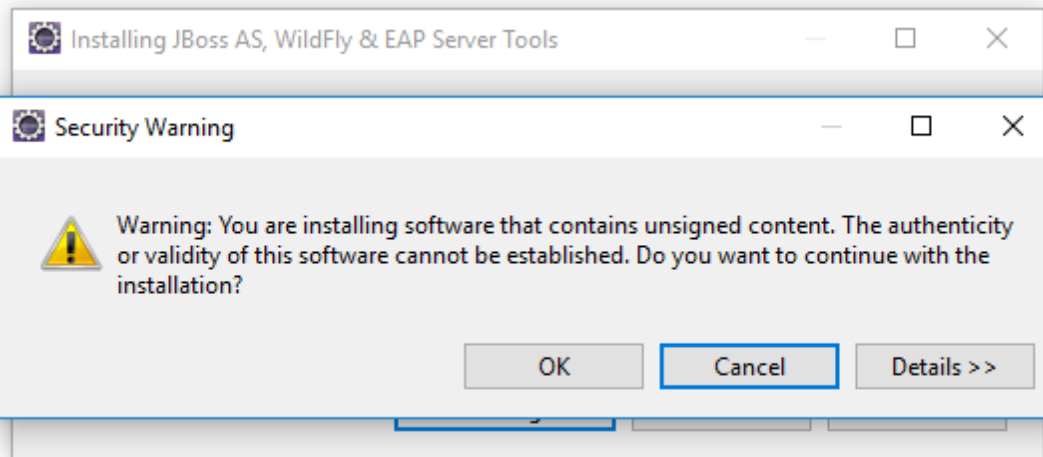


ences



Get an overview


evelo

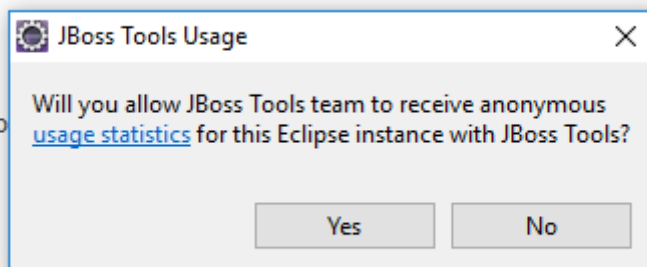

tut

elopment

try out the sam

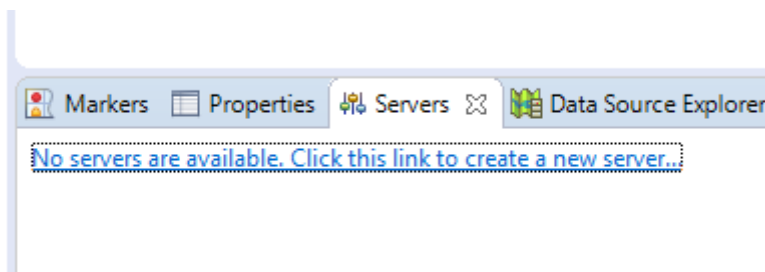



New Server



Define a New Server

Choose the type of server to create



Select the server type:

type filter text

JBoss AS 6.x

JBoss AS 7.0

JBoss AS 7.1

WildFly 8.x

WildFly 9.x

WildFly 10.x

> JBoss bv Red Hat

WildFly Application Server 10.x

Server's host name:



localhost

Server name:

WildFly 10.x



< Back

Next >

Finish

Cancel

Create a new Server Adapter

WildFly Application Server 10.x



A Server Adapter manages starting and stopping instances of your server. It manages command line arguments and keeps track of which modules have been deployed.

The server is: ☒ Local
☐ Remote

Controlled by: ☒ Filesystem and shell operations
☐ Management Operations

☐ Server lifecycle is externally managed.

The selected profile requires a runtime.

☒ Assign a runtime to this server

Create new runtime (next page) ▾

Runtime Details

JRE:

Home Directory:

Base Directory:

Configuration File:



< Back

Next >

Finish

Cancel

JBoss Runtime

WildFly Application Server 10.x



A JBoss Server runtime references a JBoss installation directory. It can be used to set up classpaths for projects which depend on this runtime, as well as by a "server" which will be able to start and stop instances of JBoss.

Name

WildFly 10.x Runtime

Home Directory

[Download and install runtime...](#)

Browse...

Runtime JRE

☒ Execution Environment:

JavaSE-1.8

Environments...

☐ Alternate JRE:

jre1.8.0_101

Installed JREs...

Server base directory: standalone

Browse...

Configuration file: standalone.xml

Browse...



< Back

Next >

Finish

Cancel

JBoss Runtime

WildFly Application Server 10.x



A JBoss Server runtime references a JBoss installation directory.
It can be used to set up classpaths for projects which depend on this runtime,
as well as by a "server" which will be able to start and stop instances of JBoss.

Name

WildFly 10.x Runtime

Home Directory[Download and install runtime...](#)

D:\servers\wildfly-10.1.0.Final

Browse...

Runtime JRE☒ Execution Environment:

JavaSE-1.8

Environments...

☐ Alternate JRE:

Installed JREs...

Server base directory: standalone

Browse...

Configuration file: standalone.xml

Browse...






< Back

Next >

Finish

Cancel

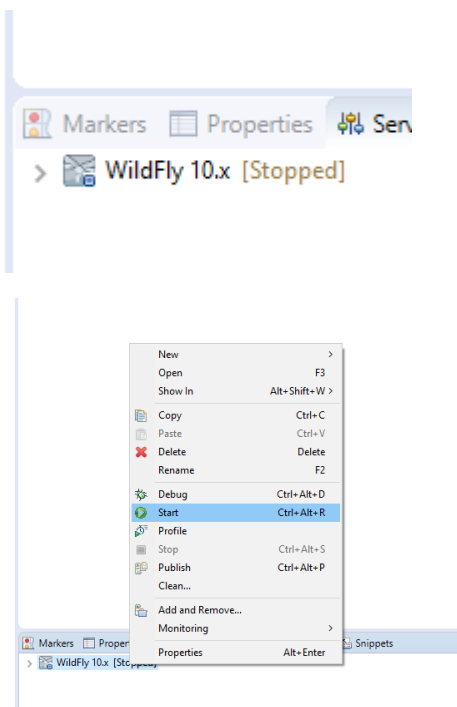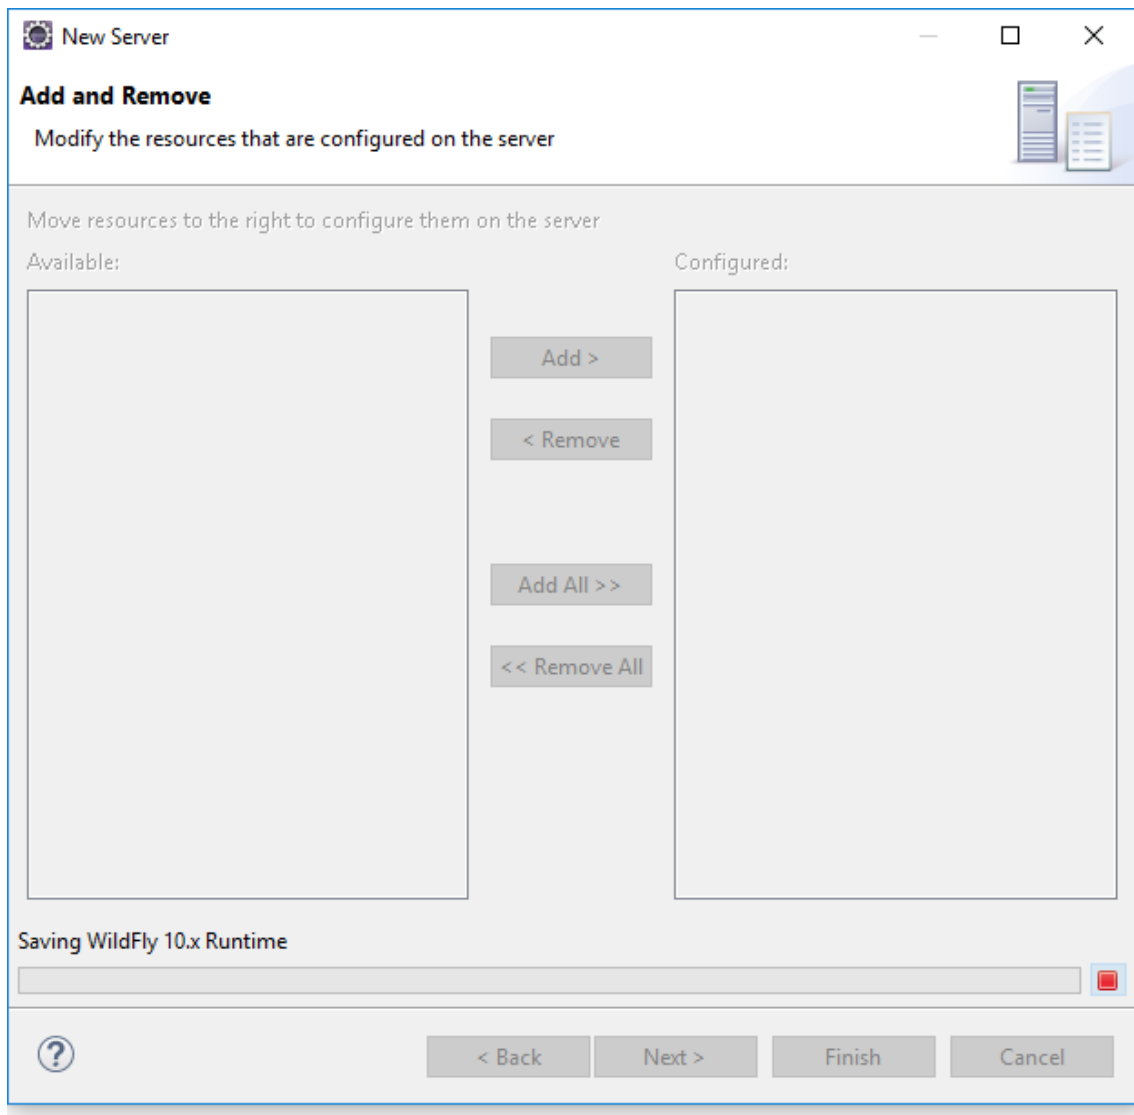

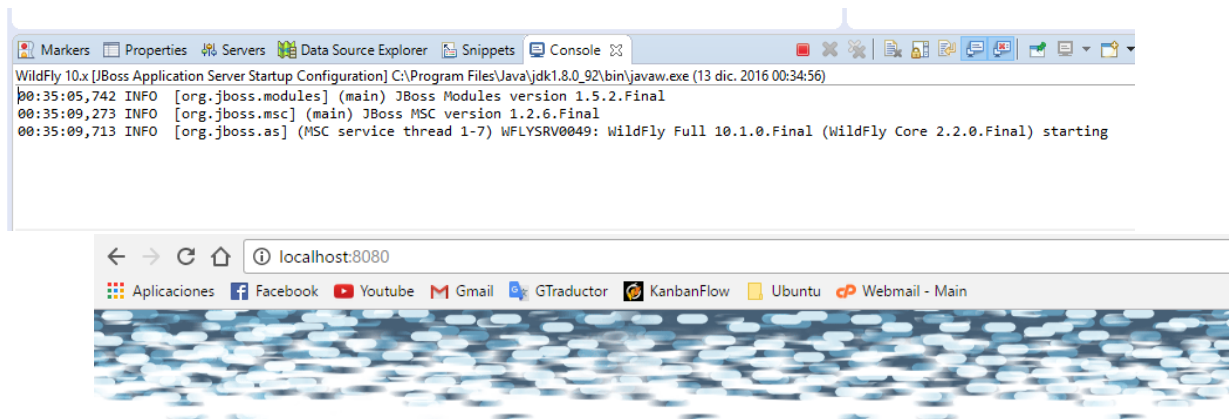

Welcome to WildFly 10

Your WildFly 10 is running.

[Documentation](#) | [Quickstarts](#) | [Administration Console](#)

[WildFly Project](#) | [User Forum](#) | [Report an issue](#)

JBoss Community

To replace this page simply deploy your own war with / as its context path.
To disable it, remove the "welcome-content" handler for location / in the undertow subsystem.