

UNIT-1

Topics to be covered

Program Structure in Java: Introduction, Writing Simple Java Programs, Elements or Tokens in Java Programs, Java Statements, Command Line Arguments, User Input to Programs, Escape Sequences Comments, Programming Style.

Data Types, Variables, and Operators :Introduction, Data Types in Java, Declaration of Variables, Data Types, Type Casting, Scope of Variable Identifier, Literal Constants, Symbolic Constants, Formatted Output with printf() Method, Static Variables and Methods, Attribute Final, Introduction to Operators, Precedence and Associativity of Operators, Assignment Operator (=), Basic Arithmetic Operators, Increment (++) and Decrement (--) Operators, Ternary Operator, Relational Operators, Boolean Logical Operators, Bitwise Logical Operators.

Control Statements: Introduction, if Expression, Nested if Expressions, if–else Expressions, Ternary Operator?;, Switch Statement, Iteration Statements, while Expression, do–while Loop, for Loop, Nested for Loop, For–Each for Loop, Break Statement, Continue Statement.

Introduction

OOP is programming which deals with building the programs and applications using the objects. These objects are similar to the real-world objects. Every object has an identity, attributes and behavior. The features of OOP such as abstraction, encapsulation, inheritance and polymorphism are closely related to real-world objects.

Difference between procedural and object-oriented programming languages

Sl.No	Procedural Programming language	Object-oriented programming language
1	This follows a top-down approach.	OOP takes a bottom-up approach in designing a program.
2	Program is divided into small chunks based on the functions.	Program is divided into objects depending on the problem.
3	Separates the data from functions that operate data.	Encapsulates data and methods in a class
4	Debugging is difficult	Debugging is easier
5	Each function contains different data.	Each object controls its own data.
6	Follows a systematic approach to solve the problem.	Focuses on security of the data irrespective of the algorithm.
7	Different parts of a program are interconnected via parameter passing.	The functions of the objects are linked via message passing.
8	No easy way for data hiding.	Data hiding is possible in OOP.
9	No such concept of inheritance in procedural programming.	Inheritance is allowed in OOP.

UNIT-1

10	Operator overloading is not allowed.	Operator overloading is allowed.
11	C,Pascal, and Fortran.	C++, Java, and Python

Differences between C++ and java

	Java	C++
1	Java is true Object-oriented language.	C++ is basically C with Object-oriented extension.
2	Java does not support operator overloading.	C++ supports operator overloading.
3	It supports labels with loops and statement blocks	It supports goto statement.
4	Java does not have template classes as in C++.	C++ has template classes.
5	Java compiled into byte code for the <u>Java Virtual Machine</u> . The source code is independent on <u>operating system</u> .	Source code can be written to be platform independent and written to take advantage of platform.C++ typically compiled into machine code.
6	Java does not support multiple inheritance of classes but it supports interface.	C++ supports multiple inheritance of classes.
7	Runs in a protected virtual machine.	Exposes low-level system facilities.
8	Java does not support global variable. Every variable should declare in class.	C++ support global variable.
9	Java does not use pointer.	C++ uses pointer.
10	It Strictly enforces an object oriented <u>programming paradigm</u> .	It Allows both <u>procedural programming</u> and <u>object-oriented programming</u> .
11	There are no header files in Java.	We have to use header file in C++.

There is given many features of java. They are also known as java buzzwords. The Java Features given below are simple and easy to understand.

- Simple
- Secure
- Portable
- Object-oriented
- Robust
- Multithreaded

- Architecture-neutral
- Interpreted
- High performance
- Distributed
- Dynamic

Simple

Java was designed to be easy for the professional programmer to learn and use effectively. According to Sun, Java language is simple because: syntax is based on C++ (so easier for programmers to learn it after C++). removed many confusing and/or rarely-used features e.g., explicit pointers, operator overloading etc. No need to remove unreferenced objects because there is Automatic Garbage Collection in java.

Secure

Once the byte code generated, the code can be transmitted to other computer in the world with knowing the internal details of the source code.

Portable

The byte code can be easily carried from one machine to other machine.

Object Oriented

Everything in Java is an Object. The object model in Java is simple and easy to extend, while primitive types, such as integers, are kept as high-performance non-objects.

Robust

The multi-plat-formed environment of the Web places extraordinary demands on a program, because the program must execute reliably in a variety of systems. Thus, the ability to create robust programs was given a high priority in the design of Java. Java also frees from having worry about many errors. Java is Robust in terms of memory management and mishandled exceptions. Java provides automatic memory management and also provides well defined exception handling mechanism.

Multithreaded

Java was designed to meet the real-world requirement of creating interactive, networked

programs. To accomplish this, Java supports multithreaded programming, which allows you to write programs that do many things simultaneously.

Architecture-neutral

The Java designers made several hard decisions in the Java language and the Java Virtual Machine in an attempt to alter this situation. Their goal was “write once; run anywhere, any time, forever.” To a great extent, this goal was accomplished.

Interpreted and High Performance


Java enables the creation of cross-platform programs by compiling into an intermediate representation called Java byte code. This code can be executed on any system that implements the Java Virtual Machine. Most previous attempts at cross-platform solutions have done so at the expense of performance. As explained earlier, the Java byte code was carefully designed so that it would be easy to translate directly into native machine code for very high performance by using a just-in-time compiler.

Distributed

Java is designed for the distributed environment of the Internet because it handles TCP/IP protocols. In fact, accessing a resource using a URL is not much different from accessing a file. Java also supports **Remote Method Invocation (RMI)**. This feature enables a program to invoke methods across a network.

Dynamic

Java programs carry with them substantial amounts of run-time type information that is used to verify and resolve accesses to objects at run time. This makes it possible to dynamically link code in a safe and expedient manner.

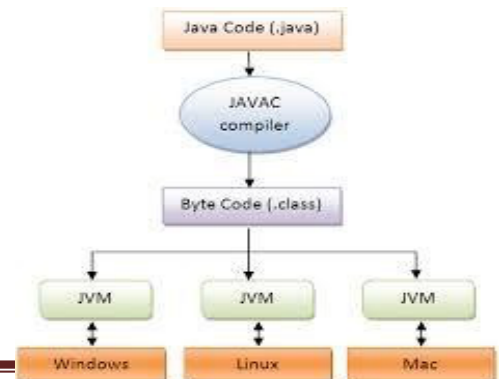

Java Virtual Machine

The key that allows Java to solve both the security and the portability problems is the byte code. The output of Java Compiler is not directly executable file. Rather, it contains highly optimized set of instructions. This set of instructions is called, "byte code". This byte code is designed to be executed by Java Virtual Machine (JVM). The JVM also called the interpreter for byte code. JVM also helps to solve many problems associated with web-based programs.

Program Structures

Simple Java Program

Example.java

```
class Example
{
    public static void main(String args[])
    {
        System.out.println("Hello World");
    }
}
```

Entering the Program

We can use any text editor such as "notepad" or "dos text editor". The source code is typed and is saved with ".java" as extension. The source code contains one or more class definitions. The program name will be same as class name in which main function is written. This is not compulsory, but by convention this is used. The source file is officially called as compilation unit. We can even use our choice of interest name for the program. If we use a different name than the class name, then compilation is done with program name, and running is done with class file name. To avoid this confusion and organize the programs well, it is suggested to put the same name for the program and class name, but not compulsory.

Compiling the Program

To compile the program, first execute the compiler, "**javac**", specifying the name of the source file on the command line, as shown below:

c:\>javac Example.java

The javac compiler creates the file called "**Example.class**", that contains the byte code version

of the source code. This byte code is the intermediate representation of the source code that contains the instructions that the Java Virtual Machine (JVM) will execute. Thus the output of the javac is not the directly executable code.

To actually run the program, we must use Java interpreter, called "java". This is interpreter the "**Example.class**" file given as input.

When the program is run with java interpreter, the following output is produced:

Hello World

Description of the every line of the program

The first line contains the keyword **class** and **class name**, which actually the basic unit for encapsulation, in which data and methods are declared.

Second line contains "{" which indicates the beginning of the class.

Third line contains the
public static void main(String args[])

where "**public**" is access specifier, when a member of a class is made public it can be accessed by the outside code also. The "**static**" is the keyword which is used to call the main function without instantiation. The "**void**" is also a keyword which is used to describe the the return type of the function. The main function is the beginning of from where execution starts. Java is case-sensitive. "**Main**" is different from the "**main**". In main there is one parameter, String args, which is used to read the command line arguments.

Fourth line contains the "{", which is the beginning of the main function.

Fifth line contains the statement **System.out.println("Hello World");**

Here "**System**" is the predefined class, that provides access to the system, and **out** is the output stream that is used to connect to the console. The **println()**, is used to display string passed to it. This can even display other information to.

UNIT-1

Elements or Tokens in Java Programs

Java compiler breaks the line of code into text (words) is called Java tokens. These are the smallest element of the Java program. The Java compiler identified these words as tokens.

Tokens can be classified as follows:

- Keywords
- Identifiers
- Literals
- Operators
- separators

Keywords: These are the **pre-defined** reserved words of any programming language. Each [keyword](#) has a special meaning. It is always written in lower case. There are 50 keywords currently defined in the Java language (see Table below). These keywords, combined with the syntax of the operators and separators, form the foundation of the Java language. These keywords cannot be used as names for a variable, class, or method.

abstract	continue	for	new	switch
assert	default	goto	package	synchronized
boolean	do	if	private	this
break	double	implements	protected	throw
byte	else	import	public	throws
case	enum	instanceof	return	transient
catch	extends	int	short	try
char	final	interface	static	void
class	finally	long	strictfp	volatile
const	float	native	super	while

Identifiers

Identifiers are used for **class names, method names, and variable names**. An identifier may be any descriptive sequence of uppercase and lowercase letters, numbers, or the underscore and dollar-sign characters. They must not begin with a number, lest they be confused with a numeric literal. Again, Java is case-sensitive, so **VALUE** is a different identifier than **Value**. Some examples of valid identifiers are:

Rules for Naming Identifier:

1. The first character of an identifier must be a letter, or dollar(\$) sign.

UNIT-1

2. The subsequent characters can be letters, an underscore, dollar sign or digit.
3. White spaces are not allowed within identifiers.
4. Identifiers are case sensitive so **VALUE** is a different identifier than **Value**

Average	Height	A1	Area_Circle
---------	--------	----	-------------

Invalid Identifiers are as follow:

2types	Area-circle	Not/ok
--------	-------------	--------

Naming Convention for Identifiers

- **Class or Interface**- These begin with a capital letter. The first alphabet of every internal word is capitalized. Ex: class **Myclass**;
- **Variable or Method** –These start with lower case letters. The first alphabet of every internal word is capitalized. Ex:- int **totalPay**;
- **Constants**- These are in upper case. Underscore is used to separate the internal word. Ex:-final **double PI=3.14**;
- **Package** – These consist of all lower-case letters. Ex:- **import java.io.***;

Literals

A literal is a value that can be passed to a variable or constant in a program. Literals can be numeric, boolean, character, string notation or null. A constant value can be created using a literal representation of it. Here are some literals:

Interger literal	Character literal	Floating point literal	byteliteral
int x=25;	char ch=88;	flaot f=12.34	byte b=12;

Comments

In java we have three types of comments: single line comment, Multiple line comment, and document type comment.

Single line comment is represented with // (two forward slashes), Multiple comment lines represented with /* ... */ (slash and star), and the document comment is represented with /***/.

UNIT-1

Separators

In Java, there are a few characters that are used as separators. The most commonly used separator in Java is the semicolon. As you have seen, it is used to terminate statements. The separators are shown in the following table:

Symbol	Name	Purpose
()	Parentheses	Used to contain lists of parameters in method definition and invocation. Also used for defining precedence in expressions, containing expressions in control statements, and surrounding cast types.
{ }	Braces	Used to contain the values of automatically initialized arrays. Also used to define a block of code, for classes, methods, and local scopes.
[]	Brackets	Used to declare array types. Also used when dereferencing array values.
;	Semicolon	Terminates statements.
,	Comma	Separates consecutive identifiers in a variable declaration. Also used to chain statements together inside a for statement.
.	Period	Used to separate package names from subpackages and classes. Also used to separate a variable or method from a reference variable.

Operators:

In programming, operators are the special symbol that tells the compiler to perform a special operation. Java provides different types of operators that can be classified according to the functionality they provide. There are eight types of [operators in Java](#), are as follows:

- Arithmetic Operators
- Assignment Operators
- Relational Operators
- Unary Operators
- Logical Operators
- Ternary Operators
- Bitwise Operators
- Shift Operators

Java Statements

They are 4 types

- Expression Statement
- Labelled Statement-
- Control statement
- Guarding statement-try,catch,finally

Control statement contains 3 types

- Selection statement-if,if-else,switch

- Iteration statement-while,do,for
- Jump statement-break,continue,return

Command Line Arguments

- Command line arguments are parameters that are supplied to the application program at the time of invoking it for execution. i.e. passed at the time of running the java program.
- The arguments passed from the console can be received in the java program and it can be used as an input.
- You can pass N (1,2,3 and so on) numbers of arguments from the command prompt.

Eg1:

```
class CommandLineEg
{
public static void main(String args[])
{
System.out.println("Your first argument is: "+args[0]);
}
}
```

Eg2:

```
class A{
public static void main(String args[])
{
for(int i=0;i<args.length;i++)
System.out.println(args[i]);
}
}
```

Escape sequences or Back slash character constants

<code>\t</code>	Inserts a tab
<code>\b</code>	Inserts a backspace
<code>\n</code>	Inserts a newline
<code>\r</code>	carriage return. ()
<code>\f</code>	form feed
<code>\'</code>	Inserts a single quote
<code>\"</code>	Inserts a double quote
<code>\\</code>	Inserts a backslash

List of Escape Sequences in Java

Data Types

Data types specify the different sizes and values that can be stored in the variable. There are two types of data types in Java:

Primitive data types: The primitive data types include boolean, char, byte, short, int, long, float and double.

Non-primitive data types: The non-primitive data types include Classes, Interfaces, and Arrays.

The primitive data types are: char, byte, short, int, long, float, double, boolean. These are again grouped into 4 groups.

1. **Integer Group:** The integer group contains byte, short, int, long. These data types will need different sizes of the memory. These are assigned positive and negative values. The width and ranges of these values are as follow:

Name	Width	Range
long	64	-9,223,372,036,854,775,808 to 9,223,372,036,854,775,807
int	32	-2,147,483,648 to 2,147,483,647
short	16	-32,768 to 32,767
byte	8	-128 to 127

byte:

The smallest integer type is **byte**. This is a signed 8-bit type that has a range from -128 to 127. Variables of type **byte** are especially useful when you're working with a stream of data from a network or file. They are also useful when you're working with raw binary data that may not be directly compatible with Java's other built-in types. Byte variables are declared by use of the **byte** keyword.

For example, the following declares two **byte** variables called **b** and **c**:

```
byte b, c; // where b and c are identifiers
```

short:

short is a signed 16-bit type. It has a range from -32,768 to 32,767. It is probably the least-used Java type. Here are some examples of **short** variable declarations:

```
short s;
```

```
short t;
```

int:

The most commonly used integer type is **int**. It is a signed 32-bit type that has a range from – 2,147,483,648 to 2,147,483,647. In addition to other uses, variables of type **int** are commonly employed to control loops and to index arrays. We can store byte and short values in an **int**. Example `int x=12;`

long:

long is a signed 64-bit type and is useful for those occasions where an **int** type is not large enough to hold the desired value. The range of a **long** is quite large. This makes it useful when big, whole numbers are needed.

Example

`long x=123456;`

2. Floating-Point Group

Floating-point numbers, also known as *real* numbers, are used when evaluating expressions that require fractional precision. These are used with operations such as square root, cosine, and sine etc. There are two types of Floating-Point numbers: float and double. The float type represents single precision and double represents double precision. Their width and ranges are as follows:

Name	Width in Bits	Approximate Range
double	64	4.9e-324 to 1.8e+308
float	32	1.4e-045 to 3.4e+038

float:

The type **float** specifies a *single-precision* value that uses 32 bits of storage. Single precision is faster on some processors and takes half as much space as double precision. Variables of type **float** are useful when you need a fractional component, but don't require a large degree of precision.

Example: `float height, price;`

double:

Double precision, as denoted by the **double** keyword, uses 64 bits to store a value. Double precision is actually faster than single precision on some modern processors that have been optimized for high-speed mathematical calculations.

All the math functions, such as **sin()**, **cos()**, and **sqrt()**, return **double** values.

Example:**double area,pi;**

Example program to calculate the area of a circle

```
import java.io.*;
class Circle
{
    public static void main(String args[])
    {
        double
        r,area,pi;
        r=12.3; pi=3.14;
        area=pi*r*r;
        System.out.println("The Area of the Circle is:"+area);
    }
}
```

3. Characters Group

In Java, the data type used to store characters is **char**. However, C/C++ programmers beware: **char** in Java is not the same as **char** in C or C++. In C/C++, **char** is 8 bits wide. This is *not* the case in Java. Instead, Java uses Unicode to represent characters. *Unicode* defines a fully international character set that can represent all of the characters found in all human languages.

Java **char** is a 16-bit type. The range of a **char** is 0 to 65,536. There are no negative **chars**. The standard set of characters known as ASCII still ranges from 0 to 127 as always, and the extended 8-bit character set, ISO-Latin-1, ranges from 0 to 255.

Here is a program that demonstrates char variables:

```
// Demonstrate char data
type. class CharDemo
{
    public static void main(String args[])
    {
        char ch1, ch2;
        ch1 = 88; // code for X
        ch2 = 'Y';
    }
}
```

```
        System.out.print("ch1 and ch2: ");
        System.out.println(ch1 + " " + ch2);
    }
}
```

4. Booleans

Java has a primitive type, called **boolean**, for logical values. It can have only one of two possible values, **true** or **false**. This is the type returned by all relational operators, as in the case of **a < b**.

Here is a program that demonstrates the boolean type:

```
// Demonstrate boolean
values. class BoolTest
{
    public static void main(String args[])
    {
        boolean
        b; b =
        false;
        System.out.println("b is " + b);
        b = true;
        System.out.println("b is " + b);
        // a boolean value can control the if statement if(b) System.out.println("This is executed."); b =
        false;
        if(b) System.out.println("This is not executed.");
        // outcome of a relational operator is a boolean value System.out.println("10 > 9 is " + (10 > 9));
    }
}
```

Variables

The variable is the basic unit of storage in a Java program. A variable is defined by the combination of an **identifier**, a **type**, and an **optional initializer**. In addition, all variables have a scope, which defines their visibility, and a lifetime.

Declaring a Variable

In Java, all variables must be declared before they can be used. The basic form of a variable declaration is shown here:

type identifier [= value/literal][, identifier [= value/literal] ...] ;

Here the type is any primitive data types, or class name. The identifier is the name of the variable. We can initialize the variable by specifying the equal sign and value.

Example

```
int a, b, c; // declares three ints, a, b, and c.
int d = 3, e, f = 5; // declares three more ints, initializing
// d and f.
byte z = 22; // initializes z.
double pi = 3.14159; // declares an approximation of pi.
char x = 'x'; //the variable x has the value 'x'
```

Dynamic Initialization of the variable

We can also assign a value to the variable dynamically as follow:

```
int x=12;
int y=13;
float z=Math.sqrt(x+y);
```

The Scope and Lifetime of Variables

- ✓ Java allows, to declare a variable within any block.
- ✓ A block begins with opening curly brace and ended with end curly brace.
- ✓ Thus, each time we start new block, we create new scope.
- ✓ A scope determines what objects are visible to parts of your program. It also determines the life time of the objects.
- ✓ Many programming languages define two scopes: **Local and Global**
- ✓ As a general rule a variable defined within one scope, is not visible to code defined outside of the scope.
- ✓ Scopes can be also nested. The variable defined in **outer scope** are visible to the **inner scopes**, but reverse is not possible.

Example code

```
void function1()
{//outer block
    int a;
    //here a, are visible to the inner
    scope int a=10;
    if(a==10)
    {// inner block
        int b=a*20;
        int c=a+30;
```

```
//end of inner block  
b=20*2;  
// b is not known here, which declared in inner scope  
}//end of the outer block
```

Type Conversion and casting

There are two types of conversion. They are **Implicit Conversion**, and **Explicit Conversion**.

Implicit Conversion

In the case of the implicit conversion type conversion is automatically performed by java when the types are compatible. For example, the **int** can be assigned to **long**. The **byte** can be assigned to **short**. However, all the types are compatible, thus all the type conversions are implicitly allowed. For example, double is not compatible with byte.

Conditions for automatic conversion

1. The two types must be compatible
2. The destination type must be larger than the source type

When automatic type conversion takes place the **widening conversion** takes place. For example,

```
int a; //needs 32 bits  
byte b=45; //needs the 8 bits  
a=b; // here 8 bits data is placed in 32 bit storage. Thus widening takes place.
```

Explicit Conversion

Fortunately, it is still possible to obtain the conversion between the incompatible types. This is called explicit type conversion. Java provides a special keyword "**cast**" to facilitate explicit conversion. For example, sometimes we want to assign int to byte, this will not be performed automatically, because byte is **smaller** than int. This kind of conversion is sometimes called "**narrowing conversion**". Since, you are explicitly making the value narrow. The general form of the cast will be as follows:

```
destination_variable=(target type) value;
```

Here the target type specifies the destination type to which the value has to be converted.

Example

```
int a=1234;  
byte b=(byte) a;
```

The above code converts the int to byte. If the integer value is larger than the byte, then it will be reduced to modulo byte's range.

casttest.java

```
import java.io.*;  
class casttest  
{  
    public static void main(String args[])  
    {  
        int a=258;  
        byte b;  
        b=(byte) a;  
  
        System.out.print(" The result is : " +b);  
    }  
}
```

output: The result is : 2

A different type of conversion will occur when a floating-point value is assigned to an integer type: **truncation**. As you know, integers do not have fractional components. Thus, when a floating-point value is assigned to an integer type, the fractional component is lost. For example, if the value 1.23 is assigned to an integer, the resulting value will simply be 1. The 0.23 will have been truncated.

Automatic Type Promotion in Expressions

The expression contains the three things: operator, operand and literals (constant). In an expression, sometimes the sub expression value exceeds the either operand.

For example, examine the following expression:

```
byte a = 40;  
byte b = 50;  
byte c = 100;  
int d = a * b / c;
```

The result of the intermediate term **a * b** easily exceeds the range of either of its **byte** operands. To handle this kind of problem, Java automatically promotes each **byte**, **short**, or **char** operand to **int** when evaluating an expression. This means that the sub expression **a * b** is performed using integers—not bytes. Thus, 2,000, the result of the intermediate expression, **50 * 40**, is legal even though **a** and **b** are both specified as type **byte**.

As useful as the automatic promotions are, they can cause confusing compile-time errors. For example, this seemingly correct code causes a problem:

```
byte b = 50;
b = b * 2; // Error! Cannot assign an int to a byte!
```

The code is attempting to store **50 * 2**, a perfectly valid **byte** value, back into a **byte** variable. However, because the operands were automatically promoted to **int** when the expression was evaluated, the result has also been promoted to **int**. Thus, the result of the expression is now of type **int**, which cannot be assigned to a **byte** without the use of a cast.

In cases where you understand the consequences of overflow, you should use an explicit cast, such as

```
byte b = 50;
b = (byte)(b * 2);
```

which yields the correct value of 100.

The Type Promotion Rules

Java defines several *type promotion* rules that apply to expressions. They are as follows:

- First, all **byte**, **short**, and **char** values are promoted to **int**, as just described.
- Then, if one operand is a **long**, the whole expression is promoted to **long**.
- If one operand is a **float**, the entire expression is promoted to **float**.
- If any of the operands is **double**, the result is **double**.

Literal constants

A literal is a value that can be passed to a variable or constant in a program. Literals can be numeric, boolean, character, string notation or null. A constant value can be created using a

UNIT-1

literal representation of it. Here are some literals:

Interger literal	Character literal	Floating point literal	byteliteral
int x=25;	char ch=88;	flaot f=12.34	byte b=12;

Operators

An operator performs an operation on one or more operands. Java provides a rich operator environment. An operator that performs an operation on one operand is called ***unary operator***. An operator that performs an operation on two operands is called ***binary operator***.

Most of its operators can be divided into the following ***four groups: arithmetic, bitwise, relational, and logical***. Java also defines some additional operators that handle certain special situations. In Java under ***Binary operator*** we have Arithmetic, relational, Shift, bitwise and assignment operators. And under ***Unary operators*** we have ++, --, !(Boolean not), ~(bitwise not) operators.

i. Arithmetic Operators

Arithmetic operators are used in mathematical expressions in the same way that they are used in algebra. The following table lists the arithmetic operators:

Operator	Result
+	Addition
-	Subtraction (also unary minus)
*	Multiplication
/	Division
%	Modulus
++	Increment
+=	Addition assignment
-=	Subtraction assignment
*=	Multiplication assignment
/=	Division assignment
%=	Modulus assignment
--	Decrement

The operands of the arithmetic operations are of numeric type. The Boolean operands are not allowed to perform arithmetic operations. The basic arithmetic operators are: addition, subtraction, multiplication, and division.

Example program to perform all the arithmetic operations

Arith.java

```
import java.io.*;
class Arith
{
    public static void main(String args[])
    {
        int a,b,c,d;
        a=5;
        b=6;
        //arithmetic addition
        c=a+b;
        System.out.println("The Sum is :"+c);
        //arithmetic subtraction
        d=a-b;
        System.out.println("The Subtraction is :"+d);
        //arithmetic division
        c=a/b;
        System.out.println("The Division is :"+c);
        //arithmetic multiplication
        d=a*b;
        System.out.println("The multiplication is :"+d);
    }
}
```

The Modulus Operator

The modulus operator, %, returns the remainder of a division operation. It can be applied to floating-point types as well as integer types. The following demonstrates the %

Modulus.java

```
// Demonstrate the % operator. class
Modulus
{
    public static void main(String args[])
    {
        int x = 42; double y =
        42.25;
        System.out.println("x mod 10 = " + x % 10);
    }
}
```

```
        System.out.println("y mod 10 = " + y % 10);
    }
}
```

Arithmetic Compound Assignment Operators

Java provides special operators that can be used to combine an arithmetic operation with an assignment. As you probably know, statements like the following are quite common in programming:

```
a = a + 4;
```

In Java, you can rewrite this statement as shown here:

```
a += 4;
```

This version uses the `+=` *compound assignment operator*. Both statements perform the same action: they increase the value of `a` by 4.

Here is another example, `a = a % 2;`

which can be expressed as `a %= 2;`

Increment and Decrement

The `++` and the `--` are Java's increment and decrement operators. The increment operator increases its operand by one. The decrement operator decreases its operand by one. For example, this statement:

```
x = x + 1;
```

can be rewritten like this by use of the increment operator: `x++;`

Similarly, this statement:

```
x = x - 1;
```

is equivalent to `x--;`

Note: If we write increment/decrement operator after the operand such expression is called post increment/decrement expression, if written before operand such expression is called pre increment/decrement expression

The following program demonstrates the increment and decrement operator.

IncDec.java

```
// Demonstrate ++ and -- class
IncDec
{
public static void main(String args[])
{
    int a = 1; int
    b = 2; int c;
    int d;
    c = ++b; //pre increment d = a--;
    //post decrement c++;
        //post increment
    d--; //post decrement
    System.out.println("a = " + a);
    System.out.println("b = " + b);
    System.out.println("c = " + c);
    System.out.println("d = " + d);
}
}
```

ii. The Bitwise Operators

Java defines several *bitwise operators* that can be applied to the integer types, **long**, **int**, **short**, **char**, and **byte**. These operators act upon the individual bits of their operands. They are summarized in the following table:

UNIT-1

Operator	Result
~	Bitwise unary NOT
&	Bitwise AND
	Bitwise OR
^	Bitwise exclusive OR
>>	Shift right
>>>	Shift right zero fill
<<	Shift left
&=	Bitwise AND assignment
=	Bitwise OR assignment
^=	Bitwise exclusive OR assignment
>>=	Shift right assignment
>>>=	Shift right zero fill assignment
<<=	Shift left assignment

These operators are again classified into two categories: **Logical operators**, and **Shift operators**.

The Bitwise Logical Operators

The bitwise logical operators are **&**, **|**, **^**, and **~**. The following table shows the outcome of each operation. The bitwise operators are applied to each individual bit within each operand.

A	B	A B	A & B	A ^ B	~A
0	0	0	0	0	1
1	0	1	0	1	0
0	1	1	0	1	1
1	1	1	1	0	0

The Bitwise NOT

Also called the *bitwise complement*, the unary NOT operator, **~**, inverts all of the bits of its operand. For example, the number 42, which has the following bit pattern:

00101010

becomes

11010101

after the NOT operator is applied.

The Bitwise AND

The AND operator, **&**, produces a 1 bit if both operands are also 1. A zero is produced in all other cases. Here is an example:

```
00101010    42
& 00001111    15
-----
00001010 10
```

The Bitwise OR

The OR operator, **|**, combines bits such that if either of the bits in the operands is a 1, then the resultant bit is a 1, as shown here:

```
00101010    42
| 00001111    15
-----
00101111 47
```

The Bitwise XOR

The XOR operator, **^**, combines bits such that if exactly one operand is 1, then the result is 1. Otherwise, the result is zero. The following example shows the effect of the **^**.

```
00101010 (42)
^ 00001111 (15)
-----
00100101 (37)
```

Using the Bitwise Logical Operators

The following program demonstrates the bitwise logical operators:

BitLogic.java

```
// Demonstrate the bitwise logical operators. class
BitLogic
{
    public static void main(String args[])
    {

        int a = 3; // 0 + 2 + 1 or 0011 in binary
        int b = 6; // 4 + 2 + 0 or 0110 in binary
        int c = a | b;
        int d = a & b;
        int e = a ^ b;
```



```
int f = (~a & b) | (a & ~b);
int g = ~a & 0x0f;
System.out.println(" a | b = " + c);
System.out.println(" a&b = " + d);
System.out.println(" a^b = " + e);
System.out.println("~a&b | a&~b = " + f);
System.out.println(" ~a = " + g);
}
}
```

Bitwise Shift Operators: (left shift and right shift)

The Left Shift

The left shift operator, `<<`, shifts all of the bits in a value to the left a specified number of times. It has this general form:

value << num

Here, **num** specifies the number of positions to left-shift the value in **value**. That is, the `<<` moves all of the bits in the specified value to the left by the number of bit positions specified by **num**.

The Right Shift

The right shift operator, `>>`, shifts all of the bits in a value to the right a specified number of times. Its general form is shown here:

value >> num

Here, **num** specifies the number of positions to left-shift the value in **value**. That is, the `>>` moves all of the bits in the specified value to the right by the number of bit positions specified by **num**.

ShiftBits.java

```
class ShiftBits
{
    public static void main(String args[])
```

```
{
    byte b=6;
    int c,d;
    //left
    shift
    c=b<<2;
    //right shift
    d=b>>3;
    System.out.println("The left shift result is :"+c);
    System.out.println("The right shift result is :"+d);
}
```

iii. Relational Operators

The *relational operators* determine the relationship that one operand has to the other. Specifically, they determine equality and ordering. The relational operators are shown here:

Operator	Result
==	Equal to
!=	Not equal to
>	Greater than
<	Less than
>=	Greater than or equal to
<=	Less than or equal to

The outcome of these operations is a **boolean** value. The relational operators are most frequently used in the expressions that control the **if** statement and the various loop statements.

iv. Short-Circuit Logical Operators (|| and &&)

Java provides two interesting **Boolean operators** not found in many other computer languages. These are secondary versions of the Boolean AND and OR operators, and are known as **short-circuit** logical operators.

When we use || operator if left hand side expression is true, then the result will be true, no matter what is the result of right hand side expression. In the case of && if the left hand side expression results true, then only the right hand side expression is evaluated.

Example 1: (expr1 || expr2)

Example2: (expr1 && expr2)

The Assignment Operator

The *assignment operator* is the single equal sign, =. The assignment operator works in Java much as it does in any other computer language. It has this general form:

var = expression;

Here, the type of *var* must be compatible with the type of *expression*. The assignment operator does have one interesting attribute that you may not be familiar with: it allows you to create a chain of assignments. For example, consider this fragment:

```
int x, y, z;  
x = y = z = 100; // set x, y, and z to 100
```

The ? Operator

Java includes a special **ternary (three-way) operator** that can replace certain types of if-then-else statements. This operator is the ?. It can seem somewhat confusing at first, but the ? can be used very effectively once mastered. The ? has this general form:

expression1 ? expression2 : expression3

Here, *expression1* can be any expression that evaluates to a **boolean** value. If *expression1* is **true**, then *expression2* is evaluated; otherwise, *expression3* is evaluated. The result of the ? operation is that of the expression evaluated. Both *expression2* and *expression3* are required to return the same type, which can't be **void**. Here is an example of the way that the ? is employed:

Test.java

```
class Test  
{  
    public static void main(String args[])  
    {  
        int x=4,y=6;  
        int res= (x>y)?x:y;  
        System.out.println("The result is :"+res);  
    }  
}
```

Expressions

An expression is a combination of operators and/or operands. Expressions are used to create Objects, Arrays, and Assigning values to variables and so on. The expression may contain identifiers, literals, separators, and operators.

Example:-

```
int m=2,n=3,o=4;  
int y=m*n*o;
```

Operator Precedence Rules and Associativity

The precedence rules are used to determine the priority in the case there are two operators with different precedence. The Associativity rules are used to determine the order of evaluation, in case two operators are having the same precedence. Associativity is two types: Left to Right and Right to Left.

Table shows the order of precedence for Java operators, from highest to lowest. Notice that the first row shows items that you may not normally think of as operators: **parentheses, square brackets, and the dot operator**. Technically, these are called *separators*, but they act like operators in an expression. Parentheses are used to alter the precedence of an operation. As you know from the previous chapter, the square brackets provide array indexing. The dot operator is used to dereference objects.

UNIT-1

Highest			
()	[]	.	
++	--	~	!
*	/	%	
+	-		
>>	>>>	<<	
>	>=	<	<=
==	!=		
&			
^			
&&			
?:			
=	op=		
Lowest			

Note: The operators =,?:, ++, and – are having Right to Left Associativity. The remaining Operators are having Left to Right Associativity.

Using Parentheses

Parentheses raise the precedence of the operations that are inside them. This is often necessary to obtain the result you desire. For example, consider the following expression:

`a >> b + 3`

This expression first adds 3 to **b** and then shifts **a** right by that result. That is, this expression can be rewritten using redundant parentheses like this:

`a >> (b + 3)`

However, if you want to first shift **a** right by **b** positions and then add 3 to that result, you will need to parenthesize the expression like this:

`(a >> b) + 3`


Flow of Control (Control Statements)

The control statements are used to control the flow of execution and branch based on the status of a program. The control statements in Java are categorized into 3 categories:

Conditional Statement (Selection Statements/Decision Making Statements)

Loops (Iteration Statements)

Branching Statements (Jump Statements)

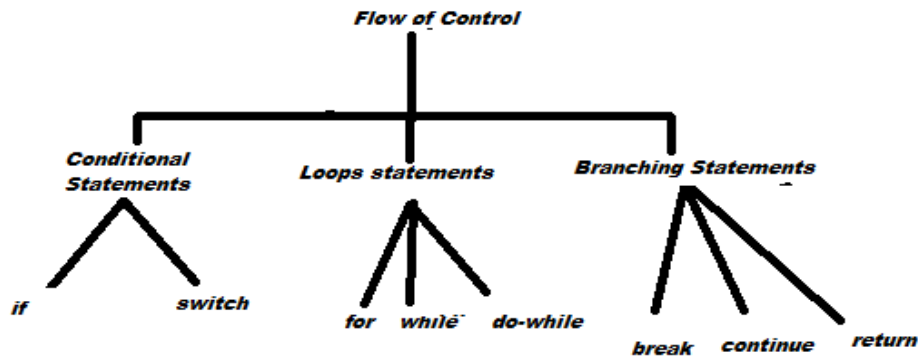

- I. **Conditional Statement (Selection Statements/Decision Making Statements):** These include **if** and **switch**. These statements allow the program to choose different paths of execution based on the outcome of the conditional expression.

if statement: This is the Java's conditional branch statement. This is used to route the execution through two different paths. The general form of if statement will be as follow:

```
if (conditional expression)
{
    statement1
}
else{
    statement2
}
```

Here the statements inside the block can be single statement or multiple statements. The conditional expression is any expression that returns the **Boolean** value. The else clause is optional. The if works as follows: if the conditional expression is true, then statement1 will be executed. Otherwise statement2 will be executed.

Example:

Write a java program to find whether the given number is even or odd?

EvenOdd.java

```
import java.io.*;
classs EvenOdd
{
    public static void main(String args[])
    {
        int n;
        System.out.println("Enter the value of n");
        DataInputStream dis=new DataInputStream(System.in);
        n=Integer.parseInt(dis.readLine());
        if(n%2==0)
        {
            System.out.println(n+" is the Even Number");
        }
        else
        {
            System.out.println(n+"is the ODD Number");
        }
    }
}
```

Nested if: The nested if statement is an if statement, that contains another if and else inside it. The nested if are very common in programming. When we nest ifs, the else always associated with the nearest if.

The general form of the nested if will be as follow:

```
if(conditional expresion1)
{
    if(conditional expression2)
```

```
{
statements1;
}
else
{
    statement2;
}
else
{
    statement3;
}}
```

Example program:

Write a java Program to test whether a given number is positive or negative.

Positive.java

```
import java.io.*;
class Positive
{
    public static void main(String args[]) throws IOException
    {
        int n;
        DataInputStream dis=new DataInputStream(System.in);
        n=Integer.parseInt(dis.readLine());
        if(n>-1)
        {
            if(n>0)
                System.out.println(n+ " is positive no");
        }
        else
            System.out.println(n+ " is Negative no");
    }
}
```

The if-else-if Ladder

A common programming construct that is based upon a sequence of nested **ifs** is the *if-else-if ladder*. It looks like this:

```
if(condition)
    statement
; else
```



```
if(condition)
    statement
; else
if(condition)
    statement;
...
else
    statement;
```

The **if** statements are executed from the top down. As soon as one of the conditions controlling the **if** is **true**, the statement associated with that **if** is executed, and the rest of the ladder is bypassed. If none of the conditions is true, then the final **else** statement will be executed.

Example Program:

Write a Java Program to test whether a given character is Vowel or Consonant?

Vowel.java

```
import java.io.*;
class Vowel
{
    public static void main(String args[]) throws IOException
    {
        char ch;
        ch=(char)System.in.read();
        if(ch=='a')
            System.out.println("Vowel");
        else if(ch=='e')
            System.out.println("Vowel");

        else if(ch=='i')
            System.out.println("Vowel");
        else if(ch=='o')
            System.out.println("Vowel");
        else if(ch=='u')
            System.out.println("Vowel");
        else

            System.out.println("consonant");
    }
}
```

```
}
```

The Switch statement

The **switch** statement is Java's multi-way branch statement. It provides an easy way to dispatch execution to different parts of your code based on the value of an expression. As such, it often provides a better alternative than a large series of **if-else-if** statements. Here is the general form of a **switch** statement:

```
switch (expression)
{
    case value1:
        // statement sequence break;
    case value2:
        // statement sequence break;
    .....
    case valueN:
        // statement sequence
        break;

    default:
// default statement sequence
}
```

The *expression* must be of type **byte**, **short**, **int**, or **char**; each of the *values* specified in the **case** statements must be of a type compatible with the expression. Each **case** value must be a unique literal (that is, it must be a constant, not a variable). Duplicate **case** values are not allowed.

The **switch** statement works like this: The value of the expression is compared with each of the literal values in the **case** statements. If a match is found, the code sequence following that **case** statement is executed. If none of the constants matches the value of the expression, then the **default** statement is executed. However, the **default** statement is optional. If no **case** matches and no **default** is present, then no further action is taken.

The **break** statement is used inside the **switch** to terminate a statement sequence. When a **break** statement is encountered, execution branches to the first line of code that follows the entire **switch** statement. This has the effect of "jumping out" of the **switch**.

Write a Java Program to test whether a given character is Vowel or Consonant?(Using Switch)

SwitchTest.java

```
import java.io.*;
class SwitchTest
{
    public static void main(String args[]) throws IOException
    {

        char ch;
        ch=(char)System.in.read();
        switch(ch)
        {
            //test for small letters
            case 'a':
                System.out.println("vowel");
                break;
            case 'e':
                System.out.println("vowel");
                break;
            case 'i':
                System.out.println("vowel");
                break;
            case 'o':
                System.out.println("vowel");
                break;
            case 'u':
                System.out.println("vowel");
                break;
            //test for capital letters
            case 'A': System.out.println("vowel");
                break;
            default: System.out.println("Consonant");
        }
    }
}
```

The **break** statement is optional. If you omit the **break**, execution will continue on into the next

case. It is sometimes desirable to have multiple **cases** without **break** statements between them. For example, consider the following program.

```
class Switch
{
public static void main(String args[])
{
    int month = 4;
    String season;
    switch (month)
    {
        case 12:
        case 1:
        case 2:season =
            "Winter"; break;
        case 3:
        case 4:
        case 5:season = "Spring";
            break;
        case 6:
        case 7:
        case 8:season = "Summer"; break;
        case 9:
        case 10:
        case 11:season = "Autumn";
            break;
        default:season = "Bogus Month";
    }
    System.out.println("April is in the " + season + ".");
}
}
```

Nested switch Statements

You can use a **switch** as part of the statement sequence of an outer **switch**. This is called a *nested switch*. Since a **switch** statement defines its own block, no conflicts arise between the **case** constants in the inner **switch** and those in the outer **switch**. For example, the following fragment is perfectly valid:

```
switch(expression) //outer switch
{
    case 1: switch(expression) // inner switch
        {
            case 4: //statement
                sequence break;
            case 5://statement
                sequence break;
        } //end of inner switch
        break;
    case 2: //statement sequence
        break;
    default: //statement sequence
} //end of outer switch
```

There are three important features of the switch statement to note:

- The **switch** differs from the **if** in that **switch** can only test for equality, whereas **if** can evaluate any type of Boolean expression. That is, the **switch** looks only for a match between the value of the expression and one of its **case** constants.
- No two **case** constants in the same **switch** can have identical values. Of course, a **switch** statement and an enclosing outer **switch** can have **case** constants in common.
- A **switch** statement is usually more efficient than a set of nested **ifs**.

II. Loops (Iteration Statements)

Java's iteration statements are **for**, **while**, and **do-while**. These statements create what we commonly call *loops*. As you probably know, a loop repeatedly executes the same set of instructions until a termination condition is met.

i. **while**

The '**while**' loop is used to repeatedly execute a block of statements based on a condition. The condition is evaluated before the iteration starts. A '**for**' loop is useful, when we know the number of iterations to be executed in advance. If we want to execute the loop for indefinite number of times, a while loop may be better choice. For example, if you execute a ***query to fetch data from database***, you will not know the exact number of records returned by the

query.

Syntax:

```
while(condition)
{
    // body of loop
    increment or decrement statement
}
```

The ***condition*** can be any Boolean expression. The body of the loop will be executed as long as the conditional expression is true. When ***condition*** becomes false, control passes to the next line of code immediately following the loop. The curly braces are unnecessary if only a single statement is being repeated.

Example program:

Write a java program to add all the number from 1 to 10.

WhileTest.java

```
import java.io.*;
class WhileTest
{
    public static void main(String args[])
    {
        int i=1,sum=0;
        while(i<=10)
        {
            sum=sum+i;
            i++;
        }
        System.out.println("The sum is :"+sum);
    }
}
```

ii. do-while statement

However, sometimes it is desirable to execute the body of a loop at least once, even if the conditional expression is false to begin with. In other words, there are times when you would like to test the termination expression at the end of the loop rather than at the beginning.

Fortunately, Java supplies a loop that does just that: the **do-while**. The **do-while** loop always

executes its body at least once, because its conditional expression is at the bottom of the loop. Its general form is:

```
do {  
    // body of loop  
  
} while (condition);
```

Each iteration of the **do-while** loop first executes the body of the loop and then evaluates the conditional expression. If this expression is true, the loop will repeat. Otherwise, the loop terminates. As with all of Java's loops, *condition* must be a Boolean expression.

Example program:

Write a java program to add all the number from 1 to 10. (using do-while)

WhileTest.java

```
import java.io.*;  
class WhileTest  
{  
    public static void main(String args[])  
    {  
        int i=1,sum=0;  
do  
    {  
        sum=sum+i;  
        i++;  
    }while(i<=10);  
        System.out.println("The sum is :"+sum);  
    }  
}
```

Note 1: Here the final value of the i will be 11. Because the body is executed first, then the condition is verified at the end.

Note 2: The **do-while** loop is especially useful when you process a **menu** selection, because you will usually want the body of a menu loop to execute at least once.

Example program: Write a Java Program to perform various operations like addition, subtraction, and multiplication based on the number entered by the user. And Also Display the Menu.

DoWhile.java

```
import
java.io.*;
class
DoWhile
{
    public static void main(String args[]) throws IOException
    {
        int n,sum=0,i=0;
        DataInputStream dis=new DataInputStream(System.in);

        do
        {
            System.out.println("Enter your
            choice"); System.out.println("1
            Addition"); System.out.println("2
            Subtraction"); System.out.println("3
            Multiplicaton");
            n=Integer.parseInt(dis.readLine());
            System.out.println("Enter two
            Numbers"); int
            a=Integer.parseInt(dis.readLine());
            int b
            =Integer.parseInt(dis.readLine()); int
            c;
            switch(n)
            {
                case 1: c=a+b;
                    System.out.println("The addition is :"+c);
                    break;
                case 2: c=a-b;
                    System.out.println("The addition is :"+c);
                    break;
                case 3: c=a*b;
                    System.out.println("The addition is :"+c);
                    break;
                default: System.out.println("Enter Correct Number");

            }
        }
```



```
        } while(n<=3);  
  
    }  
}
```

iii. for statement

The for loop groups the following three common parts into one statement: **Initialization, condition and Increment/ Decrement.**

Syntax:

```
for(initialization; condition; iteration)
```

```
{  
  
    // body of the loop
```

The **for** loop operates as follows.

- ✓ When the loop first starts, the **initialization** portion of the loop is executed. Generally, this is an expression that sets the value of the **loop control variable**, which acts as a counter that controls the loop. It is important to understand that the initialization expression is only executed once.
- ✓ Next, **condition** is evaluated. This must be a Boolean expression. It usually tests the loop control variable against a target value. If this expression is true, then the body of the loop is executed. If it is false, the loop terminates.
- ✓ Third, **Increment/Decrement** is used to increment /decrement the loop control variable value by one.

Example program: same program using the for loop

ForTest.java

```
import  
java.io.*;  
class ForTest  
{  
    public static void main(String args[])  
    {  
        int i,sum=0;  
        for(i=1;i<=10;i++)
```

```
        {  
            sum=sum+i;  
        }  
        System.out.println("The sum is :"+sum);  
    }  
}
```

There are some important things about the for loop

1. The initialization of the loop controlling variables can be done inside for loop. Example:
for(int i=1;i<=10;i++)
2. We can write any Boolean expression in the place of the condition for second part of the loop.

Example: where b is a Boolean data

type boolean b=false;

for(int i=1; !b;i++)

```
{  
    //body of the  
    loop b=true;  
}
```

This loop executes until the b is set to the true;

3. We can also run the loop infinitely, just by leaving all the three parts empty. Example:

```
for( ; ;)  
{  
    //body of the loop  
}
```

For each version of the for loop:

A for loop also provides another version, which is called **Enhanced Version** of the for loop. The general form of the for loop will be as follow:

```
for(type itr_var:collection)  
{  
    //body of the loop  
}
```

Here, type is the type of the iterative variable of that receives the elements from collection, one at a time, from beginning to the end. The collection is created using the array.

Example program:

Write a java program to add all the elements in an array?

ForEach.java

```
import
java.io.*;
class ForEach
{
    public static void main(String args[])
    {
        int i, a[], sum=0;
        a=new
        int[10];
        a={12,13,14,15,16};
        for(int x:a)
        {
            sum=sum+x;
        }
        System.out.println("The sum is :"+sum);
    }
}
```

III. Branching Statements (The Jump Statements)

Java supports three jump statements: **break**, **continue**, and **return**. These statements transfer control to another part of your program.

i. **break statement**

In Java, the **break** statement has three uses. First, as you have seen, it terminates a statement sequence in a **switch** statement. Second, it can be used to exit a loop. Third, it can be used as “civilized” form of goto statement.

Using break to Exit a Loop

By using **break**, you can force immediate termination of a loop, bypassing the conditional expression and any remaining code in the body of the loop. When a **break** statement is encountered inside a loop, the loop is terminated and program control resumes at the next statement following the loop. Here is a simple example:

// Using break to exit a loop.

```
class BreakLoop
{
    public static void main(String args[])
    {
        for(int i=0; i<100; i++)
        {
            if(i == 10) break; // terminate loop if i is 10
            System.out.println("i: " + i);
        }
        System.out.println("Loop complete.");
    }
}
```

Using **break** as a Form of Goto

In addition to its uses with the **switch** statement and loops, the **break** statement can also be employed by itself to provide a “civilized” form of the goto statement. For example, the goto can be useful when you are exiting from a deeply nested set of loops. To handle such situations, Java defines an expanded form of the **break** statement. By using this form of **break**, you can, for example, break out of one or more blocks of code.

The general form of the labeled **break** statement is shown here:

<code>break <i>label</i>;</code>

Most often, *label* is the name of a label that identifies a block of code. This can be a stand-alone block of code but it can also be a block that is the target of another statement. When this form of **break** executes, control is transferred out of the named block. The labeled block must enclose the **break** statement, but it does not need to be the immediately enclosing block.

To name a block, put a label at the start of it. A *label* is any valid Java identifier followed by a colon. Once you have labeled a block, you can then use this label as the target of a **break** statement.

Example code:

```
class Break
{
```

```
public static void main(String args[])
{
    boolean t =
    true; first: {
    secon
    d: {
    third:
    {
        System.out.println("Before the break.");
        if(t) break second; // break out of second block
        System.out.println("This won't execute");
    }
    System.out.println("This won't execute");
    }
    System.out.println("This is after second block.");
    }
    }
    }
```

Running this program generates the following output:

Before the break.
This is after second block.

ii. **continue statement**

It is used to stop the current iteration and go back to continue with next iteration. Sometimes it is useful to force an early iteration of a loop. That is, you might want to continue running the loop but stop processing the remainder of the code in its body for this particular iteration. In **while** and **do-while** loops, a **continue** statement causes control to be transferred directly to the conditional expression that controls the loop. In a **for** loop, control goes first to the iteration portion of the **for** statement and then to the conditional expression. For all three loops, any intermediate code is bypassed. Here is an example program that uses **continue** to cause two numbers to be printed on each line:

// Demonstrate continue.

```
class Continue
{
    public static void main(String args[])
    {
```

```
for(int i=1; i<=10; i++)
{
    if (i%5 == 0) continue;
    System.out.print(i + "
    ,");}
}
```

Here all the numbers from 1 to 10 except 5 are printed. as 1,2,3,4,6,7,8,9,10.

iii. return statement

The last control statement is **return**. The **return** statement is used to explicitly return from a method. That is, it causes program control to transfer back to the **caller of the method**. As such, it is categorized as a jump statement.

Example

code class

Test

```
{
    p s v main(String args[])    // caller of the method
    {
        int a=3,b=4;
        int x=method(a,b);//function call
        System.out.println("The sum is :"+x);
    }
    int method(int x,int y)    // called method
    {
        return (x+y);
    }
}
```

After computing the result the control is transferred to the caller method, that main in this case.

-----End of 1st Unit-----