


Certification Microservices Project

Outputs:


<http://localhost:8082/hello-client>

running issuems application




<http://localhost:8081/books>

running bookms application

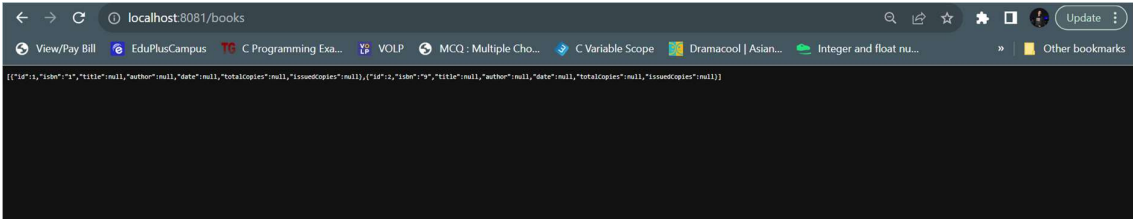

On swagger, trying all endpoints

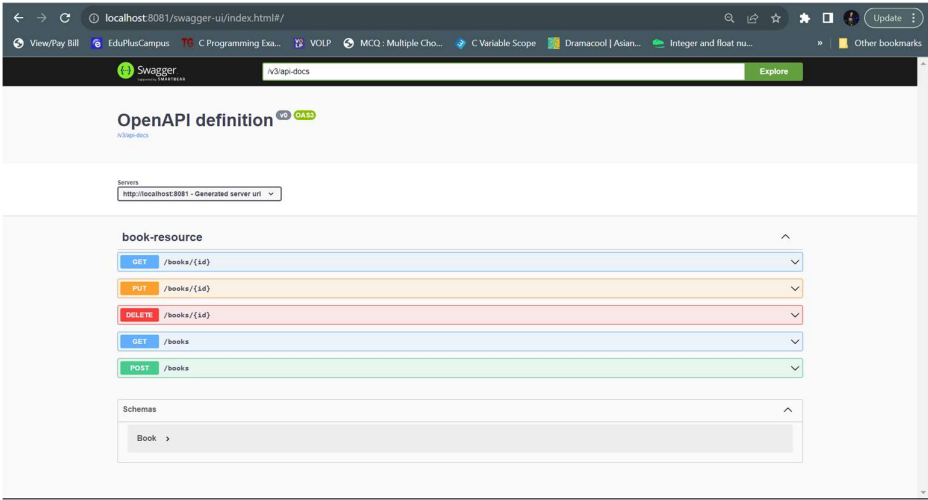

Postman interface showing two API requests to a local server.

Request 1:

- Name: `id` (required), Integer (\$int32), (path)
- Value: `1`
- Execute button

Responses:

Curl:

```
curl -X 'GET' \
  'http://localhost:8080/books/1' \
  -H 'accept: */*'
```

Request URL: `http://localhost:8080/books/1`

Server response:

Code: 200

Response body:

```
{
  "id": 1,
  "isbn": "1",
  "title": null,
  "author": null,
  "date": null,
  "totalCopies": null,
  "issuedCopies": null
}
```

Response headers:

```
connection: keep-alive
content-type: application/json
date: Mon, 07 Aug 2023 04:24:51 GMT
keep-alive: timeout=60
transfer-encoding: chunked
```

Request 2:

GET /books

Parameters: No parameters

Execute button

Responses:

Curl:

```
curl -X 'GET' \
  'http://localhost:8080/books' \
  -H 'accept: */*'
```

Request URL: `http://localhost:8080/books`

Server response:

Code: 200

Response body:

```
{
  "id": 1,
  "isbn": "1",
  "title": null,
  "author": null,
  "date": null,
  "totalCopies": null,
  "issuedCopies": null
},
{
  "id": 2,
  "isbn": "2",
  "title": null,
  "author": null,
  "date": null,
  "totalCopies": null,
  "issuedCopies": null
}
```

Response headers:

```
connection: keep-alive
content-type: application/json
date: Mon, 07 Aug 2023 04:24:51 GMT
```

Accessing books from apigateway port,8080

<http://localhost:8080/dummy-bookms/books>

Browser screenshot showing the URL `localhost:8080/dummy-bookms/books` and the response body:

```
[{"id":1,"isbn":"1","title":null,"author":null,"date":null,"totalCopies":null,"issuedCopies":null}, {"id":2,"isbn":"2","title":null,"author":null,"date":null,"totalCopies":null,"issuedCopies":null}]
```

<http://localhost:8761/>

spring Eureka

HOME LAST 1000 SINCE STARTUP

System Status

Environments	test	Current time	2023-08-07T09:47:42 +0530
Data center	default	Uptime	00:01
		Lease expiration enabled	true
		Renews threshold	5
		Renews (last min)	2

THE SELF PRESERVATION MODE IS TURNED OFF. THIS MAY NOT PROTECT INSTANCE EXPIRY IN CASE OF NETWORK/OTHER PROBLEMS.

DS Replicas

localhost

Instances currently registered with Eureka

Application	AMIs	Availability Zones	Status
APIGATEWAY	n/a (1)	(1)	UP (1) - HP-Prachi-Laptop2.apigateway.8080
BOOKMS	n/a (1)	(1)	UP (1) - HP-Prachi-Laptop2.bookms.8081

General Info

Name	Value
total-avail-memory	80mb
num-of-cpus	8
current-memory-usage	52mb (64%)
server-up-time	00:01
registered-replicas	http://localhost:8761/eureka/
unavailable-replicas	http://localhost:8761/eureka/
available-replicas	

Instance Info

Name	Value
location	192.168.1.11

Actuator working from apigateway service, metrics can be seen

<http://localhost:8080/actuator>

← → ↻

localhost:8080/actuator

View/Pay Bill EduPlusCampus TC C Programming Exa... VOLP MCQ: Multiple Cho... C Variable Scope Dramacool | Asian... Integer and float nu... Other bookmarks

```
[{"links":{"self":{"href":"http://localhost:8080/actuator","templated":false},"health":{"href":"http://localhost:8080/actuator/health","templated":false},"caches-cache":{"href":"http://localhost:8080/actuator/caches/{cache}","templated":true},"caches":{"href":"http://localhost:8080/actuator/caches","templated":false},"health-path":{"href":"http://localhost:8080/actuator/health/{path}","templated":true},"info":{"href":"http://localhost:8080/actuator/info","templated":false},"conditions":{"href":"http://localhost:8080/actuator/conditions","templated":false},"configprops":{"href":"http://localhost:8080/actuator/configprops","templated":false},"configprops-prefix":{"href":"http://localhost:8080/actuator/configprops/{prefix}","templated":true},"env":{"href":"http://localhost:8080/actuator/env","templated":false},"env-refresh":{"href":"http://localhost:8080/actuator/env/refresh","templated":true},"loggers":{"href":"http://localhost:8080/actuator/loggers","templated":false},"loggers-name":{"href":"http://localhost:8080/actuator/loggers/{name}","templated":true},"heapdump":{"href":"http://localhost:8080/actuator/heapdump","templated":false},"heapdump":{"href":"http://localhost:8080/actuator/heapdump","templated":false},"metrics":{"href":"http://localhost:8080/actuator/metrics/{metricName}","templated":true},"metrics":{"href":"http://localhost:8080/actuator/metrics","templated":false},"scheduledtasks":{"href":"http://localhost:8080/actuator/scheduledtasks","templated":false},"mappings":{"href":"http://localhost:8080/actuator/mappings","templated":false},"refresh":{"href":"http://localhost:8080/actuator/refresh","templated":false},"features":{"href":"http://localhost:8080/actuator/features","templated":false},"serviceregistry":{"href":"http://localhost:8080/actuator/serviceregistry","templated":false},"gateway":{"href":"http://localhost:8080/actuator/gateway","templated":false}}}]
```

Our oauth server is up:

<http://localhost:8761/>

spring Eureka

HOME LAST 1000 SINCE STARTUP

System Status

Environment	test	Current time	2023-08-07T22:27:20 +0530
Data center	default	Uptime	00:02
		Lease expiration enabled	true
		Renews threshold	6
		Renews (last min)	4

THE SELF PRESERVATION MODE IS TURNED OFF. THIS MAY NOT PROTECT INSTANCE EXPIRY IN CASE OF NETWORK/OTHER PROBLEMS.

DS Replicas

localhost


Instances currently registered with Eureka

Application	AMIs	Availability Zones	Status
APIGATEWAY	n/a (1)	(1)	UP (1) - HP-Prachi-Laptop2.apigateway.8080
BOOKMS	n/a (1)	(1)	UP (1) - HP-Prachi-Laptop2.bookms.8081
OAUTH-SERVER	n/a (1)	(1)	UP (1) - HP-Prachi-Laptop2.oauth-server.9000

General Info


<http://localhost:8080/dummy-bookms/books>

As our auth server is up, we can access the books details due to wrong credentials, we are getting 401 error (unauthorized request)

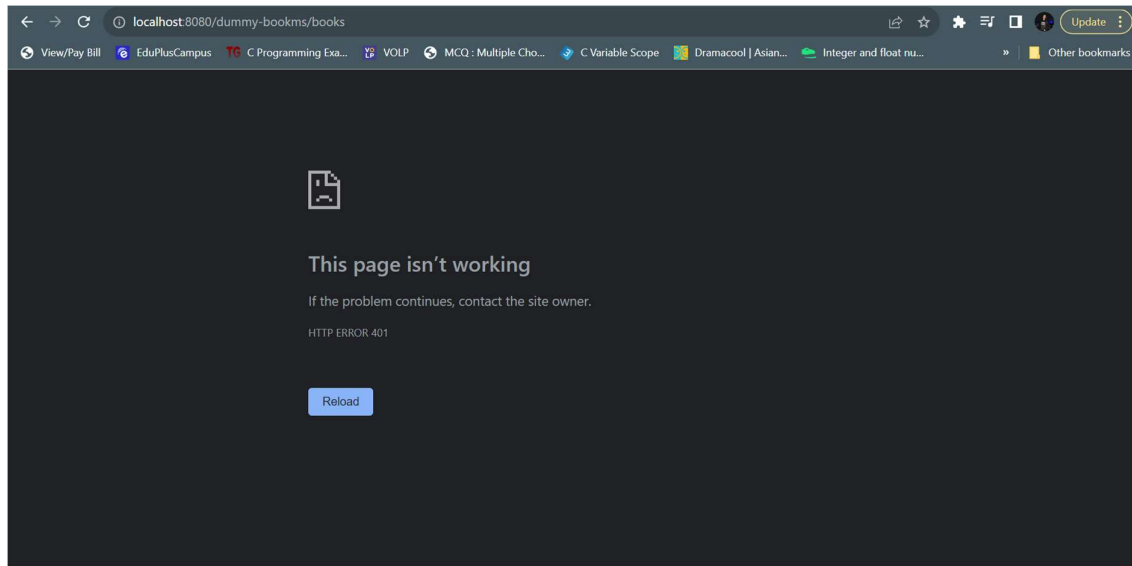

Hitting POST request on postman <http://localhost:9000/oauth/token>

We get an access token

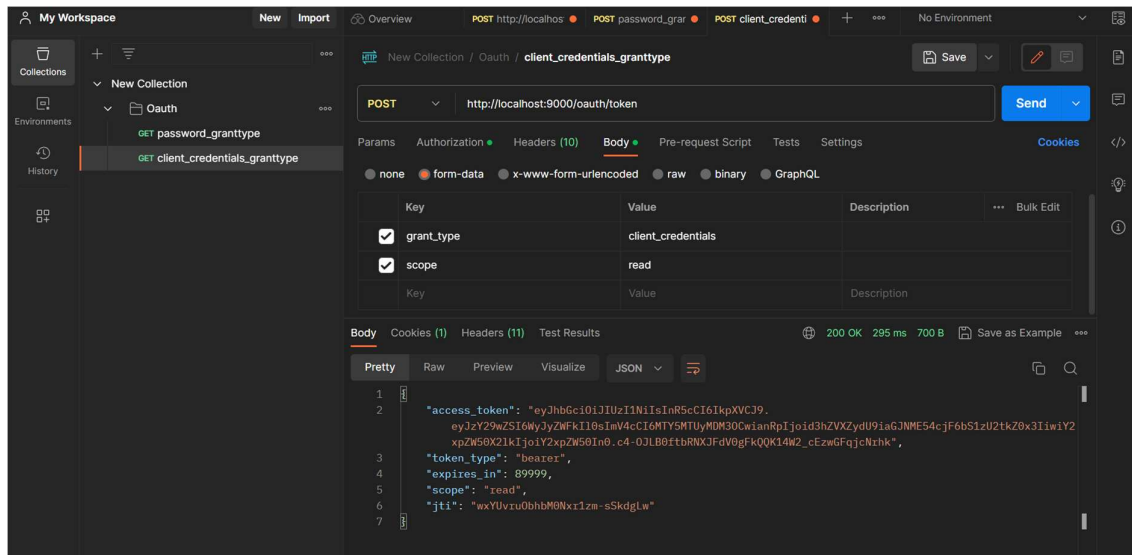

GET/localhost:8080/dummy-bookms/books/1

Using access token we can access book details, set the authorization type to “bearer token” and enter the access token as value for authorization in value.

