RelayMart technical stack

Frontend / API / Backend / Data

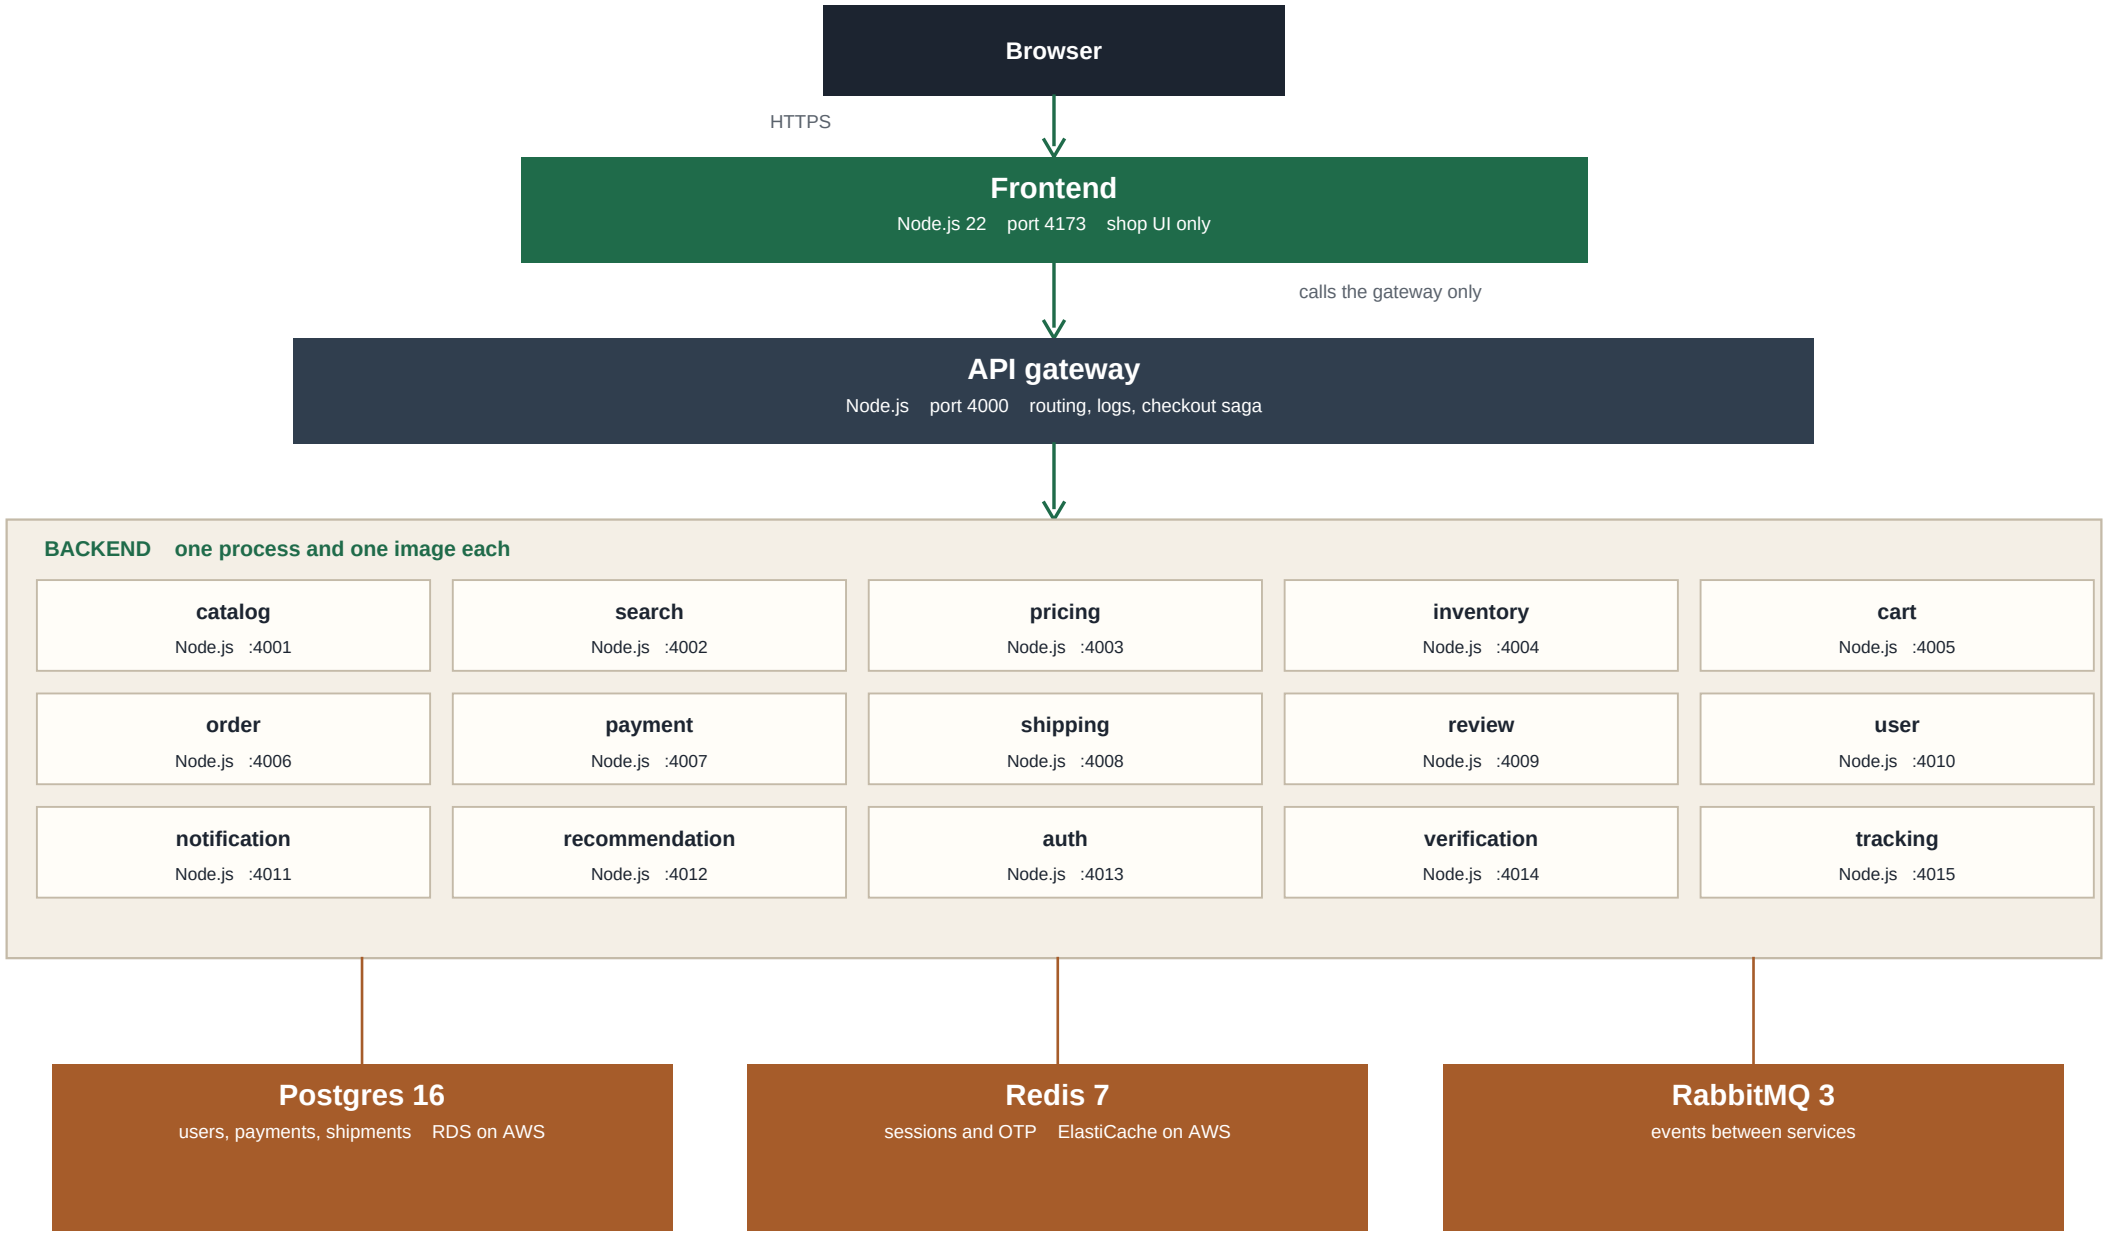

Postgres is used by auth, tracking, and payment. Redis is used by auth and verification. RabbitMQ keys: user.registered, otp.email, otp.mobile, payment.authorized, tracking.updated. Notification consumes those queues. Catalog, search, pricing, inventory, cart, order, shipping, review, user, and recommendation keep their own state and are reached only through the gateway.

Delivery and monitoring

Same images on Compose, ECS, and EKS

Image path

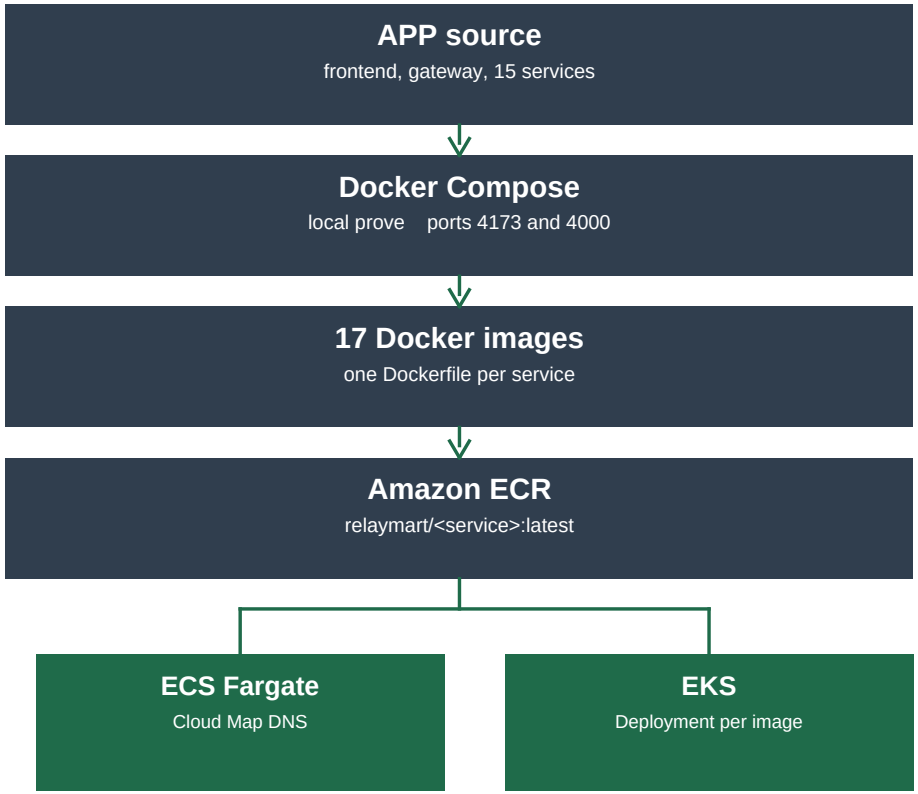

Observability

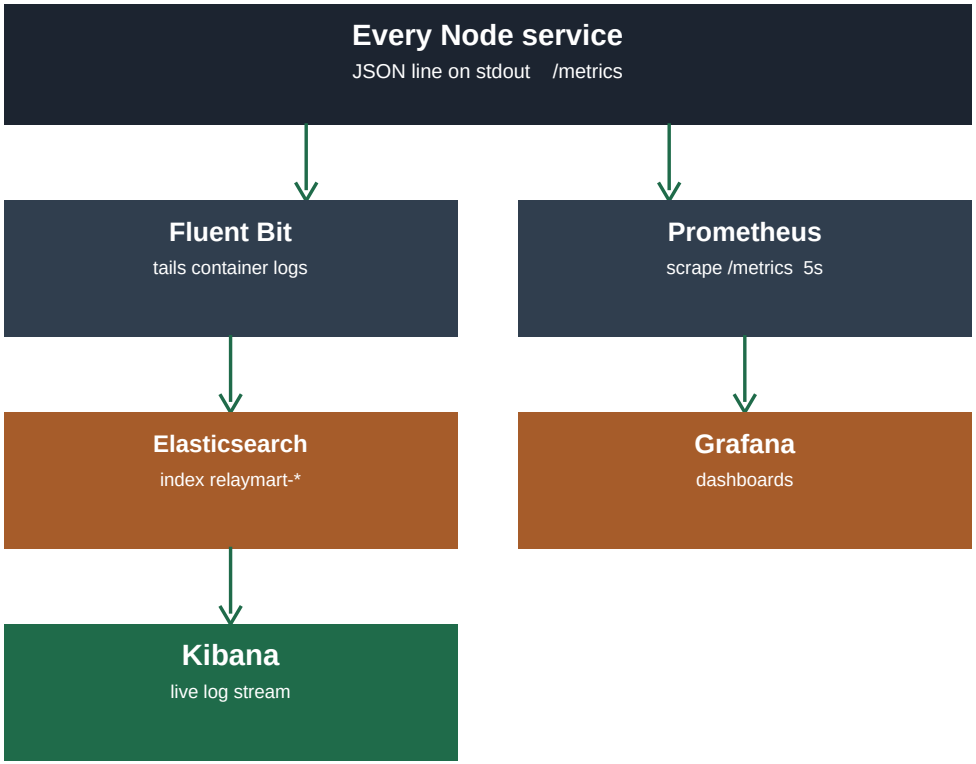

Stack

Runtime	Node.js 22 on Alpine, one container per service
Edge	Frontend :4173 calls API gateway :4000 only
Data	Postgres 16, Redis 7, RabbitMQ 3. On AWS: RDS, ElastiCache, and a broker
Registry	Amazon ECR. Compute: Docker Compose, then ECS Fargate or EKS
Logs	stdout JSON -> Fluent Bit -> Elasticsearch -> Kibana
Metrics	Prometheus scrapes /metrics. Grafana reads Prometheus