Project Report

On

E-Printing Press Website

Submitted by

G.Gayathri SK.Reshma E.Eswar Prasad

Under the guidance of

Mr K.Mahendra

Assistant Professor

Department of Computer Science and Engineering



Rajiv Gandhi University of Knowledge and Technologies R.K. Valley, Kadapa

Andhrapradesh

DEPARTMENT OF COMPUTER SCIENCE ENGINEERING

RAJIV GANDHI UNIVERSITY OF KNOWLEDGE TECHNOLOGIES

IIIT RK VALLEY - 516 330



DECLARATION

We hereby declare that the report of the B.Tech Mini Project Work entitled with the "E-Printing Press" which is being submitted to Rajiv Gandhi University of Knowledge Technologies, RK Valley, in partial fulfilment of the requirements for the award of Degree of Bachelor of Technology in Computer Science and Engineering, is a bonafide report of the work carried out by me. The material contained in this report has not been submitted to any university or institution for award of any degree.

G.Gayathri - R170204 SK.Reshma - R170205 E.Eswar Prasad - R170243

RAJIV GANDHI UNIVERSITY OF KNOWLEDGE TECHNOLOGIES



RGUKT

(A.P.Government Act 18 of 2008)

RGUKT, RK VALLEY

Department of Computer Science and Engineering

CERTIFICATE FOR PROJECT COMPLETION

This is certify that the project entitled "E-Printing Press" submitted by the G.Gayathri (R170204) under our guidance and supervision for the partial fulfilment for the degree Bachelor of Technology in Computer Science and Engineering during the academic year 2021-2022 at RGUKT, RK VALLEY. To the best of my knowledge, the results embodied in this dissertation work have not been submitted to any University or Institute for the award of any degree or diploma.

Project Internal Guide	Head of the Department	
Mr K.Mahendra	Mr.P.Harinadha	
Project Coordinator,	ivii.i .iiuiiiuuiiu	
Assistant Professor,	HOD Of CSE,	
RGUKT, RK Valley.	RGUKT, RK Valley.	

RAJIV GANDHI UNIVERSITY OF KNOWLEDGE TECHNOLOGIES



RGUKT

(A.P.Government Act 18 of 2008) RGUKT, RK VALLEY

Department of Computer Science and Engineering

CERTIFICATE FOR PROJECT COMPLETION

This is certify that the project entitled "E-Printing Press" submitted by the SK.Reshma (R170205) under our guidance and supervision for the partial fulfilment for the degree Bachelor of Technology in Computer Science and Engineering during the academic year 2021-2022 at RGUKT, RK VALLEY. To the best of my knowledge, the results embodied in this dissertation work have not been submitted to any University or Institute for the award of any degree or diploma.

Project Internal Guide	Head of the Department
Mr K.Mahendra	Mr.P.Harinadha
Project Coordinator,	
Assistant Professor,	HOD Of CSE,
RGUKT, RK Valley.	RGUKT, RK Valley.

RAJIV GANDHI UNIVERSITY OF KNOWLEDGE TECHNOLOGIES



RGUKT

(A.P.Government Act 18 of 2008) RGUKT, RK VALLEY

Department of Computer Science and Engineering

CERTIFICATE FOR PROJECT COMPLETION

This is certify that the project entitled "E-Printing Press" submitted by the E.Eswar Prasad (R170243) under our guidance and supervision for the partial fulfilment for the degree Bachelor of Technology in Computer Science and Engineering during the academic year 2021-2022 at RGUKT, RK VALLEY. To the best of my knowledge, the results embodied in this dissertation work have not been submitted to any University or Institute for the award of any degree or diploma.

Project Internal Guide	Head of the Department
Mr K.Mahendra	Mr.P.Harinadha
Project Coordinator,	
Assistant Professor,	HOD Of CSE,
RGUKT, RK Valley.	RGUKT, RK Valley.

<u>Acknowledgement</u>

The satisfaction that accompanies the successful completion of any task would be incomplete without the mention of the people who made it possible and whose constant guidance and encouragement crown all the efforts success. I am extremely grateful to our respected Director, Prof. Mrs. K.SANDHYA RANI for fostering an excellent academic climate in our institution. I also express my sincere gratitude to our respected Head of the Department Mr P.HARINADHA for their encouragement, overall guidance in viewing this project a good asset and effort in bringing out this project. I would like to convey thanks to our guide at college Mr. K.MAHENDRA for their guidance, encouragement, co-operation and kindness during the entire duration of the course and academics. My sincere thanks to all the members who helped me directly and indirectly in the completion of project work. I express my profound gratitude to all our friends and family members for their encouragement.

<u>Index</u>

1. Abstract	9
2. Introduction	10
2.1 Purpose	11
2.2 Intended Audience	12
2.3 product Vision	12
2.4 Existing System & Proposed System	12-13
2.5 Requirement Specification	14
3. Modules	15
3.1 Homepage	15
3.2 Admin	16
3.3 User	17
3.4 Order	17
3.5 History	16

4.Advantages	20
5.Technologies used	21-23
6.Use Case Diagrams	24-26
7.ER-Diagram	27-28
8. Source Code with Outputs	
9.Conclusion.	76
10.Future Enhancement	77
11.References.	78

Abstract

In the existing Offline Xerox shop System, we go to the nearby shop for taking print outs which is time consuming process and sometimes economically high too.

Online Printing Press system is internetbased Web application where user can create their account by providing valid credentials. User can upload files (Photos or Documents) and provide the number of copies required, based upon the selection, price will be displayed and the discount will be applied based on the order.

Uploaded Documents will be updated in the database and based on the location they had mentioned order will be sent to the nearby publisher along with the details

Printed documents will be sent to the end user to the entered address during order by using Courier Services available.

<u>INTRODUCTION:</u>

- ➤ The main objective of the proposed system is to reduce human intervention in taking offline printing and easier printing by having a Web application for this purpose.
- ➤ Our Web application will help the end user to save their time in printing the necessary documents by going physically to the Printing Shop. End user doesn't need to wait near the shops and getting the printed products directly delivered to the mentioned address.
- ➤ This approach takes all the documents uploaded by the user either document or photograph and type of printing whether Color or Black and White copy is needed and price will be displayed accordingly.
- ➤ Order details along with the uploaded documents are sent to the respective publisher Gmail Id registered to the website.
- Printed documents are sent to the addresses of the customers by using by courier services such as DTDC, Delhivery, Speed Post etc.

Purpose:-

The purpose of **E-Printing Press Web application** will help the end user to save their time in printing the necessary documents by going physically to the Printing Shop. End user doesn't need to wait near the shops and getting the printed products directly delivered to the mentioned address.

Intended Audience:-

- 1)Admin
- 2)Users

Product Vision:-

The main Vision of this project is to make to change the old style of Printing documents to digitalize using the online web application website for ease of Usage.

Existing System:-

In existing system end user needs to go to the nearby centre for taking hard copies of documents. In this case user have to wait for longer durations and have to travel to avail the services. In some cases, we need to use external drives to share the documents with the Xerox shop vendor. At the end, they can get their documents.

Proposed System:-

In proposed system end user can create an account and provide soft copies of required documents, then documents will be sent to their respective publisher based on location. This approach can save end users time consumption waiting near the Xerox Shop and services can be availed irrespective of the availability of printing press nearby there.

Requirement Specification

Hardware Configuration:-

Client side:

Ram : 512 Mb

Hard disk : 10GB

Processor: 1.0 GHz

Server Side:

Ram: 1GB

Hard disk : 20GB

Processor : 2.0 GHz

Software Requirements:-

Front end - HTML, CSS, Bootstrap

Backend - Django

Database Server – SQLite.

Web Browser - Chrome, Mozilla Firefox

OS - Ubuntu, Windows.

Software - Visual Studio Code

MODULES

- Homepage
- Admin
- User
- Order
- History

Modules Description:-

Homepage:

The Homepage includes the basic UI structure of website. This includes a navigation bar menu which is dynamic based upon user session. Navigation bar contains HOME LOGIN and SIGNUP fields for the anonymous users and HOME LOGOUT HISTORY for the logged in users.

The homepage also includes Prices button which is used to display the printing cost of various types of papers and colours and Order now button is available in the homepage which navigates to the order page.

Admin:-

Admin is the superuser who has control over the users and the orders received. Admin has access all over the website and holds the sensitive information of a website. Admin can edit the product details and update the users to the website.


USER:-

User module is provided with registration and login options. If user doesn't have an account, he/she can register by giving necessary credentials like a unique USERNAME, NAME, EMAIL ADDRESS, MOBILE NO. If the user already had an account user can login using those details.

If the user doesn't remember password, he/she can reset the password using OTP generated and the same changed password will be reflected in the database too.

History:

In the History module previously placed orders of the user will be displayed which are extracted from the database.

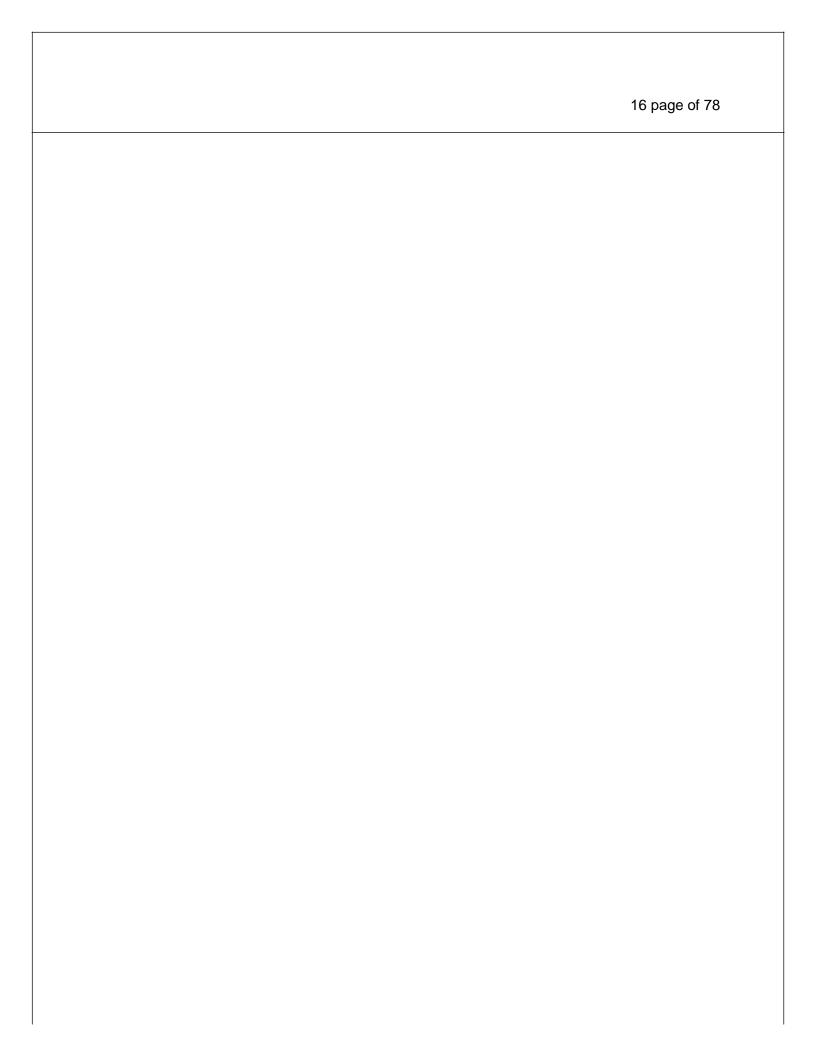


ORDER:-


After logging in user can access the ORDER module. In Order page user needs to provide VALID DETAILS LIKE NAME, EMAIL ADDRESS, NO OF COPIES and FILE should be uploaded.

If the user enters valid data he will be redirected to confirmation page where the details entered and prices will be shown and asks for confirmation. Then once the user clicks on PLACE ORDER button an EMAIL will be sent to respective publisher based upon the address entered.

User-Flow Chart:-

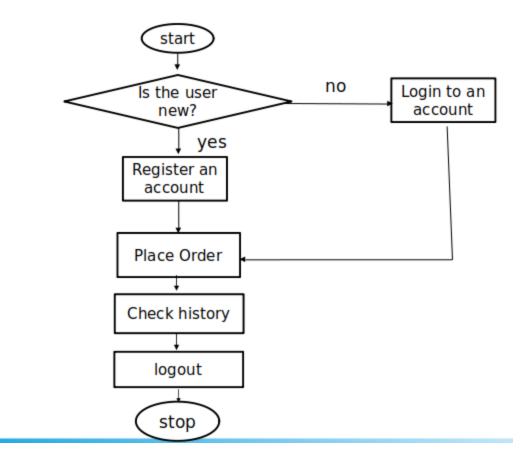

Admin-Flow Chart:-

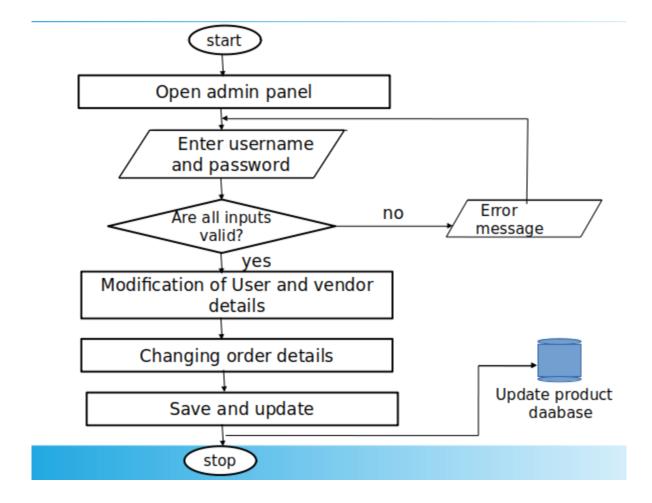

Adavntages of Proposed Technology:-

For Organization:-

- 1.Using E- Printing Press organizations can get more orders which most of them will be bulk orders which inturn will provide them good turnover than offline method.
- 2) As we are hosting a website online, it is a much efficient way for storing and retrieving information for the printing process. Organizations need to focus on quality users who can provide quantified orders.
- 3) Users will be sharing the files through Upload page and those can be retrieved easily rather than formal ways where we need to use external drivers for extracting data from users for printing purpose.
- 4)E-Printing press help organizations to provide better customer service.
- 5) E-Printing press website helps publishers to get more orders which are financially high.

For Customers:-

- 1)It provides 24/7 availability, customer can enquire about a product or service and place order any time, any where from any location.
- 2)E-Printing press application provides users with more options to select the cheaper and better options than going by man.
- 3)E-Printing press helps in reducing the cost of products if the user needs bulk copies of documents which may be more costly when done offline.
- 4) E-Printing press provides better service and users need not to go anywhere else for availing the services.

Technologies and Tools Used:-

• FRONTEND: HTML, CSS, BootStrap,


BACKEND : DJANGO

DATABASE : SQLite

ENVIRONMENT: Visual Studio Code.

HTML:-

means Hypertext Markup Language. This language is used in creating web pages. This language also supports other languages such CSS, PHP, JAVASCRIPT, etc. in creating interactive and responsive pages on the pages. HTML5 is just an updated version of the HTML. It supports new features, new attributes, new HTML elements, full CSS3 support, video and audio, 2D/3D graphics that help users and also help web developers to create new features easily on the website

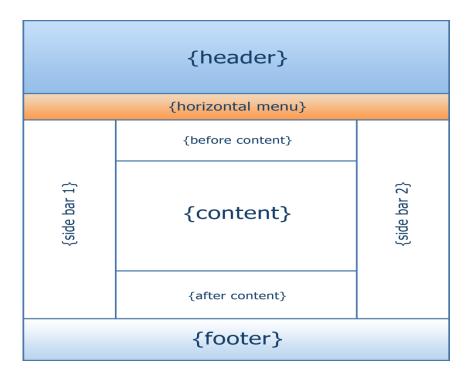

CSS:-

CSS is simply referred to as Cascading Style Sheets.CSS is used to define styles for web pages, including the design, layout, and variations in the display for different devices and screen sizes.

The general structure of CSS Basic syntax:

selector{property: value}

CSS can be used in a separate style sheet or used in the webpage

JavaScript:-

Javascript is a high-level language which could be used independently or inculcated into the webpage. It can be used to, handle requests and responses and also add dynamic behavior and also store information on a website.

Syntax:

```
<script ="javascript" type=" text/javascript" >
    JavaScript code
</script>
```

Bootstrap:-


Bootstrap is the most popular HTML, CSS, and JavaScript framework for developing responsive, mobile-first websites. It includes HTML and CSS based design templates for typography, forms, buttons, tables, navigation, modals, image carousels, etc. It also gives you support for JavaScript plugins.

Use Case Diagrams:-


Use case diagrams model behavior within a system and helps the developers understand of what the user require. The stick man represents what's called an actor. Use case diagram can be useful for getting an overall view of the system and clarifying that can do and more importantly what they can't do. Use case diagram consists of use cases and actors and shows the interaction between the use case and actors.

- The purpose is to show the interactions between the use case and actor.
- To represent the system requirements from user's perspective.
- An actor could be the end-user of the system or an external system.

Use case for E-Printing Press website:-

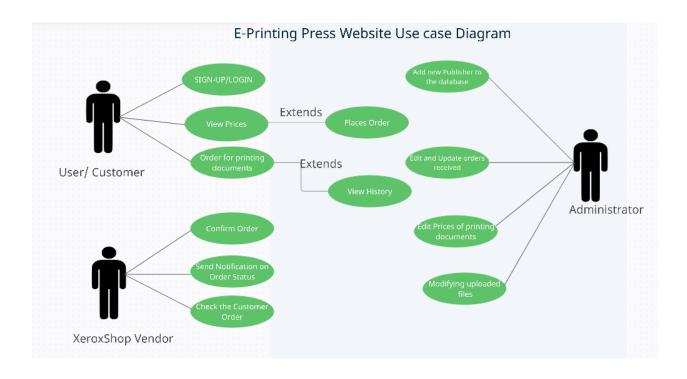

Use case Daigram for Top-Level.

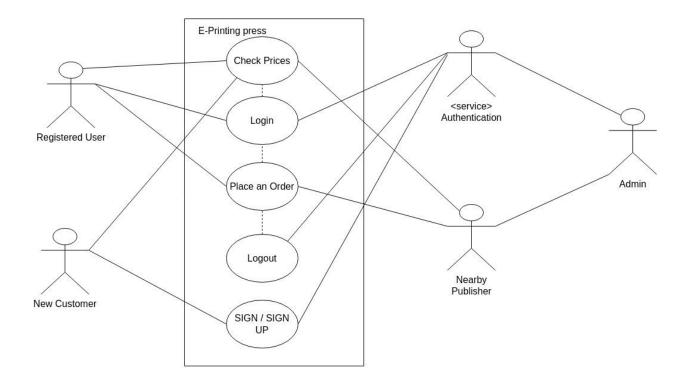


ER-Diagrams:-

The Entity-Relationship (ER) model was originally proposed by Peter in 1976 [Chen76] as a way to unify the network and relational database views. Simply stated the ER model is a conceptual data model that views the real world as entities and relationships. A basic component of the model is the Entity-Relationship diagram which is used to visually represent data objects. Since Chen wrote his paper the model has been extended and today it is commonly used for database design for the database designer, the utility of the ER model is:

- It maps well to the relational model. The constructs used in the ER model can easily be transformed into relational tables.
- It is simple and easy to understand with a minimum of training. Therefore, the model can be used by the database designer to communicate the design to the end user.
- In addition, the model can be used as a design plan by the database developer to implement a data model in specific database management software.

E-R Diagram:-

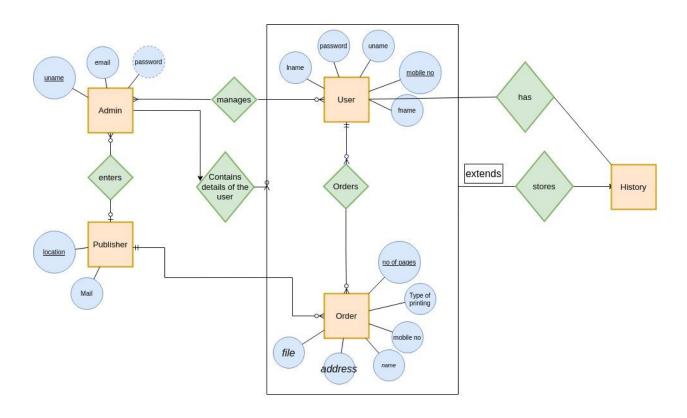

Source Code:-

Base.html

```
<!DOCTYPE html>
{%load static%}
<html lang="en">
  <head>
    <meta charset="utf-8">
    <meta name="viewport" content="width=device-width,</pre>
initial-scale=1">
    <title>{% block title %}{% endblock %}</title>
    {% block links %}{% endblock %}
    <style>
      *{
    margin:0px;
    padding:0px;
    box-sizing: border-box;
    font-family: 'Poppins', sans-serif;
}
nav{
    width: 100%;
    height: 75px;
    background-color: #3D0649;
    line-height: 75px;
    padding:0px 100px;
    z-index: 1:
}
nav ul{
    float: right;
nav ul li{
    display: inline-block;
    list-style: none;
}
```

```
nav ul li a{
    color:#FFFF;
    text-decoration: none;
    font-size: 15px;
    font-weight: 150;
    text-transform: uppercase;
    padding:0px 32px;
    margin-top: 0px;
nav ul li a:hover{
    color:#c0d96f;
nav ul li .active{
    color:#c0d96f;
{% block style %}{% endblock %}
   </style>
 </head>
  <body>
   <nav>
     ul>
     <
    <a href="/">Home</a>
     {% if not user.is authenticated %}
    <a href="/login">login</a>
   <a href="/signup">signup</a>
     {% else %}
     <a href="/logouthand">logout</a>
    <a href="/history">history</a>
     {% endif %}
   </nav>
   {% block body %}{% endblock body %}
```

```
30 Page of 78
    <script
src="https://cdn.jsdelivr.net/npm/bootstrap@5.2.1/dist/js/
bootstrap.bundle.min.js" integrity="sha384-
u10knCvxWvY5kfmNBILK2hRnQC3Pr17a+RTT6rIHI7NnikvbZlHqTP00mM
i466C8" crossorigin="anonymous"></script>
</body>
</html>
index.html
<!DOCTYPE html>
```

```
{% extends 'base.html' %}
{%load static%}
{% block links %}
<link rel="stylesheet"</pre>
href="https://cdn.jsdelivr.net/npm/bootstrap@4.0.0/dist/cs
s/bootstrap.min.css" integrity="sha384-
Gn5384xqO1aoWXA+058RXPxPq6fv4IWvTNh0E263XmFcJlSAwiGqFAW/dA
iS6JXm" crossorigin="anonymous">
<script src="https://code.jquery.com/jquery-</pre>
3.2.1.slim.min.js" integrity="sha384-
KJ3o2DKtIkvYIK3UENzmM7KCkRr/rE9/Qpg6aAZGJwFDMVNA/GpGFF93hX
pG5KkN" crossorigin="anonymous"></script>
<script
src="https://cdn.jsdelivr.net/npm/popper.js@1.12.9/dist/um
d/popper.min.js" integrity="sha384-
ApNbgh9B+Y10Ktv3Rn7W3mgPxhU9K/ScOsAP7hUibX39j7fakFPskvXusv
fa0b40" crossorigin="anonymous"></script>
<script
src="https://cdn.jsdelivr.net/npm/bootstrap@4.0.0/dist/js/
bootstrap.min.js" integrity="sha384-
JZR6Spejh4U02d8jOt6vLEHfe/JQGiRRSQQxSfFWpi1MquVdAyjUar5+76
PVCmYl" crossorigin="anonymous"></script>
link
href="https://cdn.jsdelivr.net/npm/bootstrap@5.2.1/dist/cs
s/bootstrap.min.css" rel="stylesheet" integrity="sha384-
iYQeCzEYFbKjA/T2uDLTpkwGzCig6soy8tYaI1GyVh/UjpbCx/TYkiZhlZ
B6+fzT" crossorigin="anonymous">
{% endblock links %}
```

```
{% block title %}homepage{% endblock title %}
{% block style %}
body{
  background-image: url("{%static
'boxstylewriting.jpg'%}");
  background-repeat: no-repeat;
  background-size:100%;
  height:100%;
{% endblock style %}
{% block body %}
<div>
  <!-- {{var}}-->
  {% if var%}
  <div class="alert alert-success alert-dismissible fade</pre>
show" role="alert">
    <strong>Message: </strong>{{var}}}
    <button type="button" class="close" data-</pre>
dismiss="alert" aria-label="Close">
      <span aria-hidden="true">&times;</span>
    </button>
  </div>
  </div>
  {% endif %}
<div>
</div>
  <a href="/prices" style="text-decoration:none; font-</pre>
size:14px; text-align:center; margin: 0px auto;
display:table;"><button type="submit" class=" btn btn-
submitin btn-lq full-width btn btn-primary" id="login-
submit" name="login" onClick="check_u_and_p()"><span</pre>
id="login-text">View Prices</span>
  <span id="login-load" style="display:none;"><i class="fa"</pre>
fa-circle-o-notch fa-spin"></i>
Loading...</span></button></a>
<div>
</div>
  {% if not user.is authenticated %}
```

{% else %}


<a href="/order" style="text-decoration:none; fontsize:14px; text-align:center; margin: 0px auto;
display:table;"><button type="submit" class=" btn btnsubmitin btn-lg full-width btn-primary" id="login-submit"
name="login" onClick="check_u_and_p()">Order Now

<i
class="fa fa-circle-o-notch fa-spin"></i>
Loading.../span></button>

{% endif %}

{% endblock body %}

OUTPUT:-

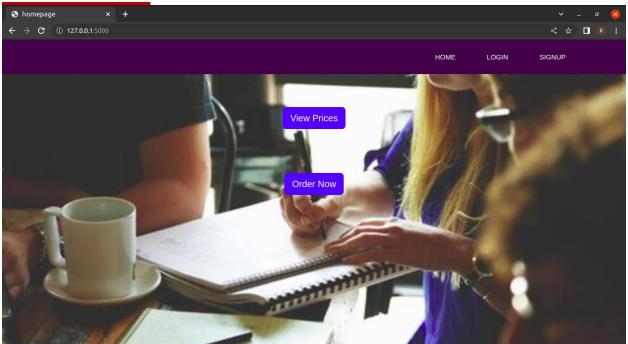

Prices.html

}

```
<!DOCTYPE html>
{% extends 'base.html' %}
{% block title %}prices{% endblock title %}
{% block style %}
html {
  font-family: "helvetica neue", helvetica, arial, sans-
serif;
}
thead th,
tfoot th {
  font-family: "Rock Salt", cursive;
th {
 letter-spacing: 2px;
td {
 letter-spacing: 1px;
tbody td {
  text-align: center;
tfoot th {
  text-align: right;
table {
  table-layout: fixed;
  width: 100%;
  border-collapse: collapse;
  border: 3px solid purple;
thead th:nth-child(1) {
  width: 30%;
```


```
thead th:nth-child(2) {
 width: 20%;
thead th:nth-child(3) {
 width: 15%;
thead th:nth-child(4) {
 width: 35%;
}
th,
td {
 padding: 20px;
{% endblock style %}
{% block links %}{% endblock links %}
{% block body %}
<thead>
  Paper Type
   Colour
   Price
  </thead>
 A4
   Black and White
   3
  Book
   Black and white
   3
```

Picture

Black and white

```
10
 A4
 Colour
 10
 Book
 Colour
 10
 Picture
 Colour
 60
 {% endblock body %}
```

OUTPUT :-

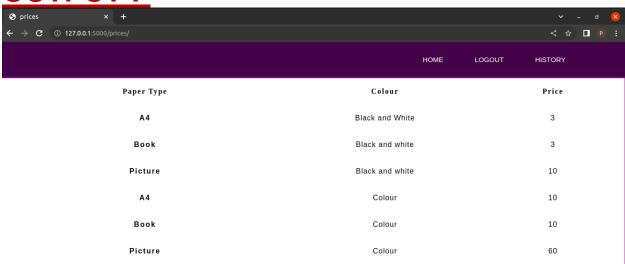

36 Page of 78

Project: urls.py

```
from django.urls import path,include
from django.conf import settings
from django.conf.urls.static import static

urlpatterns = [
    path('admin/', admin.site.urls),
    path('',include("home.urls")),
]+static(settings.MEDIA_URL,document_root=settings.MEDIA_R
00T)
```

App urls.py

```
from django.contrib import admin
from django.urls import path
from home import views
urlpatterns = [
    path('', views.index,name="index"),
    path('PageObjects',
views.PageObjects.name="PageObjects").
    path('confirm/',views.confirm,name="confirm"),
    path('prices/',views.prices,name="prices"),
    path('payment/',views.payment,name="payment"),
    path('signup/',views.signup,name="signup"),
    path('login/',views.login,name="login"),
    path('order', views.order, name="order"),
path('logouthand/',views.logouthand,name="logouthand"),
    path('history/',views.history,name="history"),
path('prices/logouthand/',views.logouthand,name="logouthan")
d"),
    path('prices/history/',views.history,name="history"),
path('signuphandle',views.signuphandle,name="signuphandle"
                                                   37 Page of 78
path('loginhandle', views.loginhandle, name="loginhandle"),
path('login/loginhandle/',views.loginhandle,name="loginhan")
dle"),
```

```
path('forgothandle',views.forgothandle,name="forgothandle"
),
    path('forgot',views.forgot,name="forgot"),
    path('otpval',views.otpval,name="otpval")
]
```

models.py

```
from django.db import models
from django.contrib import admin
# Create your models here.
class op(models.Model):
    user name=models.CharField(max length=20,default="")
    order id=models.AutoField
    name=models.CharField(max length=50)
    email=models.EmailField()
    mobile=models.PositiveBigIntegerField()
    street no=models.CharField(max length=50)
    colony choic=[
        ('idupulapaya','idupulapaya'),
        ('vempalli','vempalli'),
        ('kadiri','kadiri'),
        ('marripaadu', 'marripaadu'),
        ('rajampet','rajampet'),
        ('rajupalem','rajupalem'),
        ('kamalapuram','kamalapuram'),
        ('jammalamadugu','jammalamadugu'),
        ('pendlimarri','pendlimarri'),
        ('mylavaram', 'mylavaram'),
        ('duvuur','duvvur')
    1
                                                   38 Page of 78
colony=models.CharField(max length=50,choices=colony choic
    name of pub=models.CharField(max length=50)
    date=models.DateTimeField(null=True)
    no of pages=models.PositiveIntegerField(default=1)
```

```
no of copies=models.PositiveIntegerField(default=1)
    type choi=[
        \overline{('black} and white',"balck and white"),
        ('colur', "colour"),
    paper choi=[
        ('a4','a4'),
        ('pic','pic'),
('book','book'),
    sides choi=[
        ('one side', 'one side'),
        ('two side','two side'),
type=models.CharField(max_length=20,choices=type_choi,defa
ult="colour")
paper=models.CharField(max length=10,choices=paper choi,de
fault="")
sides=models.CharField(max length=10,choices=sides choi,de
fault="")
    price=models.IntegerField(default=0)
    discount=models.IntegerField(default=0)
    payment=models.IntegerField(default=0)
file=models.FileField(upload to="",null=True,blank=True)
    def __str__(self):
        return self.name
```

admin.py

```
from django.contrib import admin
from .models import op
admin.site.register(op)
```

39 Page of 78

forms.py

```
from django.forms import ModelForm
from .models import op
```

```
class orderform(ModelForm):
    class Meta:
        model=op
        exclude =
['name_of_pub','date','price','discount','payment','user_n
ame']
    def __init__(self,*args,**kwargs):
        super(orderform,self).__init__(*args,**kwargs)

self.fields['mobile'].widget.attrs.update({'class':'mob'})

self.fields['no_of_copies'].widget.attrs.update({'class':'mob'})

self.fields['no_of_pages'].widget.attrs.update({'class':'mob'})
```

views.py

```
from email import message
from .models import op
from diango.shortcuts import
render, HttpResponse, HttpResponseRedirect, redirect
from django.contrib.auth.models import User
from django.contrib import messages
from django.contrib.auth import authenticate, login as
log, logout
from .forms import orderform
import datetime.random
from django.core.mail import send mail, EmailMessage
# Create your views here.
def index(request):
    return render(request, "index.html")
def prices(request):
    return render(request, "prices.html")
                                                   40 Page of 78
def signup(request):
    return render(request, "user/login-sign.html")
def login(request):
    return render(request, "user/login.html")
def loginhandle(request):
    if request.method=='POST':
        login uname=request.POST['login uname']
```

```
login password=request.POST['password']
user=authenticate(username=login uname,password=login pass
word)
        if user is not None:
            log(request.user)
            form=orderform()
            return
render(request, "order/order.html", { "form":form})
        else:
            mydict={"msg":"Invalid credentials"}
render(request, 'user/login.html',context=mydict)
def signuphandle(request):
    if request.method=='POST':
        name=request.POST['name']
        password1=request.POST['password1']
        password2=request.POST['password2']
        email=request.POST['email']
        mobile=request.POST['mobile']
        fname=request.POST['fName']
        lname=request.POST['lName']
        l,u,p,d=0,0,0,0
        if(len(password1)>=8):
                 for i in password1:
                     if i.islower():
                         l+=1
                     if i.isupper():
                         u+=1
                     if i.isdigit():
                         d+=1
                                                   41 Page of 78
                    if i=='@' or i=='$' or i==' ' or i=='-
١:
                         D+=1
        if User.objects.filter(username=name).exists():
            messages.error(request, "Username already
exists,Enter unique username ")
            return render(request, "user/login-sign.html")
```

```
elif(not len(name)>4 ):
            messages.error(request, "user name should be of
length atleast 4")
        elif(not len(fname)>1 or not(fname.isalpha())):
            messages.error(request, "Enter valid first
name")
            return render(request, "user/login-sign.html")
        elif(not len(lname)>1 or not(lname.isalpha())):
            messages.error(request, "Enter valid last
name")
            return render(request, "user/login-sign.html")
        elif(not len(str(mobile))==10):
            messages.error(request, "Enter valid mobile
no")
            return render(request, "user/login-sign.html")
        elif(l<=1 or u<=0 or p<=0 or d<=0):
            messages.error(request, "password should be of
length 8 and include one capital letter, small
letter.special char,digit")
            return render(request, "user/login-sign.html")
        elif(password1!=password2):
           messages.error(request, "passwords didn't
match")
           return render(request, "user/login-sign.html")
        else:
myuser=User.objects.create user(name,email,password1)
            myuser.fname=fname
            myuser.lname=lname
            myuser.save()
            log(request,myuser)
            return
render(request, 'index.html', {"var": "Account Created
Successfully"})
    else:
        return render(request, "user/login-sign.html")
                                                    42 Page of 78
def PageObjects(request):
    if request.method=='POST':
        form=orderform(request.POST,request.FILES)
        if form.is valid():
            if(len(form.cleaned data['name'])<1 or not</pre>
form.cleaned data['name'].isalpha() ):
```

```
return
render(request, 'order/order.html',{"form":orderform(),"var
":"Enter valid name"})
            if(len(str(form.cleaned data['mobile']))!=10):
                return
render(request, 'order/order.html', { "form":orderform(), "var
":"Enter valid mobile"})
if(len(str(form.cleaned data['street no']))==0):
                return
render(request, 'order/order.html', { "form":orderform(), "var
":"Enter valid street no"})
            if(len(request.FILES)==0):
                return
render(request, 'order/order.html', { "form":orderform(), "var
":"Upload document"})
            new author = form.save(commit=False)
            name=form.cleaned data['colony']
            if(name in
['idupulapaya','vempalli','kadiri','duvvur']):
                new author.name of pub="eswar"
            elif(name in
['marripaadu','rajampet','rajupalem','kamalapuram']):
                 new author.name of pub="reshma"
            else:
                new author.name of pub="gayathri"
            col=form.cleaned data['type']
            if col=="balck and white":
                col p=3
            else:
                col p=10
            pap=form.cleaned data['paper']
            if pap=="a4" or pap=="book":
                pap p=1
            else :
                pap_p=6
            price=col p * pap p *
form.cleaned_data['no_of_pages'] *
form.cleaned_data['no_of_copies']
            new_author.price=price
            new author.user name=request.user.id
```

```
new author.date=datetime.datetime.now()
            new author.save()
            order id=new author.order id
            nam=form.cleaned data['name']
            email=form.cleaned data['email']
            mobile=form.cleaned data['mobile']
            st no=form.cleaned data['street no']
            colony=form.cleaned data['colony']
            name of pub=new author.name of pub
            date=new author.date
            no of pages=new author.no of pages
            no of copies=new author.no of copies
            type=new author.type
            paper=new author.paper
            sides=new author.sides
            pric=new author.price
            discount=new author.discount
            payment=new author.payment
            filename=new author.file.name
            path=new author.file.path
dict={"order id":order id,"name":nam,"email":email,
            "mobile":mobile,"address":st no+"
"+colony, "no of pages": no of pages,
"no of copies":no of copies, "type":type, "paper":paper,
"sides":sides, "Price":pric, "Discount":discount, "amount":pa
yment,
            "file":filename
msg="Name\t:\t"+nam+"\nEmail\t:\t"+email+"\nMobile\t:\t"+s
tr(mobile)+"\nAddress\t:\t"+st no+"
"+colony+"\nDate\t:\t"+str(date)+"\nNo of
pages\t:\t"+str(no of pages)+"\nNo of
copies\t:\t"+str(no_of_copies)+"\nType\t:\t"+type+"\nPaper
Type\t:\t"+paper+"\nSides\t:\t"+sides+"\nPrice\t:\t"+str(p
ric)+"\nDiscount\t:\t"+str(discount)+"\nAmount\t:\t"+str(p
avment)
            if(name of pub=="eswar"):
                to add="r170243@rguktrkv.ac.in"
            elif(name of pub=="reshma"):
                to add="r170205@rguktrkv.ac.in"
```

```
else:
                to add="r170204@rguktrkv.ac.in"
            em msg=EmailMessage("Order
Received",msq,"printingpressapp@gmail.com",[to add])
            em msq.attach file(path)
            em msq.send()
            with open('msg.txt', 'w') as file:
                file.write(msq)
            return
render(request, "order/confirmation.html", dict)
    else:
        form=orderform()
        return
render(request, "order/order.html", { "form":form})
def payment(request):
    return HttpResponse("HI")
def confirm(request):
    return render(request, "index.html", {"var": "Order
palced successfully"})
def logouthand(request):
    logout(request)
    return redirect('/')
def history(request):
    u name=request.user.id
    data=op.objects.filter(user name=u name).values()
    co=op.objects.filter(user name=u name).count()
   # u name=request.user.id
    return
render(request, "user/history.html", { "dict":data, "cou":co})
def forgot(request):
    return render(request, 'user/forgot.html')
def forgothandle(request):
    if
User.objects.filter(username=request.POST['user']).exists(
):
```

```
usr=User.objects.get(username=request.POST['user'])
        otp = random.randint(111111, 999999)
        send mail(
            "OTP verification",
            "ur otp for the password change is "+str(otp),
            "printingpressapp@gmail.com",
            [usr.email].
        with open('secureOtp.txt', 'w') as file:
         file.write(str(otp))
        with open('uname.txt', 'w') as file:
         file.write(request.POST['user'])
        return render(request, 'user/otpval.html')
    else:
        return
render(request, 'user/forgot.html', { "error": "invalid
username"})
def otpval(request):
    with open('secureOtp.txt', 'r') as file:
        actOTP = file.read()
    if request.method=='POST':
        with open('uname.txt', 'r') as file:
         name = file.read()
         l,u,p,d=0,0,0,0
         if(len(request.POST['pass1'])>=8):
            for i in request.POST['pass1']:
                    if i.islower():
                         l+=1
                    if i.isupper():
                         u+=1
                    if i.isdigit():
                         d+=1
                    if i=='@' or i=='$' or i==' ' or i=='-
':
                         p+=1
         if(l<=1 or u<=0 or p<=0 or d<=0):
            return
render(request, 'user/otpval.html', {"error": "Enter valid")
password"})
         if(request.POST['pass1']!=request.POST['pass2']):
            return
render(request, 'user/otpval.html',{"error":"passwords
didn't match"})
         if request.POST['otp'] == actOTP:
```

```
return
render(request, 'user/otpval.html', {"error": "invalid otp"})
         usr=User.objects.get(username=name)
         usr.set password(request.POST['pass1'])
         usr.save()
        return
render(request, 'user/login.html', {"msg": "password changed
successfully"})
    else:
        return
render(request, 'user/otpval.html', {"error": "Enter
Details"})
def order(request):
    form=orderform()
    return
render(request, "order/order.html", { "form":form})
```


login.html

```
<!DOCTYPE html>
{% extends 'base.html' %}
{% block title %}login page{% endblock title %}
{% block links %}
{%load static%}
<link rel="stylesheet" href="{% static 'bootstrap.min.css'</pre>
%}">
link
href="https://cdn.jsdelivr.net/npm/bootstrap@5.2.1/dist/cs
s/bootstrap.min.css" rel="stylesheet" integrity="sha384-
iYQeCzEYFbKjA/T2uDLTpkwGzCiq6soy8tYaI1GyVh/UjpbCx/TYkiZhlZ
B6+fzT" crossorigin="anonymous">
<link rel="stylesheet" href="{% static</pre>
'main/css/custom.css' %}">
{% endblock links %}
{% block style %}
.vh10{
  font-size: 30px;
```

```
.divider:after,
```

```
47 Page of 78
.divider:before {
  content: "";
  flex: 1;
  height: 1px;
  background: #eee;
.h-custom {
  height: calc(100% - 73px);
@media (max-width: 450px) {
.h-custom {
  height: 100%;
{% endblock style %}
{% block body %}
{%load static%}
<section class="vh-100">
  <div class="container-fluid h-custom fs-">
    <div class="row d-flex justify-content-center align-</pre>
items-center h-100 fw-bold " >
      <div class="col-md-9 col-lq-6 col-xl-5">
        <img src="https://mdbcdn.b-cdn.net/img/Photos/new-</pre>
templates/bootstrap-login-form/draw2.webp"
          class="img-fluid" alt="Sample image">
      </div>
      <div class="col-md-8 col-lg-6 col-xl-4 offset-xl-1">
         <form method="post" action="/loginhandle"</pre>
class="material-form">
          {% csrf token %}
          <div class="d-flex flex-row align-items-center</pre>
justify-content-center justify-content-lg-start">
            <b style="font-</pre>
size:24px !important">Log in with</b>
          </div>
          style="color:red";>{{msq}}
          <div class="form-outline mb-4">
            <label class="form-label"
for="login uname">Username</label>
```

```
<input type="text" id="login_uname"</pre>
name="login uname" class="form-control form-control-lg"
                                                   48 Page of 78
              placeholder="Enter a valid username" />
          </div>
          <div class="form-outline mb-3">
            <label class="form-label"</pre>
for="fpassword">Password</label>
            <input type="password" id="password"</pre>
name="password" class="form-control form-control-lg"
              placeholder="Enter password" />
          </div>
            <div>
            <a href="/forgot" class="text-body">Forgot</a>
password?</a>
          </div>
          <div class="text-center text-lg-start mt-4 pt-</pre>
2">
            <button type="submit" class="btn btn-primary</pre>
btn-lg"
      style="padding-left: 2.5rem; padding-right: 2.5rem;"
id="login-submit" name="login"
onClick="check u and p()"><span id="login-
text">Login</span>
    <span id="login-load" style="display:none;"><i</pre>
class="fa fa-circle-o-notch fa-spin"></i>
Loading...</span></button>
            Don't
have an account? <a href="/signup"
                class="link-danger">Register</a>
          </div>
        </form>
      </div>
    </div>
  </div>
</section>
{% endblock body %}
```

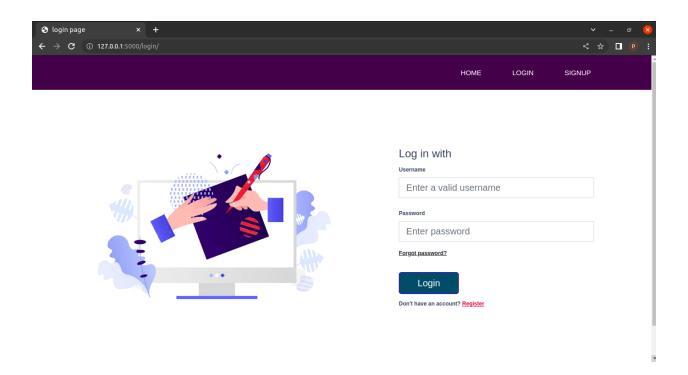

signup.html

```
<!DOCTYPE html>
{% extends 'base.html' %}
{%load static%}
{% block title %}signup{% endblock  %}
{% block links %}
{%load static%}
<link rel="stylesheet"
href="https://cdn.jsdelivr.net/npm/bootstrap@4.0.0/dist/css/bootstrap.min.css" integrity="sha384-Gn5384xqQ1aoWXA+058RXPxPg6fy4IWvTNh0E263XmFcJlSAwiGgFAW/dAis6JXm" crossorigin="anonymous">
<script src="https://code.jquery.com/jquery-3.2.1.slim.min.js" integrity="sha384-KJ3o2DKtIkvYIK3UENzmM7KCkRr/rE9/Qpg6aAZGJwFDMVNA/GpGFF93hXpG5KkN" crossorigin="anonymous"></script>
```


{% endblock style %}

```
src="https://cdn.jsdelivr.net/npm/popper.js@1.12.9/dist/um
d/popper.min.js" integrity="sha384-
ApNbgh9B+Y1QKtv3Rn7W3mgPxhU9K/ScQsAP7hUibX39j7fakFPskvXusv
fa0b4Q" crossorigin="anonymous"></script>
<script
src="https://cdn.jsdelivr.net/npm/bootstrap@4.0.0/dist/js/
bootstrap.min.js" integrity="sha384-
JZR6Spejh4U02d8jOt6vLEHfe/JQGiRRSQQxSfFWpi1MquVdAyjUar5+76
PVCmYl" crossorigin="anonymous"></script>
link
href="https://cdn.jsdelivr.net/npm/bootstrap@5.2.1/dist/cs
s/bootstrap.min.css" rel="stylesheet" integrity="sha384-
iYOeCzEYFbKjA/T2uDLTpkwGzCig6soy8tYaI1GyVh/UjpbCx/TYkiZhlZ
B6+fzT" crossorigin="anonymous">
<link rel="stylesheet" href="{% static</pre>
'main/css/custom.css' %}">
{% endblock links %}
{% block style %}
.vh10{
    font-size: 30px;
  .divider:after,
  .divider:before {
    content: "":
    flex: 1;
    height: 1px;
    background: #eee;
  .h-custom {
    height: calc(100% - 73px);
  @media (max-width: 450px) {
  .h-custom {
    height: 100%;
```

```
{% block body %}
{% for message in messages %}
<div class="alert alert-warning alert-dismissible fade</pre>
show" role="alert">
<strong>Message:</strong>{{message}}
  <button type="button" class="close" data-dismiss="alert"</pre>
aria-label="Close">
    <span aria-hidden="true">&times;</span>
  </button>
</div>
{% endfor %}
<section class="vh-100">
    <div class="container-fluid h-custom ">
      <div class="row d-flex justify-content-center align-</pre>
items-center h-100
        <div class="col-md-9 col-lg-6 col-xl-5">
         <img src="https://mdbcdn.b-</pre>
cdn.net/img/Photos/new-templates/bootstrap-login-
form/draw2.webp"
           class="img-fluid" alt="Sample image">
        </div>
       <div class="col-md-8 col-lq-6 col-xl-4 offset-xl-</pre>
1">
          <form method="post" action="/signuphandle"</pre>
class="material-form">
           {% csrf token %}
           <div class="d-flex flex-row align-items-center</pre>
justify-content-center justify-content-lq-start">
             <b style="font-</pre>
size:24px !important">Sign Up</b>
           </div>
           style="color:red";>{{var}}
           <div class="form-outline mb-4">
             <label class="form-label" for="name">User
name</label>
             <input type="text" id="name" name="name"</pre>
class="form-control form-control-lg"
               placeholder="Enter unique username" />
```

```
<div class="form-outline mb-4">
                <label class="form-label"
for="fName">First name</label>
                <input type="text" id="fName" name="fName"</pre>
class="form-control form-control-lg"
                   placeholder="Enter first username" />
              </div>
              <div class="form-outline mb-4">
                <label class="form-label" for="lName">Last
name</label>
                <input type="text" id="lName" name="lName"</pre>
class="form-control form-control-lg"
                   placeholder="Enter Last username" />
              </div>
              <div class="form-outline mb-4">
                <label class="form-label"
for="email">Email Address</label>
                <input type="email" id="email"</pre>
name="email" class="form-control form-control-lg"
                   placeholder="Enter email address" />
              </div>
              <div class="form-outline mb-4">
                <label class="form-label"
for="mobile">Phone no</label>
                <input type="tel" id="mobile"</pre>
name="mobile" class="form-control form-control-lg"
                   placeholder="Enter mobile no" />
              </div>
              <div class="form-outline mb-4">
                <label class="form-label"
for="password1">Enter Password</label>
                <input type="password" id="password1"</pre>
name="password1" class="form-control form-control-lg"
                   placeholder="Enter Password" />
              </div>
            <div class="form-outline mb-3">
              <label class="form-label"
```

```
for="password2">ConfirmPassword</label>
              <input type="password" id="password2"</pre>
name="password2" class="form-control form-control-lg"
                placeholder="Confirm password" />
            </div>
            <button type="submit" class=" btn btn-primary</pre>
btn-lg full-width btn-primary" id="login-submit"
name="login" onClick="check_u_and_p()"><span id="login-</pre>
text">Submit</span>
                 <span id="login-load"</pre>
style="display:none;"><i class="fa fa-circle-o-notch fa-
spin"></i> Loading.../button>
            </div>
          </form>
        </div>
      </div>
    </div>
  </section>
{% endblock body %}
```

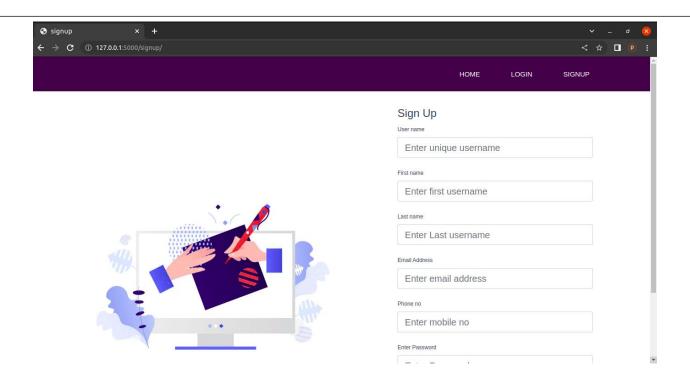

forgot.html:-

```
<!DOCTYPE html>
{% extends 'base.html' %}
{% block title %}login page{% endblock title %}
{% block links %}
{%load static%}
<link rel="stylesheet" href="{% static 'bootstrap.min.css'</pre>
%}">
link
href="https://cdn.jsdelivr.net/npm/bootstrap@5.2.1/dist/cs
s/bootstrap.min.css" rel="stylesheet" integrity="sha384-
iYQeCzEYFbKjA/T2uDLTpkwGzCiq6soy8tYaI1GyVh/UjpbCx/TYkiZhlZ
B6+fzT" crossorigin="anonymous">
<link rel="stylesheet" href="{% static</pre>
'main/css/custom.css' %}">
{% endblock links %}
{% block style %}
.vh10{
  font-size: 30px;
.divider:after,
.divider:before {
```


```
content: "";
  flex: 1;
  height: 1px;
  background: #eee;
.h-custom {
  height: calc(100% - 73px);
@media (max-width: 450px) {
.h-custom {
  height: 100%;
{% endblock style %}
                                                  55 Page of 78
{% block body %}
{%load static%}
<section class="vh-100">
  <div class="container-fluid h-custom fs-">
    <div class="row d-flex justify-content-center align-</pre>
items-center h-100 fw-bold " >
      <div class="col-md-9 col-lq-6 col-xl-5">
        <img src="https://mdbcdn.b-cdn.net/img/Photos/new-</pre>
templates/bootstrap-login-form/draw2.webp"
          class="img-fluid" alt="Sample image">
      </div>
      <div class="col-md-8 col-lg-6 col-xl-4 offset-xl-1">
         <form method="post" action="/forgothandle"</pre>
class="material-form">
          {% csrf token %}
          <div class="d-flex flex-row align-items-center</pre>
justify-content-center justify-content-lg-start">
            <b style="font-</pre>
size:24px !important">Forgot Password</b>
          </div>
          style="color:red";>{{error}}
          <div class="form-outline mb-4">
            <label class="form-label"
for="user">Username</label>
            <input type="text" id="user" name="user"</pre>
class="form-control form-control-lg"
```

```
placeholder="Enter username" />
          </div>
        <div class="text-center text-lg-start mt-4 pt-2">
        <button type="submit" class=" btn btn-primary btn-</pre>
lg full-width btn-primary" id="login-submit" name="login"
onClick="check u and p()"><span id="login-text">Send
OTP</span>
            <span id="login-load" style="display:none;"><i</pre>
class="fa fa-circle-o-notch fa-spin"></i>
Loading...</span></button>
        </div>
      </div>
        </form>
                                                56 Page of 78
      </div>
    </div>
  </div>
</section>
{% endblock body %}
<!--<!DOCTYPE html>
{%load static%}
<html lang="en">
  <head>
    <meta charset="utf-8">
    <meta name="viewport" content="width=device-width,</pre>
initial-scale=1">
    <title>PrintingPress</title>
    <link rel="stylesheet" href="{% static</pre>
'bootstrap.min.css' %}">
    <link rel="stylesheet" href="{% static</pre>
'main/css/custom.css' %}">
    link
href="https://cdn.jsdelivr.net/npm/bootstrap@5.2.1/dist/cs
s/bootstrap.min.css" rel="stylesheet" integrity="sha384-
iYQeCzEYFbKjA/T2uDLTpkwGzCiq6soy8tYaI1GyVh/UjpbCx/TYkiZhlZ
B6+fzT" crossorigin="anonymous">
    <style>
      *{
    margin:0px;
    padding:0px;
    box-sizing: border-box;
```

```
font-family: 'Poppins', sans-serif;
}
nav{
    width: 100%;
    height: 75px;
    background-color: #3D0649;
    line-height: 75px;
    padding:0px 100px;
    position:fixed;
    z-index: 1;
}
nav ul{
    float: right;
nav ul li{
    display: inline-block;
    list-style: none;
}
                                            57 Page of 78
nav ul li a{
    color:#FFFF;
    text-decoration: none;
    font-size: 15px;
    font-weight: 150;
    text-transform: uppercase;
    padding:0px 32px;
    margin-top: 0px;
}
nav ul li a:hover{
    color:#c0d96f;
}
nav ul li .active{
    color:#c0d96f;
}
    </style>
  </head>
  <body>
    <nav>
      ul>
      <
     <a href="/">Home</a>
      {% if not user.is_authenticated
     <a href="/login">login</a>
    <a href="/signup">signup</a>
      {% else %}
      <a href="logouthand/">logout</a>
```

```
<a href="history/">history</a>
      {% endif %}
    </nav>
    <h1>Hello, world!</h1>
    {{name}}
    <div class="container">
        <br/>br/>
        <br/>br/>
        <div class="well well1 "</pre>
style="background:#FFFFFF; box-shadow: 0px 2px 4px 3px
rgba(38, 51, 64, 0.4) !important; margin-bottom: 30px;
height:100% !important">
        <b style="font-</pre>
size:24px !important">Forgot password</b><br />
        to continue to Xeroxshop.com
                                                    58 Page of 78
         <center><span id="user-availability-status"</pre>
class="text-center"></span>
             <span class='alert alert-danger center-block'</pre>
id="empty-error" style="display:none;"> <i class='fa fa-
times'></i> Please Enter Username and Password</span>
             </center>
          <form method="post" action="/forgothandle"</pre>
class="material-form">
            {% csrf token %}
            {{error}}
            <div class="form-group ">
              <input type="text" class="form-control na"</pre>
placeholder="username" name="user" id="user" autofocus>
              <span class="input-border"></span>
              </span>
        <br/>br/>
          <button type="submit" class=" btn btn-submitin</pre>
btn-lg full-width btn-primary" id="login-submit"
name="login" onClick="check u and p()"><span id="login-</pre>
text">Send OTP</span>
        <span id="login-load" style="display:none;"><i</pre>
class="fa fa-circle-o-notch fa-spin"></i></i></or>
Loading...</span></button>
```

Output:-

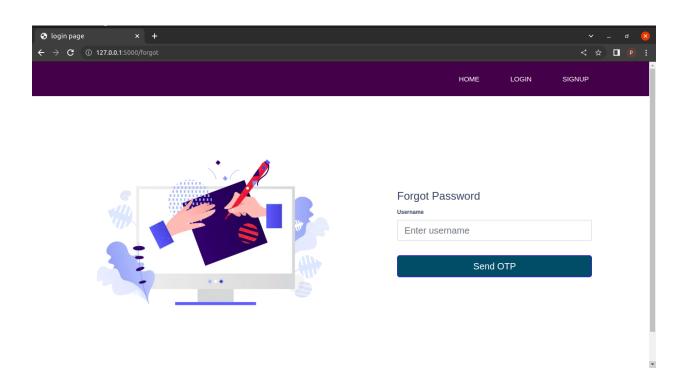


otpval.html

```
<!DOCTYPE html>
{% extends 'base.html' %}
```

```
{%load static%}
{% block title %}signup{% endblock %}
{% block links %}
{%load static%}
<link rel="stylesheet"</pre>
href="https://cdn.jsdelivr.net/npm/bootstrap@4.0.0/dist/cs
s/bootstrap.min.css" integrity="sha384-
Gn5384xqQ1aoWXA+058RXPxPq6fy4IWvTNh0E263XmFcJlSAwiGqFAW/dA
iS6JXm" crossorigin="anonymous">
<script src="https://code.jquery.com/jquery-</pre>
3.2.1.slim.min.js" integrity="sha384-
KJ3o2DKtIkvYIK3UENzmM7KCkRr/rE9/Qpg6aAZGJwFDMVNA/GpGFF93hX
pG5KkN" crossorigin="anonymous"></script>
<script
src="https://cdn.jsdelivr.net/npm/popper.js@1.12.9/dist/um
d/popper.min.js" integrity="sha384-
ApNbgh9B+Y1QKtv3Rn7W3mgPxhU9K/ScQsAP7hUibX39j7fakFPskvXusv
                                                   60 Page of 78
fa0b4Q" crossorigin="anonymous"></script>
<script
src="https://cdn.jsdelivr.net/npm/bootstrap@4.0.0/dist/js/
bootstrap.min.js" integrity="sha384-
JZR6Spejh4U02d8jOt6vLEHfe/JQGiRRSQQxSfFWpi1MquVdAyjUar5+76
PVCmYl" crossorigin="anonymous"></script>
link
href="https://cdn.jsdelivr.net/npm/bootstrap@5.2.1/dist/cs
s/bootstrap.min.css" rel="stylesheet" integrity="sha384-
iYQeCzEYFbKjA/T2uDLTpkwGzCiq6soy8tYaI1GyVh/UjpbCx/TYkiZhlZ
B6+fzT" crossorigin="anonymous">
<link rel="stylesheet" href="{% static</pre>
'main/css/custom.css' %}">
{% endblock links %}
{% block style %}
.vh10{
    font-size: 30px;
  .divider:after.
  .divider:before {
    content: "":
    flex: 1:
    height: 1px;
    background: #eee;
  .h-custom {
```

```
height: calc(100\% - 73px);
  @media (max-width: 450px) {
  .h-custom {
    height: 100%;
{% endblock style %}
{% block body %}
<section class="vh-100">
    <div class="container-fluid h-custom">
      <div class="row d-flex justify-content-center align-</pre>
items-center h-100
        <div class="col-md-9 col-lq-6 col-xl-5">
                                                    61 Page of 78
          <imq src="https://mdbcdn.b-</pre>
cdn.net/img/Photos/new-templates/bootstrap-login-
form/draw2.webp"
            class="img-fluid" alt="Sample image">
        </div>
        <div class="col-md-8 col-lg-6 col-xl-4 offset-xl-</pre>
1">
           <form method="post" action="/otpval"</pre>
class="material-form">
            {% csrf token %}
            <div class="d-flex flex-row align-items-center">
class="d-flex flex-row align-items-center"
justify-content-center justify-content-lg-start">
              <b style="font-</pre>
size:24px !important">OTP validation</b>
            </div>
            style="color:red";>{{error}}
               <div class="form-outline mb-4">
                 <label class="form-label"</pre>
for="password1">Enter Password</label>
                 <input type="password" id="pass1"</pre>
name="pass1" class="form-control form-control-lg"
                   placeholder="Enter Password" />
               </div>
            <div class="form-outline mb-3">
              <label class="form-label"</pre>
for="password2">ConfirmPassword</label>
```

```
<input type="password" id="pass2"</pre>
name="pass2" class="form-control form-control-lg"
                 placeholder="Confirm password" />
             </div>
            <div class="form-outline mb-3">
               <label class="form-label" for="otp">Enter
OTP</label>
               <input type="number" id="otp" name="otp"</pre>
class="form-control form-control-lg"
                 placeholder="OTP" />
             </div>
            <button type="submit" class=" btn btn-primary</pre>
btn-lg full-width btn-primary" id="login-submit"
name="login" onClick="check u and p()"><span id="login-</pre>
                                                    62 Page of 78
text">Submit</span>
                 <span id="login-load"</pre>
style="display:none;"><i class="fa fa-circle-o-notch fa-
spin"></i> Loading.../button>
             </div>
          </form>
        </div>
      </div>
    </div>
  </section>
{% endblock body %}
```

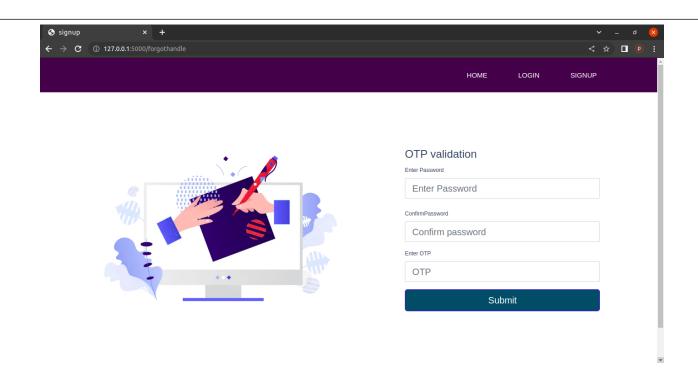

order.html:-

```
<!DOCTYPE html>
<html lang="en">
  <head>
    <meta charset="utf-8">
    <meta name="viewport" content="width=device-width,</pre>
initial-scale=1">
    <title>PrintingPress</title>
    link
href="https://cdn.jsdelivr.net/npm/bootstrap@5.2.1/dist/cs
s/bootstrap.min.css" rel="stylesheet" integrity="sha384-
iYQeCzEYFbKjA/T2uDLTpkwGzCiq6soy8tYaI1GyVh/UjpbCx/TYkiZhlZ
B6+fzT" crossorigin="anonymous">
    <style>
      *{
        margin:0px;
        padding:0px;
        box-sizing: border-box;
        font-family: 'Poppins', sans-serif;
```

```
}
nav{
  width: 100%;
  height: 75px;
  background-color: #3D0649;
  line-height: 75px;
  padding:0px 100px;
  position:fixed;
  z-index: 1;
nav ul{
  float: right;
nav ul li{
  display: inline-block;
  list-style: none;
nav ul li a{
  color:#FFFF;
  text-decoration: none;
  font-size: 15px;
  font-weight: 150;
  text-transform: uppercase;
  padding:0px 32px;
                                              64 Page of 78
  margin-top: 0px;
nav ul li a:hover{
  color:#c0d96f;
nav ul li .active{
  color:#c0d96f;
body {
    font-family: Arial, Helvetica, sans-serif;
    background-color: aliceblue;
    margin: 0;
    padding:0 0;
    display: flex;
    justify-content: center;
}
.page{
    padding:5% 5%;
    text-align: left;
    background-color:white;
```


```
font-weight: bold;
          word-spacing: 0%;
          height:100%;
          width:40%;
      input[type=tel]{
          width: 515px;
          padding: 12px 20px;
          margin: 8px 0;
          display: inline-block;
          border: 1px solid #ccc;
          box-sizing: border-box;
      }
.mob,select,input[type=file],input[type=text],input[type=t
el],input[type=email],input[type=password] {
          width: 100%;
          padding: 12px 20px;
          margin: 8px 0;
          display: inline-block;
          border: 1px solid #ccc;
          box-sizing: border-box;
      }
                                                   65 Page of 78
.mob,select:focus,input[type=text]:focus,input[type=text]:
focus,input[type=tel]:focus,input[type=email]:focus,input[
type=password]:focus{
          outline: none;
      button {
          background-color: #164e10;
          color: white;
          padding: 14px 20px;
          margin-bottom: 20px;
          margin: 8px 0;
          border: none;
          cursor: pointer;
          width: 100%;
          font-weight: bold;
      }
      button:hover {
          opacity: 0.8;
```

```
.imgcontainer {
         text-align: center;
         margin: 24px 0 12px 0;
      .container {
         padding: 16px;
     }
     .in{
       float:left;
 </style>
 </head>
 <body>
   <nav>
     ul>
     <
    <a href="/">Home</a>
     {% if not user.is authenticated
    <a href="/login">login</a>
   <a href="/signup">signup</a>
     {% else %}
                                               66 Page of 78
     <a href="logouthand/">logout</a>
    <a href="history/">history</a>
     {% endif %}
   </nav>
<div class="page">
<form action="/PageObjects" method="post"</pre>
enctype="multipart/form-data">
  {% csrf token %}
 <div class="imgcontainer">
   <h2><b>0rder</b></h2>
   {{var}}
 </div>
 <div class="container text-center">
 {% for entry in form %}
 <div class="in">
   {{entry.label_tag}}
   <br/>br>
 </div>
```

}

```
<div class="le">
    {{entry}}
  </div>
  {% endfor %}
  <button type="submit" >Order now</button>
</script>
</div>
</form>
</div>
    <script
src="https://cdn.jsdelivr.net/npm/bootstrap@5.2.1/dist/js/
bootstrap.bundle.min.js" integrity="sha384-
u10knCvxWvY5kfmNBILK2hRnQC3Pr17a+RTT6rIHI7NnikvbZlHgTP00mM
i466C8" crossorigin="anonymous"></script>
</body>
</html>
```

Output:-

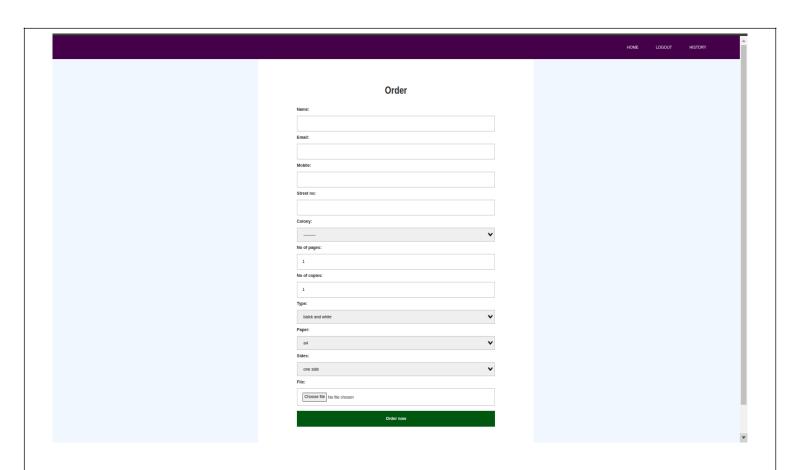

confirmorder.html:-

```
<!DOCTYPE html>
<html lang="en">
    <head>
        <meta charset="utf-8">
        <meta name="viewport" content="width=device-width, initial-scale=1">
        <title>PrintingPress</title>
        link
```

68 Page of 78


href="https://cdn.jsdelivr.net/npm/bootstrap@5.2.1/dist/cs
s/bootstrap.min.css" rel="stylesheet" integrity="sha384-

```
iYQeCzEYFbKjA/T2uDLTpkwGzCiq6soy8tYaI1GyVh/UjpbCx/TYkiZhlZ
B6+fzT" crossorigin="anonymous">
    <style>
    <style>
      *{
        margin:0px;
        padding:0px;
        box-sizing: border-box;
        font-family: 'Poppins', sans-serif;
      }
      nav{
        width: 100%;
        height: 75px;
        background-color: #3D0649;
        line-height: 75px;
        padding:0px 100px;
        position:fixed;
        z-index: 1;
      nav ul{
        float: right;
      nav ul li{
        display: inline-block;
        list-style: none;
      }
      nav ul li a{
        color:#FFFF;
        text-decoration: none;
        font-size: 15px;
        font-weight: 150;
        text-transform: uppercase;
        padding:0px 32px;
        margin-top: 0px;
      nav ul li a:hover{
        color:#c0d96f;
      nav ul li .active{
        color:#c0d96f;
```

```
<style>
    html {
      font-family: "helvetica neue", helvetica, arial,
sans-serif;
    }
    thead th,
    tfoot th {
      font-family: "Rock Salt", cursive;
    th {
      letter-spacing: 2px;
    td {
      letter-spacing: 1px;
    tbody td {
      text-align: center;
    tfoot th {
      text-align: right;
  </style>
  <style>
    table {
      table-layout: fixed;
      width: 100%;
      border-collapse: collapse;
      border: 3px solid purple;
    }
    thead th:nth-child(1) {
      width: 30%;
    }
    thead th:nth-child(2) {
      width: 20%;
                                                     70 Page of 78
    }
    thead th:nth-child(3) {
      width: 15%;
```

```
}
 thead th:nth-child(4) {
  width: 35%;
 th,
 td {
  padding: 20px;
</style>
</head>
<body>
 <nav>
  ul>
  <
  <a href="/">Home</a>
  {% if not user.is authenticated
  <a href="/login">login</a>
 <a href="/signup">signup</a>
  {% else %}
  <a href="logouthand/">logout</a>
  <a href="history/">history</a>
  {% endif %}
 </nav>
    <div>
     Confirm Details
        name
        {{name}}
       email adress
        {{email}}
                                  71 Page of 78
       mobile
        {{mobile}}
```

```
address
        {{address}}
      no of pages
        {{no of pages}}
      no of copies
        {{no_of_copies}}
      type
        {{type}}
      paper
        {{paper}}
      sides
        {{sides}}
      Total amount
        {{Price}}
      Discount
        {{Discount}}
      amount
        {{amount}}
      file
        {{file}}
      72 Page of 78
     <div class="text-center">
    <a href="confirm/"><button class="btn btn-submitin"
btn-lg full-width btn-primary">place order</button></a>
```

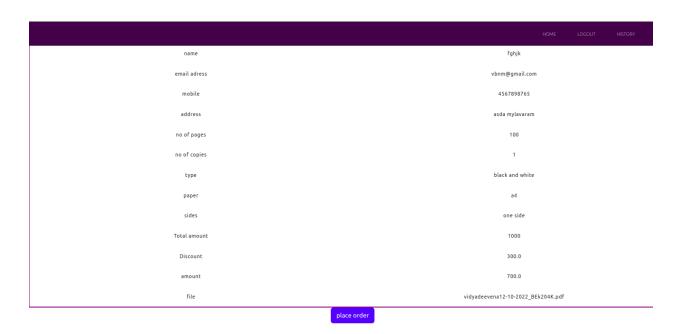

history.html:-


```
KJ3o2DKtIkvYIK3UENzmM7KCkRr/rE9/Qpg6aAZGJwFDMVNA/GpGFF93hX
pG5KkN" crossorigin="anonymous"></script>
<script
src="https://cdn.jsdelivr.net/npm/popper.js@1.12.9/dist/um
d/popper.min.js" integrity="sha384-
ApNbqh9B+Y10Ktv3Rn7W3mqPxhU9K/ScQsAP7hUibX39j7fakFPskvXusv
fa0b40" crossorigin="anonymous"></script>
<script
src="https://cdn.jsdelivr.net/npm/bootstrap@4.0.0/dist/js/
bootstrap.min.js" integrity="sha384-
JZR6Spejh4U02d8jOt6vLEHfe/JQGiRRSQQxSfFWpi1MquVdAyjUar5+76
PVCmYl" crossorigin="anonymous"></script>
link
href="https://cdn.jsdelivr.net/npm/bootstrap@5.2.1/dist/cs
s/bootstrap.min.css" rel="stylesheet" integrity="sha384-
iYOeCzEYFbKjA/T2uDLTpkwGzCiq6soy8tYaI1GyVh/UjpbCx/TYkiZhlZ
B6+fzT" crossorigin="anonymous">
{% endblock links %}
{% block body %}
<table style="border:3px solid purple" class="table table-
hover">
 <thead>
   File
    No of Copies
    Type
    Paper
    Sides
    Amount
    Vendor
   </thead>
 <!--{{dict}} -->
   {% for i in dict %}
   {{i.file}}
    {{i.no of copies}}
    {{i.type}}
    {{i.paper}}
    {{i.sides}}
                                   74 Page of 78
    {{i.payment}}
    {{i.name of pub}}
   {% endfor %}
```

{% endblock body %}

Output:-



Admin Panel:-

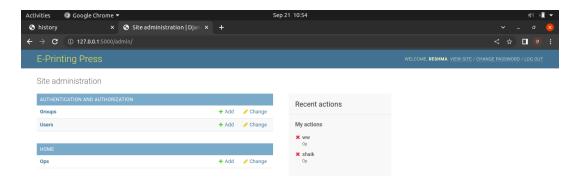

Conclusion:-

After careful observation, it has come to my conclusion that everything is becoming digital and has undeniably become an important part of our society. The world wide web is and will have a large part in our daily lives.

This web application provides user to take printed copies of the documents without manual interference and receiving Hard copies at doorstep. Online Printing press being web based needs to be thoroughly tested before implementation to find any security gaps.

- In the future we can add the Retailers modules for best quality purpose.
- ➤ We can add the machine Learning Algorithms for automated shopping in the store.
- We can add the return orders after the orders are delivered to the customer and the customer is not satisfied about their products.
- Maintaining retailers and Designers data are helpful in the improving the marketing tactics.

References:-

HTML & CSS

- >HTML- W3schools
- >CSS W3Schools

BOOTSTRAP

- **▶** Bootstrap W3schools
- > https://getbootstrap.com/

DJANGO

- > Django Documentaion
- https://www.youtube.com/playlist?list=P
 Lu0W_9III9ah7DDtYtflgwMwpT3xmjXY9