Towards Understanding Retrieval Accuracy and Prompt Quality in RAG Systems

Shengming Zhao, Yuheng Huang, Jiayang Song, Zhijie Wang, Chengcheng Wan⊠, Lei Ma⊠

Abstract—Retrieval-Augmented Generation (RAG) is a pivotal technique for enhancing the capability of large language models (LLMs) and has demonstrated promising efficacy across a diverse spectrum of tasks. While LLM-driven RAG systems show superior performance, they face unique challenges in stability and reliability. Their complexity hinders developers' efforts to design, maintain, and optimize effective RAG systems. Therefore, it is crucial to understand how RAG's performance is impacted by its design. In this work, we conduct an early exploratory study toward a better understanding of the mechanism of RAG systems, covering three code datasets, three QA datasets, and two LLMs. We focus on four design factors: retrieval document type, retrieval recall, document selection, and prompt techniques. Our study uncovers how each factor impacts system correctness and confidence, providing valuable insights for developing an accurate and reliable RAG system. Based on these findings, we present nine actionable guidelines for detecting defects and optimizing the performance of RAG systems. We hope our early exploration can inspire further advancements in engineering, improving and maintaining LLM-driven intelligent software systems for greater efficiency and reliability.

Index Terms—Large Language Models, LLM, Retrieval Augmented Generation, RAG, System Diagnostics, Software Reliability

1 Introduction

Advancements in natural language processing (NLP) have brought Large Language Models (LLMs) [1]-[3] to the forefront, revolutionizing both academic research and practical applications across diverse domains. Recently, Retrieval-Augmented Generation (RAG) [4], as a typical and representative LLM-enabled system, has emerged to further enhance the capabilities of LLMs. By retrieving relevant and upto-date information from external knowledge bases, RAG effectively mitigates key limitations of standalone LLMs, such as the high cost of training and fine-tuning [3], the phenomenon of hallucination [5], and inherent input window limitations [6]. Given its promising performance and costeffectiveness, RAG has achieved success across various tasks and scenarios, including chatbots [7], factual QA [8], longform generation [9], and automatic code completion [10]-[13]. Moreover, RAG has already become a foundational technology in various real-world products like Contextual AI [14] and Cohere [15].

Although the RAG technique has strong potential across various tasks, maximizing its effectiveness is neither straightforward nor consistently guaranteed. Unlike standalone LLMs that rely on fine-tuning, LLM-driven RAG systems require huge integration efforts and careful optimization to achieve high performance, and their effectiveness varies on a case-by-case basis. We highlight the typical workflow of a typical RAG system [16] into two phases, as shown in Figure 1: (1) the retrieval phase takes the

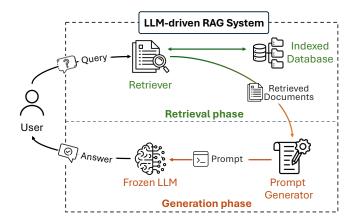


Fig. 1: The typical workflow of an LLM-driven RAG system.

user input *query* and uses a *retriever* to search for relevant information from an *indexed database*, which are *retrieved documents*; (2) the generation phase uses a *prompt generator* to create a *prompt* with *retrieved documents* and the *query*, and passes it to a *frozen LLM* to obtain the final *answer*.

While seemingly straightforward, the LLM-driven RAG system involves sophisticated implementations, with numerous design choices in its pipeline that significantly impact overall system performance. For instance, there are various candidate retrievers [17]–[20], as well as advanced retrieval techniques such as reranking [21], rewriting [22], iterative retrieving [23], [24], that could be employed. Yet, there is a lack of understanding of their effects on system performance, whether they should be adopted, and the concrete scenarios that one technique is better than the others. Therefore, it is hard to diagnose the performance issues of the retrieval phase. As another example, developers have to manually decide the number of retrieved documents and the prompt techniques [25]–[32], where the systematical

[•] Shengming Zhao, Jiayang Song, and Zhijie Wang are with the University of Alberta, Canada. E-mail: {shengmi1, jiayan13, zhijie.wang}@ualberta.ca

[•] Yuheng Huang is with The University of Tokyo, Japan. E-mail: yuhenghuang42@g.ecc.u-tokyo.ac.jp

Chengcheng Wan is with East China Normal University, Shanghai, China.
 E-mail: ccwan@sei.ecnu.edu.cn

Lei Ma is with The University of Tokyo, Japan, and University of Alberta, Canada. E-mail: ma.lei@acm.org

^{• &}lt;sup>™</sup> Chengcheng Wan and Lei Ma are the corresponding authors

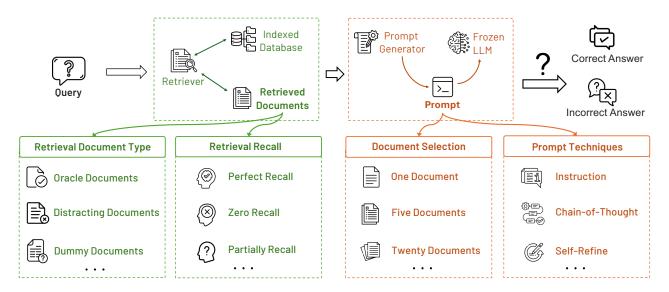


Fig. 2: Overview of our study. It focuses on two important components in RAG systems: **Retrieved Documents** and **Prompt**. Specifically, we study the impact of document type and retrieval recall for retrieved documents, as well as the effects of document quantity and prompt techniques in prompt construction.

guidance is in an urgent need. Each of these design choices in RAG system construction may have a huge impact on performance and thus should be carefully made.

Yet, the design process of RAG still heavily depends on human expertise and often demands considerable efforts — sub-optimal design choices may greatly degrade system performance, as demonstrated by our preliminary study in Section 3.5. Thus, the complexity of LLM-driven RAG systems highlights a critical challenge:

How to systematically build a reliable, high-performing LLM-driven RAG system?

To the best of our knowledge, no existing work has systematically studied the system integration of LLM-driven RAG systems. Therefore, we initiate this early exploratory study of LLM-driven RAG systems, aiming to understand the underlying factors for system performance changes, ultimately providing guidance for the development and optimization of LLM-driven RAG systems.

Our study approach focuses on understanding the impact of two critical artifacts within RAG systems — retrieved documents and prompt (Figure 2). To gain insights into these artifacts, we argue that four key factors could influence RAG systems' quality: Retrieval Document Type and Retrieval Recall as the main aspects of retrieved documents, and Document Selection and Prompt Techniques as the key aspects of prompt. By examining these factors, we can understand the ultimate effects of various design choices, techniques, and architectures on RAG system performance without needing to study every possible configuration directly.

To ensure a broad and comparative perspective, our study is grounded in three code-related datasets and three question-answering datasets, along with two representative LLMs. We evaluated the LLM-driven RAG systems in terms of correctness and confidence, offering a comparative assessment of their performance and behavior characteristics. The analyses take over 200,000 API calls and consumed more than 1,000 GPU hours.

By analyzing the impact of these four factors, we uncovered several intriguing and counter-intuitive findings regarding the development of RAG systems:

Retrieval Document Type Analysis. In this study, we consider three different types of retrieved documents: oracle (ground-truth), distracting (high similarity but actually useless), and irrelevant (low similarity and lack useful information). Our experiment results reveal that distracting documents negatively impact system performance, and surprisingly, irrelevant documents are more effective than oracle documents in code generation tasks in some cases. Further analysis reveals that irrelevant documents enhance the LLMs' code generation ability across all scenarios, resulting in an up to 15.6% pass rate increase on average. We also observed an intriguing effect of irrelevant documents, which we termed the "magic word" effect. This effect does not scale with prompt length and is most effective when irrelevant documents are used alone, with a specific type of document *diff* consistently yielding the greatest improvement.

Retrieval Recall Analysis. Although Retrieval recall strongly correlates with RAG system performance, the level of recall required to match the performance of standalone LLMs varies significantly across models and datasets — from as low as 20% to as high as 100%. Further analysis reveals a performance degradation in RAG systems — RAG systems with perfect retrieval recall still fail on a significant proportion of instances where standalone LLMs succeed. We also observed that higher LLM confidence (perplexity) aligned with higher retrieval recall in QA datasets, making the former a useful on-the-fly indicator to predict the latter.

Document Selection Analysis. The number of retrieved documents can directly influence the amount of information in the LLM prompt. Our study results reveal that while adding more documents could include more useful information in the prompt, it could also raise error rates on previously correct samples, especially in code tasks and with less powerful LLMs. Moreover, model confidence does not

align with the quality of LLM generation on code problems.

Prompt Techniques Analysis. We found that the effectiveness of prompting techniques is highly context-specific when impacting the performance of LLM-driven RAG systems, varying across different models and tasks. While prompt techniques show potential to improve system performance, most of them do not perform better than plain zero-shot prompt in overall effectiveness.

In summary, this paper makes the following contributions:

- We analyzed the impact of retrieved documents, providing a quantitative assessment of their impacts on RAG system performance.
- We explored two key design choices in prompt construction for RAG systems, offering valuable guidelines for effective implementation.
- We investigated performance degradations in RAG systems, providing insights into their causes and prevention.
- We established that model confidence serves as an effective metric for QA tasks but proves unreliable in code tasks.
- We explored RAG for code-related tasks, revealing the unique effectiveness of irrelevant documents in enhancing code generation.

Contribution to the Software Engineering Field: With rapid progress and adoption, LLM-driven RAG systems have the potential to become significant and representative software systems, with many potential industrial applications. However, RAG, from both concepts and engineering practices, introduces numerous challenges that remain underexplored, with existing studies offering limited understanding and insights. In this paper, our study of LLMdriven RAG system design offers the first exploratory understanding of the engineering challenges and how inadequate design choices degrade the system performance. We uncovered the impact of retrieval recall, retrieval document types, and other aspects on the overall system performance. Based on it, we proposed various tentative solution candidates for practitioners to design, develop, evaluate, and optimize LLM-driven RAG systems from the perspective of system integration. These solutions may guide developers in making correct design choices, including prompts prioritization for improving stability in multi-task RAG systems, confidence-guided LLM inference feedback for improving QA task performance, and many other automated solutions. We also studied RAG performance on code tasks under various settings, providing guidance for LLMs for code. We discovered the unique and significant impact of irrelevant documents and demonstrated the limitations of model confidence in evaluating code-related tasks.

2 BACKGROUND

In this section, we provide an overview of the *retrieval* and *generation* phases in RAG systems, detailing their design and implementation.

2.1 Retrieval Phase

As illustrated in Figure 1, the retrieval phase of a LLM-driven RAG system often contains two main components: the *indexed database* and the *retriever*.

The *indexed database* is a structured collection of documents D_1, D_2, \ldots, D_n , containing domain knowledge and information related to potential user queries. Organized and optimized for efficient searching, it serves as the foundation for retrieving pertinent information.

The *retriever* ranks all documents in the *indexed database* based on their similarity to a query. Given a query Q and the *indexed database* comprising n documents D_1, D_2, \ldots, D_n , the *retriever* identifies the order of these documents according to a similarity criterion sim. Formally,

$$\{D_{i_1}, D_{i_2}, \dots, D_{i_n}\} = \operatorname{sort}(\{D_1, D_2, \dots, D_n\}, \operatorname{sim}(Q, D_i))$$
 (1)

There are two primary types of retrievers, based on their utilization of the sparse or dense representations of queries and documents [33]. Sparse retrievers compute similarity by projecting the query and documents into a sparse vector space that aligns with the vocabulary of the documents, typically using traditional Bag-of-Words methods such as TF-IDF or BM25 [17]. To overcome the limitations of these methods, which may struggle with synonyms or varying contextual meanings, dense retrievers [18], [19] obtain similarity scores by encoding queries and documents as dense vectors that capture their semantic meaning.

2.2 Generation Phase

The generation phase contains two components: the *prompt* generator and the frozen LLM. A straightforward implementation of the prompt generator is to concatenate the documents and the query in a simple sequence, represented as $< D_1, D_2, \ldots, D_k, P >$. Additionally, more sophisticated strategies may include applying various prompt techniques [27], [29], [31], [32] to better align the prompt with the LLM's capabilities, or using iterative methods that involve multiple rounds of retrieval and generation [23], [24].

The *frozen LLM* is an off-the-shelf LLM used without modification; therefore, this paper does not focus on it.

3 STUDY DESIGN

This section, we introduce our study design, including datasets, evaluation metrics, retrieval methods, and model settings. Following this, we present the two preliminary studies conducted.

3.1 Datasets

We conduct our study on six representative datasets covering scenarios in both software engineering (SE) and natural language processing (NLP) domains, as listed in Table 1.

In the SE domain, automatic code generation and completion are critical tasks [39] and are considered core capabilities of LLMs [1], [3], [40], [41]. In this study, we select three Python library-oriented datasets: CoNaLa [34], DS1000 [35] and Pandas_Numpy_Eval(PNE) [12], since their primary retrieved documents are API documentation [10], [42], allowing for well-defined and accessible oracle (ground-truth)

TABLE 1: Overview of datasets.

Domain	Software Engineering			Natu	Natural Language Processing		
Dataset	CoNaLa [34]	DS1000 [35]	PNE [12]	NQ [36]	TriviaQA [37]	HotpotQA [38]	
Task	Code Gen.	Code Gen.	Code Completion	open-domain QA	open-domain QA	multihop QA	
Samples	100	200	200	2,000	2,000	2,000	

documents. Specifically, we utilize 200 randomly selected samples from DS1000, all 200 samples PNE, and incorporated 100 unit-tested samples from CoNaLa [10]. We exclude open-domain code exercises and repository-level code completion datasets, as they rely on different retrieval forms. For instance, RAG systems for code exercises typically retrieve similar code snippets [43]–[45], while repository-level tasks rely on project-specific contextual information [46]–[49]. To the best of our knowledge, no robust methods currently exist to define and obtain oracle documents for these tasks, which complicates the setup of controlled experiments.

For the NLP domain, question answering (QA) tasks often benefit from RAG techniques due to their demand for factual knowledge. In this study, we select the three most prominent QA datasets: Natural Questions (NQ) [36], TriviaQA [37], and the multi-hop QA dataset HotpotQA [38], randomly extracting 2,000 queries from each.

We select code generation and open-domain QA as representative tasks of SE and NLP domains, as they are representative and cover a diverse range of challenges. We believe that our findings could be generalized to other tasks in these two domains.

3.2 Metrics

We evaluate the RAG system from two aspects.

- Correctness For Code Generation and Completion tasks, we use the pass@1 metric to measure the functional correctness of the generated code. A pass occurs if the generated code produces the expected output when executed with a given input. This metric is widely adopted for robustly assessing the quality of code [40]. For question-answering (QA) tasks, we use the has_answer metric [50]. This approach addresses the difficulty of ensuring that the LLM output exactly matches the correct answer by checking if any of the canonical answers appear in the generated output, providing a more flexible yet reliable evaluation of LLM accuracy.
- Confidence measures the system's uncertainty about its generated answer. Given the inherent instability in LLM generation, confidence is an important aspect of ensuring a reliable and trustworthy system. We apply perplexity (PPL), a standard metric for assessing the quality of language model generation. Perplexity quantifies how well a probability distribution predicts a sequence, with lower values indicating greater model confidence and quality. Given the probabilities of generated tokens $p(x_1), ..., p(x_N)$, the perplexity is calculated as

$$PPL = \exp\left(-\frac{1}{N}\sum_{i=1}^{N}\log p(x_i)\right). \tag{2}$$

3.3 Retrieval Settings

3.3.1 Code Corpus Preparation

While there exists a collection of Python API documentations [10], it has several flaws making it unfit for our study: 1) it covers a limited range of third-party libraries, notably lacking API documentation for libraries, such as SciPy; 2) it omits API version information, which is crucial since different versions can introduce significant changes (e.g., TensorFlow 1.0 vs. 2.0); and 3) the corpus highly relies on string matching to determine retrieval success (i.e., locating the Oracle API documentation), which is likely to match APIs incorrectly with shared names (e.g., tensorflow.keras.layers.add and tensorflow.python.ops.math_ops.add).

To address these problems, we have developed a new automated documentation collection and API usage identification approach. It contains four steps:

- API Signatures Collection: Given the name and version
 of a Python library, we first install the library and traverses its modules to identify all attributes. Then we
 find public and callable attributes and collects their API
 signatures.
- 2) *Document Collection*: We first use *Pydoc* to gather documentation for each API signature before merging duplicates since different signatures can share the same documentation.
- 3) *Oracle Function Collection*: For each code generation task, we parse an Abstract Syntax Tree (AST) from the unit-test program and its canonical solution to extract the names of all functions used in the canonical solution.
- 4) *Oracle Document Identification*: For each function name, we truncate all possible prefixes from the canonical solution, and then augments the unit tests with the *help()* from *Pydoc* for each prefix-function combination. For each function, API signatures are obtained through executing and then matched with the previously collected API documentations to identify the oracle documents.

We then gathered library requirements from all three code datasets, collected API documentation, and identified Oracle documents with this automated tool. Samples without API utilization are omitted. We use 10% of the samples as exemplars for few-shot learning. Finally, we created a corpus containing 70,956 unique API documents, aggregated from an initial 365,691 documents before deduplication.

3.3.2 QA Corpus Preparation

For NQ and TriviaQA datasets, we adopt the corpus constructed by [19], which uses the English Wikipedia dump from Dec. 20, 2018 as the source documents, then apply the pre-processing code to remove semi-structured data to extract the clean, text-portion of articles. Each article is then split into multiple, disjoint 100-word text blocks as passages, yielding a total of 21,015,324 passages. For the HotpotQA

TABLE 2: Overview of retrievers.

Retriever	Retriever Type	Domains Applied
BM25	Sparse	SE & NLP
text-embedding	Dense	SE & NLP
MiniLM	Dense	SE & NLP
Contriever	Dense	NLP
CodeT5 fine-tuned	Dense	SE

dataset, we use the accompanying corpus provided with the dataset, as described in [38], which consists of 5,233,235 documents sourced from Wikipedia.

To identify the documents containing supporting facts for each question (i.e., oracle documents), we follow the methodology outlined by [19] for NQ and TriviaQA. For HotpotQA, oracle documents are identified by verifying their alignment with the provided supporting facts.

3.3.3 Studied Retrievers

We explore both sparse and dense retrieval methods, as listed in Table 2. For sparse retrieval, we use BM25 [17] as the similarity metric, implemented with ElasticSearch [51] as the search engine. For dense retrieval, we select two representative off-the-shelf embedding models: ALL-MINILM-L6-V2 [20] and OpenAI's TEXT-EMBEDDING-3-SMALL. Additionally, we incorporate pre-trained retrieval models: Contriever [18], specialized for question answering, and CodeT5, fine-tuned specifically for code generation problems [10]. Similarity scores for embedded vectors are calculated using the FAISS library [52].

3.4 LLM Settings

3.4.1 Prompt Generator

We use a zero-shot prompt style as the default. To ensure the LLMs comprehend each task accurately and provide clear, extractable answers, we crafted specific instructions I tailored to each dataset and model pair. Consequently, the prompt generator can be represented as $\langle I, D_1, D_2, \ldots, D_k, Q \rangle$. In our analysis of prompt techniques, we further examine how different prompt techniques affect RAG systems performance.

3.4.2 Studied LLMs

To ensure thorough experimentation, we employ both opensource and close-source Large Language Models from the Llama 2 [3] and GPT 3.5 [1] families, each well-represented in the field:

- Llama 2. For QA tasks, we select Llama2-13b-chat, and for code tasks, we use CodeLlama-13b-instruct, which is fine-tuned with Python code from Llama2-13b to enhance robustness in code-related outputs.
- *GPT 3.5.* We utilize gpt-3.5-turbo-0125 for both QA and code generation tasks.

To mitigate instability in LLM outputs and ensure reproducibility, we use greedy decoding for the Llama models and set the temperature to 0 for GPT 3.5. We apply regular expressions to extract the answer from LLM Responses.

Experimental Environment. All of our experiments were conducted on a server with a 4.5GHz AMD 5955WX 16-Core CPU, 256GB RAM, and two NVIDIA A6000 GPUs with 48GB VRAM each. The overall computation takes over 200,000 API calls on GPT-3.5 and more than 1,000 GPU hours for LLama2 and CodeLlama.

3.5 Preliminary Study

We conducted two preliminary studies: (1) evaluating the effectiveness of a vanilla RAG system on our selected tasks to establish an initial baseline and motivation; and (2) comparing the performance of various retrievers to determined the optimal retrieval settings for further experiments.

3.5.1 A Vanilla RAG System

We conduct a preliminary experiment using a commonly applied RAG system configuration: BM25 as the retriever, incorporating the top 5 retrieved documents into the prompt, and applying a zero-shot prompt with instructions as described in Section 3.4.1.

The results, shown in Table 3, suggest that, despite the addition of retrieval and extended prompt length, the vanilla RAG system underperforms compared to the corresponding standalone LLMs. When using GPT-3.5 as the frozen LLM, the RAG system performs worse on 4 out of 6 datasets. Similarly, with Llama2-13B, the RAG system shows clear improvement on only 1 dataset, with negative or minimal improvements on the remaining five ones.

These findings highlight that a basic RAG system configuration is unlikely to deliver satisfactory performance. Therefore, in Sections 4-7, we conduct further studies to explore how to effectively build a reliable, high-performing LLM-driven RAG system and identify the key issues contributing to poor performance.

3.5.2 Retriever Selection

We compare the retriever performance using the metric of retrieval recall, which is defined as the proportion of oracle (ground-truth) documents retrieved relative to the total oracle (ground-truth) documents. As shown in Figure 3, OpenAI's text-embedding-3-small achieves the highest performance across both QA and code datasets. The all-MiniLM-L6-v2 model performs comparably to text-embedding-3-small on code datasets, though slightly weaker on QA datasets. In contrast, BM25 and the specialized retrievers — Contriever and fine-tuned CodeT5 — show inferior retrieval recall on both QA and code datasets. Therefore, the rest of this study uses OpenAI's text-embedding-3-small as the retriever, given its adequate performance advantage.

4 RQ1: RETRIEVAL DOCUMENT TYPE

Our preliminary experiments reveal that a vanilla RAG system underperforms corresponding standalone LLMs in half of the commonly applied scenarios. This counterintuitive finding motivates us to investigate the reasons behind this underperformance and provide guidelines for building and optimizing RAG systems. To achieve this, we systematically analyze the key factors within RAG systems and their impact on overall system performance.

TABLE 3: Performance comparison of RAG systems vs. standalone LLMs. "Perf Increase" denotes the relative improvement over the corresponding standalone LLM, with special emphasis on cases with **negative** or **minimal** improvements.

	GPT-3.5			Llama	Llama2-13B / CodeLlama-13B		
Dataset	Standalone	with RAG	Perf Increase	Standalone	with RAG	Perf Increase	
NQ	0.496	0.359	<u>-27.6%</u>	0.401	0.423	5.5%	
TriviaQA	0.862	0.752	<u>-11.6%</u>	0.737	0.766	3.9%	
HotpotQA	0.324	0.384	18.5%	0.277	0.394	42.2%	
CoNaLa	0.226	0.357	58.0%	0.226	0.190	<u>-15.9%</u>	
DS1000	0.367	0.353	<u>-3.8%</u>	0.166	0.084	<u>-50.6%</u>	
PNE	0.784	0.778	<u>-0.8%</u>	0.605	0.629	4.0%	




Fig. 3: Average retrieval recall across different retrievers.

The retrieval phase of RAG systems outputs the information and materials relevant to the query, which we refer to as *retrieved documents* in this study. These retrieved documents are the central component determining the effectiveness of the retrieval phase, with all advanced techniques in this phase primarily aiming to enhance their quality. Consequently, our first research focus is on understanding the impact of retrieved document quality on the overall RAG systems. Specifically, in our first research question (RQ1), we examine *Retrieval Document Type* as a key aspect of retrieved document quality.

4.1 Experimental Setup

Retrieved documents can be classified into two main categories: *oracle* documents and *distracting* documents. *Oracle* documents contain part or all of the necessary knowledge required for problem-solving, whereas *distracting* documents, although deemed highly similar to the problem by the retriever, do not contain useful knowledge. To examine the impact of the retrieval document type, we introduce a third category: *irrelevant* documents. These documents neither contain useful information nor exhibit high similarity to the problem. We define three types of irrelevant documents: *random* (arbitrarily selected from the same knowledge base), *diff* (from a different domain, e.g., Wikipedia articles for a code generation task), and *dummy* (composed of meaningless word combinations).

To ensure a fair comparison, we keep the number of documents and the token length per document consistent. This setup mitigates the effect of document type, allowing accurately assessing its impact on RAG system performance.

4.2 Results and Discussion

The *correctness* (*has_answer* for QA tasks and *pass*@1 for code tasks), as well as the *confidence* of RAG systems under different document types are respectively displayed in Figure 4&5.

Distracting documents degrade RAG system performance. RAG systems incorporating distracting documents (second column in each sub-figure of Figure 4) display the poorest correctness across all datasets and models. Since *irrelevant* are supposed to have minimal influence on RAG systems outputs due to their lack of useful information, the superior performance of RAG systems with *irrelevant* documents compared to those with *distracting* documents in most scenarios highlights the negative impact of the latter.

The confidence of RAG systems with *distracting* documents is higher than with *irrelevant* documents, as shown in Figure 5, which is as expected since *irrelevant* documents introduce noise that reduces the certainty of LLMs.

Irrelevant documents outperform oracle documents in code tasks. As we expected, *irrelevant documents* are utilized as the baselines that are neither useful (like oracle) nor distracting to the LLMs generation (which is as so in QA datasets). However, both the correctness and confidence of RAG systems with *irrelevant* documents are comparable or even better than those with *oracle* documents in multiple scenarios, especially for *diff* documents (last column in each sub-figure).

Oracle documents consistently enhance system confidence. From Figure 5, we can observe that the perplexity of RAG systems with *oracle* documents is always lower than with *distracting* documents. Especially in GPT-3.5, QA tasks (three upper-left sub-plots), RAG systems with *oracle* documents are extremely lower and have an evident difference compared to RAG systems with *distracting* documents. The finding can be utilized to evaluate the distribution of *oracle* and *distracting* documents when the *oracle* documents are difficult or expensive to identify (which is common in real-world scenarios).

4.3 Follow-up Experiments: The effect of irrelevant documents

Motivated by the intriguing phenomenon that RAG systems with *irrelevant* documents outperform those with *oracle* documents, we conduct additional experiments to study a follow-up question to RQ1:

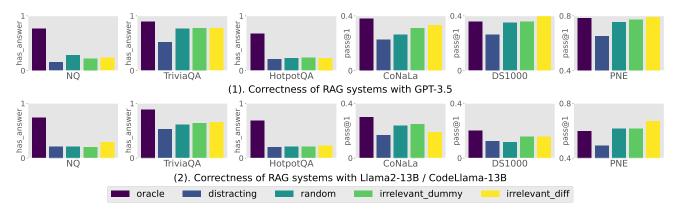


Fig. 4: Correctness of RAG systems with varying types of documents.

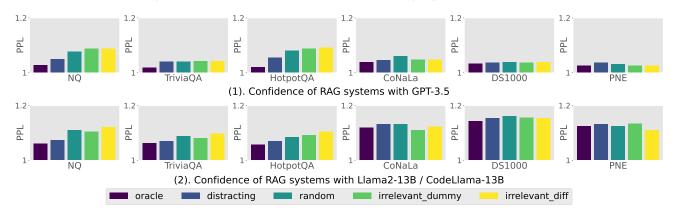


Fig. 5: Confidence of RAG systems with varying types of documents. Higher perplexity (PPL) reflects lower confidence.

What is the effect of irrelevant documents on code generation for LLMs and RAG systems?

We investigate this question from two perspectives: 1) **Extent of Improvement:** To what extent can *irrelevant* documents boost the code generation capabilities of LLMs and RAG systems? 2) **Characteristics of Effectiveness:** What are the characteristics of this effectiveness, and how does it compare to previously observed effects? Understanding these aspects will shed light on how *irrelevant* documents impact RAG systems performance and may uncover new strategies for optimizing code generation in LLMs and RAG systems. Therefore, we hypothesize two possible explanations for this effect: 1) combining *irrelevant* documents with *retrieved* documents may amplify RAG performance, as suggested by [53], and 2) extending the input length could improve LLM performance, as indicated by [54]. Based on these hypotheses, we design the following experiments.

Specifically, we define four initial settings: RAG systems with *oracle, distracting, retrieved top-5* documents, and standalone LLMs with *no* documents, using the same configuration as described in Section 4.1. These initial settings are then augmented with three types of *irrelevant* documents — *random, diff,* and *dummy* — as detailed in Section 4.1. To explore the characteristics of the effectiveness of *irrelevant* documents, we introduce a new document type, *ellipsis*, consisting solely of ellipses. Additionally, we include two control groups: 1) augmenting the initial RAG systems by repeating their original documents, referred to as *repeat*, and 2) using RAG systems with only *irrelevant* documents. In all augmented LLMs and RAG systems, we maintain a

consistent prompt length of 4000 tokens to ensure that the variations in results are not influenced by prompt length differences.

Irrelevant Documents improve the code generation in all scenarios. As illustrated in Table 4, augmenting with irrelevant documents, especially diff and dummy documents, consistently increases the pass rate of generated code across all settings, including RAG systems with oracle, distracting, retrieved top-5 documents, as well as standalone LLMs with no documents. The most significant improvement is observed in RAG systems using only diff documents, achieving a 13.2% higher pass rate compared to the RAG system with retrieved top-5 documents, which is considered as the baseline. Notably, this performance is on par with the RAG system using oracle documents, underscoring the substantial effect of irrelevant documents in enhancing code generation capabilities.

The effect of *irrelevant* documents resembles a "magic word" effect. We propose that the impact of *irrelevant* documents presents a novel effect, which we term the "magic word" effect, based on the following observations: 1) the lack of improvement from augmenting RAG systems with *ellipsis* documents, repeating original documents, or extending the length of *irrelevant* documents suggests that the enhancement is not merely due to longer prompts, as emphasized by [54]; and 2) the superior performance of RAG systems using only *irrelevant* documents, compared to those using combinations of *irrelevant* and *retrieved* documents, challenges the findings of [53], which suggested that *irrelevant* documents enhance system accuracy when

TABLE 4: Correctness of RAG systems augmented with *irrelevant* documents. The last section represents scenarios where RAG systems use only *irrelevant* documents. Scenarios with the **highest** and **second highest** improvements are highlighted. An asterisk (*) denotes the initial RAG systems prior to augmentation. The "Improv." column shows improvement relative to the initial RAG systems; in the last section, improvement is calculated relative to the baseline RAG system using *retrieved top-5* documents.

Scenario	Conala	DS1000	PNE	Avg	Improv.
Oracle*	0.381	0.356	0.784	0.507	0.0%
Oracle, repeat	0.357	0.376	0.772	0.502	-1.1%
Oracle + Random	0.393	0.369	0.802	0.521	2.8%
Oracle + Diff	0.381	0.388	0.814	0.528	<u>4.1</u> %
Oracle + Dummy	0.381	0.387	0.814	0.527	4%
Oracle + Ellipsis	0.345	0.373	0.784	0.501	-1.2%
Distracting*	0.226	0.264	0.653	0.381	0.0%
Distracting, repeat	0.274	0.319	0.689	0.427	12.2%
Distracting + Random	0.202	0.327	0.713	0.414	8.7%
Distracting + Diff	0.250	0.321	0.719	0.43	<u>12.9</u> %
Distracting + Dummy	0.238	0.349	0.695	0.427	12.2%
Distracting + Ellipsis	0.179	0.292	0.677	0.383	0.4%
Retrieved Top-5*	0.286	0.339	0.719	0.448	0.0%
Retrieved Top-5, repeat	0.298	0.295	0.713	0.435	-2.8%
Retrieved Top-5 + Random	0.262	0.321	0.743	0.442	-1.3%
Retrieved Top-5 + Diff	0.310	0.343	0.778	0.477	<u>6.5</u> %
Retrieved Top-5 + Dummy	0.298	0.317	0.766	0.46	2.8%
Retrieved Top-5 + Ellipsis	0.298	0.312	0.772	0.461	2.8%
None*	0.226	0.367	0.790	0.461	0.0%
None + Random	0.286	0.323	0.76	0.456	-1%
None + Diff	0.321	0.357	0.790	0.489	<u>6.1</u> %
None + Dummy	0.298	0.343	0.760	0.467	1.3%
None + Ellipsis	0.262	0.332	0.764	0.453	-1.8%
Random*	0.262	0.351	0.754	0.456	1.8%
Random, repeat	0.357	0.371	0.737	0.488	8.9%
<u>Diff*</u>	0.333	0.399	0.790	0.507	<u>13.2</u> %
Diff, repeat	0.345	0.378	0.772	0.502	12.1 %
Dummy*	0.310	0.356	0.772	0.479	6.9%
Dummy, repeat	0.310	0.369	0.737	0.472	5.4%
Ellipsis*	_	_	_	_	
Ellipsis, repeat	0.274	0.368	0.784	0.475	6.0%

combined with relevant documents and appropriately positioned within a prompt. 3) Among the three types of *irrelevant* documents, *diff* documents consistently deliver the best performance, while *random* documents exhibit the least improvement in most scenarios.

These observations collectively indicate that *irrelevant* documents, particularly *diff* documents, function like a "magic word" in enhancing LLMs and RAG systems performance. Despite being unrelated to the task, the inclusion of *irrelevant* documents significantly boosts code generation results. The absence of similar benefits from merely extending prompt length or combining with *retrieved* documents reinforces the distinctiveness of this effect, highlighting how simply adding certain *irrelevant* words can uniquely optimize LLM outputs.

Based on the findings from Section 4.2&4.3, we summarize

TABLE 5: Retrieval recall requirements across models and datasets. These requirements represent the minimum retrieval recall needed for RAG systems to outperform their corresponding standalone LLMs.

Model	NQ	TriviaQA	HotpotQA	CoNaLa	DS1000	PNE
Llama	0.4	0.6	0.2	0.6	0.6	1.0
GPT	0.6	1.0	0.2	0.2	0.4	1.0

two guidelines for developers:

Guideline-1: The RAG system performance drop typically comes with a high proportion of *distracting* documents, which can be detected unsupervised using the perplexity metric.

Guideline-2: *Irrelevant* documents, especially *diff* documents, enhance code generations in LLMs and RAG systems when incorporated into prompts.

5 RQ2: RETRIEVAL RECALL

In this research question, we consider another critical dimension in RAG systems: *Retrieval Recall*. Retrieval recall quantifies the proportion of oracle documents retrieved and utilized by RAG systems over the total oracle documents, providing an overall measure of retrieved document quality. Given its critical role in determining RAG system performance [19] and the observation that vanilla RAG systems often underperform compared to standalone LLMs (Section 3.5), we aim to quantify the influence of retrieval recall on RAG systems performance and determine the threshold *retrieval recall* required for RAG systems to surpass standalone LLMs across different datasets and models.

5.1 Experimental Setup

To investigate the impact of retrieval recall, we first configure RAG systems with only oracle documents for each sample, representing a scenario with perfect retrieval recall. We then control the retrieval recall to different levels: 0.8, 0.6, 0.4, 0.2, and 0, observing the corresponding performance changes in RAG systems. To ensure a controlled setup, we maintain consistency in the number of documents and prompt token length across all retrieval recall levels. This is achieved by randomly replacing a portion of the *oracle* documents with *distracting* documents, simulating scenarios with varying degrees of retrieval recall.

5.2 Results and Discussion

The performance (correctness, confidence) of RAG systems under varying levels of retrieval recalls are shown in Figure 6&7. We further summarize the retrieval recall requirements for different datasets and models in Table 5.

Correctness increases with retrieval recall. In Figure 6, an upward trend is observed between retrieval recall and correctness across all QA datasets, as well as the code datasets CoNaLa and PNE. However, for DS1000, while the trend is positive, notable fluctuations occur. This is likely due to the complexity of problems in DS1000, as highlighted in Table 6.

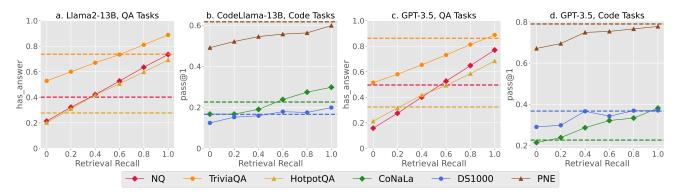


Fig. 6: Correctness of RAG systems across varying retrieval recall levels and standalone LLMs. Dashed lines represent the correctness of standalone LLMs.

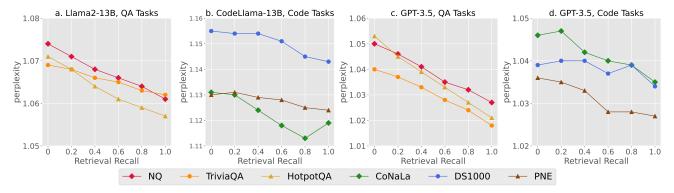


Fig. 7: Confidence of RAG systems across varying retrieval recall levels. Higher perplexity reflects lower confidence.

TABLE 6: Comparison of average oracle documents and code lines per instance across code datasets.

Metric	CoNaLa	DS1000	PNE
Avg. Code Lines in Canonical Solutions	1.0	5.5	1.17
Avg. Oracle Documents	1.74	2.68	1.49

The larger number of oracle documents and higher problem complexity may make it challenging for LLMs to establish clear relationships between the retrieved documents and the problem, thereby diminishing the effectiveness of increased retrieval recall.

Higher retrieval recall aligns with higher confidence in QA tasks but not in code tasks. In Figure 7, perplexity decreases (confidence increases) with higher retrieval recall in QA datasets, reflecting a clear inverse relationship between retrieval recall and system confidence. However, this trend is inconsistent in code tasks, as seen with CodeLlama-13B on CoNaLa at 0.8 retrieval recall and GPT-3.5 on DS1000 at 0.6 retrieval recall. This suggests that perplexity may serve as a useful indicator for detecting retrieval recall quality in QA tasks when direct evaluation is challenging; however, it is not a reliable metric for code tasks.

Retrieval recall requirements range widely, from 20% to 100%. As shown in Table 5, the minimum retrieval recall required for RAG systems to outperform corresponding standalone LLMs varies dramatically, ranging from 0.2 to 1.0 across different models and datasets. Some datasets benefit from moderate levels of retrieval recall, while others demand near-perfect recall to achieve similar improvements. Notably, for the PNE and TriviaQA datasets, only

100% retrieval recall allows RAG systems to match the performance of the standalone LLMs. This may be because tasks in these two datasets are relatively straightforward for modern LLMs, with models like GPT-3.5 already achieving exceptionally high scores, exceeding 0.8.

RAG systems with 100% retrieval recall fail on instances where standalone LLMs succeed. To further investigate why only RAG systems with 100% retrieval recall match the performance of standalone LLMs, we conduct a prediction distribution analysis. Specifically, we compare the percentage of samples correctly solved by standalone LLMs but not by RAG systems with 100% retrieval recall. To account for LLM instability, we also evaluate the instances correctly solved by RAG systems with 80% retrieval recall but not by those with 100% retrieval recall.

As shown in Table 7, RAG systems exhibit similar behavior between 100% and 80% retrieval recall but differ significantly from standalone LLMs. Even with 100% retrieval recall, RAG systems fail on a notable number of instances (up to 12% in code generation tasks and 6.9% in QA tasks) that standalone LLMs solve correctly. Conversely, cases only correctly solved by RAG systems with 80% retrieval recall are minimal. This highlights a performance degradation in RAG systems, which may stem from the LLMs' difficulty in properly understanding and effectively utilizing retrieved information. Developers should be cautious of this degradation, as it could be a key contributor to the underperformance of RAG systems.

Based on the four findings outlined above, we propose three practical guidelines for developers:

TABLE 7: Performance gap between RAG systems with perfect retrieval recall and standalone LLMs.

LLM	Condition	NQ	TriviaQA	HotpotQA	CoNaLa	DS1000	PNE
GPT-3.5	standalone	4.2%	6.9%	2.4%	4.8%	8.3%	9%
GI 1-5.5	80% retrieval recall	0.7%	1.2%	2.5%	2.4%	2.5%	3.6%
Llama2-13B / CodeLlama-13B	standalone	3.9%	4.3%	2.7%	3.6%	7%	12%
Lianiaz-13b / CodeLiania-13b	80% retrieval recall	0.3%	0.4%	0.33%	1.2%	1.3%	0.6%

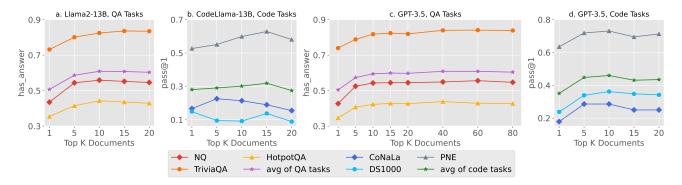


Fig. 8: Correctness of RAG systems with varying numbers of documents.

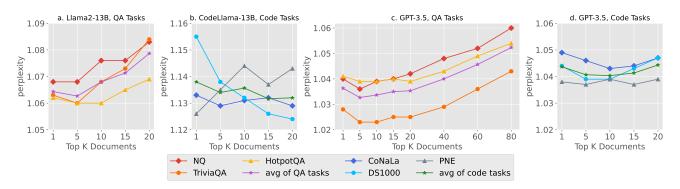


Fig. 9: Confidence of RAG systems with varying numbers of documents. Higher perplexity reflects lower confidence.

Guideline-3: Perplexity can be an effective and low-cost metric for evaluating retrieval quality, particularly in QA tasks.

Guideline-4: An RAG system may not bring benefits to the LLM, even for tasks traditionally suited to it.

Guideline-5: Even perfect document retrieval cannot guarantee correct responses, as LLMs may misunderstand these documents. Given **only** oracle documents, RAG systems fail in up to 12% of cases where standalone LLMs succeed.

6 RQ3: DOCUMENT SELECTION

As discussed in Section 2, RAG systems typically utilize pretrained and frozen LLMs for answer generation, making the quality of the prompt the primary decisive factor in this phase. In this research question, we first investigate the impact of **document selection**. Since only a limited subset of the highest-ranked documents, as determined by the retriever, can be incorporated into the prompt, selecting the optimal number of documents involves a crucial yet underexplored trade-off: while adding more documents increases the likelihood of including useful information, it also raises the risk of introducing distracting content that could mislead the LLM.

6.1 Experimental Setup

In our experiments, we test different configurations for code generation and QA datasets: For code tasks, we evaluate the impact of appending top-1/5/10/15/20 retrieved documents. For QA datasets, we follow the same configuration—top-1/5/10/15/20—on Llama2-13B, with additional tests for appending top-40/60/80 documents. This setup examines the minimum to the maximum number of documents within the token limits of the models. (GPT-3.5 and CodeLlama-13B support up to 16k tokens, while Llama2-13B has a 4k token limit.)

6.2 Results and Discussion

The performance data is illustrated in Figure 8&9.

Confidence does not reflect correctness as the number of documents varies, especially in code tasks. We observe inconsistencies between correctness and confidence (measured by perplexity). As more documents are included, in QA tasks, the perplexity of RAG systems first sightly decreases and then increases, yet correctness does not exhibit




Fig. 10: Retrieval recall of RAG systems with varying numbers of documents.

a corresponding decline. In code tasks, perplexity remains stable or even decreases while the pass rate continues to drop. For QA datasets, this inconsistency may be attributed to the inclusion of distracting information, which confuses the model and lowers its confidence, leading to an increase in perplexity. However, in code datasets, perplexity shows no clear trend and behaves paradoxically with correctness—for example, in the DS1000 dataset, perplexity even decreases as correctness declines. This inconsistency and the observations in RQ2 suggest that perplexity is not a reliable metric for evaluating code generation quality in LLMs and RAG systems.

Retrieval recall does not determine RAG system performance when the number of documents varies. In Figure 10, we summarize the retrieval recalls of RAG systems under varying numbers of documents to explore the impact of document numbers. For QA tasks, correctness initially increases, stabilizes, and then slightly decreases (Figure 8.a&c), while retrieval recall rises sharply at first, then more gradually (Figure 10.a). Although the trends for correctness and retrieval recall align at the beginning, they diverge later. In code tasks, this divergence is even more pronounced: while RAG system correctness initially rises and then declines (Figure 8.b&d), retrieval recall continues to steadily increase (Figure 10.b). This suggests that the benefit of higher retrieval recall is offset by other factors when more documents are added, resulting in stable performance in QA tasks and declining accuracy in code tasks.

Adding more documents causes RAG systems to make errors on previous correct instances. To analyze the side effects of adding more documents, we use RAG systems with the top-5 retrieved documents as the baseline and calculate the percentage of instances correctly solved by the baseline but rendered incorrect as larger numbers of documents are included. As shown in Figure 11, RAG systems make progressively more mistakes as additional documents are added, particularly in Llama and code tasks. For every five additional documents, error rates increase by an average of 1% in code tasks and 1.5% in QA tasks using Llama. While the mistakes made by the RAG system with the top-10 documents, compared to the baseline (top-5) system, may partly result from the inherent instability of LLMs, the steadily increasing error rate demonstrates that including more documents has a clear negative side effect on RAG systems. The actual impact of this side effect

is likely even greater than shown in the figure, as RAG systems with top-15 documents not only make mistakes on instances correctly solved by the top-5 system but also on those correctly handled by the top-10 system and so on.

This degradation is likely caused by the growing presence of distracting information, which confuses LLMs and leads to incorrect answers for problems they could initially solve. This explains the stabilization or decline in RAG system correctness with increasing document numbers despite the continuous rise in retrieval recall.

Based on our findings regarding document selection, we summarize the following guidelines for developers:

Guideline-6: While effective for QA tasks, perplexity might be unreliable for evaluating code generation due to its poor correlation with code correctness.

Guideline-7: Incorporating more documents degrades RAG system performance, so increase the number only if it significantly enhances retrieval recall. This effect can be more pronounced in less capable LLMs.

7 RQ4: PROMPT TECHNIQUES

Following RQ3, we examine another crucial design choice: *Prompt Techniques*. Although prompt techniques are known to significantly enhance LLM performance, the actual impact of different prompt methods on RAG systems across different contexts remains unknown and unexplored. To bridge this gap, RQ4 systematically investigates how different prompt techniques influence RAG system performance.

7.1 Experimental Setup

We first systematically survey various kinds of representative prompt techniques and integrate them into our experimental contexts. Our processes of collecting prompt techniques collecting are as follows:

- 1) **Review Existing Surveys:** We begin by reviewing prompting surveys [55]–[57] to identify applicable techniques for our context.
- 2) **Categorization:** We classify these collected techniques into four categories adapted from [55], with some categories merged.
- Selection: We select the two most representative techniques from each category, considering their relevance and popularity.

An overview of four categories of collected prompt techniques is presented in Table 8. We also briefly introduce each specific prompt techniques in Table 9. We then implement these techniques by following these steps:

- 1) **Prompts Collection:** Initially, we gather prompts (instructions or exemplars) from the original paper that introduces each prompt technique.
- 2) **Prompts Generation:** Next, we use GPT-40 to generate new prompts tailored to our tasks, building on the collected prompts.

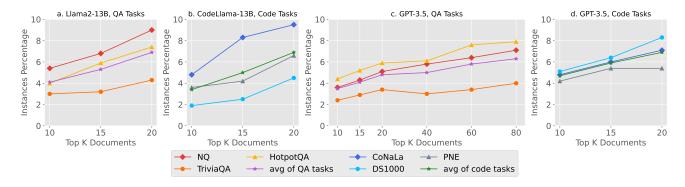


Fig. 11: Performance degradation in RAG systems with increasing document count.

TABLE 8: Summary of prompt techniques categories.

Category	Category Description	Selected Methods
Prompt Tuning	Enhance LLM's performance by crafting, searching, or generating a better version of prompt from the original prompt to better demonstrate the task to LLM.	Few-shot [25], RaR [26]
Thought Generation	Enhance LLM's reasoning ability by letting it generate thoughts.	CoT [27], Self-Consistency [28]
Decomposition	Improve LLM's problem-solving ability by asking LLM to decompose the problem into sub-problems and solve them	Least-to-Most [29], Plan-and-Solve [30]
Content Verification	Enhance LLM by letting it check and verify the input or output content.	Self-Refine [31], Chain-of-Note [32]

TABLE 9: Overview of selected prompt techniques.

Method	Description
Few-shot	Provide a few exemplars to guide the LLM on approaching similar problems.
RaR	Rephrase the problem and respond it.
СоТ	Solve the problem step-by-step, using intermediate reasoning steps.
Self-Consistency	Generate multiple reasoning paths in CoT style and select the most consistent ones.
Least-to-Most Break down the problem into sub-problem solve each of them to reach the final solution	
Plan-and-Solve	Develop a plan for solving the problem, then execute the plan.
Self-Refine	Generate feedback on the initial response and refine it based on the feedback.
Chain-of-Note Take notes on each retrieved documents, the solve the problem based on these notes.	

- 3) **Evaluation:** Two authors with over three years experience in machine learning and over one year experience in LLM, evaluate the generated prompts for (1) alignment with the principles in original papers and (2) effectiveness in guiding LLMs to produce desired outputs.
- 4) **Modification:** Prompts failing to meet the criteria are revised by a third student and re-evaluated until consensus is reached.

This meticulous procedure for collecting and implementing prompts ensures that they retain the integrity of the original prompt techniques while being customized to suit our specific datasets and models. The curated prompts will be made available at [58].

7.2 Results and Discussions

Most prompt techniques fail to improve RAG system correctness. Comparing the overall results across QA tasks and code tasks (represented by every fourth bar in Figure 12), we find that RAG systems using most prompt techniques underperform relative to our baseline RAG system (employing the prompt discussed in Section 3.4.1, indicated by dashed lines). In QA tasks, no prompt techniques enhance overall system performance. Only Self-Consistency and Least-to-Most achieve similar performance to the baseline under GPT-3.5, while no techniques achieve baseline performance under Llama2-13B. In code tasks, only Few-shot, Least-to-Most, and Self-Refine either match or exceed baseline performance across both models.

This lack of improvement may stem from two main reasons. First, some prompt techniques are specifically designed for certain types of tasks. For instance, techniques in the categories of Thought Generation and Decomposition are primarily aimed at enhancing LLMs' reasoning abilities, which makes them less effective for datasets like NQ and TriviaQA that require only direct factual knowledge. In contrast, other techniques—Few-shot [25], RaR [26], Self-Refine [31], and CoN [32]—are designed for broader applicability. However, their continued underperformance suggests that the effectiveness of seemingly versatile techniques may still depend on the specific characteristics of the tasks at hand. Second, the success of these techniques often hinges on extensive optimization, as even small perturbations, such as slight adjustments to conversational style, can significantly impact LLM performance [59]. As such, these techniques often require extensive tuning, which can present a

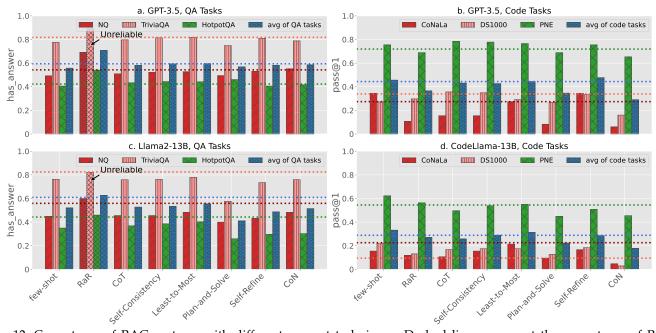


Fig. 12: Correctness of RAG systems with different prompt techniques. Dashed lines represent the correctness of RAG systems using the plain baseline prompt. The results for *RaR* in QA tasks, marked by arrows in sub-figures a and c, are deemed unreliable due to the inability to extract exact answers from the generated responses.




Fig. 13: Confidence of RAG systems with different prompt techniques. Higher perplexity reflects lower confidence. The results for *Self-Consistency* are omitted because this technique requires a non-zero model temperature, resulting in the incomparable perplexity values.

substantial time investment, particularly when evaluating and comparing multiple prompt methods.

The impact of prompt techniques is inconsistent. Our analysis of prompt techniques across different datasets and models reveals substantial inconsistencies in their effectiveness. While certain techniques outperform the baseline in specific scenarios, they often underperform in others. For instance, *CoN* shows improvement in NQ with GPT-3.5 but fails to deliver comparable results in other QA datasets. Similarly, *Few-shot* enhances performance in DS1000 with GPT-3.5 and CoNaLa with GPT-3.5 and DS1000 with Llama. Additionally, *CoT* and *Self-consistency* are effective in PNE with GPT-3.5 but do not yield similar benefits in CoNaLa or DS1000. This indicates that the effectiveness of prompt techniques is both task- and




Fig. 14: Problem-solving potential of prompt techniques in RAG systems. The results for *RaR* are considered unreliable for the same reason described in Figure 12.

model-specific, posing challenges for their consistent application in real-world scenarios involving diverse tasks and conversational styles. Mitigating this issue may require the development of more generalized prompting methods that perform robustly across tasks and models. Such methods would help avoid scenarios where prompts optimized for one task fail to deliver adequate performance on others, thereby maintaining the overall effectiveness of the system.

System confidence across different prompt techniques is incomparable. As shown in Figure 13, the confidence (measured by perplexity) exhibits a significant divergence from correctness. For instance, RAG systems employing Self-Refine achieve high performance despite low confidence (high perplexity), whereas systems using CoN and Plan-and-Solve show lower correctness but higher confidence. This divergence arises because perplexity reflects the model's uncertainty, which varies in the structure and complex-

ity of outputs generated by different prompt techniques. Techniques like *Self-Refine* produce more intricate responses, increasing perplexity, while simpler techniques like *zero-shot* lower it. Thus, perplexity values across prompt techniques are inherently incomparable.

Prompt Techniques have the potential to improve RAG system performance. Our findings indicate that most prompt techniques fail to enhance overall RAG system performance, a counter-intuitive result that challenges the common belief in their ability. To explore their potential, we calculate the percentage of instances correctly resolved by RAG systems utilizing advanced prompt techniques but incorrectly resolved by the baseline RAG systems, as shown in Figure 14.

The results reveal that all prompt techniques successfully address a considerable number of instances that the baseline system fails to handle. Despite overall subpar performance, some techniques exhibit a higher proportion of "only correct instances." For example, *Plan-and-Solve* achieves the highest percentage of "only correct instances" in QA tasks despite its low overall correctness. Similarly, *CoT* addresses a substantial number of "only correct instances" in code tasks.

These observations indicate that prompt techniques have the potential to outperform the baseline, as they successfully address many "only correct" examples. However, they also reveal an inefficiency in advanced prompt techniques: they fail to handle straightforward problems that the baseline prompts resolve effectively. This highlights the trade-offs of advanced techniques, as their inefficiencies in simpler cases can undermine their advantages. Addressing this ineffectiveness may be a key point in optimizing and tuning prompt techniques for specific tasks and models.

Based on our findings, we summarize the following guidelines for developers regarding prompt techniques:

Guideline-8: In multi-task RAG systems, prompts design needs to consider balancing generalizability and task-specific alignment. A single prompt for optimizing both dimensions might not exist.

Guideline-9: Applying advanced prompts could tackle previously unsolved problems while may fail on simple tasks that plain prompts could solve.

8 IMPLICATION AND OPPORTUNITY

Optimizing RAG systems. In this study, we analyzed two critical components of RAG systems—retrieved documents and prompts—focusing on their four key factors. The study yields valuable insights and results in nine guidelines to support the development and optimization of RAG systems. While we have made progress toward optimizing RAG systems, the systematic and automated tuning of RAG system settings remains a complex challenge that demands further research and deeper exploration.

Addressing RAG system degradations. Our study reveals several causes of RAG system degradation, including the negative impact of distracting documents, the gap in fully utilizing oracle documents, the inclusion of excessive information, and the inefficiency of prompt techniques. Monitoring and addressing these causes is crucial for preventing

RAG system performance decline and building reliable, trustworthy LLM-driven RAG systems.

Perplexity as a system confidence indicator. When developing reliable LLM-driven systems, assessing the confidence of model-generated responses is critical. Our study demonstrates a strong correlation between perplexity and the quality of retrieved documents in QA tasks, highlighting its potential as a useful indicator for monitoring system performance and robustness. However, perplexity proves unreliable across different prompt techniques or in coderelated tasks. This highlights a pressing need for new confidence evaluation methods designed for diverse prompt techniques and code-related tasks.

The effect of irrelevant documents. Our empirical study uncovers a surprising finding: irrelevant documents can significantly enhance LLMs' code generation abilities. As an initial exploration, we identify specific features and propose that this phenomenon resembles the 'magic word' effect. In future work, we will further study the underlying mechanisms of this effectiveness and develop methodology to ensure that it can be reliably and ethically leveraged in trustworthy LLM-driven systems.

Retrieval for code tasks. Retrieval in code tasks differs fundamentally from QA tasks. While QA tasks often involve retrieving documents that directly contain the required information, retrieval for code tasks provides contextual or structural guidance rather than direct solutions. This increases the challenge of formally collecting and processing useful knowledge into indexed retrieval databases, and of defining and identifying oracle documents to evaluate retrieval quality. However, foundational research in these areas remains insufficient.

Moreover, retrieval recall in code-related tasks often lags behind QA contexts. As discussed in Section 3.5, the retrieval recall of the top-100 documents for QA datasets reaches 80% across all three datasets, while for code datasets, it only achieves 40%. Unsuccessful retrievals, particularly the presence of distracting documents, negatively affect task performance. This underscores the need for improved retrieval accuracy in code-related tasks—a critical yet under-explored research area.

Optimizing prompts for multi-task scenarios. Our findings in RQ4 show that simple, generalizable prompts are often more effective as a plug-and-play solution for multi-task RAG systems, whereas complex prompts, though beneficial for specific tasks, can hinder overall performance across diverse tasks. Despite these challenges, advanced prompt techniques still hold significant potential to improve the performance of LLMs and RAG systems. Traditionally, prompt engineering has focused on generating outputs for single or narrowly defined tasks. However, with the increasing demands of LLM-driven applications, the ability to handle multiple diverse tasks has become essential. This highlights prompt refinement and optimization for multi-task scenarios as an important yet under-explored area of research.

9 RELATED WORK

9.1 RAG System Performance Analysis

Several prior works have investigated how various factors and design choices in RAG systems affect overall performance. Among them, Liu et al. [50] examine the influence of document positioning and found that placing oracle documents in the middle of the prompt leads to inferior performance. Cuconasu et al. [53] analyze the effects of document type and position on RAG system performance, identifying the negative impact of distracting documents and the potential benefits of noise documents. However, their study is limited to the retrieval phase and focuses solely on a single QA task (NQ). As discussed in Section 4, our findings regarding the effect of irrelevant documents in code tasks differ from theirs. Wang et al. [60] focus on comparing various design choices in the retrieval phase of RAG systems, such as retrievers and reranking techniques. In contrast, our controlled experiments provide a deeper understanding of the critical factors related to retrieved documents and their implications for overall system performance. Barnett et al. [61] identify seven failure points in RAG systems through three case studies from a software engineering perspective. While they highlight challenges in applying RAG systems, they do not delve into how specific factors contribute to these failures or provide guidance on avoiding or mitigating them. Other works explore different aspects of the RAG system. Chen et al. [62] investigate the implication of retrieval granularity, while Ovadia et al. [63] compare the effectiveness of RAG techniques with finetuning for knowledge updates. Xu et al. [64] compare the performance of RAG systems with LLMs that have longcontext windows, and Chen et al. [9] examine the effectiveness of RAG techniques in long-form QA tasks.

9.2 System Engineering for Al-enabled Systems

Extensive research has explored the distinctive software engineering challenges posed by AI-enabled machine learning systems. Several studies highlight critical engineering challenges in AI-enabled systems, including design risks, security requirements, and integration issues across development, production, and organizational contexts — essential considerations for building robust and reliable AI systems [65]–[67].

To address these challenges, a substantial body of work focuses on the development phase of AI models, specifically on testing the reliability and robustness of standalone deep learning models (DNN) at the *unit level* [68]. For instance, various DNN-specific coverage criteria have been proposed to guide the testing and enhance the understanding of DNN behavior [69]–[71]. Building on these foundations, techniques for synthesizing test inputs have been developed to support comprehensive DNN testing [72]–[74]. Other work aims to improve the quality of DNNs through testing on its components, including training and testing data [75]–[78], as well as DL libraries [79]–[81].

Beyond model-specific testing, researchers have explored testing approaches for entire AI-enabled software software at the *system level*. This includes testing autonomous driving systems [82]–[96], machine translation systems [97]–[100] and applications leveraging cloud-based

machine learning APIs [101], [102]. Additionally, empirical studies offer insights into the software engineering challenges faced by real-world AI applications. For example, several works categorize and analyze common bugs found in AI-enabled applications [103]–[105]. Case studies further explore and address the development challenges of building and integrating AI systems [106], [107]. Finally, a range of studies investigates the deployment challenges involved in deploying and maintaining ML/DL models [108]–[110].

While previous works have analyzed and addressed challenges in AI-enabled systems, their methodologies are not directly applicable to LLM-driven RAG systems. On the one hand, LLMs, as the core of the systems we studied, operate on fundamentally different principles from traditional classification DNNs. Unlike them, LLMs generate free-form outputs, resulting in exponentially larger behavioral spaces. The complexity increases further in RAG systems, which integrate external databases containing diverse data types such as text, audio, or images. Additionally, while traditional AI modules are typically task-specific, LLM-driven RAG systems are highly versatile and capable of supporting a broad range of applications.

On the other hand, development and deployment patterns for RAG systems differ significantly from those of traditional ML systems. LLMs, as extremely large models, are challenging to develop independently and rely heavily on robust infrastructure. This shift introduces new challenges in system engineering to LLM-driven RAG systems. These differences highlight the unique system engineering challenges posed by RAG systems, necessitating novel approaches for their design, deployment, and maintenance.

10 THREATS TO VALIDITY

External Validity. The choice of retriever poses a potential threat to the generalizability of our findings. In this study, we exclusively rely on retrieval results from *text-embedding-3-small* due to the extensive experiments conducted. Consequently, the behavior of RAG systems may differ when employing alternative retrievers. Nevertheless, the variations introduced by different retrievers primarily affect the levels of distracting and oracle documents, which are examined in RQ 1&2, alleviating this concern.

Internal Validity. Our focus on a typical RAG architecture introduces a potential limitation to the internal validity of our findings. As illustrated in [16], numerous advanced RAG techniques and architectures exist. However, these techniques, such as reranking, rewriting, and iterative retrieval, are primarily designed to improve either the quality of retrieved documents or prompts. Since our analyses directly target these two core components of the RAG system, our findings and guidelines remain relevant and applicable to advanced RAG systems.

11 CONCLUSION

In this paper, we conducted an in-depth analysis of the development of LLM-driven RAG systems by investigating the impact of retrieved documents and prompts across six datasets spanning NLP and software engineering domains with two models. We first analyze several key factors that significantly impact the performance of RAG systems and

propose actionable guidelines for their optimization. Interestingly, our exploration revealed that irrelevant documents can sometimes improve code-related tasks through a "magic word" effect. Additionally, we examine several pitfalls in current RAG systems, such as the risk posed by distracting documents, which can negatively affect overall performance. Furthermore, we highlight key challenges in the development and quality assurance of RAG systems as potential future directions. For instance, can we create more advanced metrics to efficiently assess retrieval quality and address the limitations of perplexity in code-related tasks? How can RAG systems be dynamically adjusted to meet varying retrieval recall requirements across different tasks? What strategies can prevent scenarios where even perfect retrieval results in degraded performance? Finally, is it feasible to design general prompts that maintain effectiveness across diverse tasks?

As an early exploration in this direction, we hope our findings and guidelines could assist developers in enhancing the development lifecycle of RAG systems and provide researchers with deeper insights. Ultimately, we aim to pave the way for creating more reliable, trustworthy, and effective LLM-driven software.

REFERENCES

- [1] OPENAI, 2022, ChatGPT, https://openai.com/index/chatgpt/.
- [2] Google, 2023, Gemini, https://gemini.google.com/.
- [3] H. Touvron, T. Lavril, G. Izacard, X. Martinet, M.-A. Lachaux, T. Lacroix, B. Rozière, N. Goyal, E. Hambro, F. Azhar et al., "Llama: Open and efficient foundation language models," arXiv preprint arXiv:2302.13971, 2023.
- [4] P. Lewis, E. Perez, A. Piktus, F. Petroni, V. Karpukhin, N. Goyal, H. Küttler, M. Lewis, W.-t. Yih, T. Rocktäschel et al., "Retrievalaugmented generation for knowledge-intensive nlp tasks," Advances in Neural Information Processing Systems, vol. 33, pp. 9459– 9474, 2020.
- [5] Y. Bang, S. Cahyawijaya, N. Lee, W. Dai, D. Su, B. Wilie, H. Lovenia, Z. Ji, T. Yu, W. Chung *et al.*, "A multitask, multilingual, multimodal evaluation of chatgpt on reasoning, hallucination, and interactivity," *arXiv preprint arXiv:2302.04023*, 2023.
- [6] A. Vaswani, "Attention is all you need," Advances in Neural Information Processing Systems, 2017.
- [7] Cinnamon, 2024, RAG-based Chatbot, https://github.com/ Cinnamon/kotaemon.
- [8] P. Lewis, E. Perez, A. Piktus, F. Petroni, V. Karpukhin, N. Goyal, H. Küttler, M. Lewis, W.-t. Yih, T. Rocktäschel et al., "Retrievalaugmented generation for knowledge-intensive nlp tasks," Advances in Neural Information Processing Systems, vol. 33, pp. 9459– 9474, 2020.
- [9] H.-T. Chen, F. Xu, S. Arora, and E. Choi, "Understanding retrieval augmentation for long-form question answering," arXiv preprint arXiv:2310.12150, 2023.
- [10] S. Zhou, U. Alon, F. F. Xu, Z. Wang, Z. Jiang, and G. Neubig, "Docprompting: Generating code by retrieving the docs," arXiv preprint arXiv:2207.05987, 2022.
- [11] D. Zan, B. Chen, Z. Lin, B. Guan, Y. Wang, and J.-G. Lou, "When language model meets private library," arXiv preprint arXiv:2210.17236, 2022.
- [12] D. Zan, B. Chen, D. Yang, Z. Lin, M. Kim, B. Guan, Y. Wang, W. Chen, and J.-G. Lou, "Cert: continual pre-training on sketches for library-oriented code generation," arXiv preprint arXiv:2206.06888, 2022.
- [13] M. Liu, T. Yang, Y. Lou, X. Du, Y. Wang, and X. Peng, "Code-gen4libs: A two-stage approach for library-oriented code generation," in 2023 38th IEEE/ACM International Conference on Automated Software Engineering (ASE). IEEE, 2023, pp. 434–445.
- [14] 2024, Contextual AI, https://contextual.ai/.
- [15] 2024, Cohere, https://cohere.com/.

- [16] Y. Gao, Y. Xiong, X. Gao, K. Jia, J. Pan, Y. Bi, Y. Dai, J. Sun, and H. Wang, "Retrieval-augmented generation for large language models: A survey," arXiv preprint arXiv:2312.10997, 2023.
- [17] S. Robertson, H. Zaragoza *et al.*, "The probabilistic relevance framework: Bm25 and beyond," *Foundations and Trends*® *in Information Retrieval*, vol. 3, no. 4, pp. 333–389, 2009.
- [18] G. Izacard, M. Caron, L. Hosseini, S. Riedel, P. Bojanowski, A. Joulin, and E. Grave, "Unsupervised dense information retrieval with contrastive learning," arXiv preprint arXiv:2112.09118, 2021.
- [19] V. Karpukhin, B. Oğuz, S. Min, P. Lewis, L. Wu, S. Edunov, D. Chen, and W.-t. Yih, "Dense passage retrieval for open-domain question answering," arXiv preprint arXiv:2004.04906, 2020.
- [20] N. Reimers and I. Gurevych, "Sentence-bert: Sentence embeddings using siamese bert-networks," arXiv preprint arXiv:1908.10084, 2019.
- [21] R. Nogueira, Z. Jiang, and J. Lin, "Document ranking with a pretrained sequence-to-sequence model," arXiv preprint arXiv:2003.06713, 2020.
- [22] X. Ma, Y. Gong, P. He, H. Zhao, and N. Duan, "Query rewriting for retrieval-augmented large language models," arXiv preprint arXiv:2305.14283, 2023.
- [23] H. Trivedi, N. Balasubramanian, T. Khot, and A. Sabharwal, "Interleaving retrieval with chain-of-thought reasoning for knowledge-intensive multi-step questions," *arXiv preprint arXiv:2212.10509*, 2022.
- [24] Z. Jiang, F. F. Xu, L. Gao, Z. Sun, Q. Liu, J. Dwivedi-Yu, Y. Yang, J. Callan, and G. Neubig, "Active retrieval augmented generation," arXiv preprint arXiv:2305.06983, 2023.
- [25] T. B. Brown, "Language models are few-shot learners," arXiv preprint ArXiv:2005.14165, 2020.
- [26] Y. Deng, W. Zhang, Z. Chen, and Q. Gu, "Rephrase and respond: Let large language models ask better questions for themselves," arXiv preprint arXiv:2311.04205, 2023.
- [27] J. Wei, X. Wang, D. Schuurmans, M. Bosma, F. Xia, E. Chi, Q. V. Le, D. Zhou et al., "Chain-of-thought prompting elicits reasoning in large language models," Advances in neural information processing systems, vol. 35, pp. 24824–24837, 2022.
- [28] X. Wang, J. Wei, D. Schuurmans, Q. Le, E. Chi, S. Narang, A. Chowdhery, and D. Zhou, "Self-consistency improves chain of thought reasoning in language models," arXiv preprint arXiv:2203.11171, 2022.
- [29] D. Zhou, N. Schärli, L. Hou, J. Wei, N. Scales, X. Wang, D. Schuurmans, C. Cui, O. Bousquet, Q. Le et al., "Least-to-most prompting enables complex reasoning in large language models," arXiv preprint arXiv:2205.10625, 2022.
- [30] L. Wang, W. Xu, Y. Lan, Z. Hu, Y. Lan, R. K.-W. Lee, and E.-P. Lim, "Plan-and-solve prompting: Improving zero-shot chain-of-thought reasoning by large language models," arXiv preprint arXiv:2305.04091, 2023.
- [31] A. Madaan, N. Tandon, P. Gupta, S. Hallinan, L. Gao, S. Wiegreffe, U. Alon, N. Dziri, S. Prabhumoye, Y. Yang et al., "Self-refine: Iterative refinement with self-feedback," Advances in Neural Information Processing Systems, vol. 36, 2024.
- [32] W. Yu, H. Zhang, X. Pan, K. Ma, H. Wang, and D. Yu, "Chain-of-note: Enhancing robustness in retrieval-augmented language models," arXiv preprint arXiv:2311.09210, 2023.
- [33] J. Lin, X. Ma, S.-C. Lin, J.-H. Yang, R. Pradeep, and R. Nogueira, "Pyserini: A python toolkit for reproducible information retrieval research with sparse and dense representations," in *Proceedings of the 44th International ACM SIGIR Conference on Research and Development in Information Retrieval*, 2021, pp. 2356–2362.
- [34] P. Yin, B. Deng, E. Chen, B. Vasilescu, and G. Neubig, "Learning to mine aligned code and natural language pairs from stack overflow," in *Proceedings of the 15th international conference on mining software repositories*, 2018, pp. 476–486.
- [35] Y. Lai, C. Li, Y. Wang, T. Zhang, R. Zhong, L. Zettlemoyer, W.-t. Yih, D. Fried, S. Wang, and T. Yu, "Ds-1000: A natural and reliable benchmark for data science code generation," in *International Conference on Machine Learning*. PMLR, 2023, pp. 18319–18345.
- [36] T. Kwiatkowski, J. Palomaki, O. Redfield, M. Collins, A. Parikh, C. Alberti, D. Epstein, I. Polosukhin, J. Devlin, K. Lee et al., "Natural questions: a benchmark for question answering research," Transactions of the Association for Computational Linguistics, vol. 7, pp. 453–466, 2019.

- [37] M. Joshi, E. Choi, D. S. Weld, and L. Zettlemoyer, "Triviaqa: A large scale distantly supervised challenge dataset for reading comprehension," arXiv preprint arXiv:1705.03551, 2017.
- [38] Z. Yang, P. Qi, S. Zhang, Y. Bengio, W. W. Cohen, R. Salakhutdinov, and C. D. Manning, "Hotpotqa: A dataset for diverse, explainable multi-hop question answering," arXiv preprint arXiv:1809.09600, 2018.
- [39] S. Lu, D. Guo, S. Ren, J. Huang, A. Svyatkovskiy, A. Blanco, C. Clement, D. Drain, D. Jiang, D. Tang et al., "Codexglue: A machine learning benchmark dataset for code understanding and generation," arXiv preprint arXiv:2102.04664, 2021.
- [40] M. Chen, J. Tworek, H. Jun, Q. Yuan, H. P. D. O. Pinto, J. Kaplan, H. Edwards, Y. Burda, N. Joseph, G. Brockman *et al.*, "Evaluating large language models trained on code," *arXiv preprint arXiv:2107.03374*, 2021.
- [41] B. Roziere, J. Gehring, F. Gloeckle, S. Sootla, I. Gat, X. E. Tan, Y. Adi, J. Liu, R. Sauvestre, T. Remez et al., "Code llama: Open foundation models for code," arXiv preprint arXiv:2308.12950, 2023
- [42] M. Liu, T. Yang, Y. Lou, X. Du, Y. Wang, and X. Peng, "Code-gen4libs: A two-stage approach for library-oriented code generation," in 2023 38th IEEE/ACM International Conference on Automated Software Engineering (ASE). IEEE, 2023, pp. 434–445.
- [43] S. Lu, N. Duan, H. Han, D. Guo, S.-w. Hwang, and A. Svy-atkovskiy, "Reacc: A retrieval-augmented code completion framework," arXiv preprint arXiv:2203.07722, 2022.
- [44] J. Li, Y. Li, G. Li, Z. Jin, Y. Hao, and X. Hu, "Skcoder: A sketch-based approach for automatic code generation," in 2023 IEEE/ACM 45th International Conference on Software Engineering (ICSE). IEEE, 2023, pp. 2124–2135.
- [45] J. Li, Y. Zhao, Y. Li, G. Li, and Z. Jin, "Acecoder: An effective prompting technique specialized in code generation," ACM Transactions on Software Engineering and Methodology, 2024.
- [46] R. Bairi, A. Sonwane, A. Kanade, A. Iyer, S. Parthasarathy, S. Rajamani, B. Ashok, and S. Shet, "Codeplan: Repository-level coding using llms and planning," *Proceedings of the ACM on Software Engineering*, vol. 1, no. FSE, pp. 675–698, 2024.
- [47] F. Zhang, B. Chen, Y. Zhang, J. Keung, J. Liu, D. Zan, Y. Mao, J.-G. Lou, and W. Chen, "Repocoder: Repository-level code completion through iterative retrieval and generation," arXiv preprint arXiv:2303.12570, 2023.
- [48] D. Shrivastava, H. Larochelle, and D. Tarlow, "Repository-level prompt generation for large language models of code," in *Inter*national Conference on Machine Learning. PMLR, 2023, pp. 31 693– 31 715
- [49] Z. Tang, J. Ge, S. Liu, T. Zhu, T. Xu, L. Huang, and B. Luo, "Domain adaptive code completion via language models and decoupled domain databases," in 2023 38th IEEE/ACM International Conference on Automated Software Engineering (ASE). IEEE, 2023, pp. 421–433.
- [50] N. F. Liu, K. Lin, J. Hewitt, A. Paranjape, M. Bevilacqua, F. Petroni, and P. Liang, "Lost in the middle: How language models use long contexts," *Transactions of the Association for Computational Linguistics*, vol. 12, pp. 157–173, 2024.
- [51] Elastic Search, https://www.elastic.co/.
- [52] M. Douze, A. Guzhva, C. Deng, J. Johnson, G. Szilvasy, P.-E. Mazaré, M. Lomeli, L. Hosseini, and H. Jégou, "The faiss library," arXiv, 2024.
- [53] F. Cuconasu, G. Trappolini, F. Siciliano, S. Filice, C. Campagnano, Y. Maarek, N. Tonellotto, and F. Silvestri, "The power of noise: Redefining retrieval for rag systems," in *Proceedings of the 47th International ACM SIGIR Conference on Research and Development in Information Retrieval*, 2024, pp. 719–729.
- [54] M. Levy, A. Jacoby, and Y. Goldberg, "Same task, more tokens: the impact of input length on the reasoning performance of large language models," arXiv preprint arXiv:2402.14848, 2024.
- [55] S. Schulhoff, M. Ilie, N. Balepur, K. Kahadze, A. Liu, C. Si, Y. Li, A. Gupta, H. Han, S. Schulhoff et al., "The prompt report: A systematic survey of prompting techniques," arXiv preprint arXiv:2406.06608, 2024.
- [56] P. Sahoo, A. K. Singh, S. Saha, V. Jain, S. Mondal, and A. Chadha, "A systematic survey of prompt engineering in large language models: Techniques and applications," arXiv preprint arXiv:2402.07927, 2024.
- [57] 2024, PromptPapers, https://github.com/thunlp/ PromptPapers.

- [58] 2024, Website of this Paper, https://sites.google.com/view/ rag-system-factors-study/.
- [59] H. Gonen, S. Iyer, T. Blevins, N. A. Smith, and L. Zettlemoyer, "Demystifying prompts in language models via perplexity estimation," arXiv preprint arXiv:2212.04037, 2022.
- [60] X. Wang, Z. Wang, X. Gao, F. Zhang, Y. Wu, Z. Xu, T. Shi, Z. Wang, S. Li, Q. Qian et al., "Searching for best practices in retrieval-augmented generation," arXiv preprint arXiv:2407.01219, 2024.
- [61] S. Barnett, S. Kurniawan, S. Thudumu, Z. Brannelly, and M. Abdelrazek, "Seven failure points when engineering a retrieval augmented generation system," in *Proceedings of the IEEE/ACM 3rd International Conference on AI Engineering-Software Engineering for AI*, 2024, pp. 194–199.
- [62] T. Chen, H. Wang, S. Chen, W. Yu, K. Ma, X. Zhao, D. Yu, and H. Zhang, "Dense x retrieval: What retrieval granularity should we use?" *arXiv preprint arXiv:*2312.06648, 2023.
- [63] O. Ovadia, M. Brief, M. Mishaeli, and O. Elisha, "Fine-tuning or retrieval? comparing knowledge injection in llms," arXiv preprint arXiv:2312.05934, 2023.
- [64] P. Xu, W. Ping, X. Wu, L. McAfee, C. Zhu, Z. Liu, S. Subramanian, E. Bakhturina, M. Shoeybi, and B. Catanzaro, "Retrieval meets long context large language models," arXiv preprint arXiv:2310.03025, 2023.
- [65] G. Holt, D. Golovin, E. Davydov, T. Phillips, D. Ebner, V. Chaudhary, M. Young, J.-F. Crespo, and D. Dennison, "Hidden technical debt in machine learning systems," *Advances in neural information processing systems*, vol. 28, 2015.
- [66] I. Stoica, D. Song, R. A. Popa, D. Patterson, M. W. Mahoney, R. Katz, A. D. Joseph, M. Jordan, J. M. Hellerstein, J. E. Gonzalez et al., "A berkeley view of systems challenges for ai," arXiv preprint arXiv:1712.05855, 2017.
- [67] A. Arpteg, B. Brinne, L. Crnkovic-Friis, and J. Bosch, "Software engineering challenges of deep learning," in 2018 44th euromicro conference on software engineering and advanced applications (SEAA). IEEE, 2018, pp. 50–59.
- [68] J. M. Zhang, M. Harman, L. Ma, and Y. Liu, "Machine learning testing: Survey, landscapes and horizons," *IEEE Transactions on Software Engineering*, vol. 48, no. 1, pp. 1–36, 2020.
- [69] K. Pei, Y. Cao, J. Yang, and S. Jana, "Deepxplore: Automated whitebox testing of deep learning systems," in proceedings of the 26th Symposium on Operating Systems Principles, 2017, pp. 1–18.
- [70] J. Kim, R. Feldt, and S. Yoo, "Guiding deep learning system testing using surprise adequacy," in 2019 IEEE/ACM 41st International Conference on Software Engineering (ICSE). IEEE, 2019, pp. 1039–1049.
- [71] L. Ma, F. Juefei-Xu, F. Zhang, J. Sun, M. Xue, B. Li, C. Chen, T. Su, L. Li, Y. Liu et al., "Deepgauge: Multi-granularity testing criteria for deep learning systems," in *Proceedings of the 33rd ACM/IEEE international conference on automated software engineering*, 2018, pp. 120–131.
- [72] X. Xie, L. Ma, F. Juefei-Xu, M. Xue, H. Chen, Y. Liu, J. Zhao, B. Li, J. Yin, and S. See, "Deephunter: a coverage-guided fuzz testing framework for deep neural networks," in *Proceedings of the 28th ACM SIGSOFT international symposium on software testing and analysis*, 2019, pp. 146–157.
- [73] J. Guo, Y. Jiang, Y. Zhao, Q. Chen, and J. Sun, "Dlfuzz: Differential fuzzing testing of deep learning systems," in Proceedings of the 2018 26th ACM Joint Meeting on European Software Engineering Conference and Symposium on the Foundations of Software Engineering, 2018, pp. 739–743.
- [74] A. Odena, C. Olsson, D. Andersen, and I. Goodfellow, "Tensorfuzz: Debugging neural networks with coverage-guided fuzzing," in *International Conference on Machine Learning*. PMLR, 2019, pp. 4901–4911.
- [75] N. Polyzotis, M. Zinkevich, S. Roy, E. Breck, and S. Whang, "Data validation for machine learning," *Proceedings of machine learning* and systems, vol. 1, pp. 334–347, 2019.
- [76] J. H. Metzen, T. Genewein, V. Fischer, and B. Bischoff, "On detecting adversarial perturbations," arXiv preprint arXiv:1702.04267, 2017.
- [77] S. Ma, Y. Liu, W.-C. Lee, X. Zhang, and A. Grama, "Mode: automated neural network model debugging via state differential analysis and input selection," in *Proceedings of the 2018 26th ACM Joint Meeting on European Software Engineering Conference and Symposium on the Foundations of Software Engineering*, 2018, pp. 175–186.

- [78] M. Attaoui, H. Fahmy, F. Pastore, and L. Briand, "Black-box safety analysis and retraining of dnns based on feature extraction and clustering," ACM Transactions on Software Engineering and Methodology, vol. 32, no. 3, pp. 1–40, 2023.
- [79] H. V. Pham, T. Lutellier, W. Qi, and L. Tan, "Cradle: cross-backend validation to detect and localize bugs in deep learning libraries," in 2019 IEEE/ACM 41st International Conference on Software Engineering (ICSE). IEEE, 2019, pp. 1027–1038.
- [80] Z. Wang, M. Yan, J. Chen, S. Liu, and D. Zhang, "Deep learning library testing via effective model generation," in *Proceedings of the 28th ACM Joint Meeting on European Software Engineering Con*ference and Symposium on the Foundations of Software Engineering, 2020, pp. 788–799.
- [81] M. Nejadgholi and J. Yang, "A study of oracle approximations in testing deep learning libraries," in 2019 34th IEEE/ACM International Conference on Automated Software Engineering (ASE). IEEE, 2019, pp. 785–796.
- [82] Y. Tian, K. Pei, S. Jana, and B. Ray, "Deeptest: Automated testing of deep-neural-network-driven autonomous cars," in *Proceedings* of the 40th international conference on software engineering, 2018, pp. 303–314.
- [83] M. Zhang, Y. Zhang, L. Zhang, C. Liu, and S. Khurshid, "Deeproad: Gan-based metamorphic testing and input validation framework for autonomous driving systems," in *Proceedings of* the 33rd ACM/IEEE international conference on automated software engineering, 2018, pp. 132–142.
- [84] R. Ben Abdessalem, S. Nejati, L. C. Briand, and T. Stifter, "Testing advanced driver assistance systems using multi-objective search and neural networks," in *Proceedings of the 31st IEEE/ACM in*ternational conference on automated software engineering, 2016, pp. 63–74.
- [85] R. B. Abdessalem, S. Nejati, L. C. Briand, and T. Stifter, "Testing vision-based control systems using learnable evolutionary algorithms," in *Proceedings of the 40th International Conference on Software Engineering*, 2018, pp. 1016–1026.
- [86] A. Stocco, B. Pulfer, and P. Tonella, "Mind the gap! a study on the transferability of virtual versus physical-world testing of autonomous driving systems," *IEEE Transactions on Software Engineering*, vol. 49, no. 4, pp. 1928–1940, 2022.
- [87] Z. Zhong, G. Kaiser, and B. Ray, "Neural network guided evolutionary fuzzing for finding traffic violations of autonomous vehicles," *IEEE Transactions on Software Engineering*, vol. 49, no. 4, pp. 1860–1875, 2022.
- [88] M. Cheng, Y. Zhou, and X. Xie, "Behavexplor: Behavior diversity guided testing for autonomous driving systems," in *Proceedings of the 32nd ACM SIGSOFT International Symposium on Software Testing and Analysis*, 2023, pp. 488–500.
- [89] M. Biagiola and P. Tonella, "Boundary state generation for testing and improvement of autonomous driving systems," *IEEE Transactions on Software Engineering*, 2024.
- [90] J. Dai, B. Gao, M. Luo, Z. Huang, Z. Li, Y. Zhang, and M. Yang, "Sctrans: Constructing a large public scenario dataset for simulation testing of autonomous driving systems," in *Proceedings of the* 46th IEEE/ACM International Conference on Software Engineering, 2024, pp. 1–13.
- [91] T. Zohdinasab, V. Riccio, and P. Tonella, "Focused test generation for autonomous driving systems," ACM Transactions on Software Engineering and Methodology, 2024.
- [92] T. Wang, T. Gu, H. Deng, H. Li, X. Kuang, and G. Zhao, "Dance of the ads: Orchestrating failures through historically-informed scenario fuzzing," in *Proceedings of the 33rd ACM SIGSOFT In*ternational Symposium on Software Testing and Analysis, 2024, pp. 1086–1098.
- [93] Z. Li, J. Dai, Z. Huang, N. You, Y. Zhang, and M. Yang, "Viohawk: Detecting traffic violations of autonomous driving systems through criticality-guided simulation testing," in *Proceedings of the 33rd ACM SIGSOFT International Symposium on Software Testing and Analysis*, 2024, pp. 844–855.
- [94] A. Guo, Y. Zhou, H. Tian, C. Fang, Y. Sun, W. Sun, X. Gao, A. T. Luu, Y. Liu, and Z. Chen, "Sovar: Build generalizable scenarios from accident reports for autonomous driving testing," in Proceedings of the 39th IEEE/ACM International Conference on Automated Software Engineering, 2024, pp. 268–280.
- [95] S. Tang, Z. Zhang, J. Zhou, L. Lei, Y. Zhou, and Y. Xue, "Legend: A top-down approach to scenario generation of autonomous driving systems assisted by large language models," in *Proceedings of*

- the 39th IEEE/ACM International Conference on Automated Software Engineering, 2024, pp. 1497–1508.
- [96] Y. Lu, Y. Tian, Y. Bi, B. Chen, and X. Peng, "Diavio: Llm-empowered diagnosis of safety violations in ads simulation testing," in *Proceedings of the 33rd ACM SIGSOFT International Symposium on Software Testing and Analysis*, 2024, pp. 376–388.
- [97] Z. Sun, J. M. Zhang, M. Harman, M. Papadakis, and L. Zhang, "Automatic testing and improvement of machine translation," in *Proceedings of the ACM/IEEE 42nd international conference on software engineering*, 2020, pp. 974–985.
- [98] L. Sun and Z. Q. Zhou, "Metamorphic testing for machine translations: Mt4mt," in 2018 25th Australasian Software Engineering Conference (ASWEC). IEEE, 2018, pp. 96–100.
- [99] P. He, C. Meister, and Z. Su, "Testing machine translation via referential transparency," in 2021 IEEE/ACM 43rd International Conference on Software Engineering (ICSE). IEEE, 2021, pp. 410– 422
- [100] ——, "Structure-invariant testing for machine translation," in *Proceedings of the ACM/IEEE 42nd International Conference on Software Engineering*, 2020, pp. 961–973.
- [101] C. Wan, S. Liu, S. Xie, Y. Liu, H. Hoffmann, M. Maire, and S. Lu, "Automated testing of software that uses machine learning apis," in *Proceedings of the 44th International Conference on Software Engineering*, 2022, pp. 212–224.
- [102] C. Wan, S. Liu, H. Hoffmann, M. Maire, and S. Lu, "Are machine learning cloud apis used correctly?" in 2021 IEEE/ACM 43rd International Conference on Software Engineering (ICSE). IEEE, 2021, pp. 125–137.
- [103] Y. Zhang, Y. Chen, S.-C. Cheung, Y. Xiong, and L. Zhang, "An empirical study on tensorflow program bugs," in *Proceedings of the 27th ACM SIGSOFT international symposium on software testing and analysis*, 2018, pp. 129–140.
- [104] F. Thung, S. Wang, D. Lo, and L. Jiang, "An empirical study of bugs in machine learning systems," in 2012 IEEE 23rd International Symposium on Software Reliability Engineering. IEEE, 2012, pp. 271–280.
- [105] T. Zhang, C. Gao, L. Ma, M. Lyu, and M. Kim, "An empirical study of common challenges in developing deep learning applications," in 2019 IEEE 30th International Symposium on Software Reliability Engineering (ISSRE). IEEE, 2019, pp. 104–115.
- [106] S. Amershi, A. Begel, C. Bird, R. DeLine, H. Gall, E. Kamar, N. Nagappan, B. Nushi, and T. Zimmermann, "Software engineering for machine learning: A case study," in 2019 IEEE/ACM 41st International Conference on Software Engineering: Software Engineering in Practice (ICSE-SEIP). IEEE, 2019, pp. 291–300.
- [107] V. Riccio, G. Jahangirova, A. Stocco, N. Humbatova, M. Weiss, and P. Tonella, "Testing machine learning based systems: a systematic mapping," *Empirical Software Engineering*, vol. 25, pp. 5193–5254, 2020.
- [108] Z. Chen, Y. Cao, Y. Liu, H. Wang, T. Xie, and X. Liu, "A comprehensive study on challenges in deploying deep learning based software," in *Proceedings of the 28th ACM joint meeting on European software engineering conference and symposium on the foundations of software engineering*, 2020, pp. 750–762.
- [109] Z. Chen, H. Yao, Y. Lou, Y. Cao, Y. Liu, H. Wang, and X. Liu, "An empirical study on deployment faults of deep learning based mobile applications," in 2021 IEEE/ACM 43rd International Conference on Software Engineering (ICSE). IEEE, 2021, pp. 674– 685.
- [110] Q. Guo, S. Chen, X. Xie, L. Ma, Q. Hu, H. Liu, Y. Liu, J. Zhao, and X. Li, "An empirical study towards characterizing deep learning development and deployment across different frameworks and platforms," in 2019 34th IEEE/ACM International Conference on Automated Software Engineering (ASE). IEEE, 2019, pp. 810–822.