



ComponentSpace

ComponentSpace

SAML for ASP.NET Core

Examples Guide

Contents

Introduction	1
Visual Studio Solution Files	1
Setting the Startup Projects	1
Example Identity Provider.....	2
Building and Running	2
IdP-initiated SSO	2
IdP-initiated SLO.....	6
Example Service Provider.....	7
Building and Running	7
SP-initiated SSO.....	8
SP-initiated SLO.....	10
Middleware Identity Provider.....	11
Building and Running	11
IdP-initiated SSO	12
IdP-initiated SLO.....	15
Middleware Service Provider.....	16
Building and Running	16
SP-initiated SSO.....	17
SP-initiated SLO.....	19
Blazor Server Identity Provider.....	21
Building and Running	21
IdP-initiated SSO	21
IdP-initiated SLO.....	26
Blazor Server Service Provider	28
Building and Running	28
SP-initiated SSO.....	29
SP-initiated SLO.....	31
Example Web API.....	33
Building and Running	33
SP-initiated SSO.....	34
SP-initiated SLO.....	38
Example Angular SPA.....	38
Building and Running	38
SP-initiated SSO.....	39

SP-initiated SLO.....	43
SAML Proxy	44
Building and Running	45
IdP-initiated SSO	45
IdP-initiated SLO.....	47
SP-initiated SSO.....	49
SP-initiated SLO.....	52
Code Walkthrough	54
Example Identity Provider.....	54
Configuration	54
Startup	54
SamlController.InitiateSingleSignOn.....	55
Identity/Account/Logout Page.....	55
SamlController.SingleSignOnService.....	56
SamlController.SingleLogoutService	57
SamlController.ArtifactResolutionService	58
Example Service Provider.....	58
Configuration	58
Startup	58
SamlController.SingleSignOn	59
Identity/Account/Logout Page.....	59
SamlController.AssertionConsumerService	60
SamlController.SingleLogoutService	61
SamlController.ArtifactResolutionService	62
JWT Bearer Token Support	62
Middleware Identity Provider.....	63
Configuration	63
Startup	63
Index Page.....	64
Identity/Account/Logout Page.....	64
Middleware Service Provider.....	65
Configuration	65
Startup	65
Identity/Account/Logout	66
Blazor Server Identity Provider	66
Configuration	66

Startup	66
SamlController.InitiateSingleSignOn.....	67
Identity/Account/Logout Page.....	68
SamlController.InitiateSingleLogout	68
SamlController.SingleSignOnService.....	68
SamlController.SingleLogoutService.....	70
SamlController.ArtifactResolutionService	70
Blazor Server Service Provider	71
Configuration	71
Startup	71
SamlController.SingleSignOn	71
Identity/Account/Logout Page.....	72
SamlController.InitiateSingleLogout	72
SamlController.AssertionConsumerService.....	72
SamlController.SingleLogoutService	74
SamlController.ArtifactResolutionService	75
Example Web API.....	75
Configuration	75
Startup	75
SamlController.InitiateSingleSignOn.....	76
SamlController.InitiateSingleLogout	76
SamlController.AssertionConsumerService.....	77
SamlController.SingleLogoutService	77
Example Angular SPA	78
Configuration	78
Auth Service	79
Token Interceptor	79
SAML Proxy	80
Configuration	80
Startup	80
IdentityProviderController.SingleSignOnService	80
IdentityProviderController.SingleLogoutService	81
IdentityProviderController.ArtifactResolutionService	81
ServiceProviderController.AssertionConsumerService	82
ServiceProviderController.SingleLogoutService	82
ServiceProviderController.ArtifactResolutionService.....	83

ComponentSpace SAML for ASP.NET Core Examples Guide

Error Handling.....	83
Running the Examples on IIS.....	83
Connection String.....	83
Database Creation.....	83
Database Permissions	84
IIS Publication.....	85
Update SAML Configuration	86

Introduction

This document describes the example projects shipped with the product.

Refer to the SAML for ASP.NET Core Installation Guide for instructions on installing the product.

The example projects include SAML configurations. Refer to the SAML for ASP.NET Core Configuration Guide for information on SAML configuration.

The SAML for ASP.NET Core Developer Guide describes the SAML APIs called by the example projects.

Visual Studio Solution Files

Solution files for the various .NET Core releases and versions of Visual Studio are included.

Select the appropriate solution file to open the example projects in Visual Studio.

No changes are required for the example projects to build cleanly and run without error in Visual Studio.

Setting the Startup Projects

Open the Visual Studio solution properties to edit the start-up project to ensure the required projects are run.

For example, start the ExampleIdentityProvider, MiddlewareServiceProvider and ExampleServiceProvider projects for SSO between these applications.

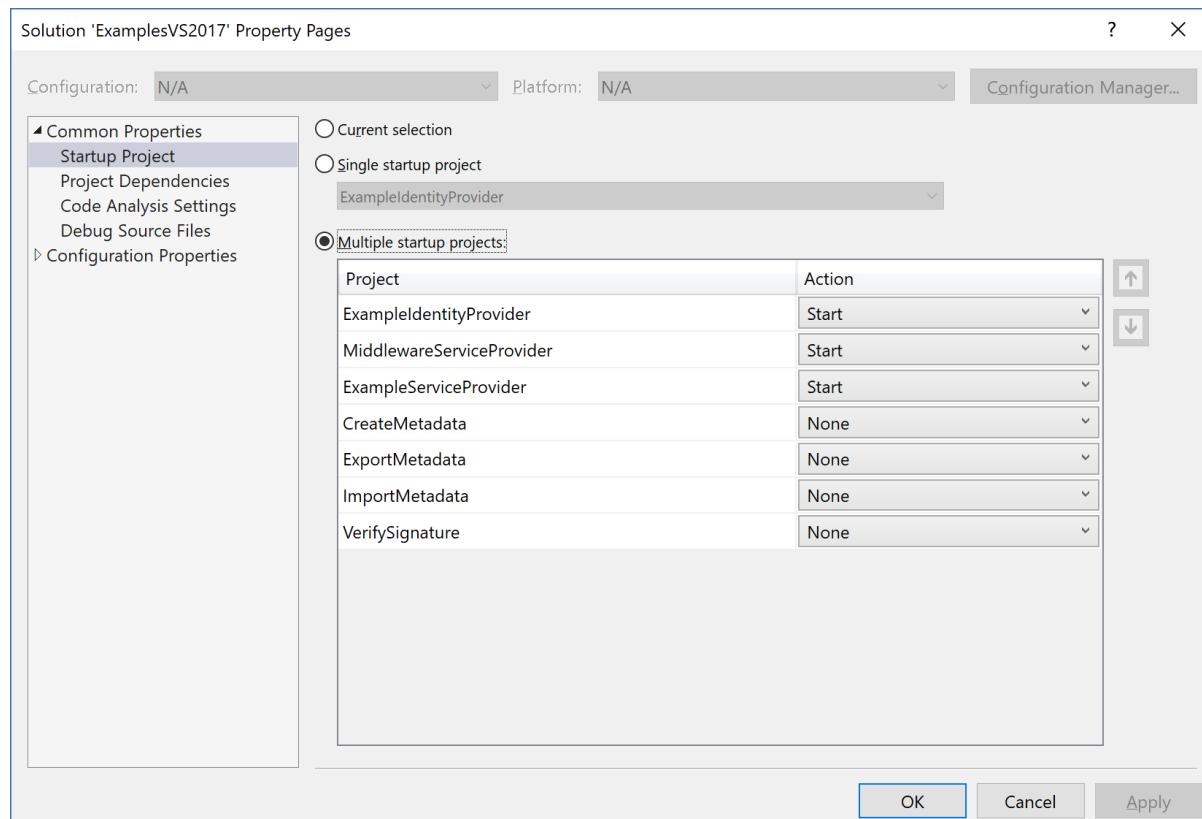


Figure 1 Startup Projects

Example Identity Provider

The ExampleIdentityProvider project is an ASP.NET Core web application based off the Visual Studio template.

It demonstrates acting as a SAML identity provider and supports:

- IdP-initiated SSO
- SP-initiated SSO
- IdP-initiated SLO
- SP-initiated SLO

Through changes to its SAML configuration, it can support all SAML v2.0 compliant third-party offerings.

Building and Running

The ExampleIdentityProvider should build without any errors or warnings.

As it is configured to use the default LocalDB connection string, the simplest approach is to run the application on IIS Express through the Visual Studio debugger.

Note that this database is not used by the SAML API but is the application's user registry.

To run on IIS, the application must be configured in and published to IIS. It should use a database provider other than LocalDB.


The application is configured to run at <https://localhost:44313/>.

If this is changed, the ExampleServiceProvider's SAML configuration must be updated to match the new URLs.

To demonstrate SAML SSO, both the ExampleIdentityProvider and ExampleServiceProvider must be run.

IdP-initiated SSO

Browse to the example identity provider's home page at <http://localhost:44313/>.

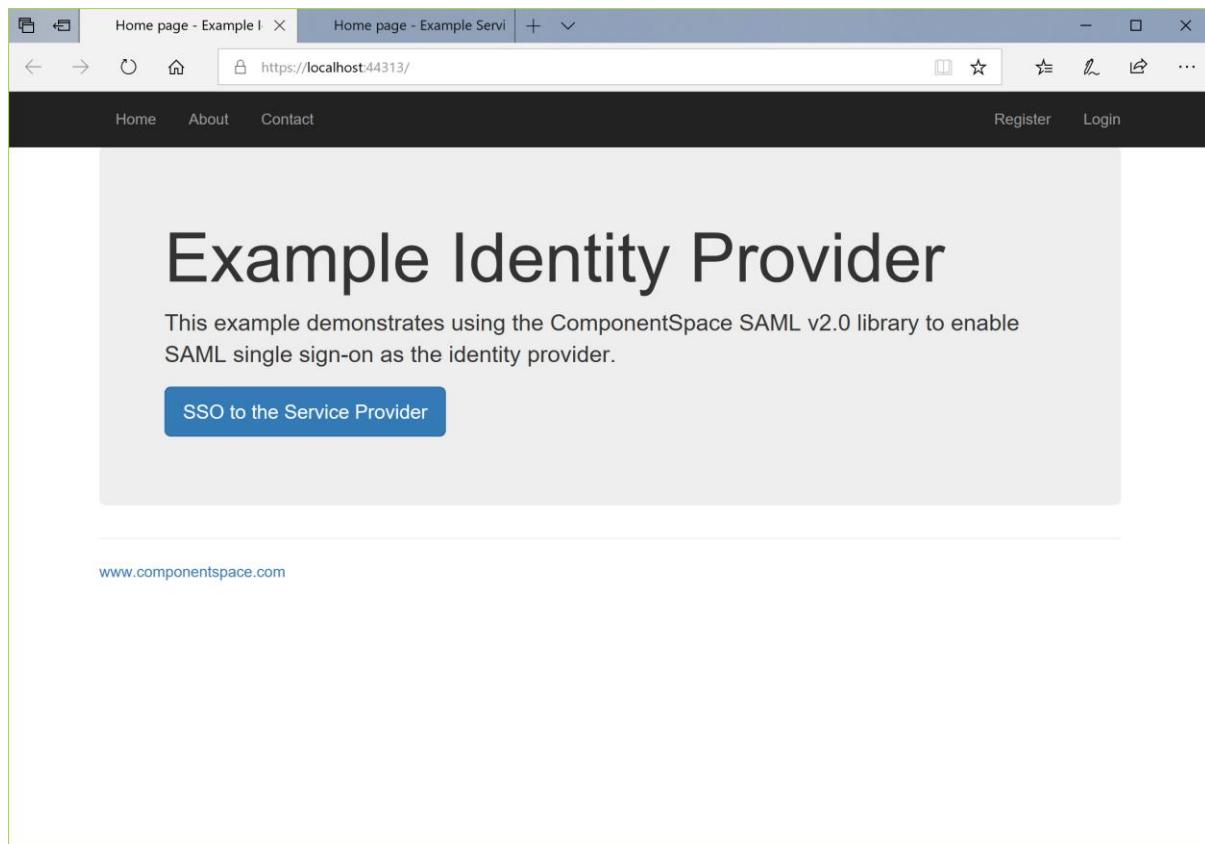

Click the SSO to the Service Provider button.

As you haven't been authenticated at the ExampleIdentityProvider, you are prompted to login or register.

ComponentSpace SAML for ASP.NET Core Examples Guide

The screenshot shows a web browser window titled "Log in at the Identity Pr" with the URL "https://localhost:44313/Identity/Account/Login?ReturnUrl=%2FSaml%2FInitiateSingleSignOn". The page has a dark header with "Home", "About", "Contact", "Register", and "Login" links. The main content area is titled "Log in at the Identity Provider" and contains two sections: "Use a local account to log in." and "Use another service to log in.". The "Use a local account to log in." section includes fields for "Email" and "Password", a "Remember me?" checkbox, and a "Log in" button. Below these fields are links for "Forgot your password?" and "Register as a new user". The "Use another service to log in." section contains a message stating there are no external authentication services configured, with a link to an article for details. At the bottom of the page is a link to "www.componentspace.com".

Click the link to register as a new user.

Complete the registration process.

The screenshot shows a web browser window titled "Register - Example Iden" with the URL "https://localhost:44313/Identity/Register?returnUrl=%2FSaml%2FInitiateSingleSignOn". The page has a dark header with "Home", "About", "Contact", "Register", and "Login" links. The main content area is titled "Register" and contains a form for creating a new account. The form fields include "Given Name" (with "John" entered), "Surname" (with "Doe" entered), "Email" (with "johndoe@componentspace.com" entered), "Password" (with "*****" entered), and "Confirm password" (with "*****" entered). Below the form is a "Register" button. At the bottom of the page is a link to "www.componentspace.com".

If you've previously registered, simply login.

Log in at the Identity Provider

Use a local account to log in.

Email
johndoe@componentspace.com

Password

Remember me?

[Forgot your password?](#)


[Register as a new user](#)

Use another service to log in.

There are no external authentication services configured. See [this article](#) for details on setting up this ASP.NET application to support logging in via external services.


www.componentspace.com

SSO completes with automatic login at the service provider. The user identity is that specified by the identity provider.

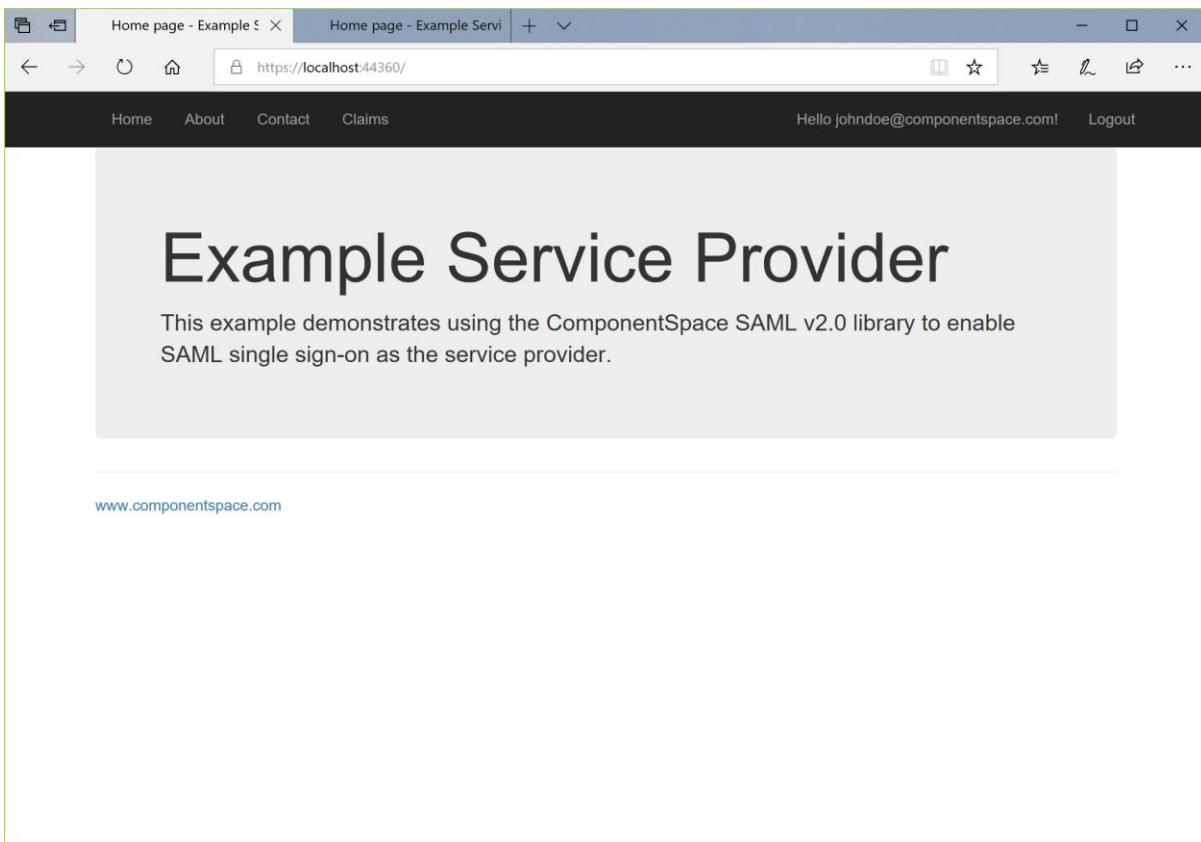


IdP-initiated SLO

Having completed SSO, in the same browser window, browse to the example identity provider's home page at <https://localhost:44313/>.

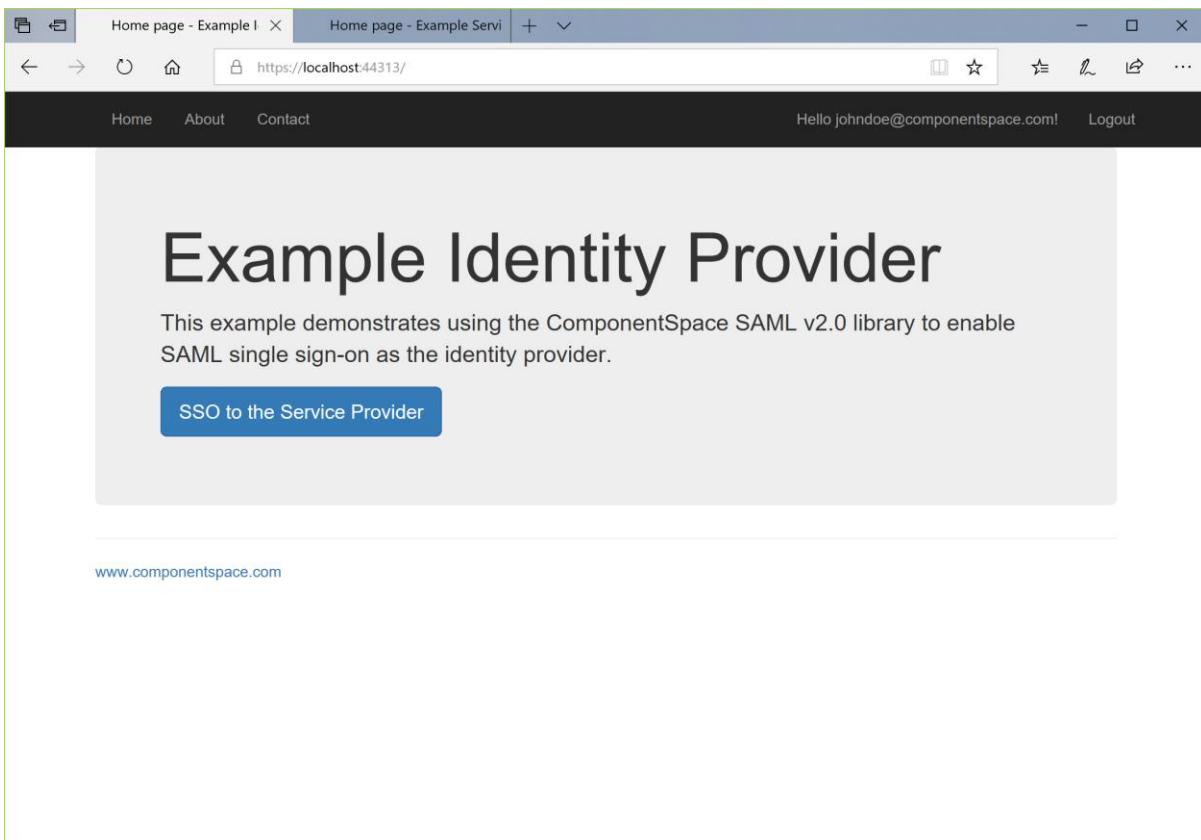

Click the Log out link. Logout occurs at both the identity provider and service provider.

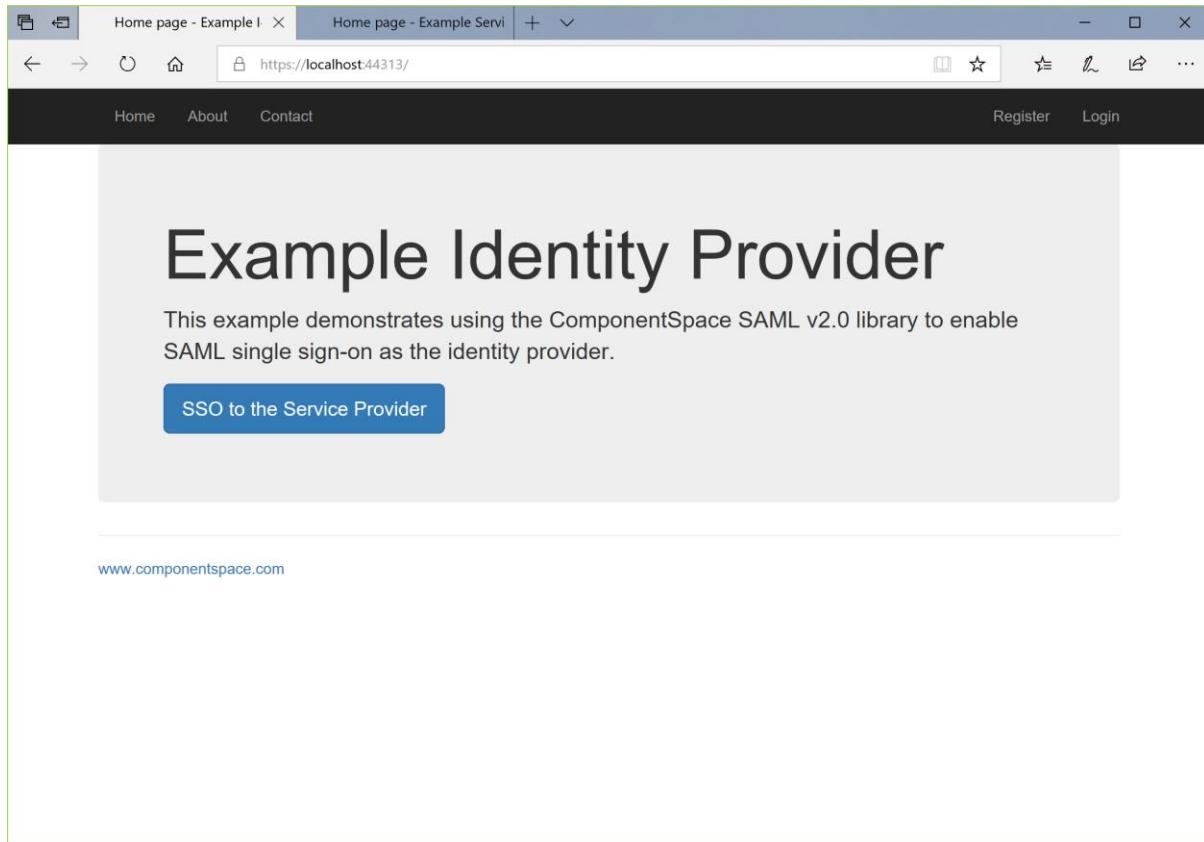

Example Service Provider

The ExampleServiceProvider project is an ASP.NET Core web application based off the Visual Studio template.

It demonstrates acting as a SAML service provider and supports:

- IdP-initiated SSO
- SP-initiated SSO
- IdP-initiated SLO
- SP-initiated SLO

Through changes to its SAML configuration, it can support all SAML v2.0 compliant third-party offerings.

Building and Running

The ExampleServiceProvider should build without any errors or warnings.

As it is configured to use the default LocalDB connection string, the simplest approach is to run the application on IIS Express through the Visual Studio debugger.

Note that this database is not used by the SAML API but is the application's user registry.

To run on IIS, the application must be configured in and published to IIS. It should use a database provider other than LocalDB.


The application is configured to run at <https://localhost:44360/>.

If this is changed, the ExampleIdentityProvider's SAML configuration must be updated to match the new URLs.

To demonstrate SAML SSO, both the ExampleIdentityProvider and ExampleServiceProvider must be run.

SP-initiated SSO

Browse to the example service provider's home page at <https://localhost:44360/>.

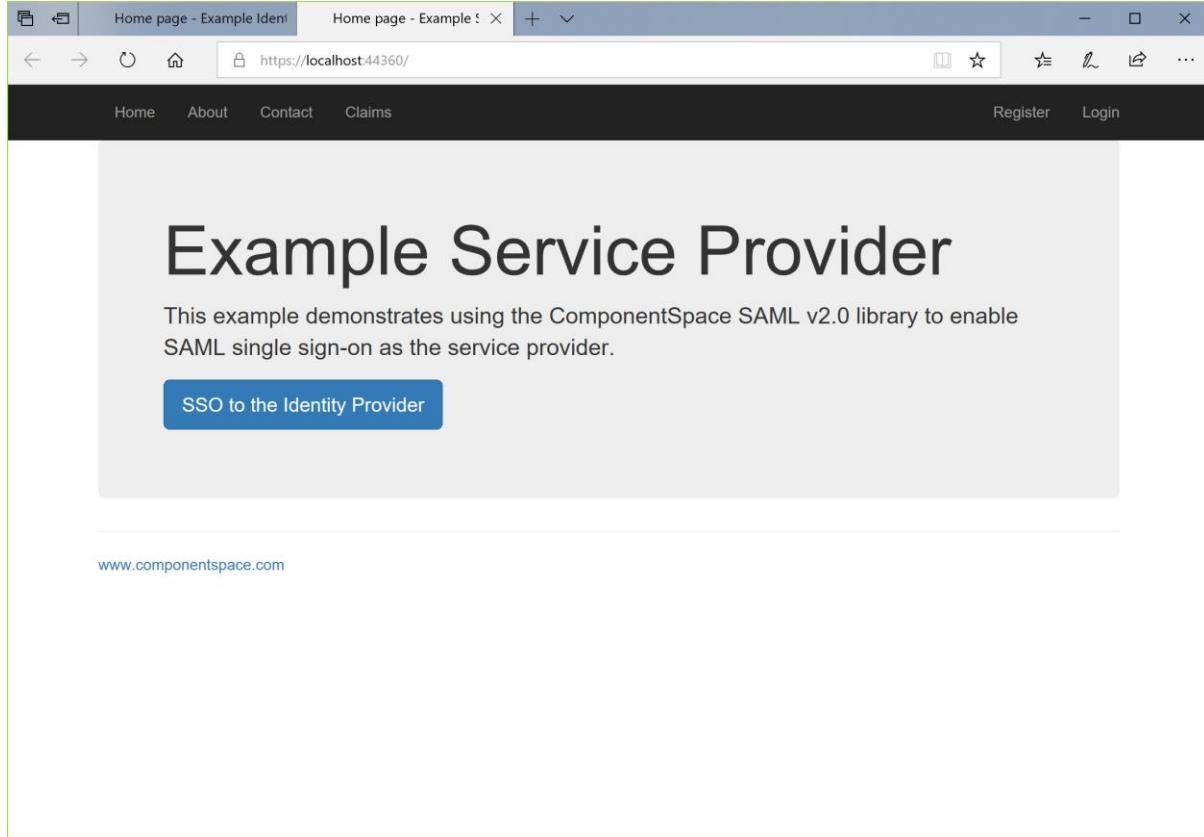

Click the SSO to the Identity Provider button.

You are prompted to login at the identity provider.

ComponentSpace SAML for ASP.NET Core Examples Guide


The screenshot shows a web browser window titled "Home page - Example Ident". The address bar displays the URL <https://localhost:44313/Identity/Account/Login?ReturnUrl=%2FSaml%2FSingleSignOnServiceCompletion>. The page content is titled "Log in at the Identity Provider". It contains two sections: "Use a local account to log in." and "Use another service to log in.". The "Use a local account to log in." section includes fields for "Email" (johndoe@componentspace.com) and "Password" (represented by a series of dots). There is also a "Remember me?" checkbox and a "Log in" button. Below these fields are links for "Forgot your password?" and "Register as a new user". The "Use another service to log in." section contains a message stating there are no external authentication services configured, with a link to an article for details. At the bottom of the page is a footer with the text "www.componentspace.com".

SSO completes with automatic login at the service provider. The user identity is that specified by the identity provider.


The screenshot shows a web browser window titled "Home page - Example Ident". The address bar displays the URL <https://localhost:44360/>. The page content is titled "Example Service Provider". It features a main heading "Example Service Provider" and a subtext: "This example demonstrates using the ComponentSpace SAML v2.0 library to enable SAML single sign-on as the service provider." In the top right corner of the page area, there is a greeting "Hello johndoe@componentspace.com!" and a "Logout" link. At the bottom of the page is a footer with the text "www.componentspace.com".

SP-initiated SLO

Having completed SSO, in the same browser window, browse to the example service provider's home page at <https://localhost:44360/>.

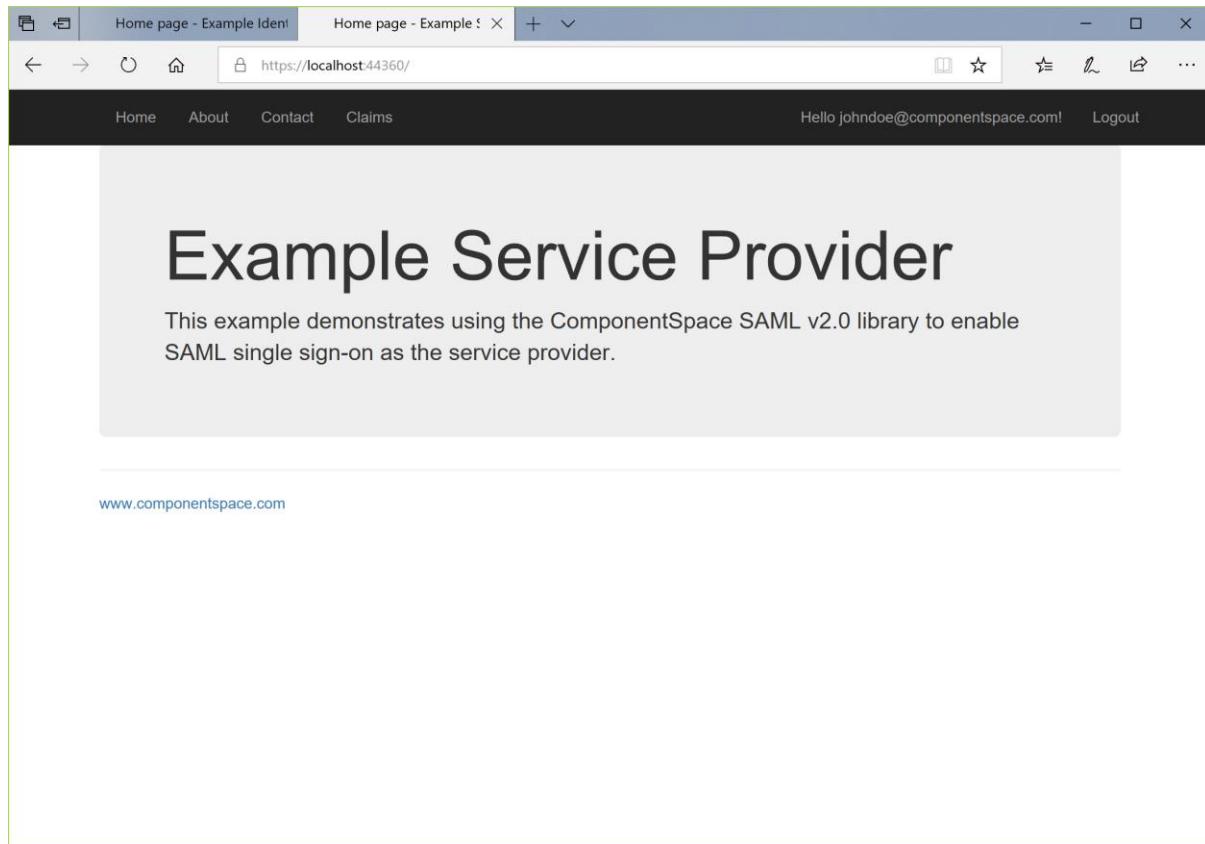

Click the Log out link. Logout occurs at both the identity provider and service provider.

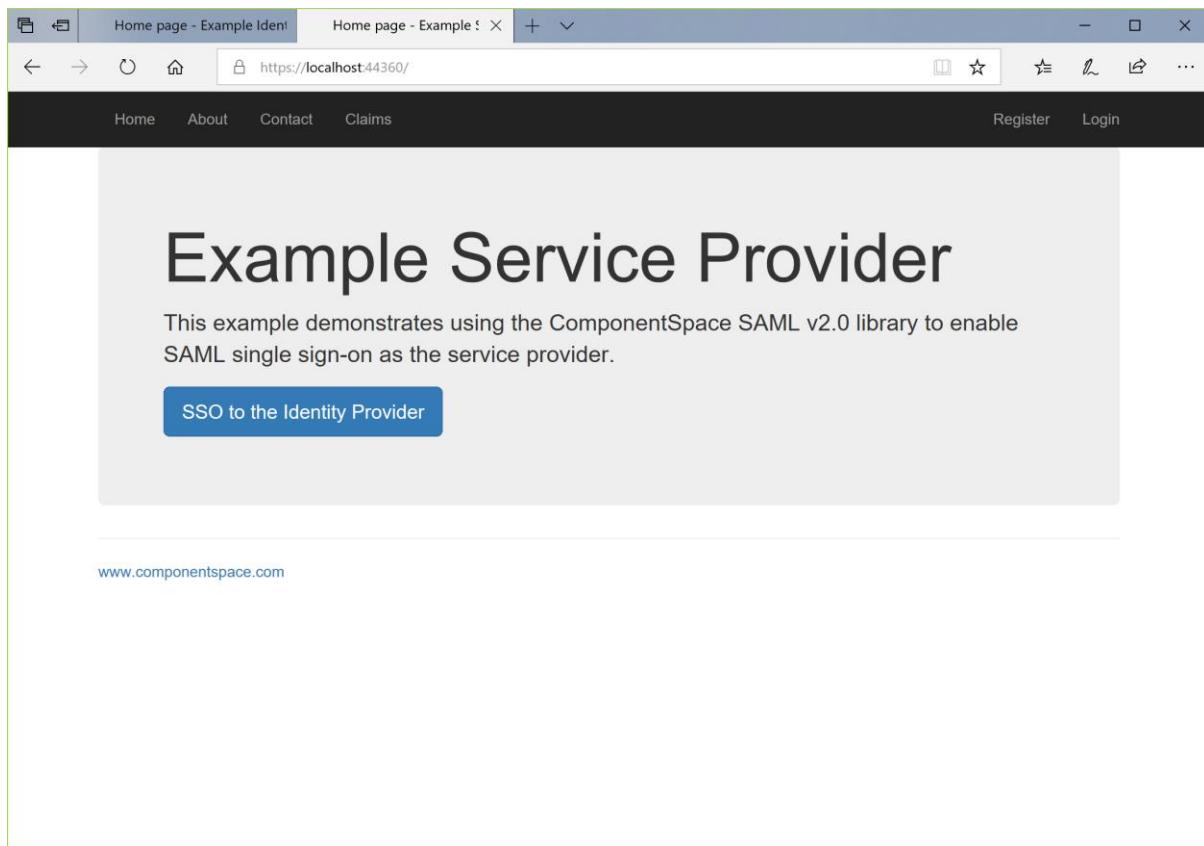

Middleware Identity Provider

The `MiddlewareIdentityProvider` project is an ASP.NET Core web application based off the Visual Studio template.

It demonstrates acting as a SAML identity provider and supports:

- IdP-initiated SSO
- SP-initiated SSO
- IdP-initiated SLO
- SP-initiated SLO

Rather than making explicit SAML API calls, the SAML middleware is used to support SSO.

Through changes to its SAML configuration, it can support all SAML v2.0 compliant third-party offerings.

Building and Running

The `MiddlewareIdentityProvider` should build without any errors or warnings.

As it is configured to use the default LocalDB connection string, the simplest approach is to run the application on IIS Express through the Visual Studio debugger.

Note that this database is not used by the SAML API but is the application's user registry.

To run on IIS, the application must be configured in and published to IIS. It should use a database provider other than LocalDB.


The application is configured to run at <https://localhost:44377/>.

If this is changed, the `MiddlewareServiceProvider`'s SAML configuration must be updated to match the new URLs.

To demonstrate SAML SSO, both the `MiddlewareIdentityProvider` and `MiddlewareServiceProvider` must be run.

IdP-initiated SSO


Browse to the middleware identity provider's home page at <http://localhost:44377/>.

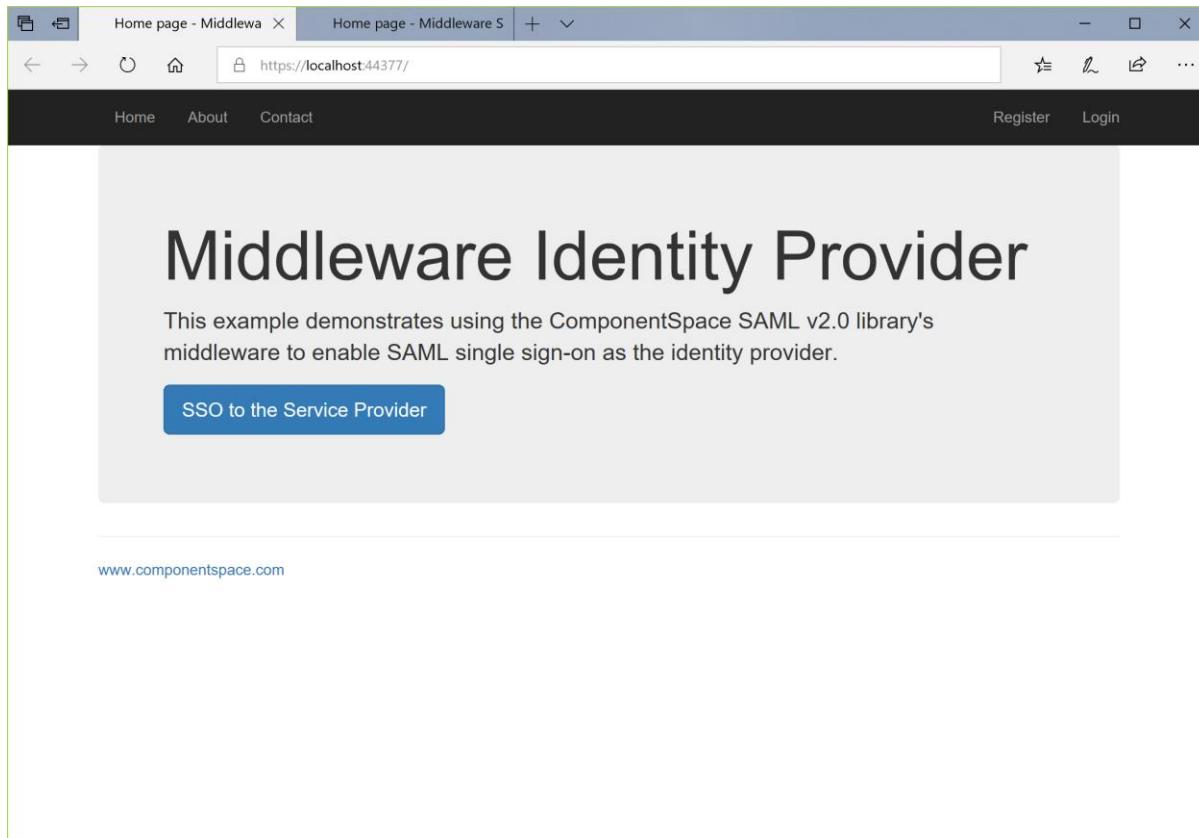

Click the SSO to the Service Provider button.

As you haven't been authenticated at the `MiddlewareIdentityProvider`, you are prompted to login or register.


ComponentSpace SAML for ASP.NET Core Examples Guide

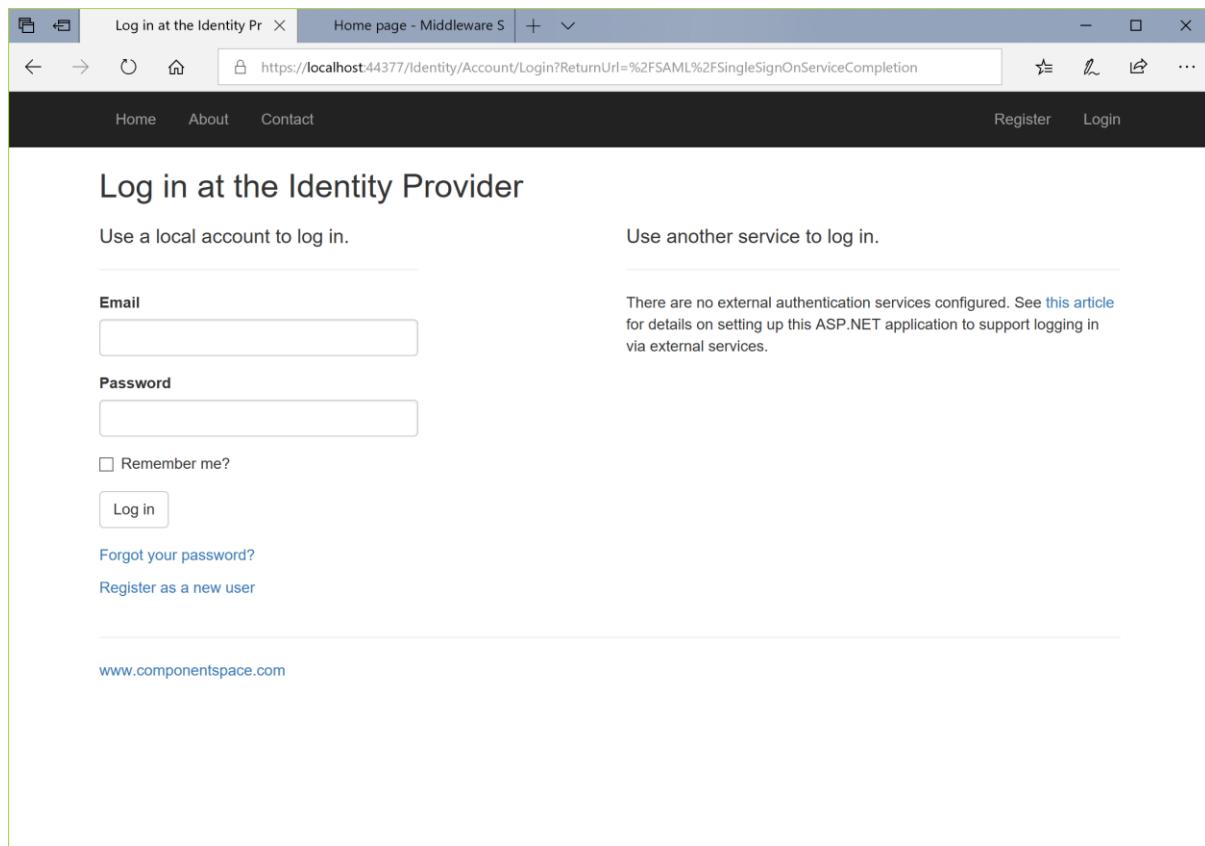

The screenshot shows a browser window titled "Log in at the Identity Pr" with the URL "https://localhost:44377/Identity/Account/Login?ReturnUrl=%2FSAML%2FSingleSignOnServiceCompletion". The page has a dark header with "Home", "About", "Contact", "Register", and "Login" links. The main content area is titled "Log in at the Identity Provider" and contains two sections: "Use a local account to log in." and "Use another service to log in.". The "Use a local account to log in." section includes fields for "Email" and "Password", a "Remember me?" checkbox, and a "Log in" button. Below these fields are links for "Forgot your password?" and "Register as a new user". The "Use another service to log in." section contains a message stating there are no external authentication services configured, with a link to an article for details. At the bottom of the page is a link to "www.componentspace.com".

Click the link to register as a new user.

Complete the registration process.

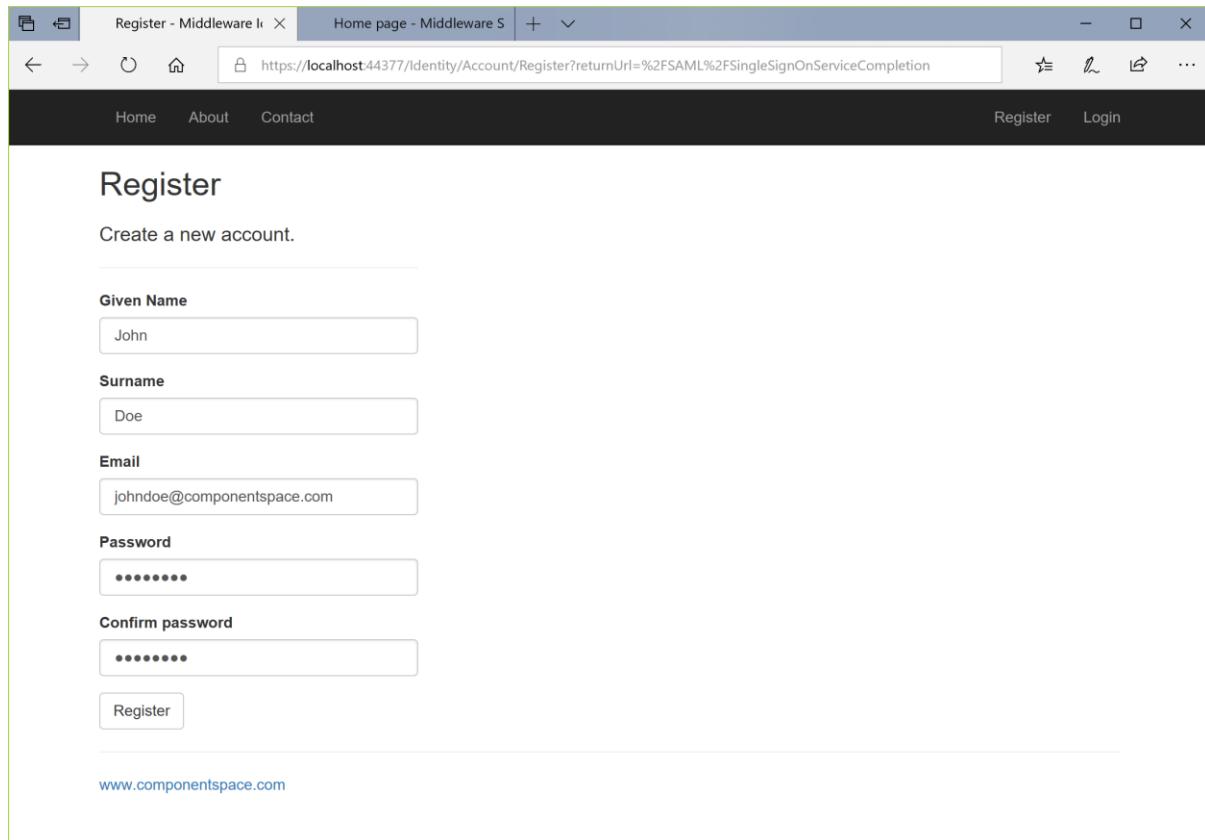

The screenshot shows a browser window titled "Register - Middleware I" with the URL "https://localhost:44377/Identity/Account/Register?returnUrl=%2FSAML%2FSingleSignOnServiceCompletion". The page has a dark header with "Home", "About", "Contact", "Register", and "Login" links. The main content area is titled "Register" and has a sub-instruction "Create a new account.". It contains five input fields: "Given Name" (with "John" entered), "Surname" (with "Doe" entered), "Email" (with "johndoe@componentspace.com" entered), "Password" (with "*****" entered), and "Confirm password" (with "*****" entered). Below these fields is a "Register" button. At the bottom of the page is a link to "www.componentspace.com".

If you've previously registered, simply login.

Log in at the Identity Provider

Use a local account to log in.

Email
johndoe@componentspace.com

Password

Remember me?

[Forgot your password?](#)


[Register as a new user](#)

Use another service to log in.

There are no external authentication services configured. See [this article](#) for details on setting up this ASP.NET application to support logging in via external services.


www.componentspace.com

SSO completes with automatic login at the service provider. The user identity is that specified by the identity provider.

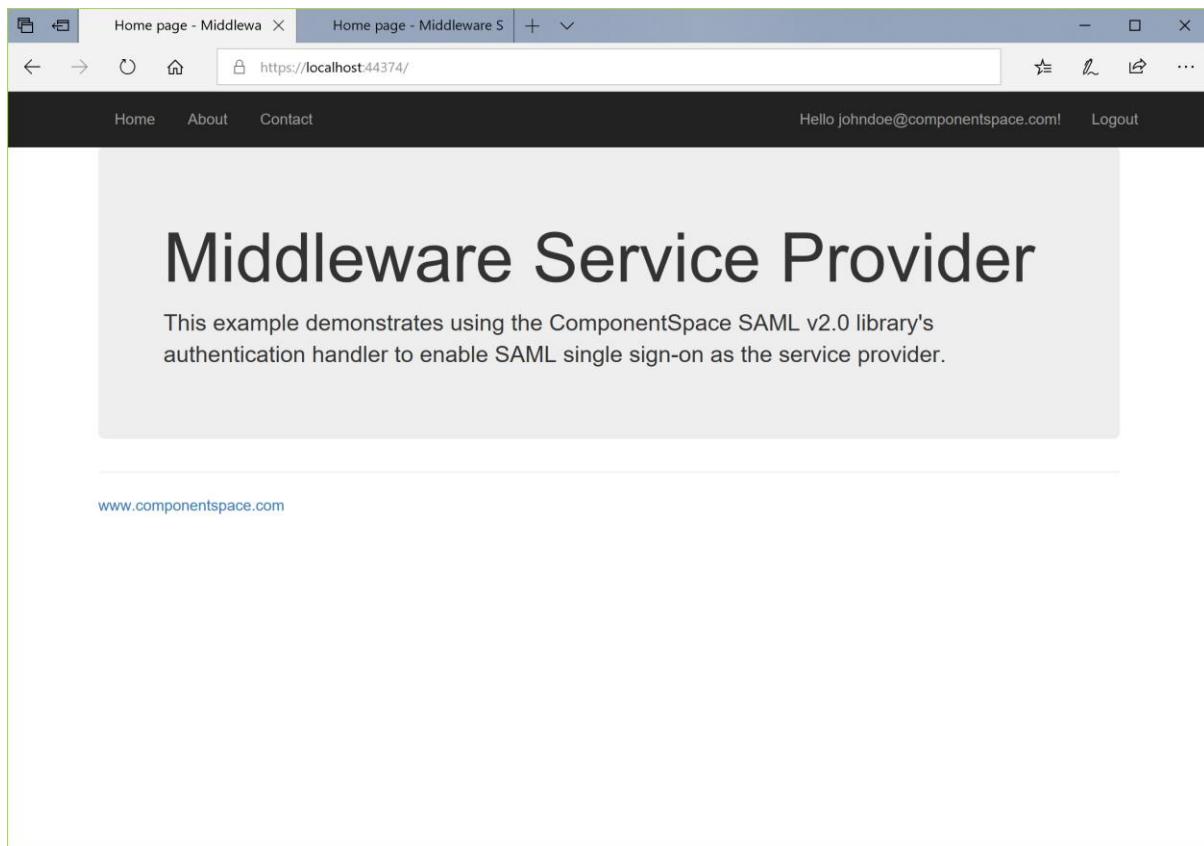


IdP-initiated SLO

Having completed SSO, in the same browser window, browse to the example identity provider's home page at <https://localhost:44377/>.

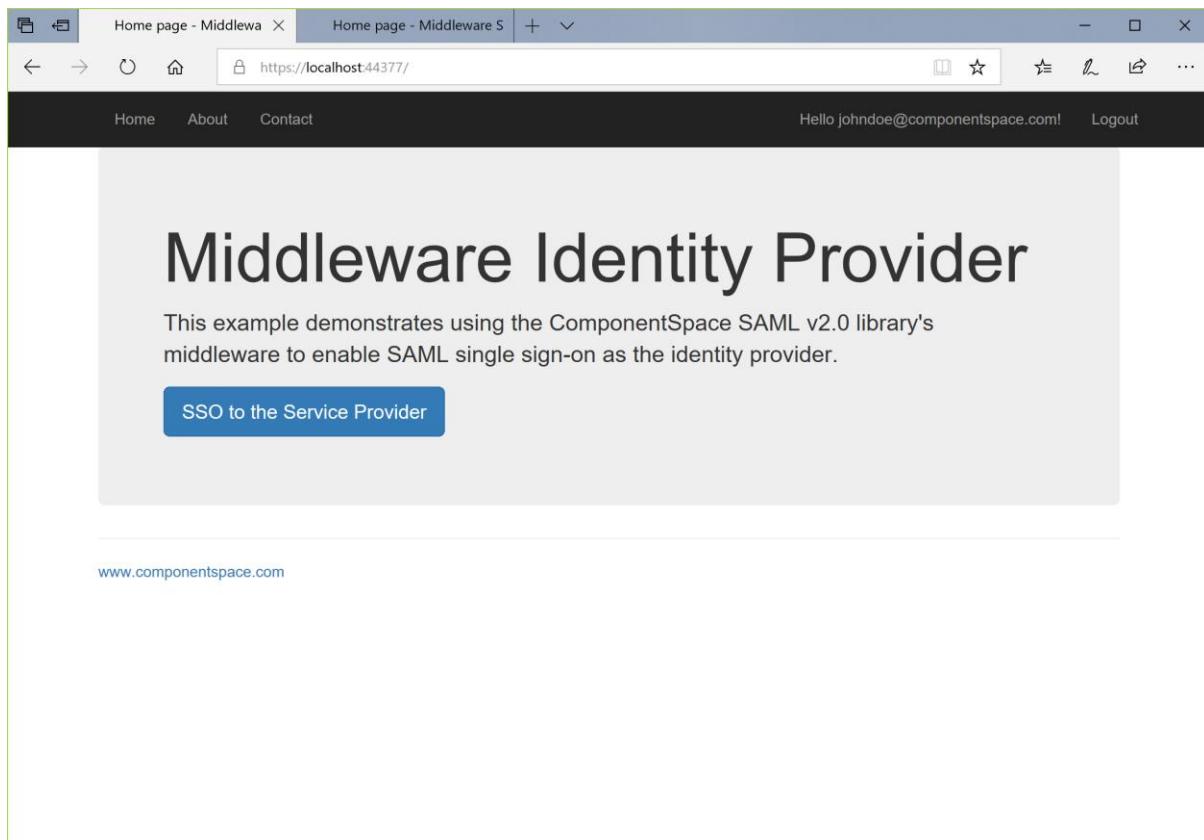

Click the Log out link. Logout occurs at both the identity provider and service provider.

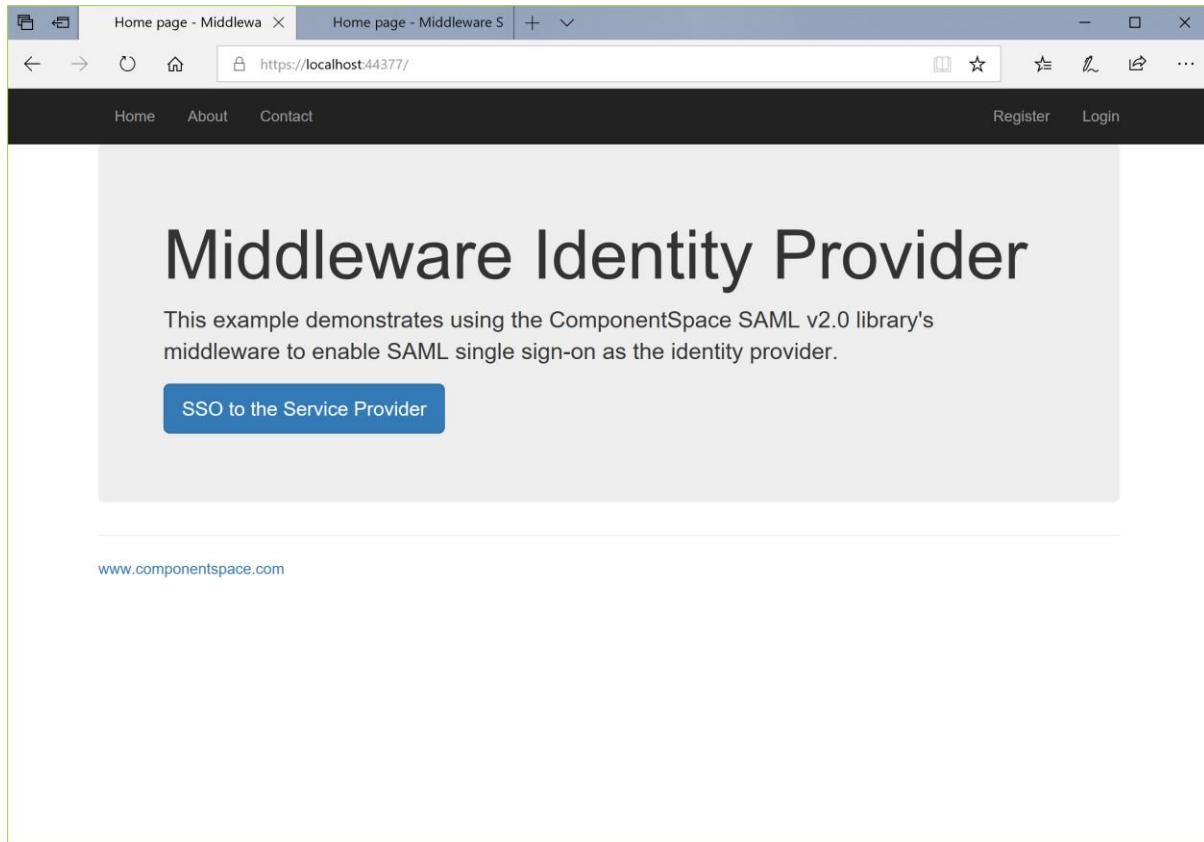

Middleware Service Provider

The `MiddlewareServiceProvider` project is an ASP.NET Core web application based off the Visual Studio template.

It demonstrates acting as a SAML service provider and supports:

- IdP-initiated SSO
- SP-initiated SSO
- IdP-initiated SLO
- SP-initiated SLO

Rather than making explicit SAML API calls, the SAML authentication handler is used to support SSO.

Through changes to its SAML configuration, it can support all SAML v2.0 compliant third-party offerings.

Building and Running

The `MiddlewareServiceProvider` should build without any errors or warnings.

As it is configured to use the default LocalDB connection string, the simplest approach is to run the application on IIS Express through the Visual Studio debugger.

Note that this database is not used by the SAML API but is the application's user registry.

To run on IIS, the application must be configured in and published to IIS. It should use a database provider other than LocalDB.


The application is configured to run at <https://localhost:44374/>.

If this is changed, the corresponding `MiddlewareIdentityProvider`'s SAML configuration must be updated to match the new URLs.

To demonstrate SAML SSO, both the `MiddlewareIdentityProvider` and `MiddlewareServiceProvider` must be run.

SP-initiated SSO

Browse to the middleware service provider's home page at <https://localhost:44374/>.

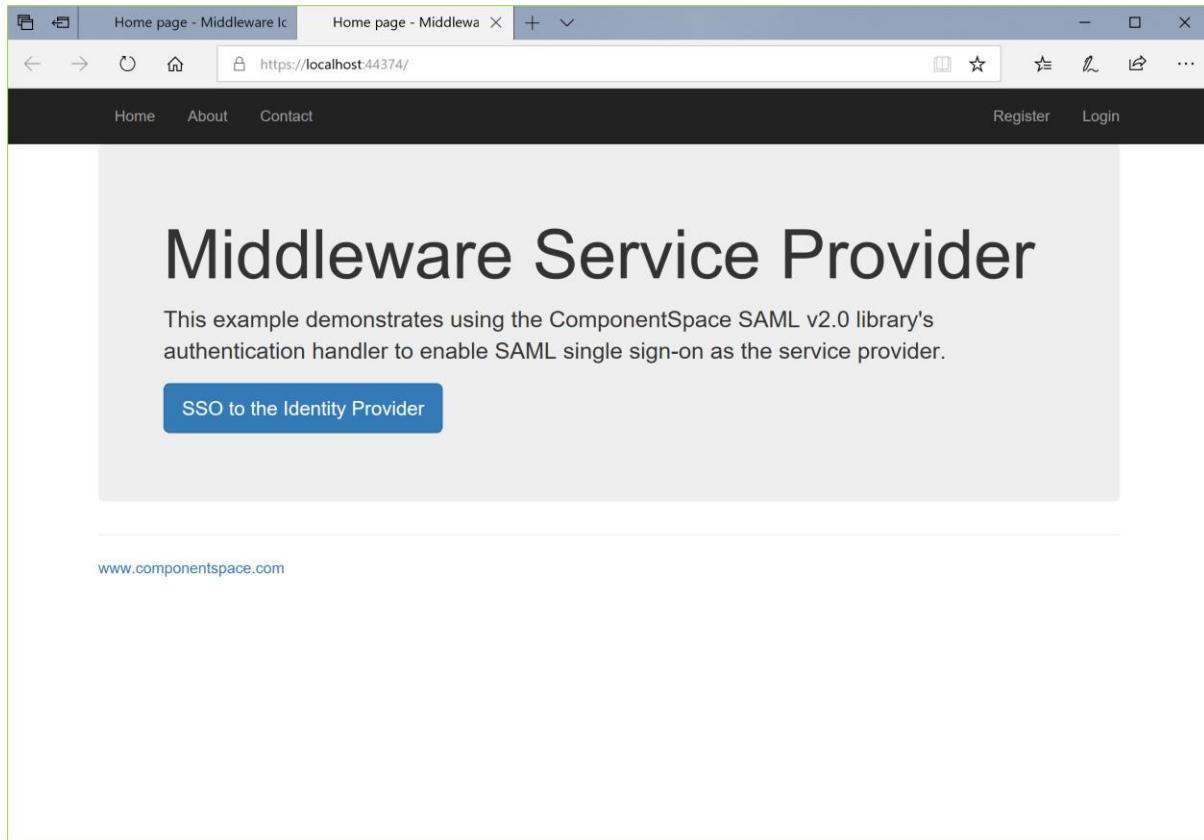

Click the SSO to the Identity Provider button.

Alternatively, click the Log in link and then the SAML button.


ComponentSpace SAML for ASP.NET Core Examples Guide

The screenshot shows a web browser window with the title bar "Home page - Middleware Ic" and the address bar "Log in at the Service Pr X https://localhost:44374/Identity/Account/Login". The page content is titled "Log in at the Service Provider". It has two main sections: "Use a local account to log in." and "Use another service to log in.". The "Use a local account" section contains fields for "Email" and "Password", a "Remember me?" checkbox, and a "Log in" button. Below these are links for "Forgot your password?" and "Register as a new user". The "Use another service" section contains a "SAML" button. At the bottom of the page is a link to "www.componentspace.com".

You are prompted to login at the identity provider.


The screenshot shows a web browser window with the title bar "Home page - Middleware Ic" and the address bar "Log in at the Identity Pr X https://localhost:44377/Identity/Account/Login?ReturnUrl=%2FSAML%2FSingleSignOnServiceCompletion". The page content is titled "Log in at the Identity Provider". It has two main sections: "Use a local account to log in." and "Use another service to log in.". The "Use a local account" section contains fields for "Email" (with the value "johndoe@componentspace.com") and "Password" (with the value "*****"), a "Remember me?" checkbox, and a "Log in" button. Below these are links for "Forgot your password?" and "Register as a new user". The "Use another service" section contains the text "There are no external authentication services configured. See [this article](#) for details on setting up this ASP.NET application to support logging in via external services." At the bottom of the page is a link to "www.componentspace.com".

SSO completes with automatic login at the service provider. The user identity is that specified by the identity provider.

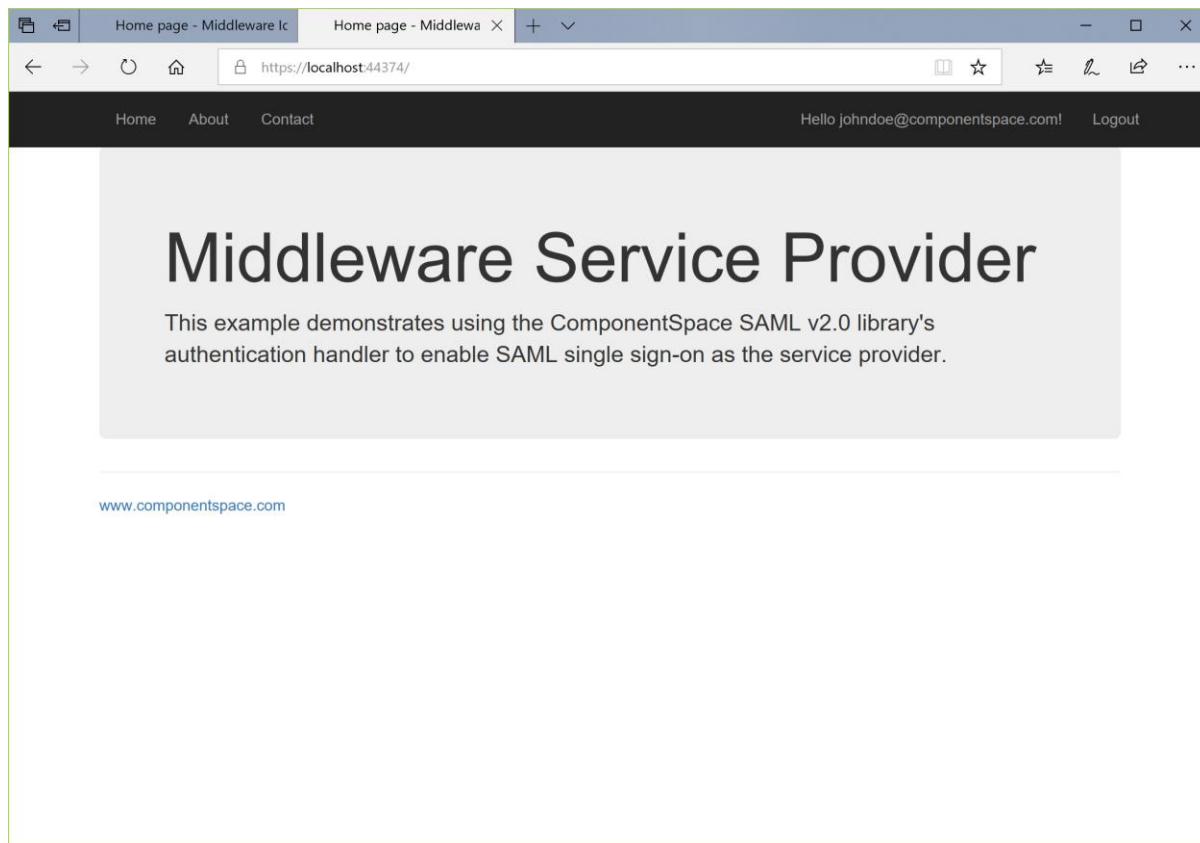


SP-initiated SLO

Having completed SSO, in the same browser window, browse to the middleware service provider's home page at <https://localhost:44374/>.

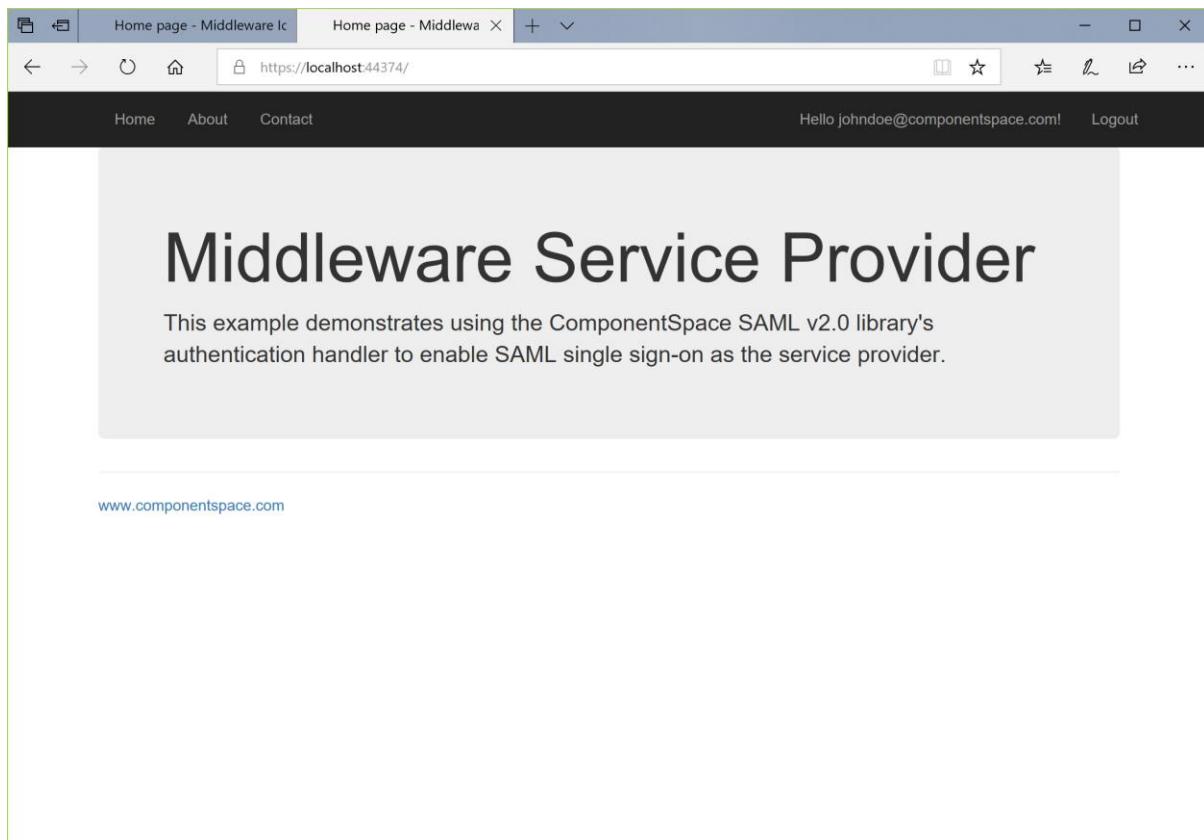

Click the Log out link. Logout occurs at both the identity provider and service provider.

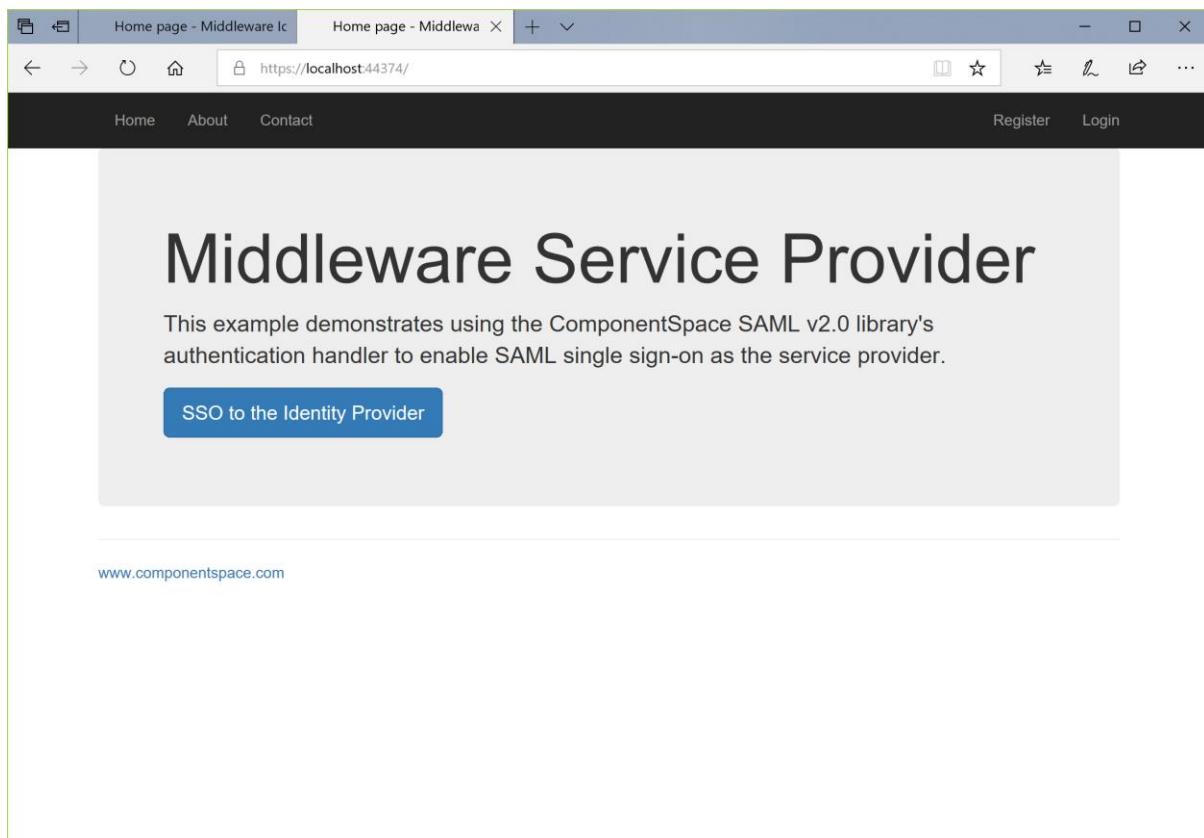

Blazor Server Identity Provider

The BlazorServerIdentityProvider project is a Blazor Server web application based off the Visual Studio template.

It demonstrates acting as a SAML identity provider and supports:

- IdP-initiated SSO
- SP-initiated SSO
- IdP-initiated SLO
- SP-initiated SLO

Through changes to its SAML configuration, it can support all SAML v2.0 compliant third-party offerings.

Building and Running

The BlazorServerIdentityProvider should build without any errors or warnings.

As it is configured to use the default LocalDB connection string, the simplest approach is to run the application on IIS Express through the Visual Studio debugger.

Note that this database is not used by the SAML API but is the application's user registry.

To run on IIS, the application must be configured in and published to IIS. It should use a database provider other than LocalDB.


The application is configured to run at <https://localhost:44361/>.

If this is changed, the BlazorServerServiceProvider's SAML configuration must be updated to match the new URLs.

To demonstrate SAML SSO, both the BlazorServerIdentityProvider and BlazorServerServiceProvider must be run.


IdP-initiated SSO

Browse to the example identity provider's home page at <http://localhost:44361/>.

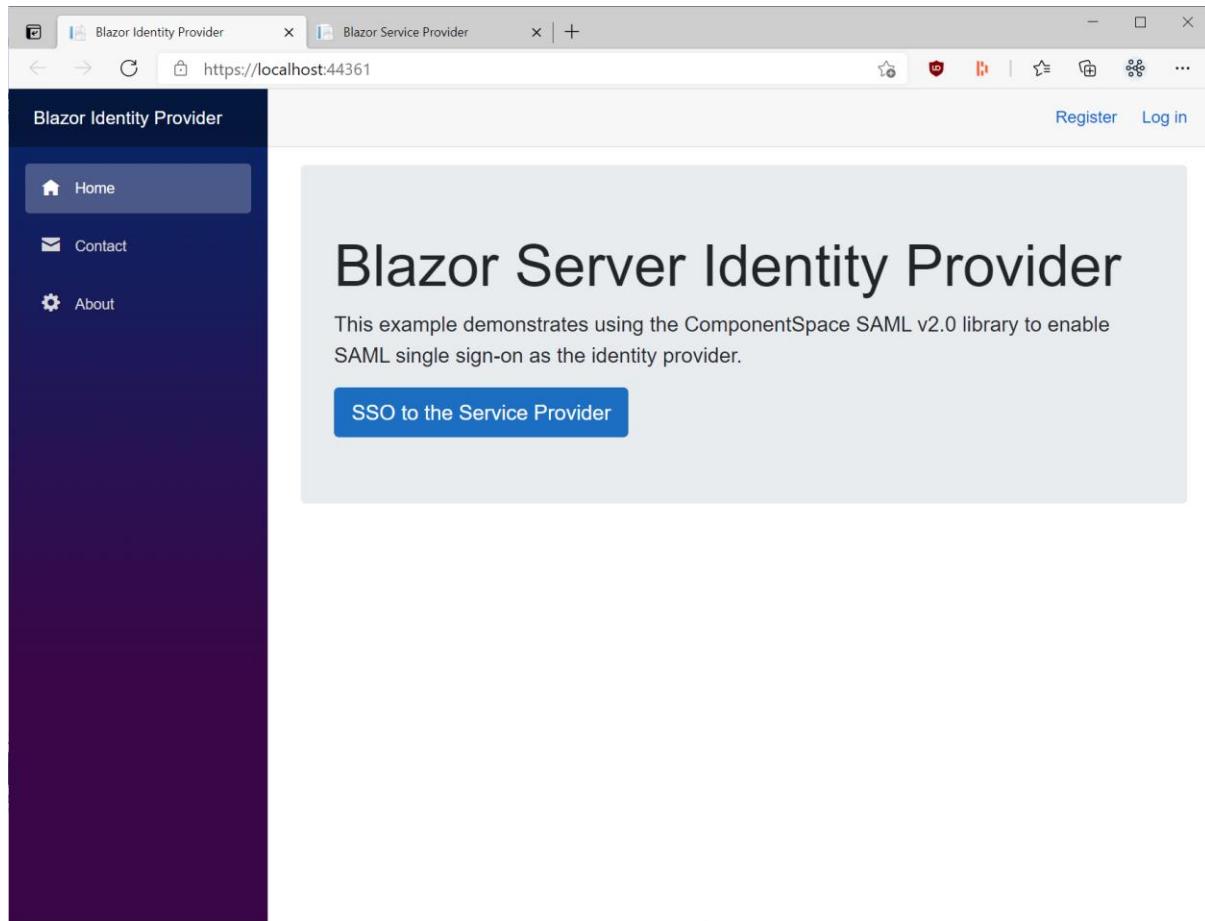


Click the SSO to the Service Provider button.

As you haven't been authenticated at the BlazorServerIdentityProvider, you are prompted to login or register.

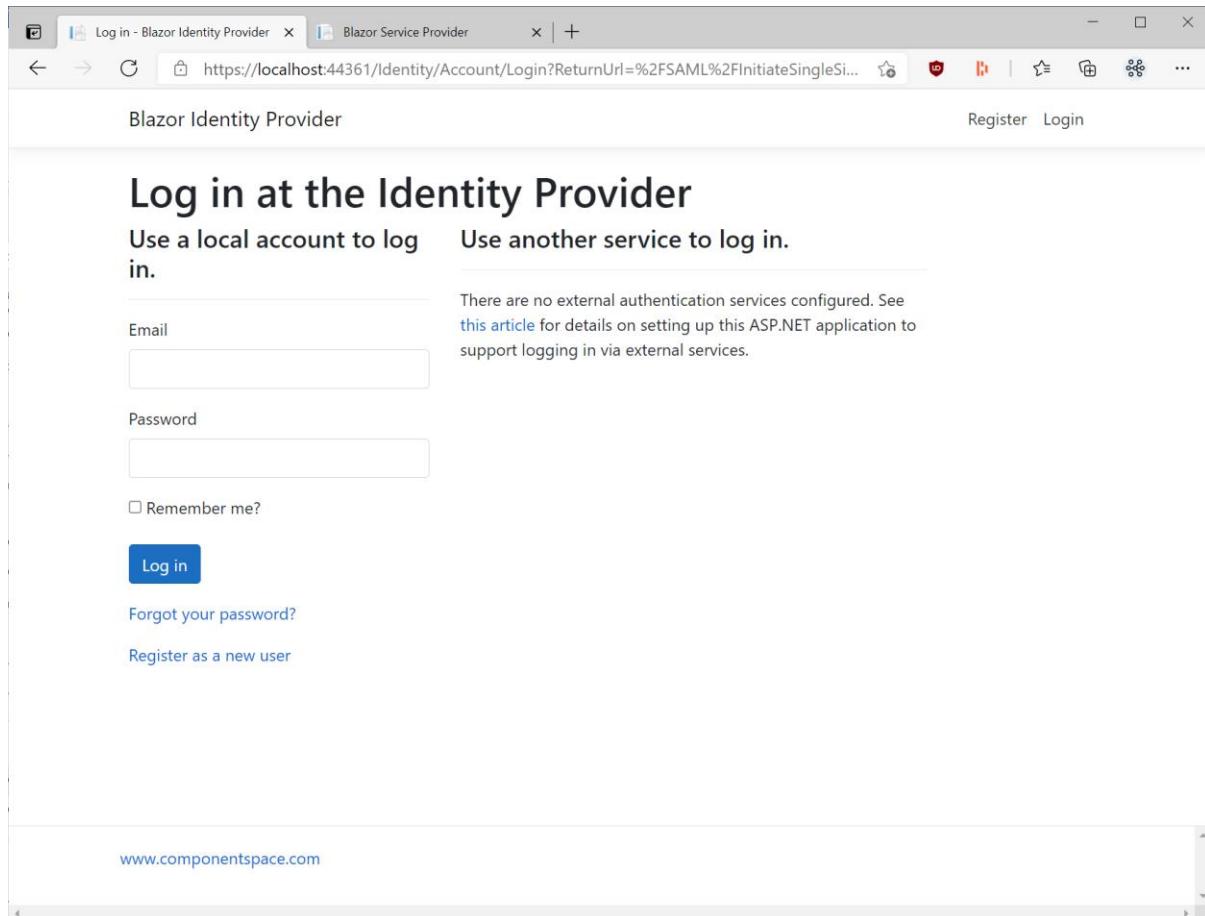


Click the link to register as a new user.


Complete the registration process.

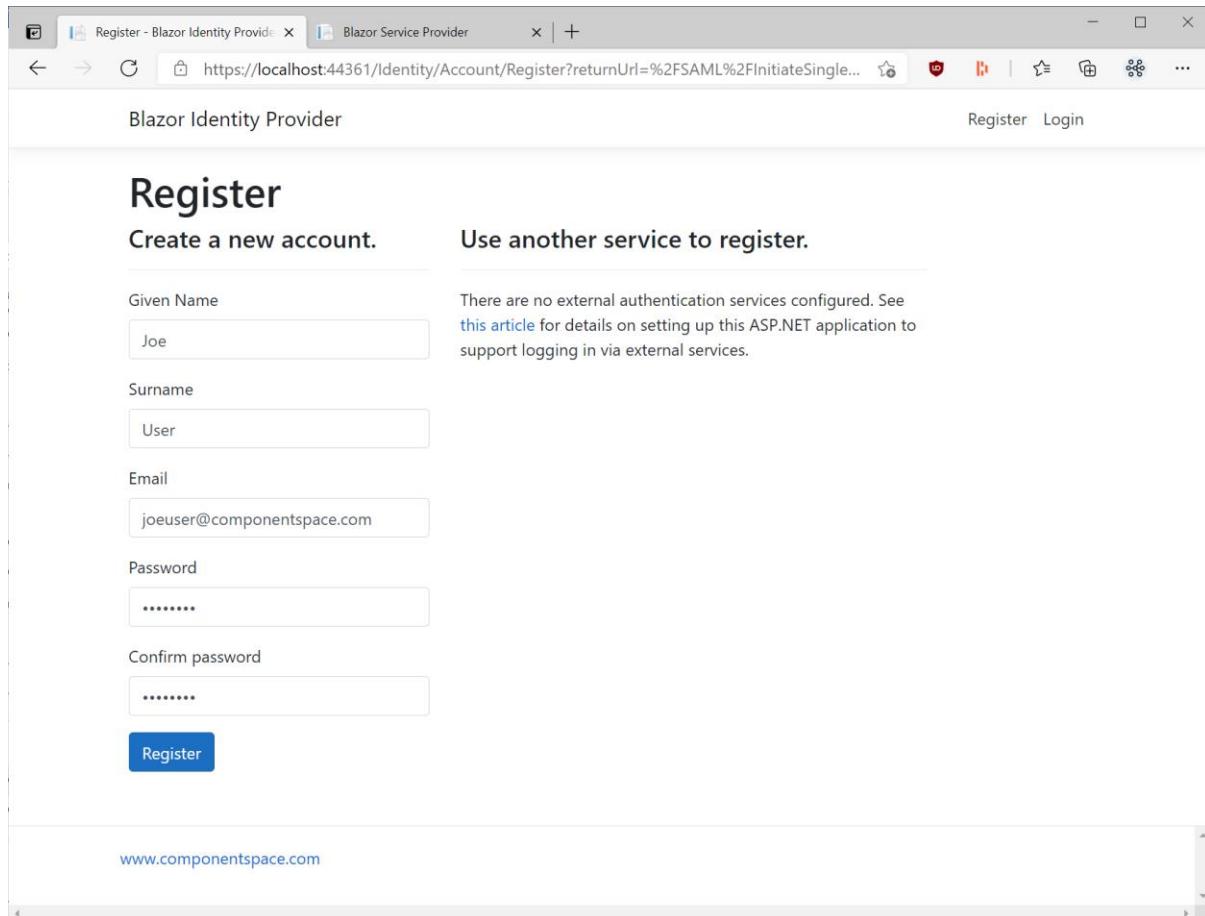

If you've previously registered, simply login.

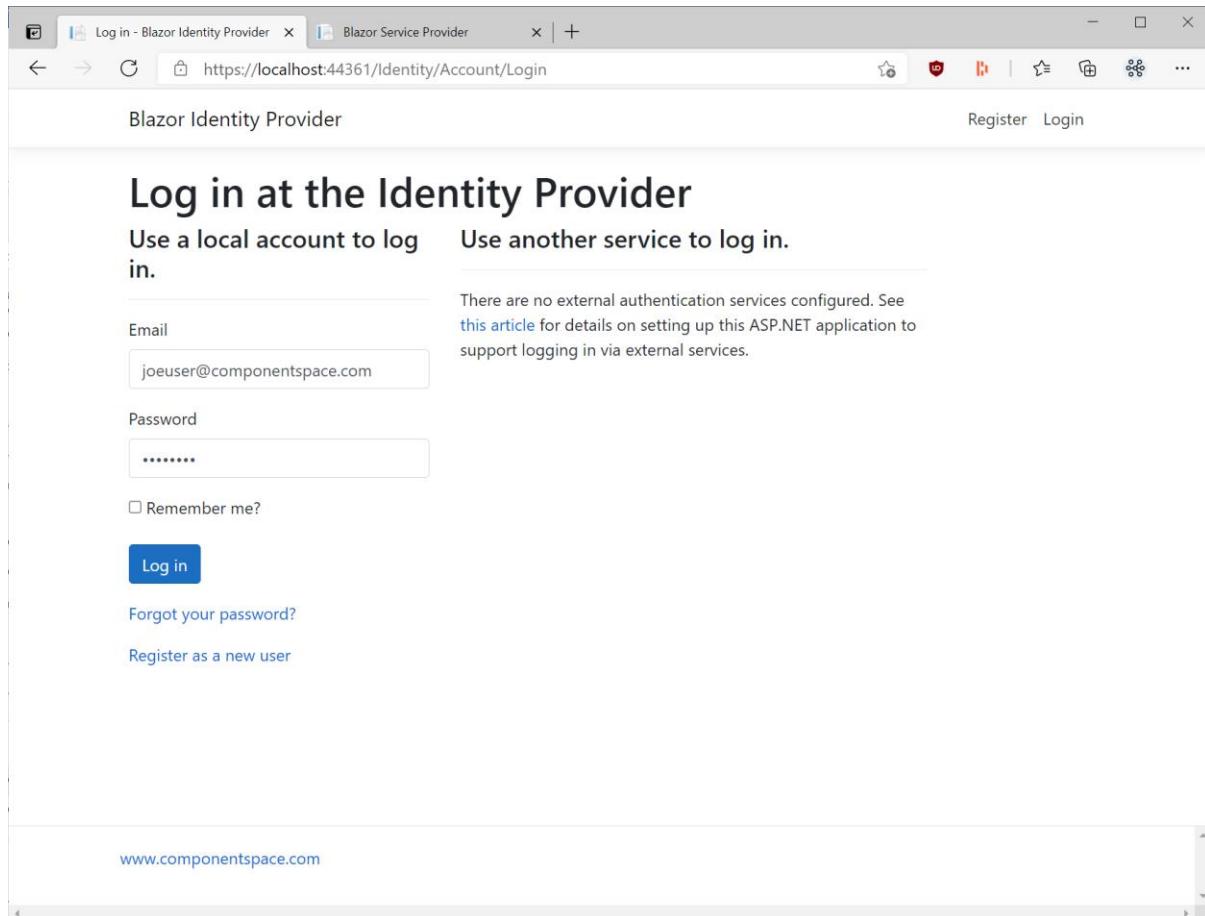


SSO completes with automatic login at the service provider. The user identity is that specified by the identity provider.

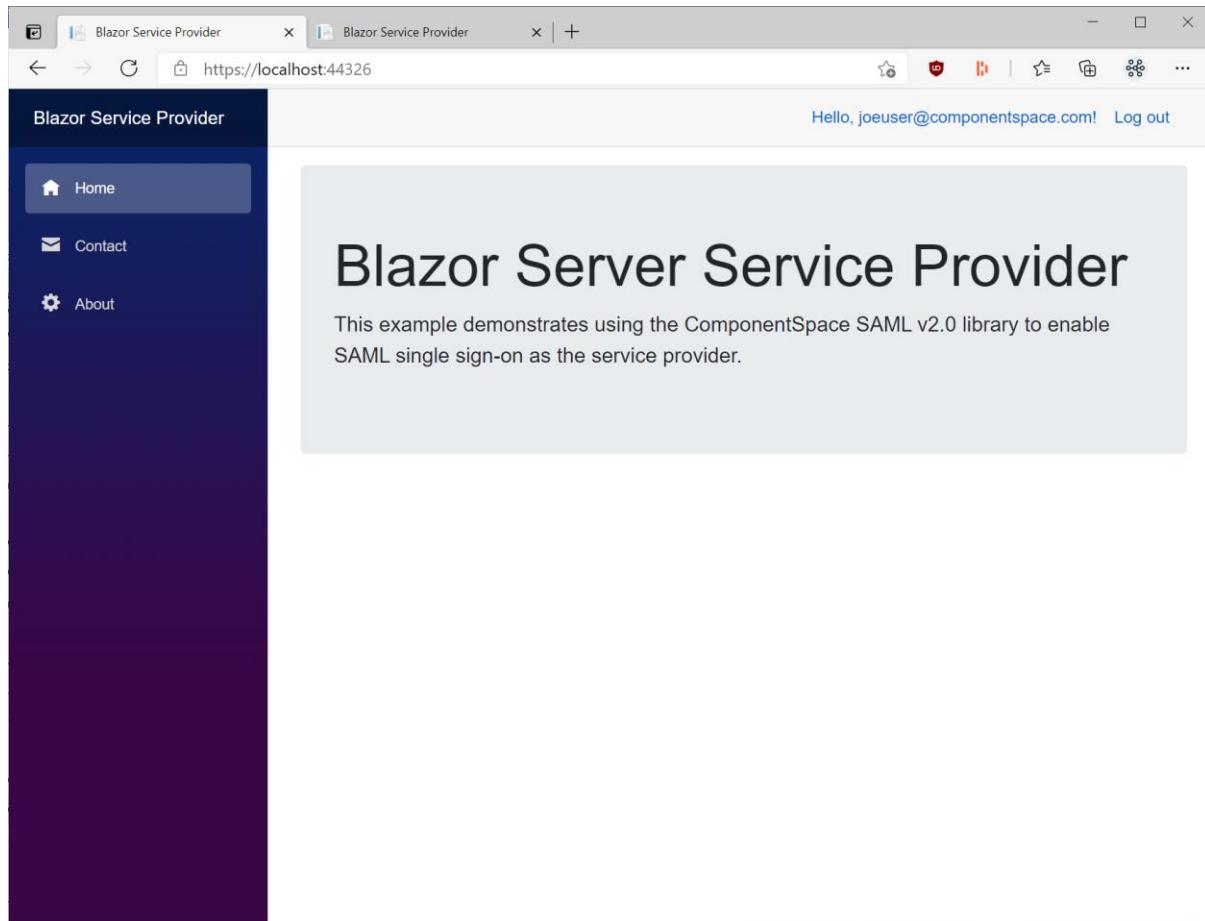


IdP-initiated SLO

Having completed SSO, in the same browser window, browse to the example identity provider's home page at <https://localhost:44361/>.

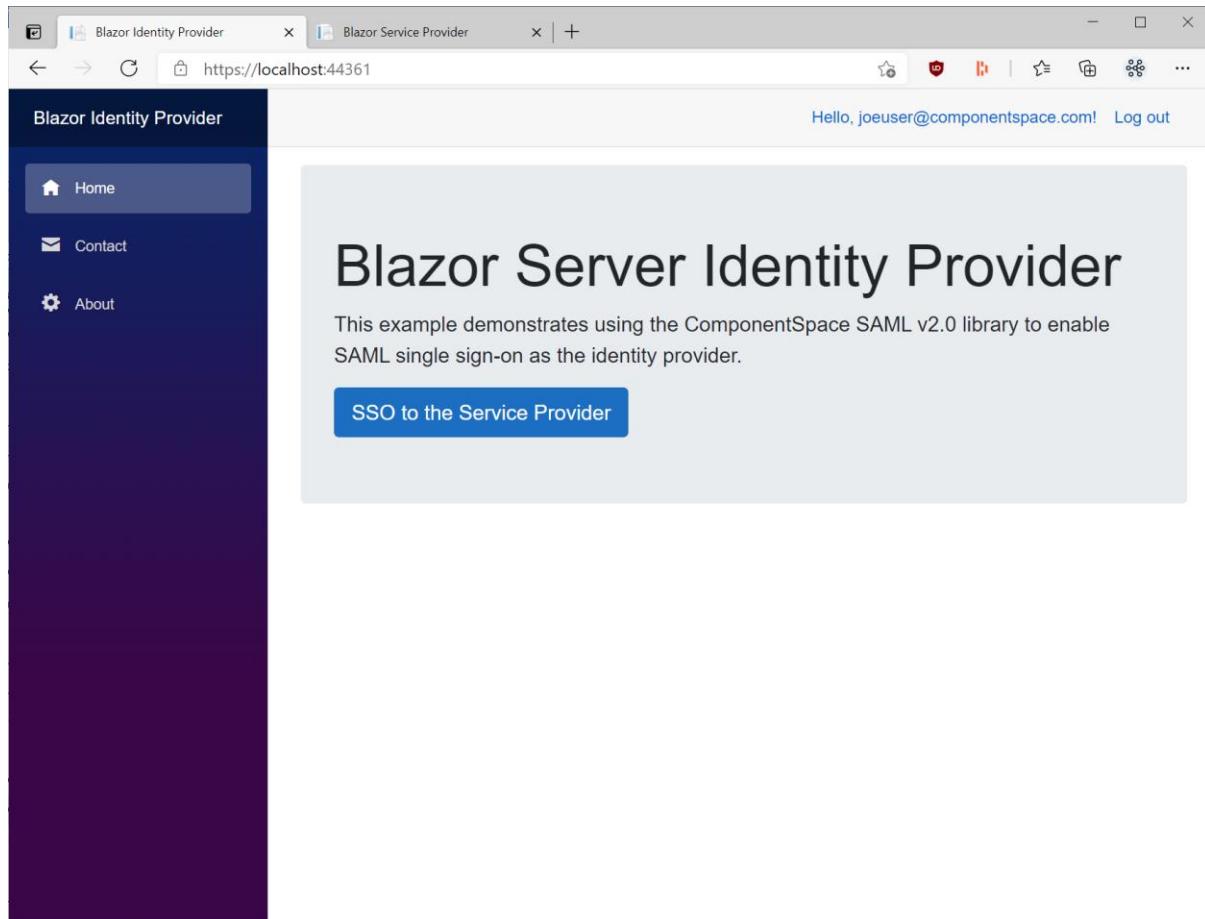

Click the Log out link. Logout occurs at both the identity provider and service provider.

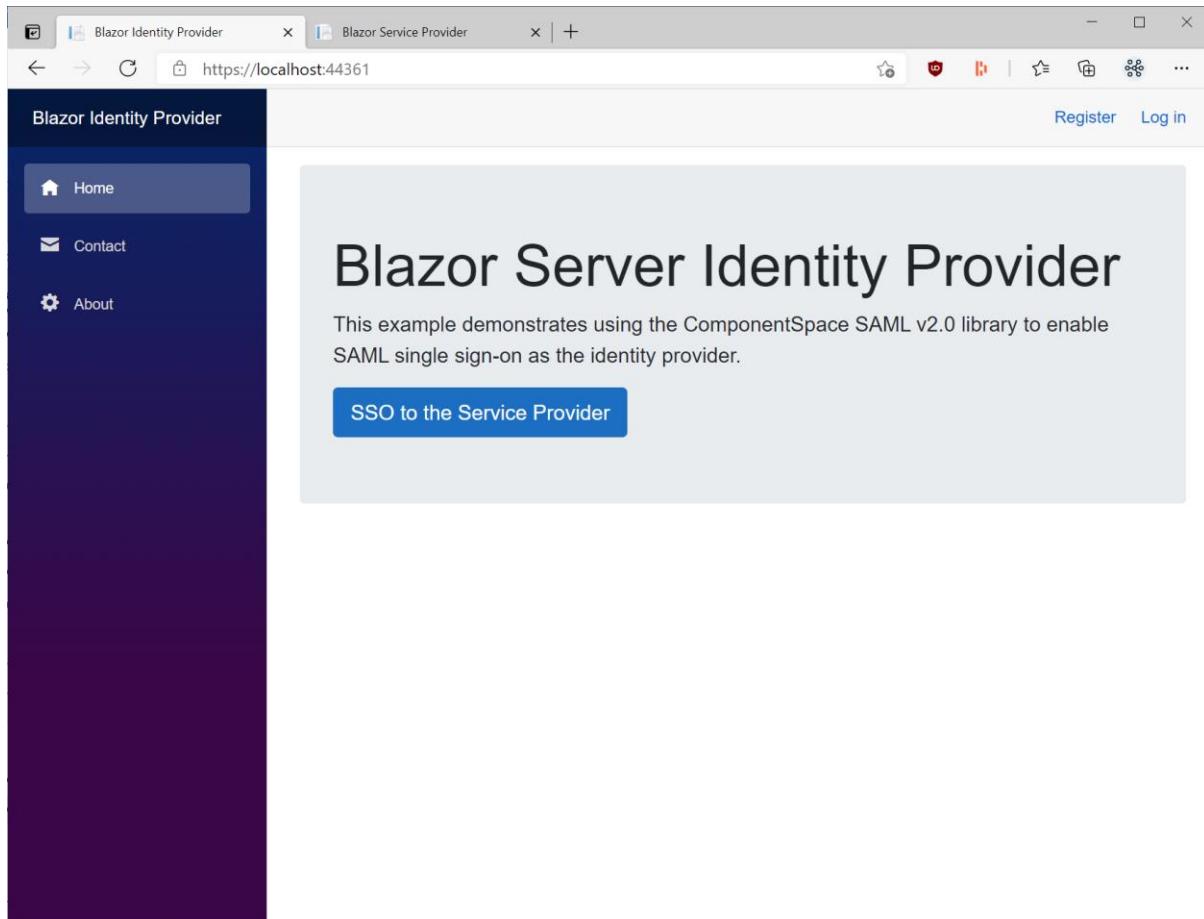

Blazor Server Service Provider

The BlazorServerServiceProvider project is a Blazor Server web application based off the Visual Studio template.

It demonstrates acting as a SAML service provider and supports:

- IdP-initiated SSO
- SP-initiated SSO
- IdP-initiated SLO
- SP-initiated SLO

Through changes to its SAML configuration, it can support all SAML v2.0 compliant third-party offerings.

Building and Running

The BlazorServerServiceProvider should build without any errors or warnings.

As it is configured to use the default LocalDB connection string, the simplest approach is to run the application on IIS Express through the Visual Studio debugger.

Note that this database is not used by the SAML API but is the application's user registry.

To run on IIS, the application must be configured in and published to IIS. It should use a database provider other than LocalDB.


The application is configured to run at <https://localhost:44326/>.

If this is changed, the BlazorServerIdentityProvider's SAML configuration must be updated to match the new URLs.

To demonstrate SAML SSO, both the BlazorServerIdentityProvider and BlazorServerServiceProvider must be run.


SP-initiated SSO

Browse to the example service provider's home page at <https://localhost:44326/>.

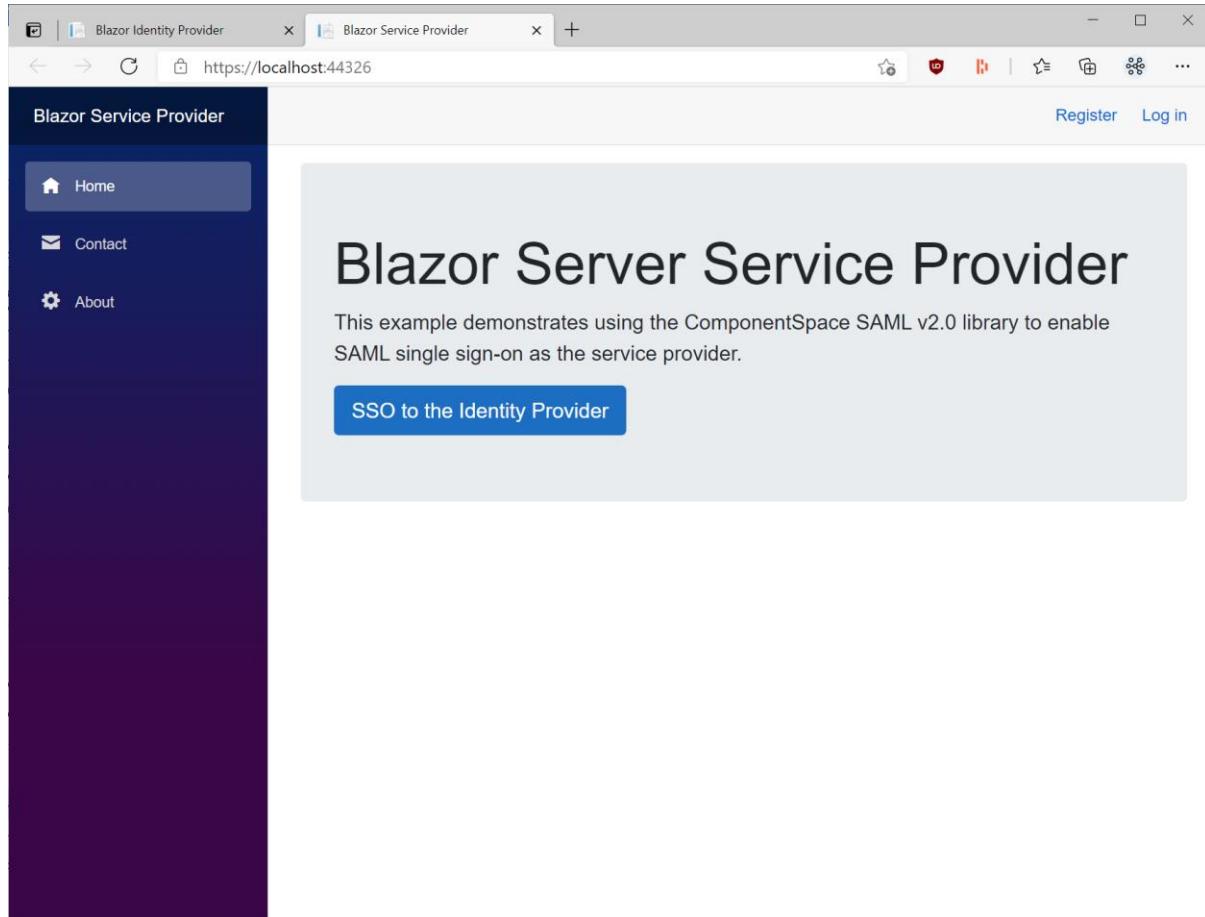


Click the SSO to the Identity Provider button.

You are prompted to login at the identity provider.

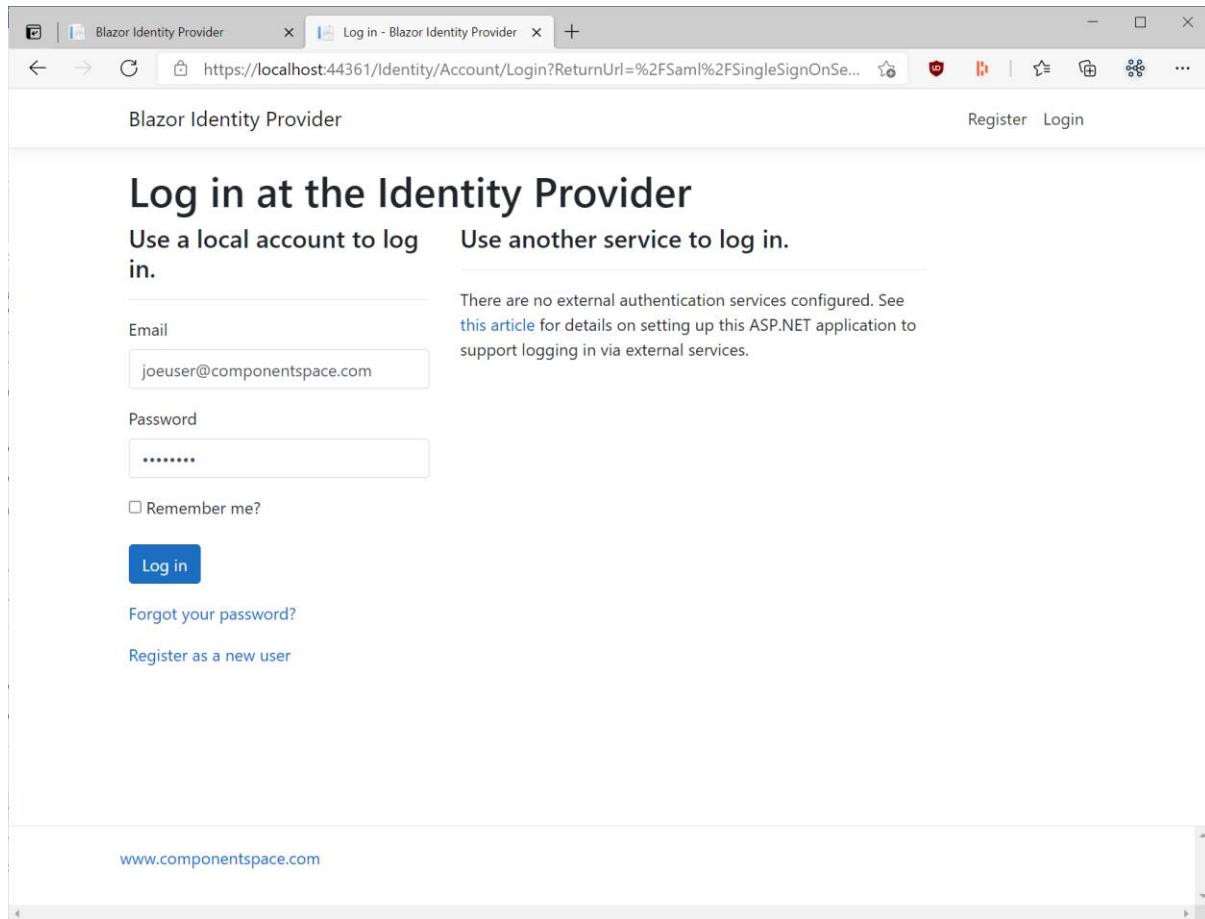


SSO completes with automatic login at the service provider. The user identity is that specified by the identity provider.

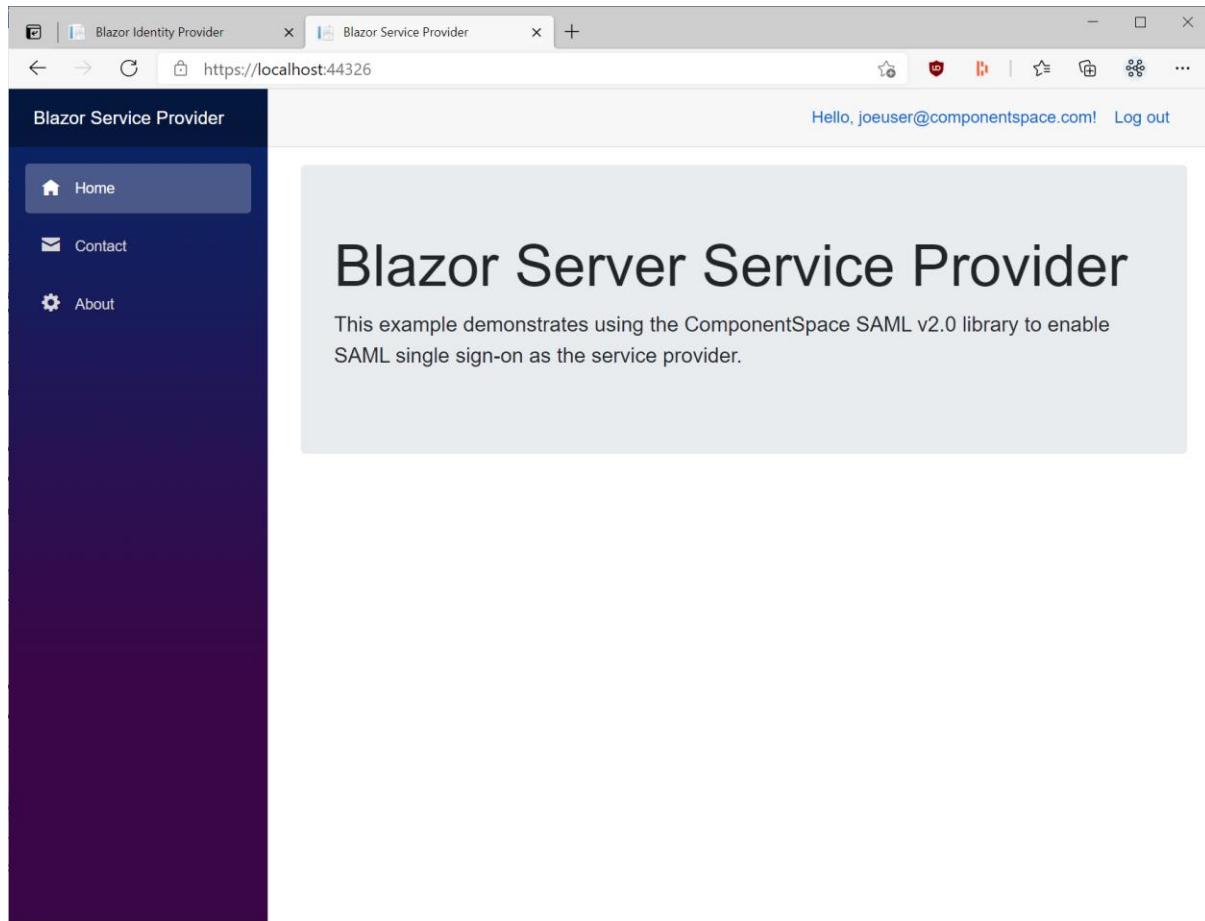


SP-initiated SLO

Having completed SSO, in the same browser window, browse to the example service provider's home page at <https://localhost:44326/>.

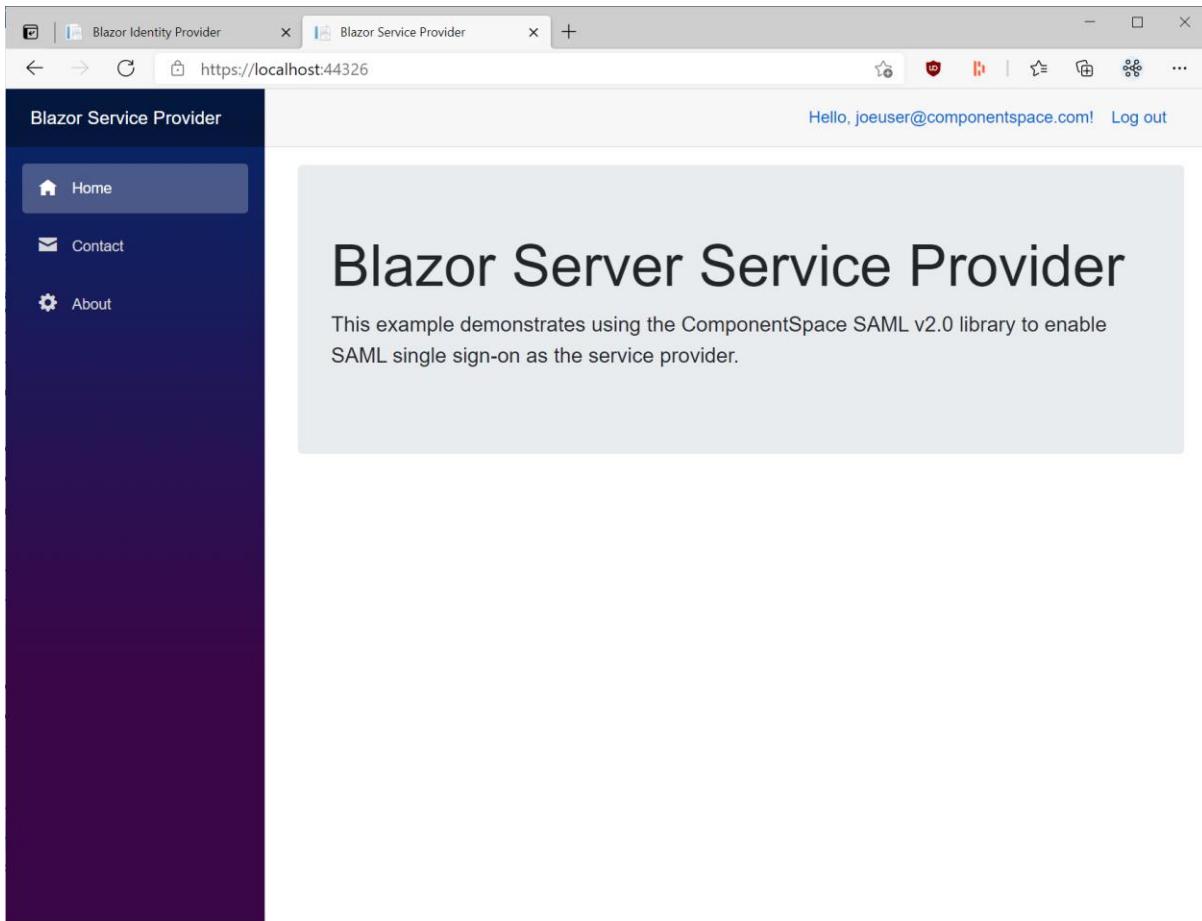

Click the Log out link. Logout occurs at both the identity provider and service provider.

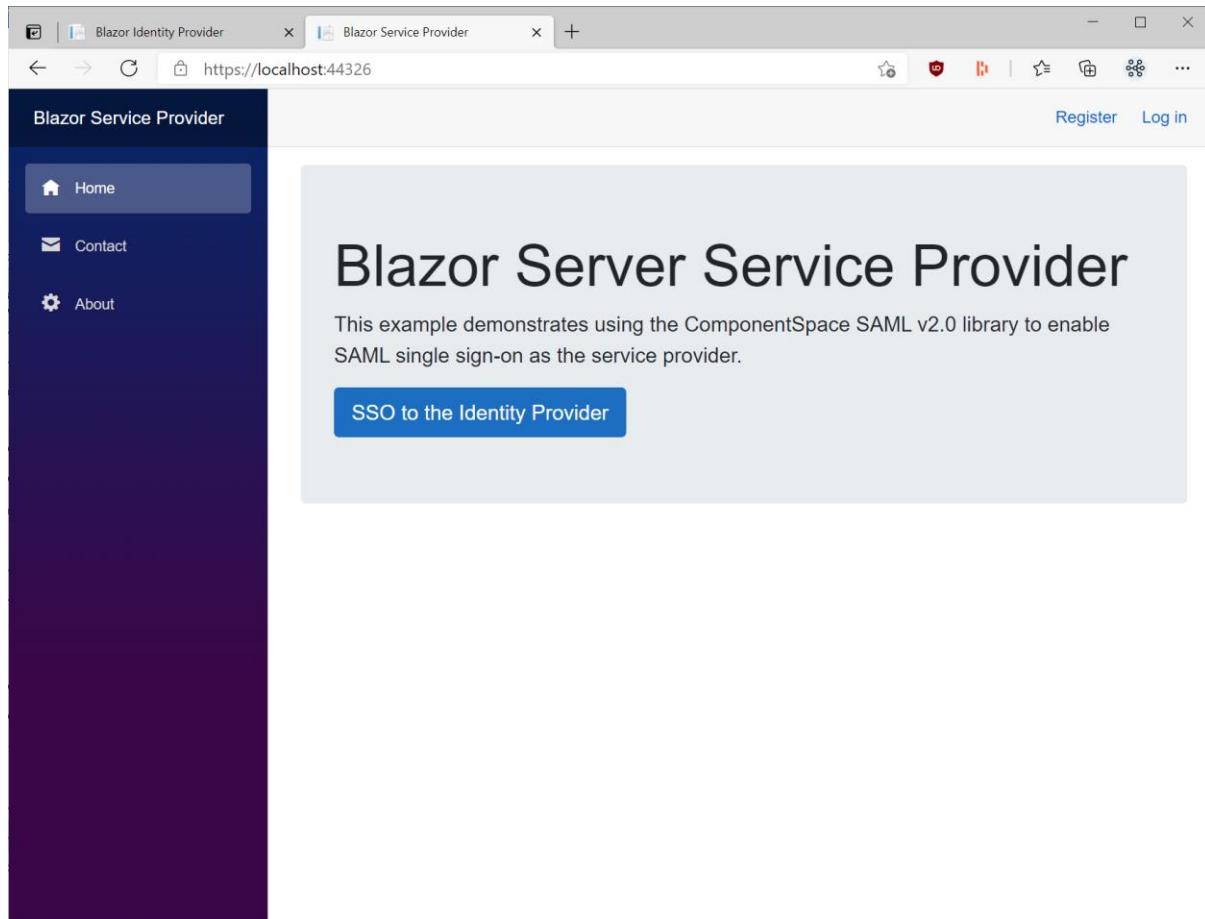

Example Web API

The ExampleWebApi project is an ASP.NET Core web application based off the Visual Studio template.

It demonstrates a web API acting as a SAML service provider and supports:

- IdP-initiated SSO
- SP-initiated SSO
- IdP-initiated SLO
- SP-initiated SLO

Through changes to its SAML configuration, it can support all SAML v2.0 compliant third-party offerings.

In conjunction with a JavaScript SPA, the ExampleWebApi demonstrates authentication through SAML SSO and web API authorization through JWT bearer tokens.

It doesn't demonstrate revoking JWT bearer tokens on logout but this functionality could be added.

Building and Running

The ExampleWebApi should build without any errors or warnings.

The application is configured to run at <https://localhost:44319/>.

If this is changed, the `ExampleIdentityProvider`'s SAML configuration must be updated to match the new URLs.


To demonstrate SAML SSO, both the `ExampleIdentityProvider` and `ExampleWebApi` must be run.

SP-initiated SSO

Browse to <https://localhost:44319/Saml/InitiateSingleSignOn?returnUrl=http://localhost>.


The `returnUrl` parameter must be present but can specify any URL. Control is redirected to this URL once SSO completes.

You are prompted to login at the identity provider.

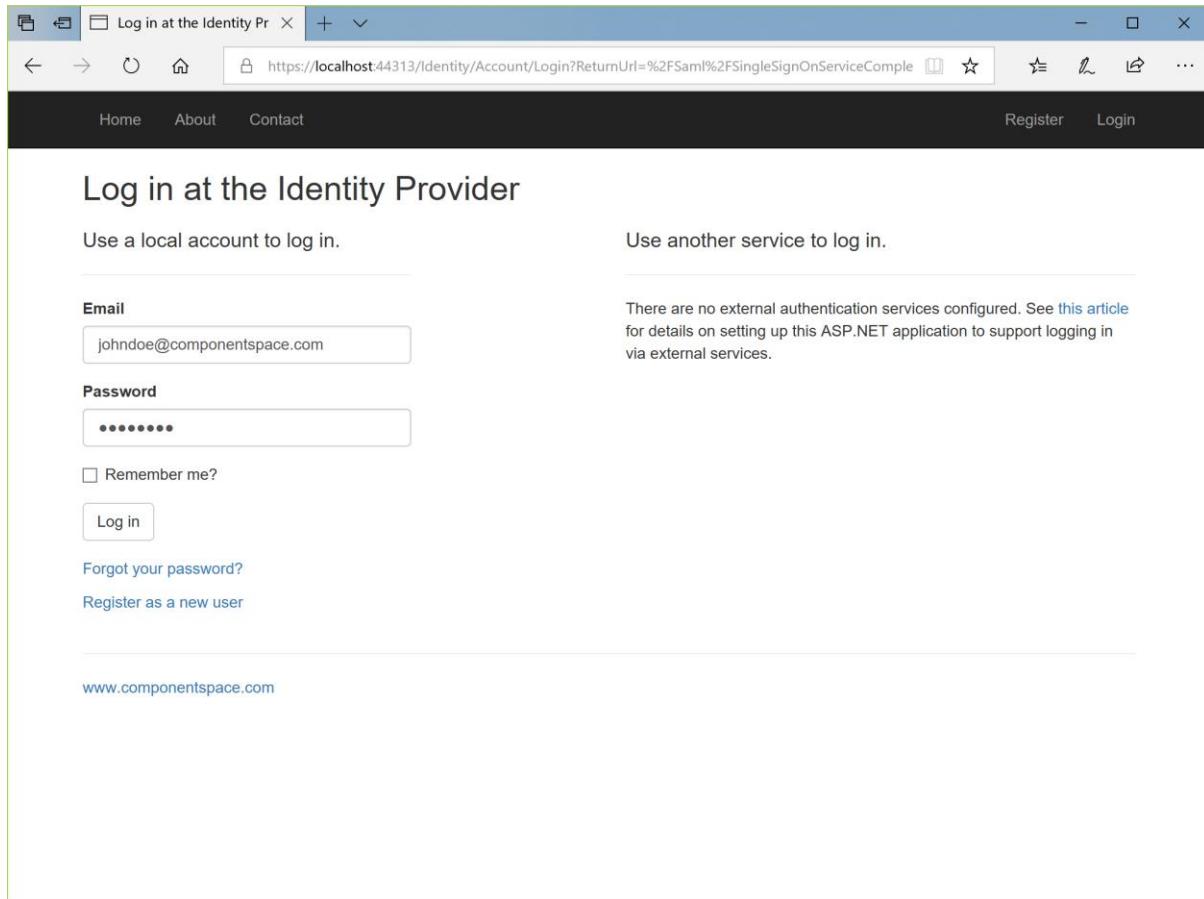

A screenshot of a web browser window titled "Log in at the Identity Pr". The address bar shows the URL <https://localhost:44319/Identity/Account/Login?ReturnUrl=%2FSaml%2FSingleSignOnServiceComplete>. The page itself is titled "Log in at the Identity Provider". It has two main sections: "Use a local account to log in." and "Use another service to log in.". The "Use a local account to log in." section contains fields for "Email" (johndoe@componentspace.com) and "Password" (represented by six asterisks). There is also a "Remember me?" checkbox and a "Log in" button. Below these fields are links for "Forgot your password?" and "Register as a new user". The "Use another service to log in." section contains a message stating there are no external authentication services configured, with a link to "this article" for more details. At the bottom of the page is a link to "www.componentspace.com".


SSO completes.

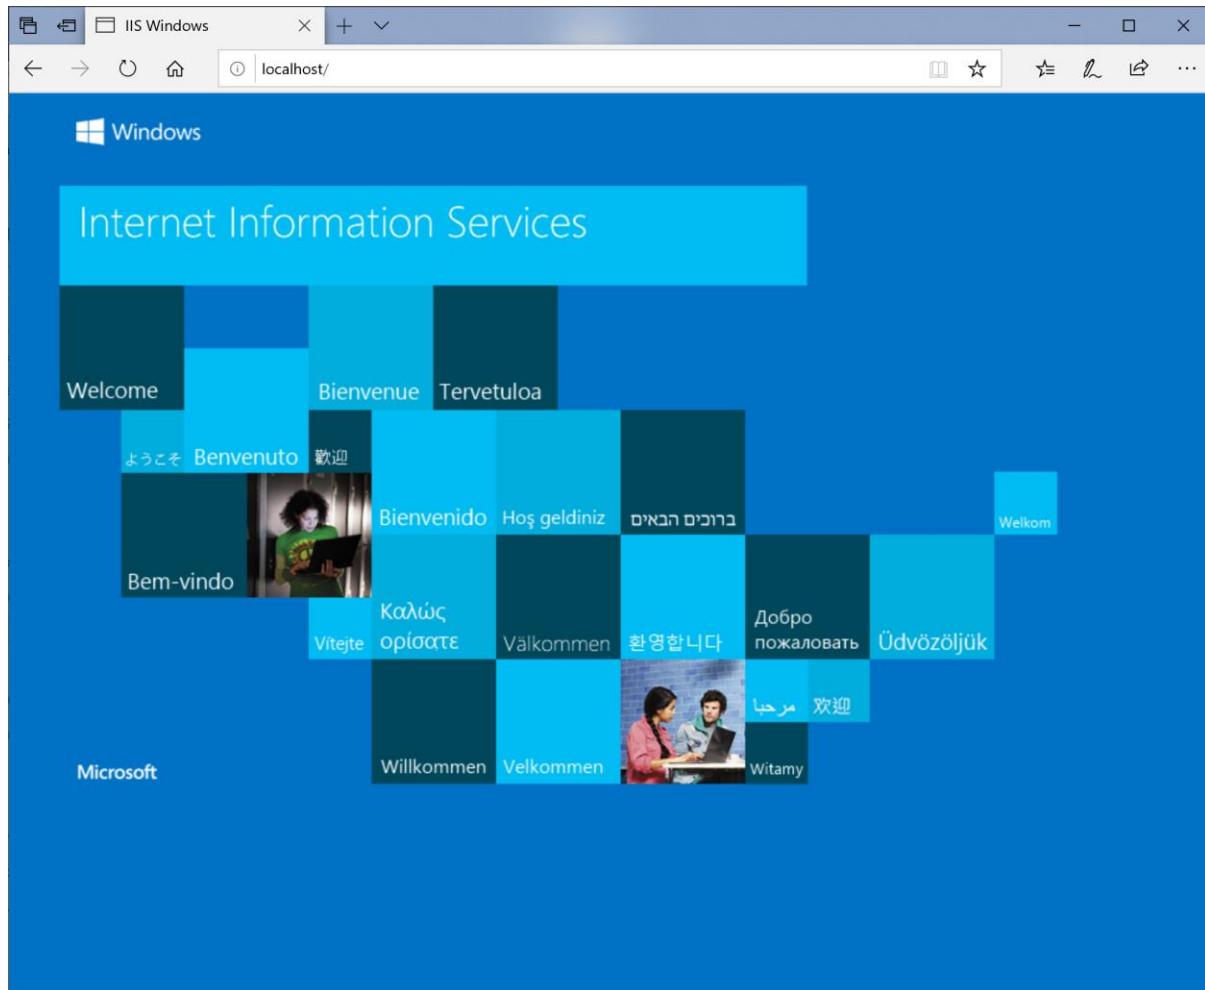

Within the same browser context, browse to <https://localhost:44319/api/authorization>.

The JWT is returned securely in the HTTP response body.

ComponentSpace SAML for ASP.NET Core Examples Guide

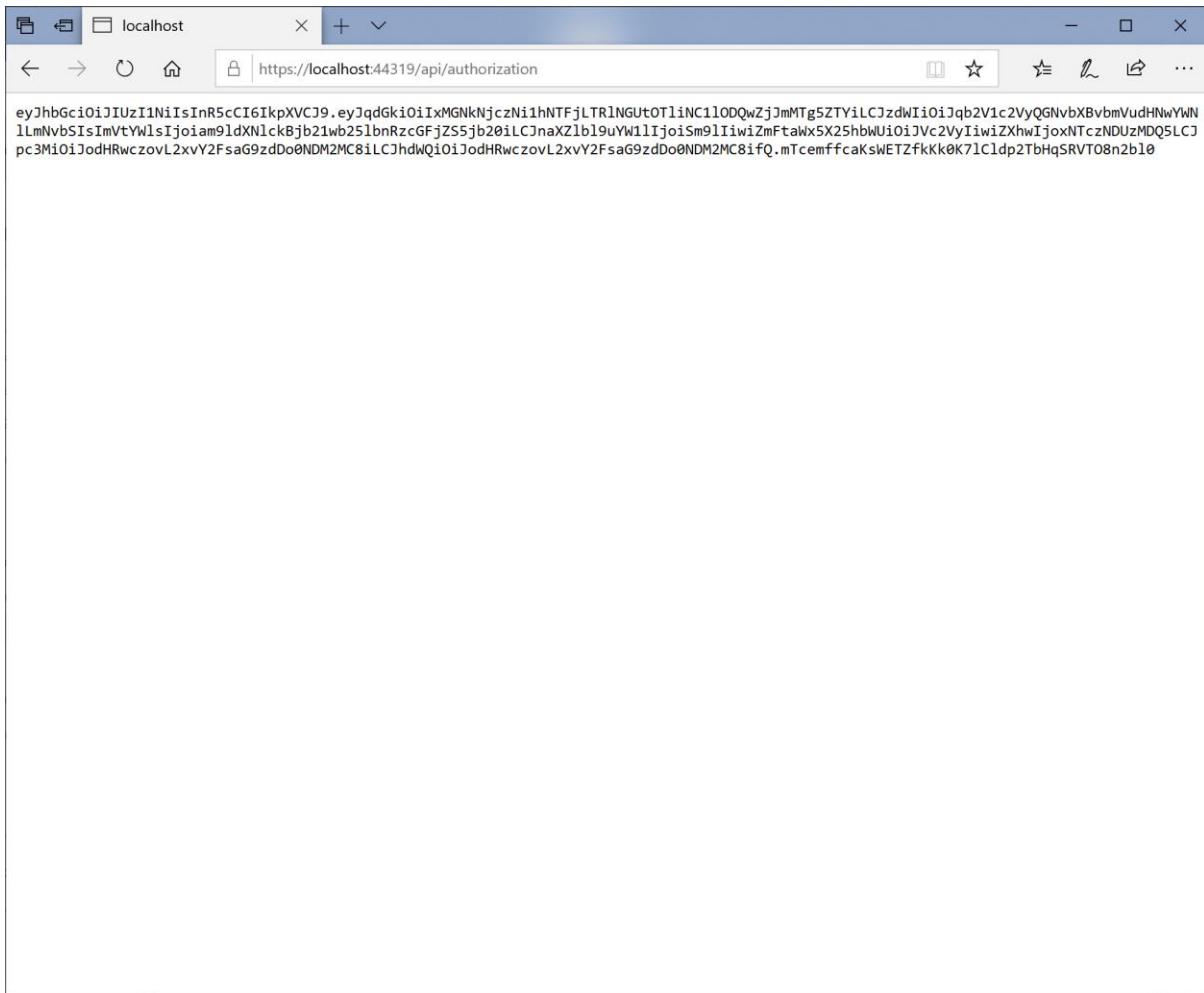

Save a copy of the token.

Use Postman to access the web API at <https://localhost:44319/api/samllicense>.

A 401 unauthorized status code is returned as a valid JWT bearer token wasn't presented.

ComponentSpace SAML for ASP.NET Core Examples Guide

The screenshot shows the Postman application interface. In the top navigation bar, 'File', 'Edit', 'View', and 'Help' are visible. Below the bar, there are buttons for 'New', 'Import', 'Runner', and 'Invite'. The title bar says 'My Workspace' and has an 'Upgrade' button. The main area is titled 'Untitled Request'. A GET request is made to 'https://localhost:44319/api/samllicense'. The status bar at the bottom indicates 'Status: 401 Unauthorized'.


Specify the previously saved token as the bearer token.

The screenshot shows the Postman application interface. The 'Authorization' tab is selected, showing 'Bearer Token' as the type. A warning message states: 'Heads up! These parameters hold sensitive data. To keep this data secure while working in a collaborative environment, we recommend using variables. Learn more about variables.' The 'Token' field contains a long JWT token. The status bar at the bottom indicates 'Status: 200 OK'.

Access the web API again.

ComponentSpace SAML for ASP.NET Core Examples Guide

A 200 OK status is returned along with the expected web API result.

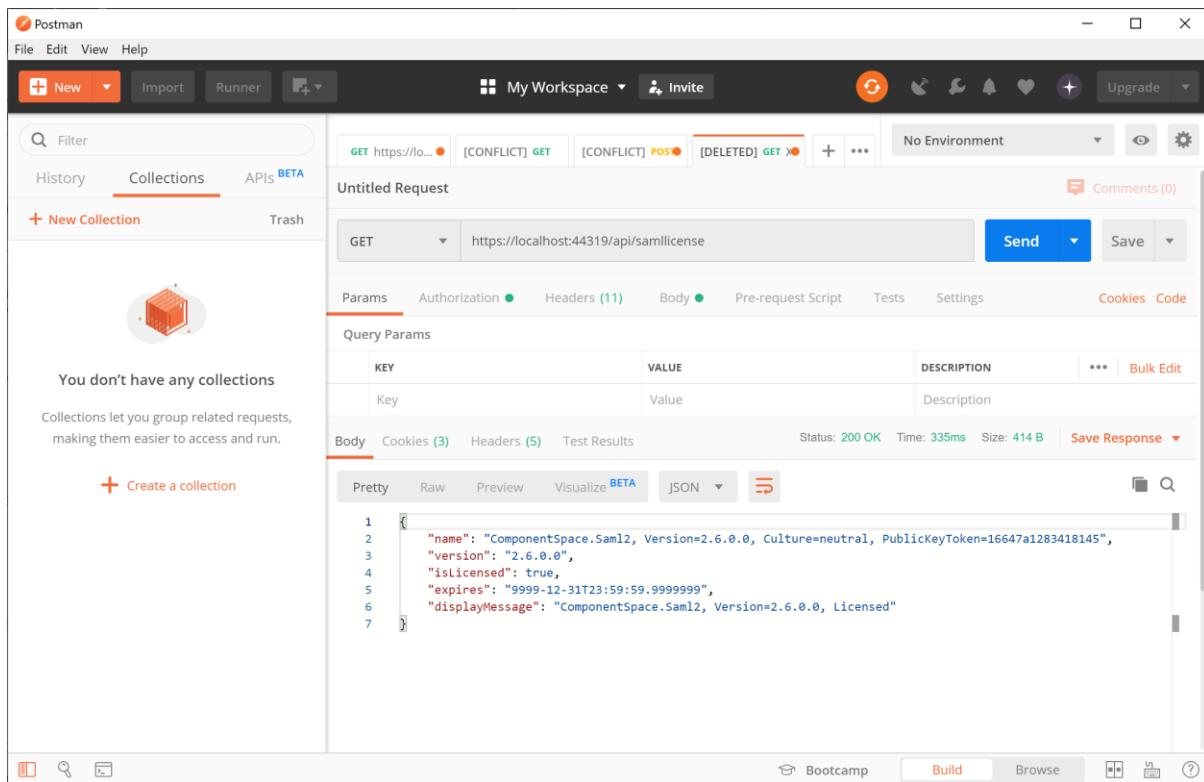

The screenshot shows the Postman application interface. In the top navigation bar, there are tabs for 'File', 'Edit', 'View', 'Help', 'New', 'Import', 'Runner', and 'My Workspace'. Below the navigation is a toolbar with icons for search, collections, and environment management. The main workspace is titled 'Untitled Request' and contains a single GET request to 'https://localhost:44319/api/samllicense'. The 'Body' tab is selected, showing a JSON response:

```
1 {  
2   "name": "ComponentSpace.Saml2", "Version": 2.6.0.0, "Culture": "neutral", "PublicKeyToken": "16647a1283418145",  
3   "version": "2.6.0.0",  
4   "islicensed": true,  
5   "expires": "9999-12-31T23:59:59.999999",  
6   "displayMessage": "ComponentSpace.Saml2, Version=2.6.0.0, Licensed"  
7 }
```

The status bar at the bottom indicates a 200 OK status, 335ms time, and 414B size.

SP-initiated SLO

Having completed SSO, in the same browser window, browse to <https://localhost:44319/Saml/InitiateSingleLogout?returnUrl=http://localhost>.

The returnUrl parameter must be present but it doesn't need to specify an actual web page.

Logout occurs at both the identity provider and service provider.

Example Angular SPA

The ExampleAngularSpa project is an Angular application created using the Angular CLI (<https://cli.angular.io/>).

In conjunction with the ExampleWebApi, it demonstrates authentication through SAML SSO and web API authorization through JWT bearer tokens.

Building and Running

The ExampleAngularSpa should build without any errors or warnings.

From the application's top-level folder, restore the packages.

```
npm install
```

From the application's top-level folder, run the application.


```
ng serve
```

The application is configured to run at <http://localhost:4200/>.


To demonstrate SAML SSO, both the ExampleIdentityProvider and ExampleWebApi must be run.

SP-initiated SSO


Browse to the Angular application at <http://localhost:4200/>.

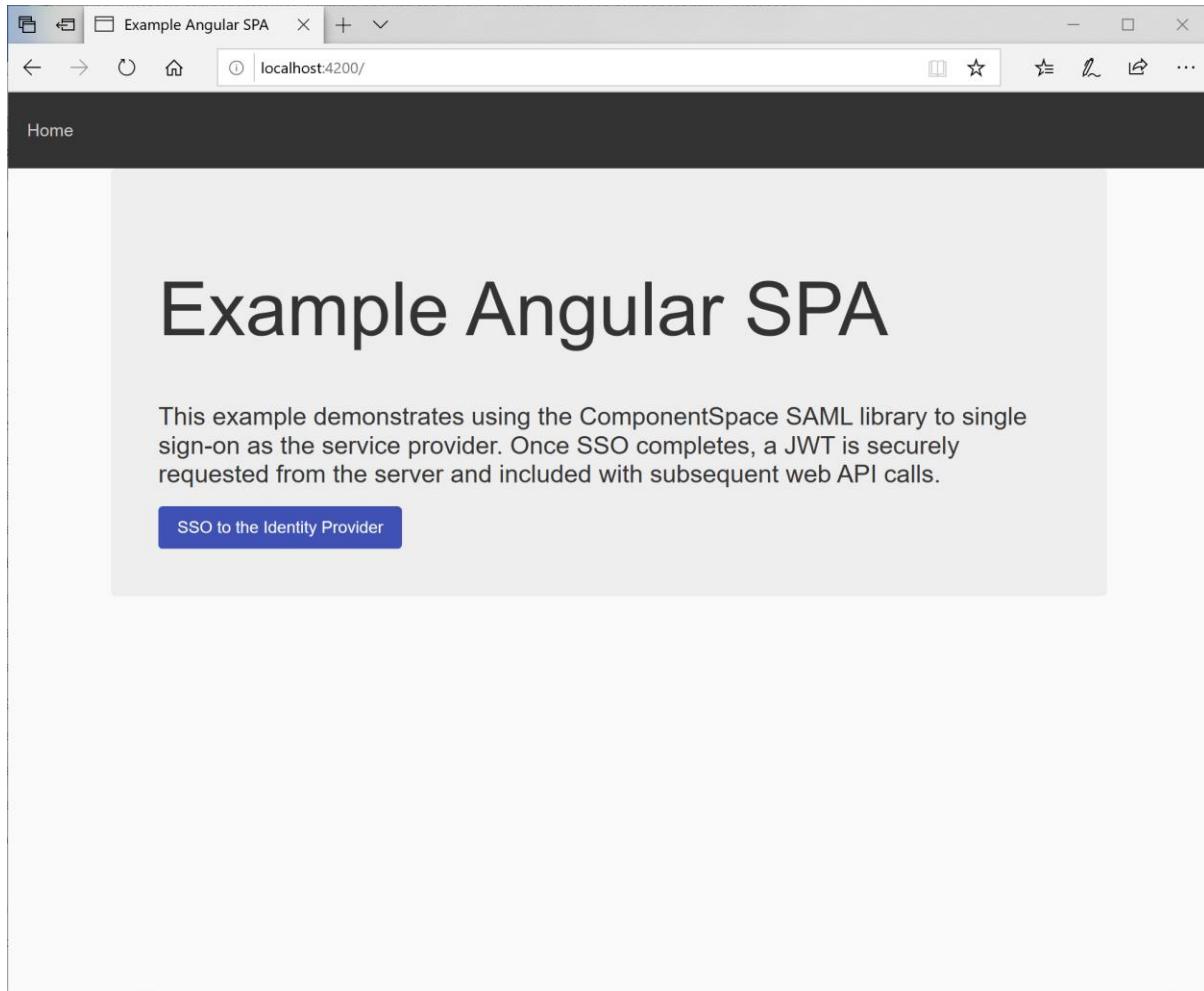

Click the SSO to the Identity Provider button.

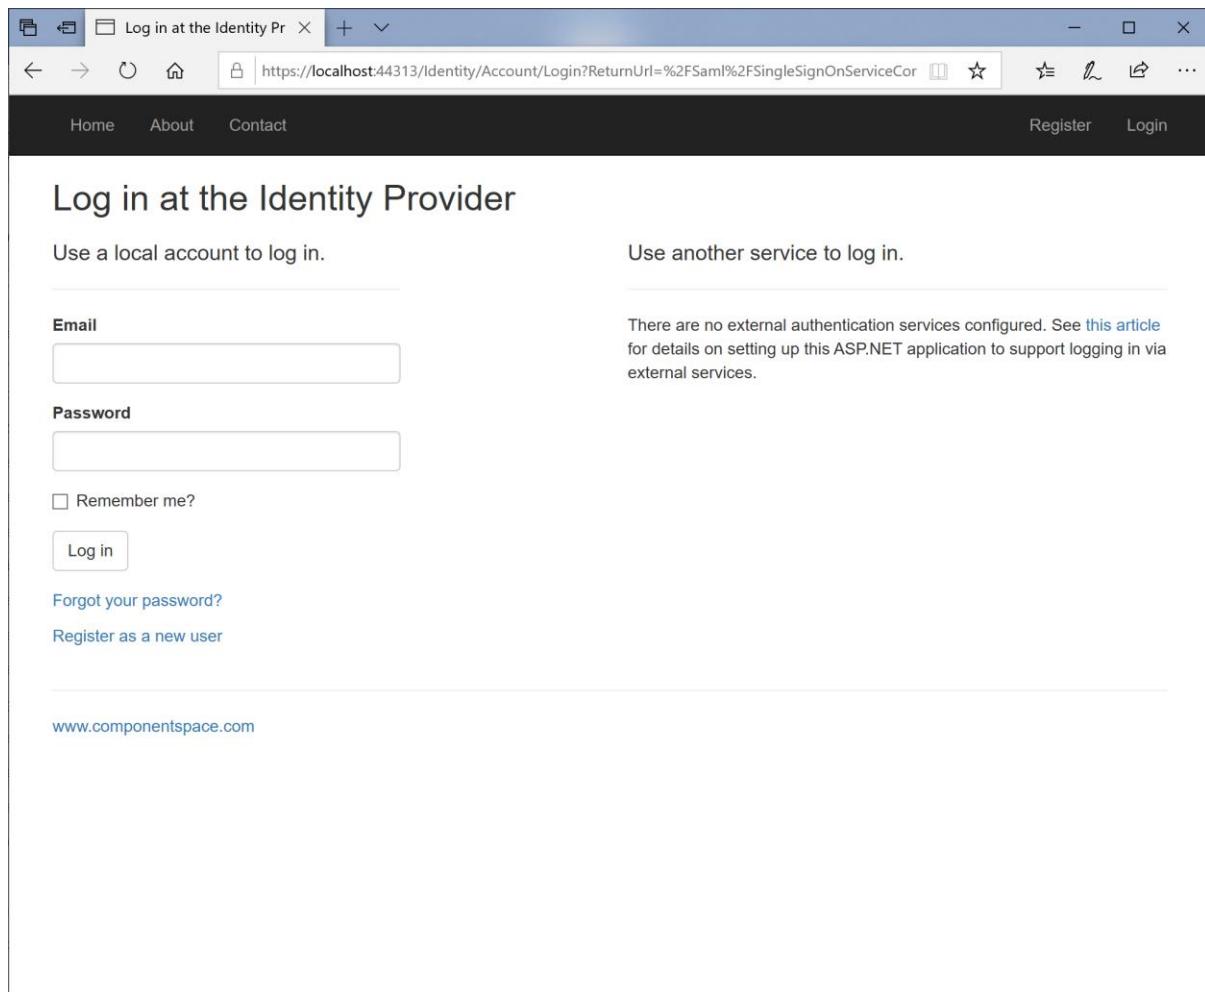


You are prompted to login at the identity provider.

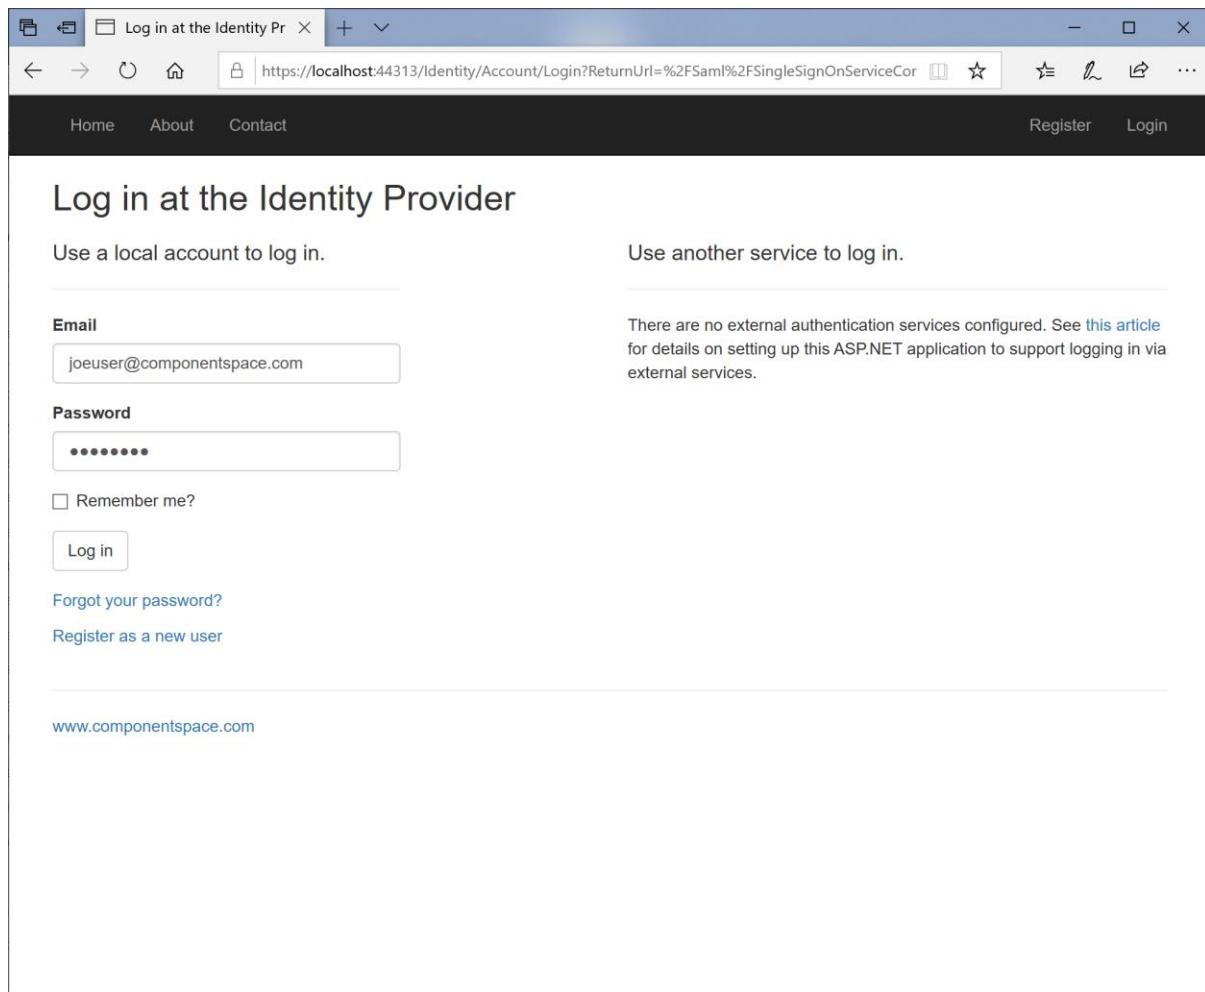


SSO completes with automatic login at the service provider. The user identity is that specified by the identity provider.

For informational purposes only, the returned JWT is displayed.

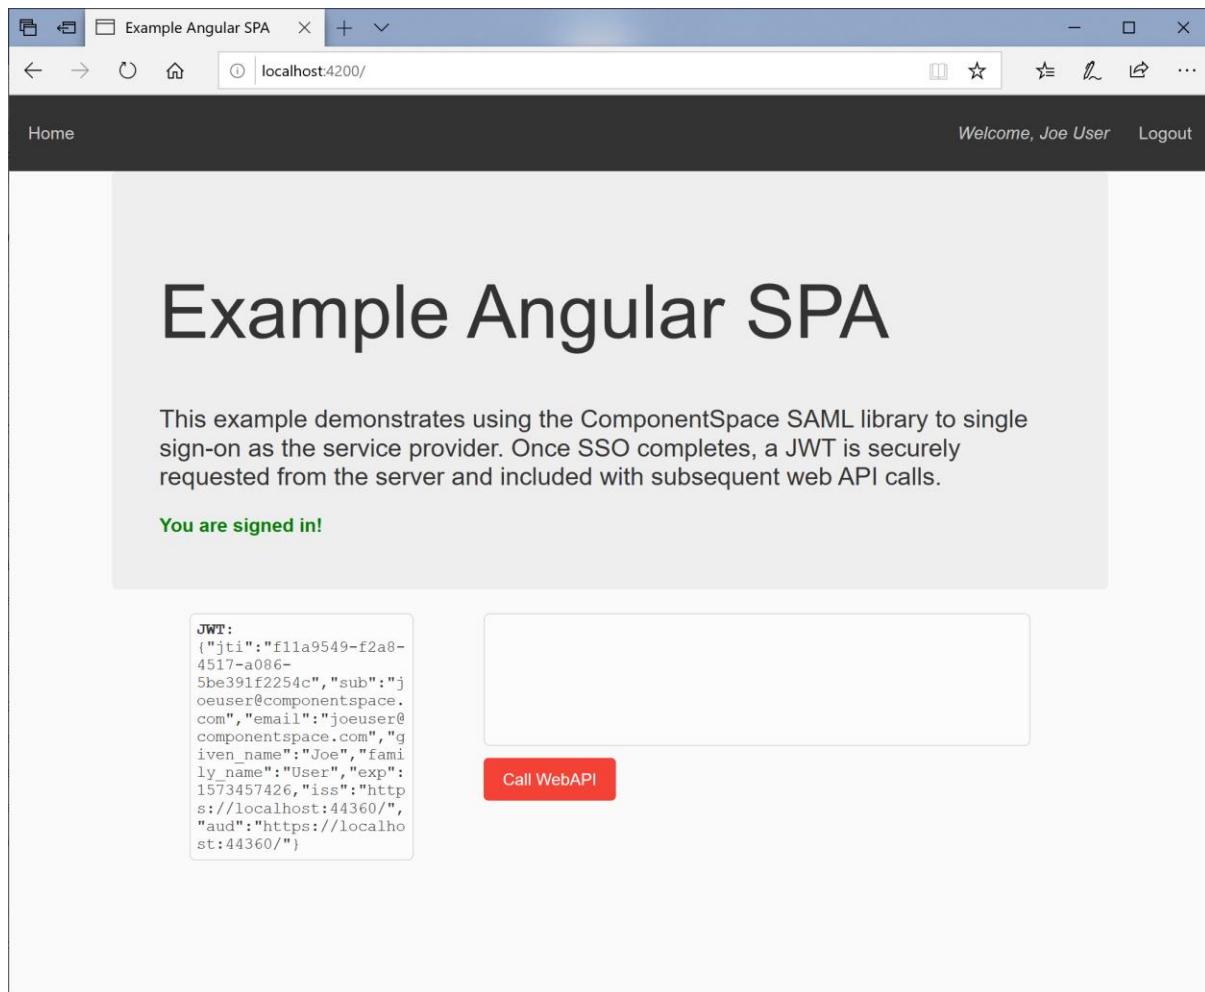

Click the Call WebAPI button.


A web API is called with the JWT bearer token and the returned SAML product information is displayed.

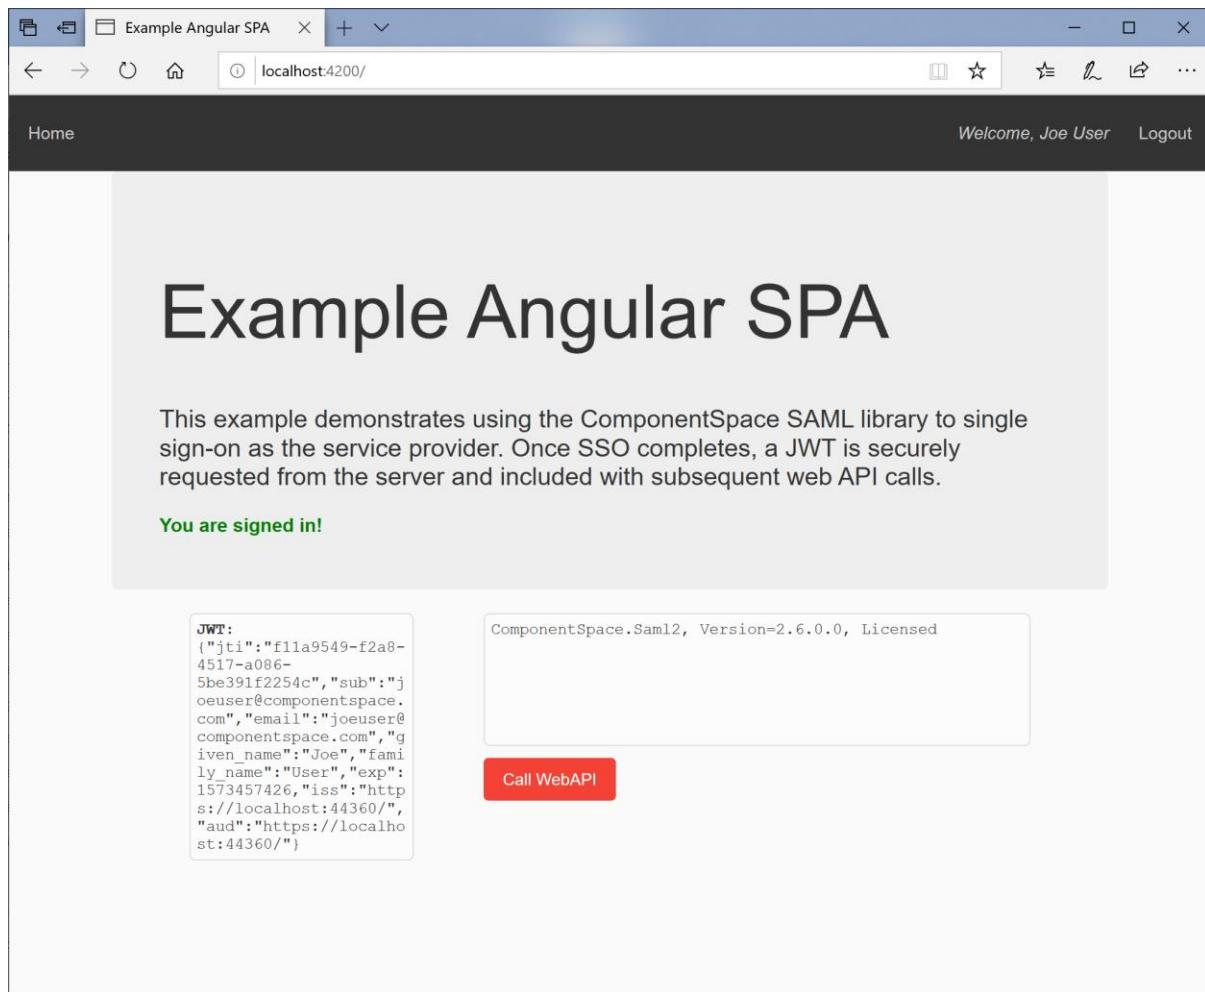

SP-initiated SLO

Having completed SSO, in the same browser window, browse to the Angular application at <http://localhost:4200/>.

Click the Log out link. Logout occurs at both the identity provider and service provider.

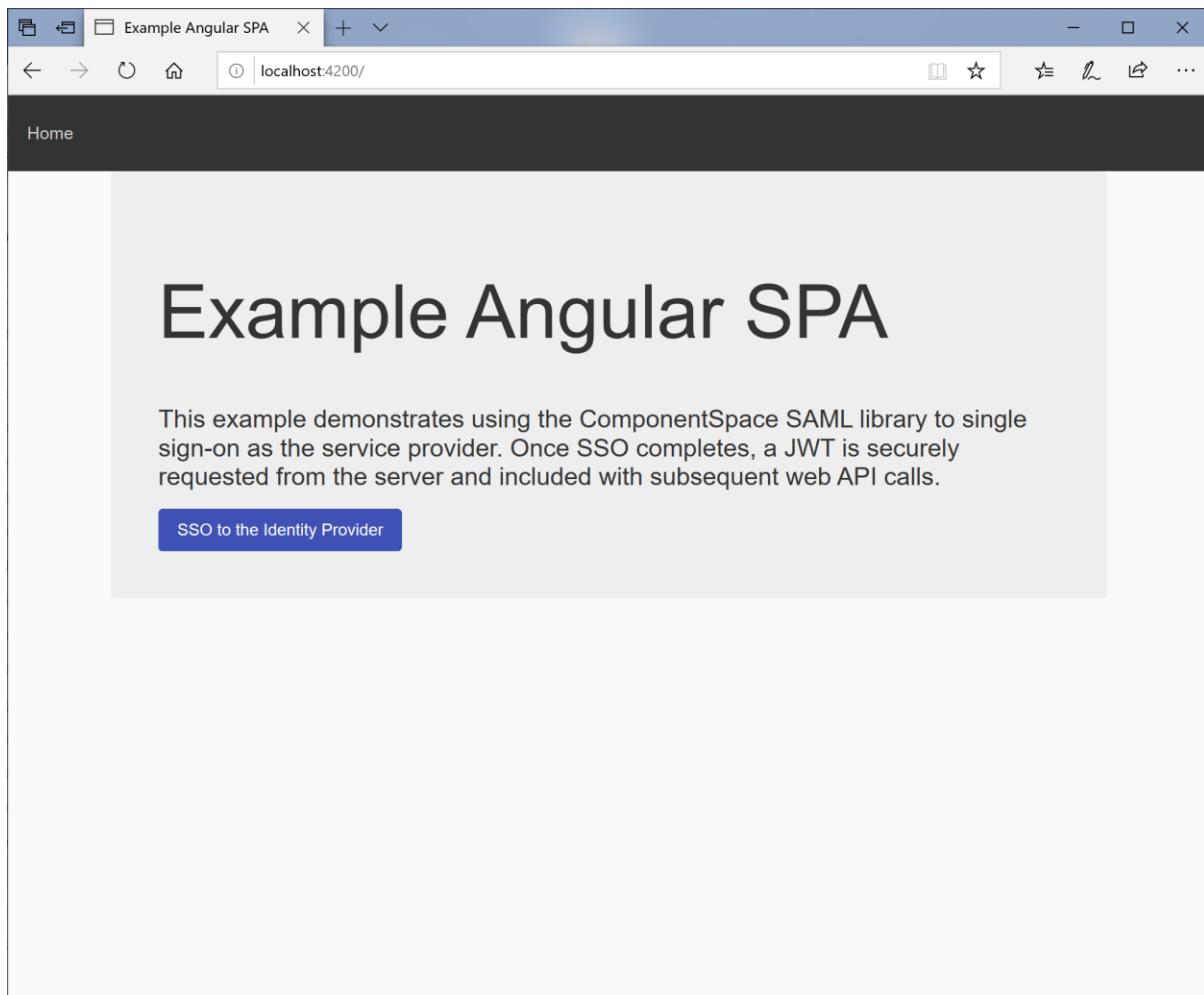

SAML Proxy

The SamlProxy project is an ASP.NET Core web application based off the Visual Studio template.

It demonstrates acting as a SAML proxy for identity providers and service providers and supports:

- IdP-initiated SSO
- SP-initiated SSO
- IdP-initiated SLO
- SP-initiated SLO

An IdP-initiated SSO from an identity provider results in a new IdP-initiated SSO to the target service provider.

An SP-initiated SSO from a service provider results in a new SP-initiated SSO to the target identity provider.

The advantage of a SAML proxy is that it's a single access point for external identity providers or services providers single signing onto one or more internal identity providers or services providers. For example, an external identity provider needs to know about a single service provider only (i.e. the SAML Proxy) which acts on behalf of multiple internal service providers. This minimizes the configuration required at the identity provider and makes configuration changes easier to manage.

Through changes to its SAML configuration, it can support all SAML v2.0 compliant third-party offerings.

Building and Running

The SamlProxy should build without any errors or warnings.

To run on IIS, the application must be configured in and published to IIS.

The application is configured to run at <https://localhost:44361/>.


If this is changed, the SAML configurations must be updated to match the new URLs.

To demonstrate SAML SSO, the ExampleIdentityProvider, ExampleServiceProvider and SamlProxy must be run.

Update the PartnerName in both the ExampleIdentityProvider's and ExampleServiceProvider's appsettings.json to specify https://SamlProxy.


IdP-initiated SSO

Browse to the example identity provider's home page at <http://localhost:44313/>.

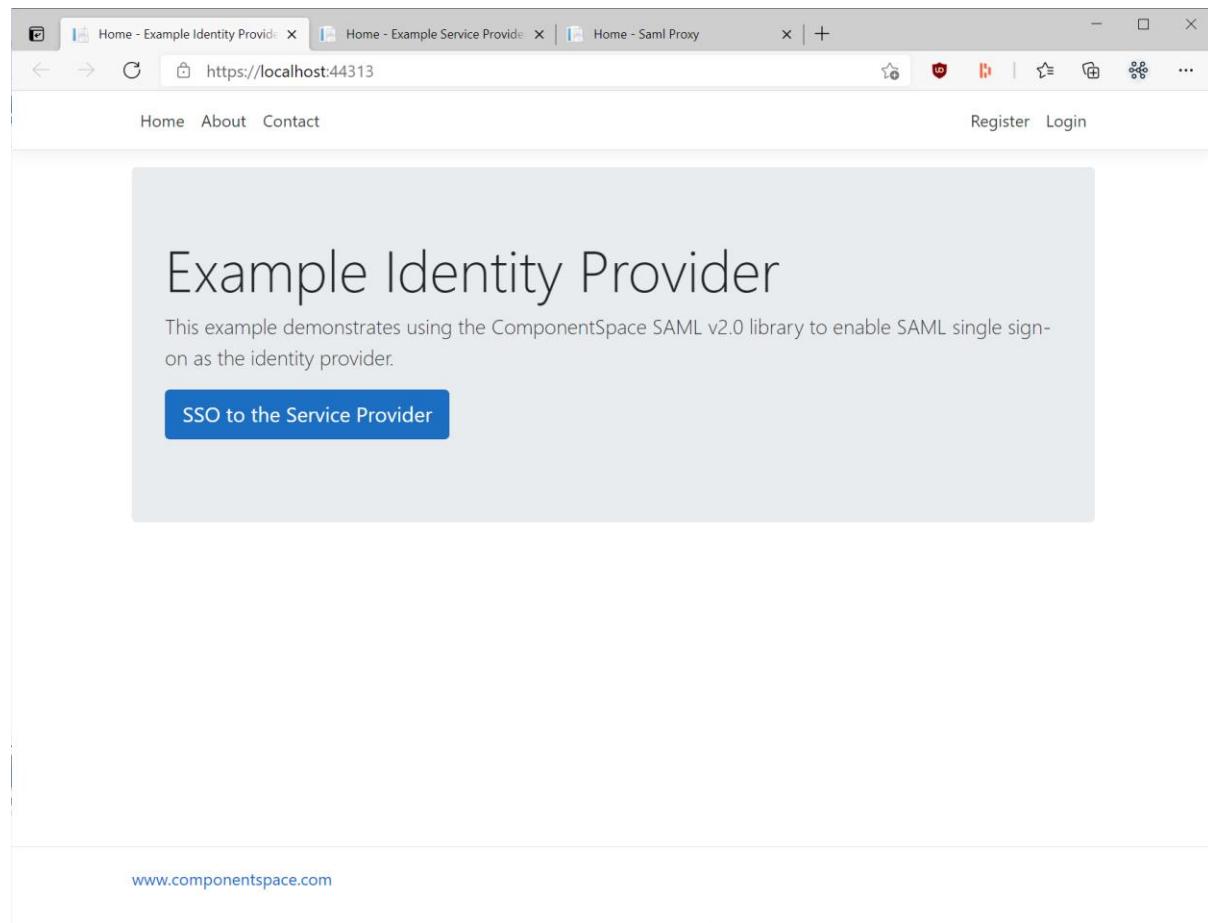


Click the SSO to the Service Provider button.

As you haven't been authenticated at the ExampleIdentityProvider, you are prompted to login.

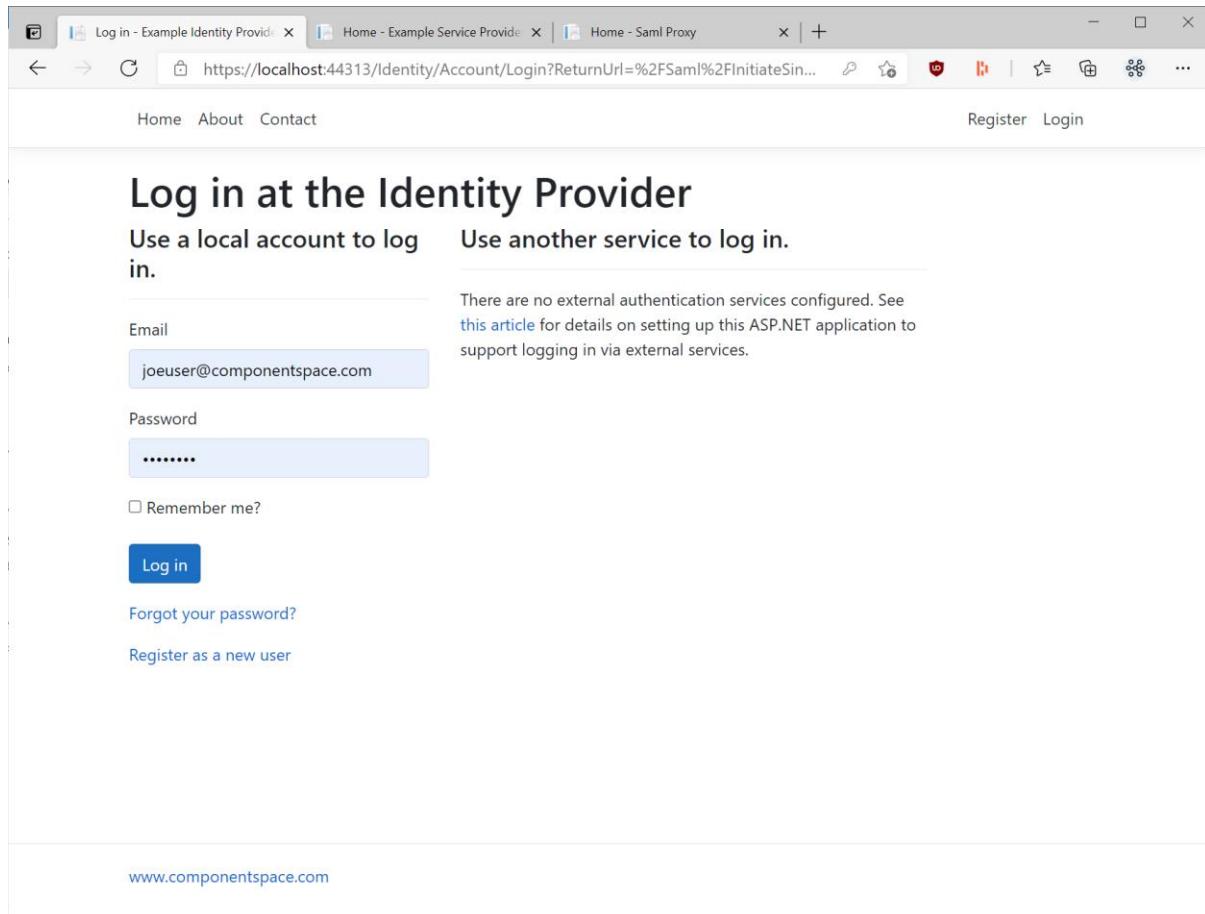


SSO completes with automatic login at the service provider. The user identity is that specified by the identity provider.

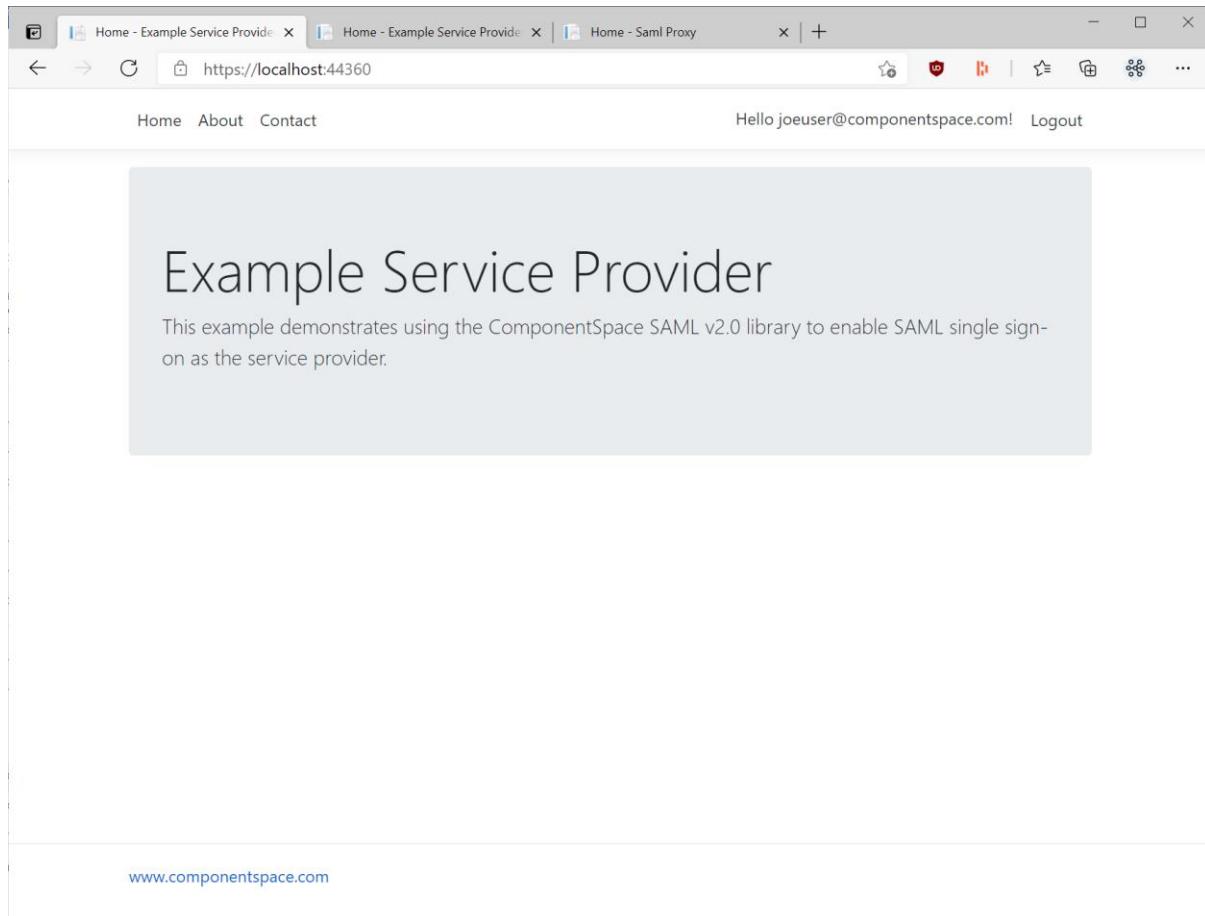


IdP-initiated SLO

Having completed SSO, in the same browser window, browse to the example identity provider's home page at <https://localhost:44313/>.

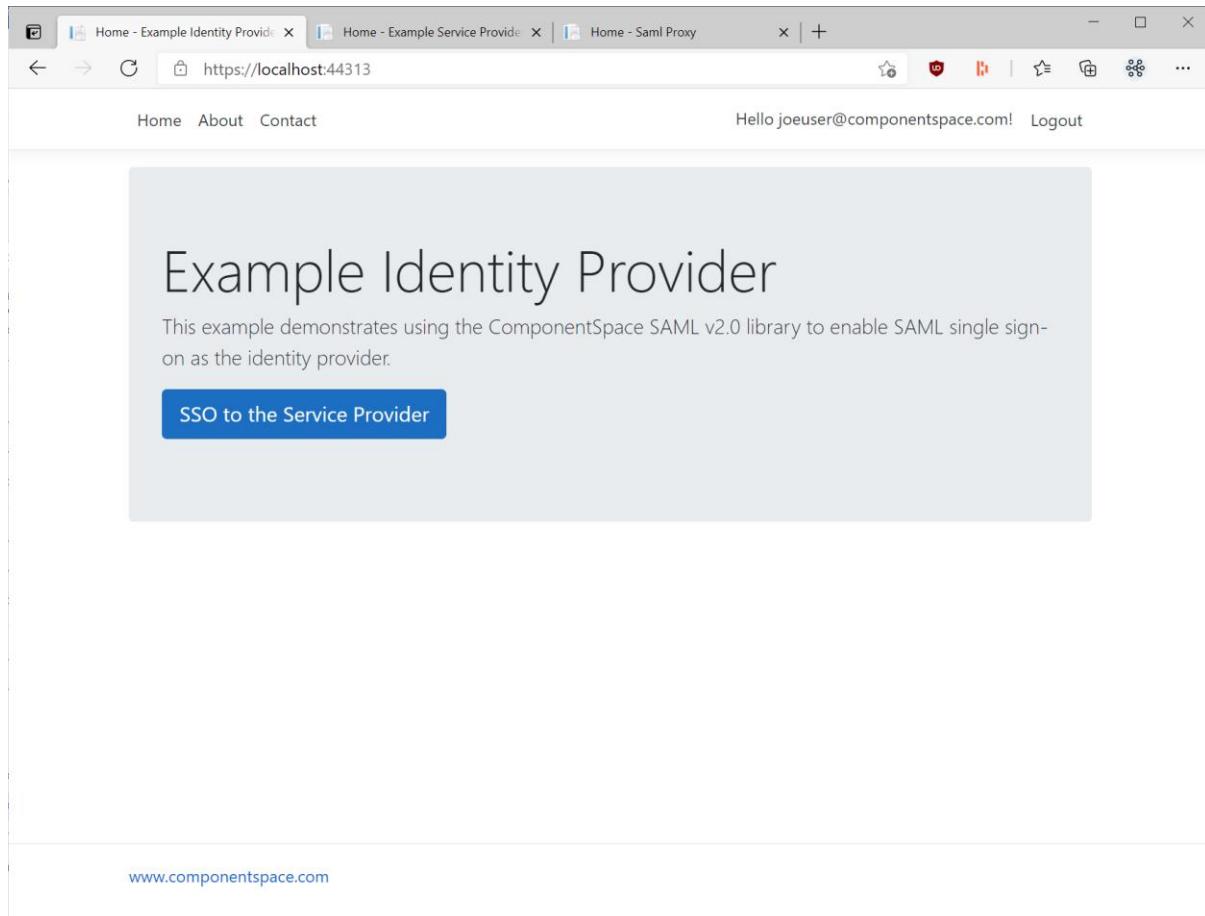


Click the Log out link. Logout occurs at both the identity provider and service provider.

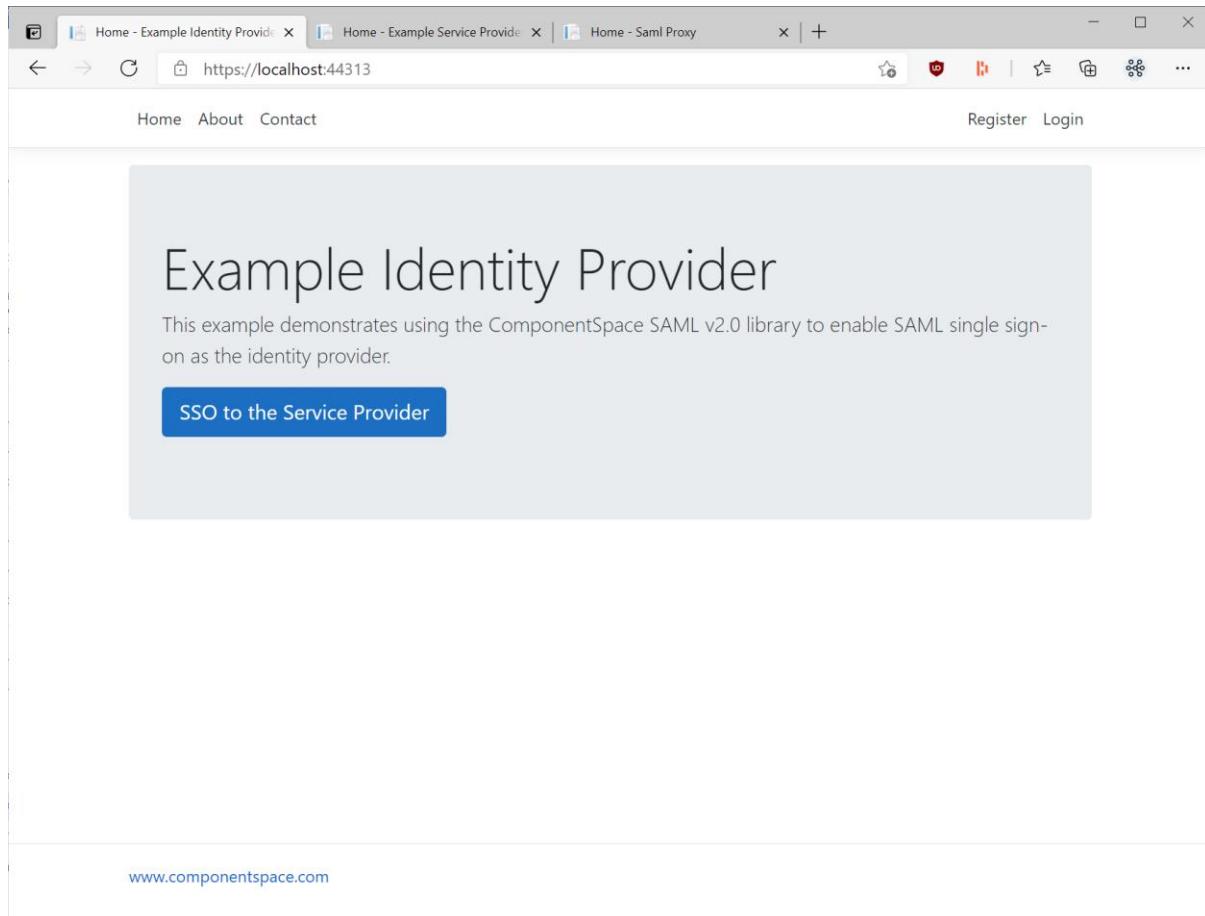


SP-initiated SSO

Browse to the example service provider's home page at <https://localhost:44360/>.

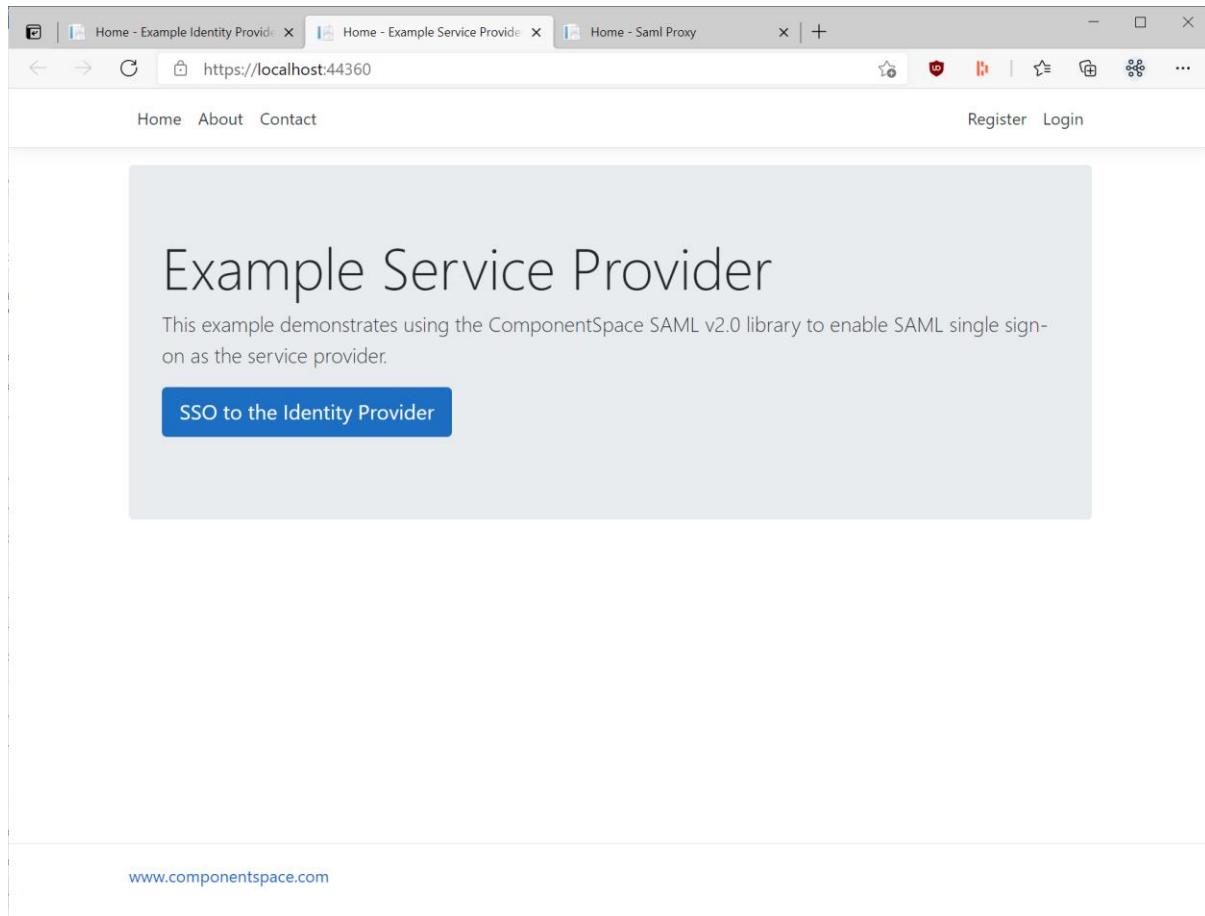


Click the SSO to the Identity Provider button.

You are prompted to login at the identity provider.

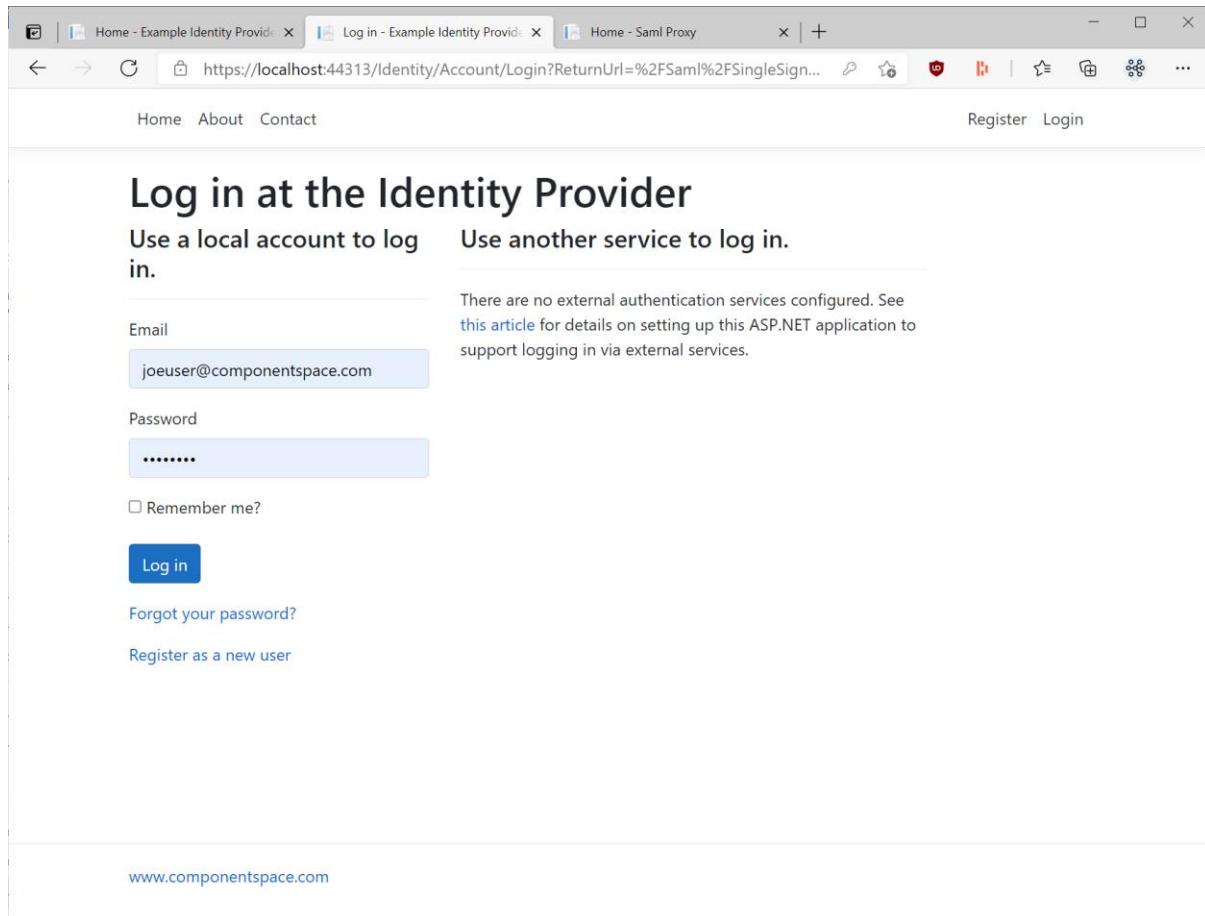


SSO completes with automatic login at the service provider. The user identity is that specified by the identity provider.

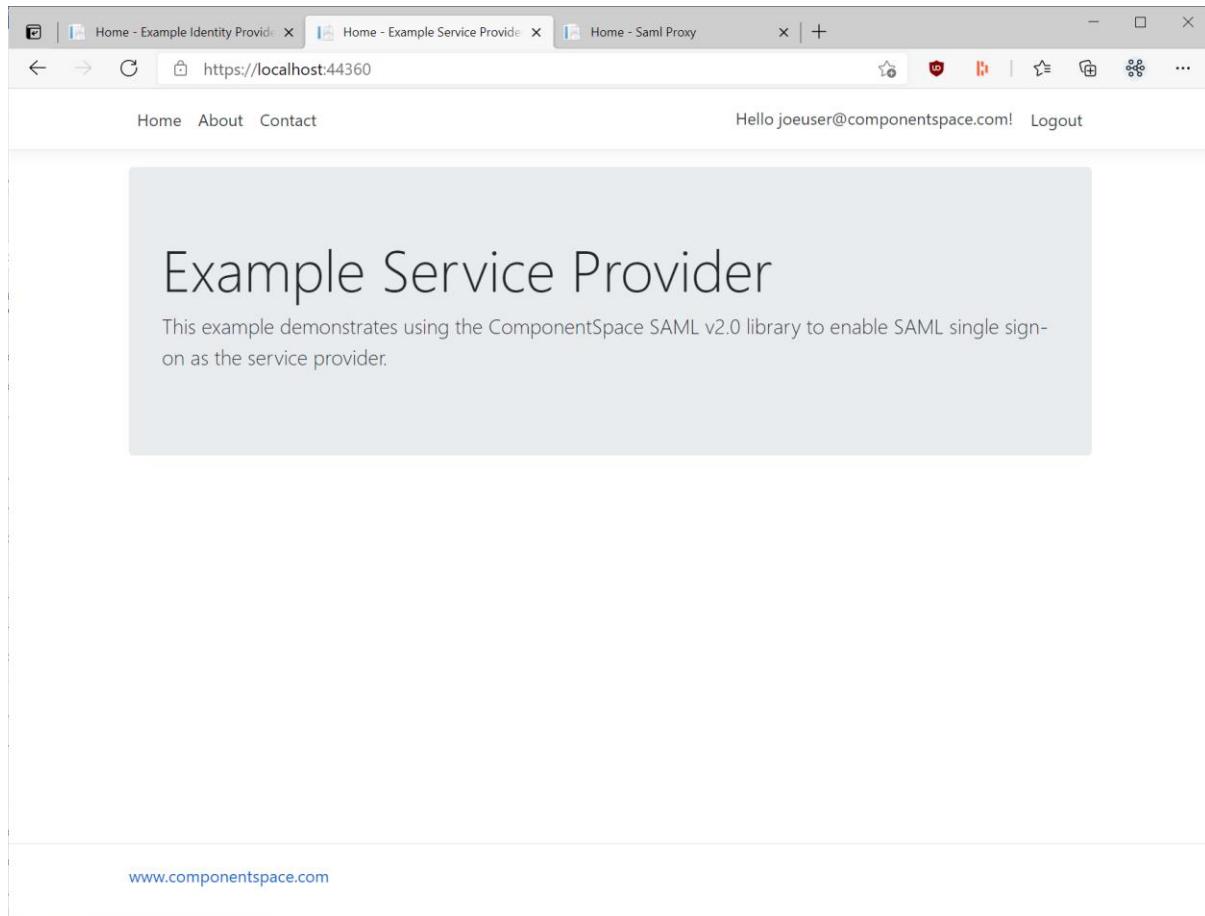


SP-initiated SLO

Having completed SSO, in the same browser window, browse to the example service provider's home page at <https://localhost:44360/>.

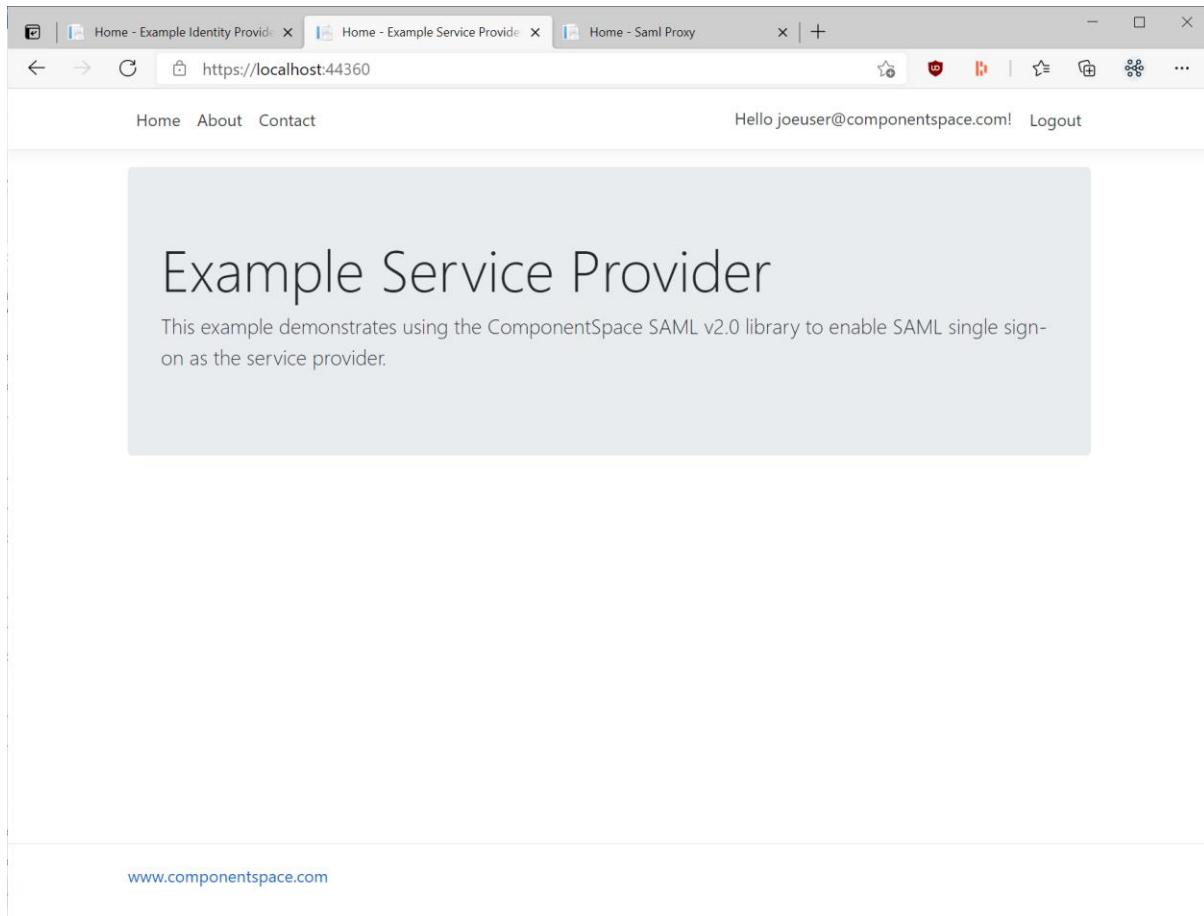

Click the Log out link. Logout occurs at both the identity provider and service provider.

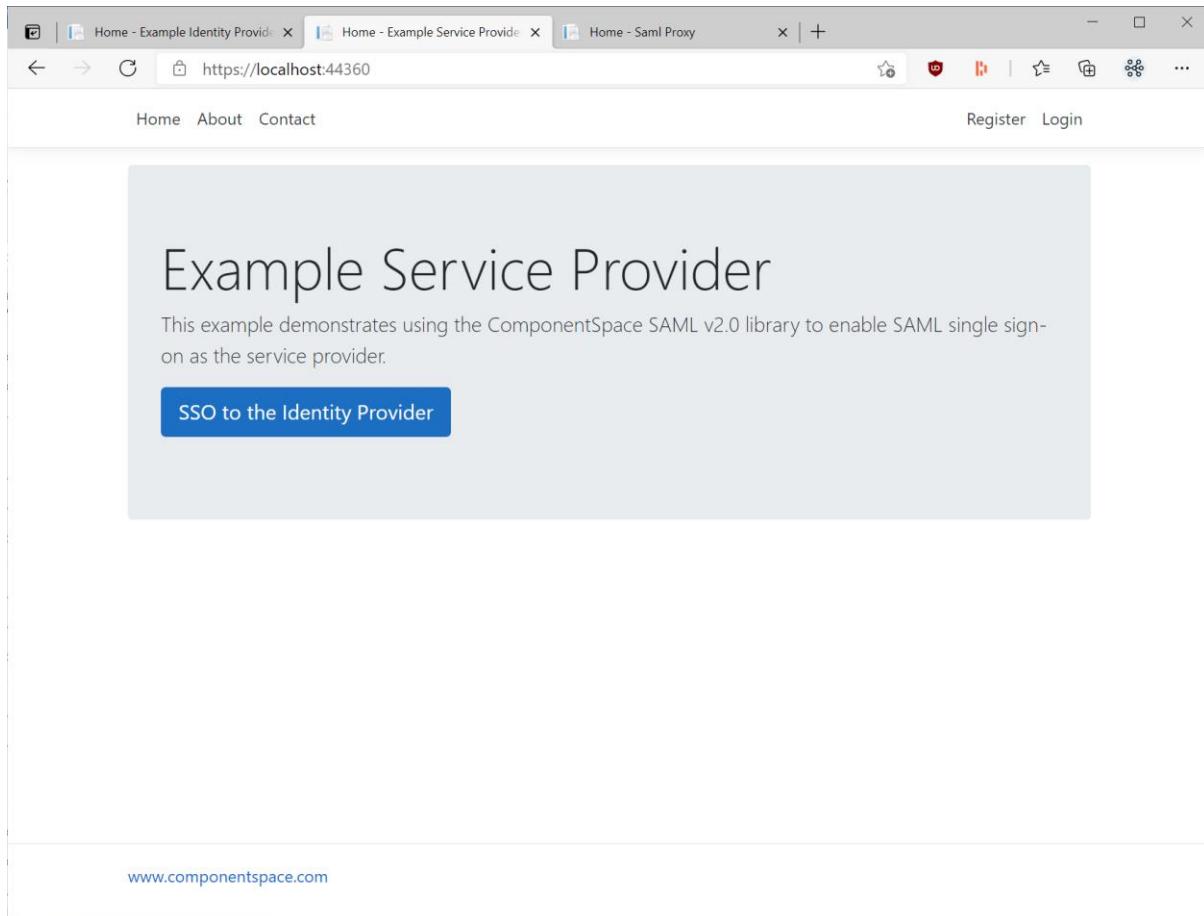

Code Walkthrough

Example Identity Provider

Configuration

The appsettings.json includes the SAML configuration.

The configuration consists of a single SAML configuration specifying a single local identity provider and multiple partner service providers.

Refer to the SAML for ASP.NET Core Configuration Guide for more information.

Startup

The ConfigureServices method includes the following code.

```
// Use a unique identity cookie name rather than sharing the cookie across applications in the domain.
services.ConfigureApplicationCookie(options =>
{
    options.Cookie.Name = "ExampleIdentityProvider.Identity";
});

// Add SAML SSO services.
services.AddSaml(Configuration.GetSection("SAML"));
```

To avoid the sharing of identity cookies between the ExampleIdentityProvider and ExampleServiceProvider, unique cookie names are specified.

The SAML services are added using the SAML configurations stored in the appsettings.json.

Although some of this code is specific to this example, most applications will include code to register the SAML configuration and add the SAML services.

[SamlController.InitiateSingleSignOn](#)

The SAML controller includes the following action to support IdP-initiated SSO.

```
[Authorize]
public async Task<IActionResult> InitiateSingleSignOn()
{
    // Get the name of the logged in user.
    var userName = User.Identity.Name;

    // For demonstration purposes, include some claims.
    var attributes = new List<SamlAttribute>()
    {
        new SamlAttribute(ClaimTypes.Email, User.FindFirst(ClaimTypes.Email)?.Value),
        new SamlAttribute(ClaimTypes.GivenName, User.FindFirst(ClaimTypes.GivenName)?.Value),
        new SamlAttribute(ClaimTypes.Surname, User.FindFirst(ClaimTypes.Surname)?.Value),
    };

    // Initiate single sign-on to the service provider (IdP-initiated SSO)
    // by sending a SAML response containing a SAML assertion to the SP.
    // The optional relay state normally specifies the target URL once SSO completes.
    var partnerName = _configuration["PartnerName"];
    var relayState = _configuration["RelayState"];

    await _samlIdentityProvider.InitiateSsoAsync(partnerName, userName, attributes, relayState);

    return new EmptyResult();
}
```

The authorize attribute on the method ensures only authenticated users can initiate SSO.

The user's name and some associated claims, to be included in the SAML assertion sent to the service provider, are retrieved. The user ID and attributes, if any, sent to the service provider may be different depending on your business requirements.

The partner service provider name is retrieved from the application configuration. The method for determining which service provider to select may be different depending on your business requirements.

InitiateSsoAsync is called to construct and send a SAML response to the service provider.

Control now moves to the service provider site.

[Identity/Account/Logout Page](#)

The logout page includes the following code to support IdP-initiated SLO.

```
var ssoState = await _samlIdentityProvider.GetStatusAsync();
```

```

if (await ssoState.CanSloAsync())
{
    // Request logout at the service provider(s).
    await _samlIdentityProvider.InitiateSloAsync(relayState: returnUrl);

    return new EmptyResult();
}

```

If the user clicks the log out link, a check is made to see whether the user has completed SSO and, if so, `InitiateSloAsync` is called to construct and send a logout request to the service provider(s).

Control now moves to the service provider site.

[SamlController.SingleSignOnService](#)

The SAML controller includes the following code to support SP-initiated SSO.

```

public async Task<IActionResult> SingleSignOnService()
{
    // Receive the authn request from the service provider (SP-initiated SSO).
    await _samlIdentityProvider.ReceiveSsoAsync();

    // If the user is logged in at the identity provider, complete SSO immediately.
    // Otherwise have the user login before completing SSO.
    if (User.Identity.IsAuthenticated)
    {
        await CompleteSsoAsync();

        return new EmptyResult();
    }
    else
    {
        return RedirectToAction("SingleSignOnServiceCompletion");
    }
}

```

`ReceiveSsoAsync` receives and processes the SAML authentication request from the service provider.

An internal redirect to the `SingleSignOnServiceCompletion` action is performed to ensure the user is logged in.

```

[Authorize]
public async Task<ActionResult> SingleSignOnServiceCompletion()
{
    await CompleteSsoAsync();

    return new EmptyResult();
}

```

The `Authorize` attribute on the method ensures only authenticated users can respond to the SSO request.

```

private Task CompleteSsoAsync()
{
    // Get the name of the logged in user.
    var userName = User.Identity.Name;

    // For demonstration purposes, include some claims.
    var attributes = new List<SamlAttribute>()
    {
        new SamlAttribute(ClaimTypes.Email, User.FindFirst(ClaimTypes.Email)?.Value),
        new SamlAttribute(ClaimTypes.GivenName, User.FindFirst(ClaimTypes.GivenName)?.Value),
        new SamlAttribute(ClaimTypes.Surname, User.FindFirst(ClaimTypes.Surname)?.Value),
    };

    // The user is logged in at the identity provider.
    // Respond to the authn request by sending a SAML response containing a SAML assertion to the SP.
    return _samlIdentityProvider.SendSsoAsync(userName, attributes);
}

```

The user's name and some associated claims, to be included in the SAML assertion sent to the service provider, are retrieved. The user ID and attributes, if any, sent to the service provider may be different depending on your business requirements.

`SendSsoAsync` is called to construct and send a SAML response to the service provider.

Control now returns to the service provider site.

[SamlController.SingleLogoutService](#)

The SAML controller includes the following code to support IdP-initiated and SP-initiated SLO.

```

public async Task<IActionResult> SingleLogoutService()
{
    // Receive the single logout request or response.
    // If a request is received then single logout is being initiated by a partner service provider.
    // If a response is received then this is in response to single logout having been initiated by the identity provider.
    var sloResult = await _samlIdentityProvider.ReceiveSloAsync();

    if (sloResult.IsResponse)
    {
        if (sloResult.HasCompleted)
        {
            // IdP-initiated SLO has completed.
            if (!string.IsNullOrEmpty(sloResult.RelayState))
            {
                return LocalRedirect(sloResult.RelayState);
            }

            return RedirectToPage("/Index");
        }
    }
    else
    {

```

```

// Logout locally.
await _signInManager.SignOutAsync();

// Respond to the SP-initiated SLO request indicating successful logout.
await _samlIdentityProvider.SendSloAsync();
}

return new EmptyResult();
}

```

ReceiveSloAsync is called to receive and process the logout message from the service provider.

For IdP-initiated SLO, a logout response is received. If the results indicate SLO has completed, the user is redirected to the home page.

For SP-initiated SLO, a logout request is received. The user is logged out locally and SendSloAsync is called to construct and send a SAML logout response to the service provider. Control now returns to the service provider site.

[SamlController.ArtifactResolutionService](#)

The SAML controller includes the following code to support SAML artifact resolution as part of the HTTP-Artifact binding. If the HTTP-Artifact binding is not supported, this code may be omitted.

```

public async Task<IActionResult> ArtifactResolutionService()
{
    // Resolve the HTTP artifact.
    // This is only required if supporting the HTTP-Artifact binding.
    await _samlIdentityProvider.ResolveArtifactAsync();

    return new EmptyResult();
}

```

[Example Service Provider](#)

[Configuration](#)

The appsettings.json includes the SAML configuration.

The configuration consists of a single SAML configuration specifying a single local service provider and multiple partner identity providers.

Refer to the [SAML for ASP.NET Core Configuration Guide](#) for more information.

[Startup](#)

The ConfigureServices method includes the following code.

```

// Use a unique identity cookie name rather than sharing the cookie across applications in the domain.
services.ConfigureApplicationCookie(options =>
{
    options.Cookie.Name = "ExampleServiceProvider.Identity";
});

// Add SAML SSO services.

```

```
services.AddSaml(Configuration.GetSection("SAML"));
```

To avoid the sharing of identity cookies between the ExampleIdentityProvider and ExampleServiceProvider, unique cookie names are specified.

The SAML services are added using the SAML configurations stored in the appsettings.json.

Although some of this code is specific to this example, most applications will include code to register the SAML configuration and add the SAML services.

[SamlController.SingleSignOn](#)

The SAML controller includes the following action to support SP-initiated SSO.

```
public async Task<IActionResult> InitiateSingleSignOn(string returnUrl = null)
{
    // To login automatically at the service provider, initiate single sign-on to the identity provider (SP-initiated SSO).
    // The return URL is remembered as SAML relay state.
    var partnerName = _configuration["PartnerName"];

    await _samlServiceProvider.InitiateSsoAsync(partnerName, returnUrl);

    return new EmptyResult();
}
```

The partner identity provider name is retrieved from the application configuration. The method for determining which identity provider to select may be different depending on your business requirements.

InitiateSSOAsync is called to construct and send a SAML authentication request to the identity provider.

Control now moves to the identity provider site.

[Identity/Account/Logout Page](#)

The logout page includes the following code to support SP-initiated SLO.

```
var ssoState = await _samlServiceProvider.GetStatusAsync();

if (await ssoState.CanSloAsync())
{
    // Request logout at the identity provider.
    await _samlServiceProvider.InitiateSloAsync(relayState: returnUrl);

    return new EmptyResult();
}
```

If the user clicks the log out link, a check is made to see whether the user has completed SSO and, if so, InitiateSloAsync is called to construct and send a logout request to the identity provider.

Control now moves to the identity provider site.

SamlController.AssertionConsumerService

The SAML controller includes the following code to support IdP-initiated and SP-initiated SSO.

```
public async Task<IActionResult> AssertionConsumerService()
{
    // Receive and process the SAML assertion contained in the SAML response.
    // The SAML response is received either as part of IdP-initiated or SP-initiated SSO.
    var ssoResult = await _samlServiceProvider.ReceiveSsoAsync();

    // Automatically provision the user.
    // If the user doesn't exist locally then create the user.
    // Automatic provisioning is an optional step.
    var user = await _userManager.FindByNameAsync(ssoResult.UserID);

    if (user == null)
    {
        user = new IdentityUser { UserName = ssoResult.UserID, Email = ssoResult.UserID };

        var result = await _userManager.CreateAsync(user);

        if (!result.Succeeded)
        {
            throw new Exception($"The user {ssoResult.UserID} couldn't be created - {result}");
        }

        // For demonstration purposes, create some additional claims.
        if (ssoResult.Attributes != null)
        {
            var samlAttribute = ssoResult.Attributes.SingleOrDefault(a => a.Name == ClaimTypes.Email);

            if (samlAttribute != null)
            {
                await _userManager.AddClaimAsync(user, new Claim(ClaimTypes.Email, samlAttribute.ToString()));
            }

            samlAttribute = ssoResult.Attributes.SingleOrDefault(a => a.Name == ClaimTypes.GivenName);

            if (samlAttribute != null)
            {
                await _userManager.AddClaimAsync(user, new Claim(ClaimTypes.GivenName,
samlAttribute.ToString()));
            }
        }

        samlAttribute = ssoResult.Attributes.SingleOrDefault(a => a.Name == ClaimTypes.Surname);

        if (samlAttribute != null)
        {
            await _userManager.AddClaimAsync(user, new Claim(ClaimTypes.Surname,
samlAttribute.ToString()));
        }
    }

    // Automatically login using the asserted identity.
    await _signInManager.SignInAsync(user, isPersistent: false);
}
```

```
// Redirect to the target URL if specified.
if (!string.IsNullOrEmpty(ssoResult.RelayState))
{
    return LocalRedirect(ssoResult.RelayState);
}

return RedirectToPage("/Index");
}
```

ReceiveSsoAsync receives and processes the SAML response from the identity provider. The SAML response is either the result of IdP-initiated or SP-initiated SSO.

If the user doesn't exist in the user database, they're automatically provisioned. You may or may not support automatic provisioning depending on your business requirements.

The user is logged in automatically at the service provider using information retrieved from the SAML assertion. The user ID and attributes, if any, received by the service provider may be different depending on your business requirements.

For IdP-initiated SSO, the optional relay state sent by the identity provider specifies a URL to support deep web linking. If specified, the user is redirected to this page. Otherwise, the user is redirected to the home page.

[SamlController.SingleLogoutService](#)

The SAML controller includes the following code to support IdP-initiated and SP-initiated SLO.

```
public async Task<IActionResult> SingleLogoutService()
{
    // Receive the single logout request or response.
    // If a request is received then single logout is being initiated by the identity provider.
    // If a response is received then this is in response to single logout having been initiated by the service
    provider.
    var sloResult = await _samlServiceProvider.ReceiveSloAsync();

    if (sloResult.IsResponse)
    {
        // SP-initiated SLO has completed.
        if (!string.IsNullOrEmpty(sloResult.RelayState))
        {
            return LocalRedirect(sloResult.RelayState);
        }

        return RedirectToPage("/Index");
    }
    else
    {
        // Logout locally.
        await _signInManager.SignOutAsync();

        // Respond to the IdP-initiated SLO request indicating successful logout.
        await _samlServiceProvider.SendSloAsync();
    }
}
```

```
    return new EmptyResult();
}
```

ReceiveSloAsync is called to receive and process the logout message from the identity provider.

For SP-initiated SLO, a logout response is received. The user is redirected to the home page.

For IdP-initiated SLO, a logout request is received. The user is logged out locally and SendSloAsync is called to construct and send a SAML logout response to the identity provider. Control now returns to the identity provider site.

[SamlController.ArtifactResolutionService](#)

The SAML controller includes the following code to support SAML artifact resolution as part of the HTTP-Artifact binding. If the HTTP-Artifact binding is not supported, this code may be omitted.

```
public async Task<IActionResult> ArtifactResolutionService()
{
    // Resolve the HTTP artifact.
    // This is only required if supporting the HTTP-Artifact binding.
    await __samlServiceProvider.ResolveArtifactAsync();

    return new EmptyResult();
}
```

ResolveArtifactAsync is called to receive and process the artifact resolve request from the identity provider.

[JWT Bearer Token Support](#)


The ExampleServiceProvider project demonstrates authorizing access to a web API using JWT tokens.

The claims page calls a web API to return a JWT bearer token. This token includes claims originating from the SAML assertion received as part of SSO.

The claim page then presents the JWT bearer token when accessing a web API that returns the user's claims for display.

None of this code is SAML SSO specific but it does demonstrate using SAML SSO for authentication of the user, creating a JWT bearer token, and presenting this token for authorized access to a web API.

ComponentSpace SAML for ASP.NET Core Examples Guide

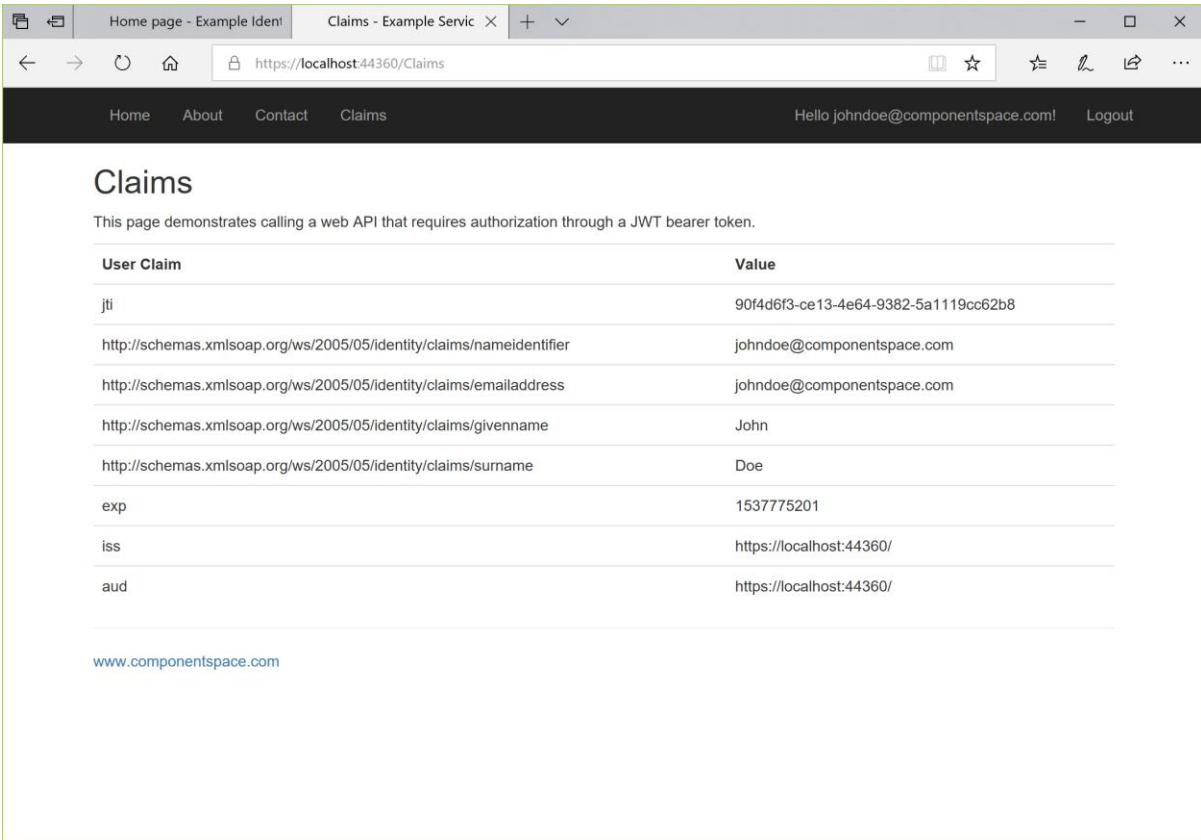

User Claim	Value
jti	90f4d6f3-ce13-4e64-9382-5a1119cc62b8
http://schemas.xmlsoap.org/ws/2005/05/identity/claims/nameidentifier	johndoe@componentspace.com
http://schemas.xmlsoap.org/ws/2005/05/identity/claims/emailaddress	johndoe@componentspace.com
http://schemas.xmlsoap.org/ws/2005/05/identity/claims/givenname	John
http://schemas.xmlsoap.org/ws/2005/05/identity/claims/surname	Doe
exp	1537775201
iss	https://localhost:44360/
aud	https://localhost:44360/

www.componentspace.com

Middleware Identity Provider

Configuration

The appsettings.json includes the SAML configuration.

The configuration consists of a single SAML configuration specifying a single local identity provider and multiple partner service providers.

Refer to the SAML for ASP.NET Core Configuration Guide for more information.

Startup

The ConfigureServices method includes the following code.

```
// Use a unique identity cookie name rather than sharing the cookie across applications in the domain.
services.ConfigureApplicationCookie(options =>
{
    options.Cookie.Name = "MiddlewareIdentityProvider.Identity";
});

// Add SAML SSO services.
services.AddSaml(Configuration.GetSection("SAML"));

// Add the SAML middleware services.
services.AddSamlMiddleware(options =>
{
    options.PartnerName = () => Configuration["PartnerName"];
});
```

To avoid the sharing of identity cookies between the `MiddlewareIdentityProvider` and `ExampleServiceProvider`, unique cookie names are specified.

The SAML services are added using the SAML configurations stored in the `appsettings.json`.

Finally, the SAML middleware is added.

The SAML options specify the name of a configured partner service provider.

The `Configure` method includes the following code.

```
app.UseAuthentication();

// Use SAML middleware.
app.UseSaml();
```

The authentication middleware and SAML middles are enabled.

Although some of this code is specific to this example, most applications will include code to register the SAML configuration and add the SAML services.

[Index Page](#)

The index page includes the following code to support IdP-initiated SSO.

```
public IActionResult OnGetInitiateSingleSignOn()
{
    // Pass control to the SAML middleware for IdP-initiated SSO.
    return LocalRedirect(SamlMiddlewareDefaults.InitiateSingleSignOnPath);
}
```

A redirect to the `InitiateSingleSignOnPath` initiates SSO.

The SAML middleware constructs a SAML response and sends it to the service provider.

Control now moves to the service provider site.

[Identity/Account/Logout Page](#)

The logout page includes the following code to support SP-initiated SLO.

```
public async Task<IActionResult> OnGet(string returnUrl = null)
{
    // If a redirect URL is included, this was invoked by the SAML middleware as part of SP-initiated SLO.
    if (returnUrl != null)
    {
        // Logout the user locally.
        await _signInManager.SignOutAsync();
        _logger.LogInformation("User logged out.");

        // Return control to the SAML middleware.
        return LocalRedirect(returnUrl);
    }

    return Page();
}
```

```
}
```

The user is logged out locally and control is returned to the SAML middleware to complete SLO.

Control now moves to the service provider site.

The logout page includes the following code to support IdP-initiated SLO.

```
public async Task<IActionResult> OnPost(string returnUrl = null)
{
    // Logout the user locally.
    await _signInManager.SignOutAsync();
    _logger.LogInformation("User logged out.");

    // Pass control to the SAML middleware for IdP-initiated SLO.
    return LocalRedirect(
        QueryHelpers.AddQueryString(
            SamlMiddlewareDefaults.InitiateSingleLogoutPath,
            SamlMiddlewareDefaults.ReturnUrlParameter,
            returnUrl));
}
```

A redirect to the `InitiateSingleLogoutPath` initiates SLO.

The SAML middleware constructs a SAML logout request and sends it to the service provider.

Control now moves to the service provider site.

[Middleware Service Provider](#)

[Configuration](#)

The `appsettings.json` includes the SAML configuration.

The configuration consists of a single SAML configuration specifying a single local service provider and multiple partner identity providers.

Refer to the [SAML for ASP.NET Core Configuration Guide](#) for more information.

[Startup](#)

The `ConfigureServices` method includes the following code.

```
// Use a unique identity cookie name rather than sharing the cookie across applications in the domain.
services.ConfigureApplicationCookie(options =>
{
    options.Cookie.Name = "MiddlewareServiceProvider.Identity";
});

// Add SAML SSO services.
services.AddSaml(Configuration.GetSection("SAML"));

// Add SAML authentication middleware.
services.AddAuthentication().AddSaml(options =>
{
```

```
options.PartnerName = () => Configuration["PartnerName"];
});
```

To avoid the sharing of identity cookies between the ExampleIdentityProvider and MiddlewareServiceProvider, unique cookie names are specified.

The SAML services are added using the SAML configurations stored in the appsettings.json.

Finally, the SAML authentication is added.

The SAML options specify the name of a configured partner identity provider.

Although some of this code is specific to this example, most applications will include code to register the SAML configuration and add the SAML services and middleware.

[Identity/Account/Logout](#)

The logout page includes the following code to support SP-initiated SLO.

```
public async Task<IActionResult> OnPost(string returnUrl = null)
{
    // Logout the user locally.
    await _signInManager.SignOutAsync();
    _logger.LogInformation("User logged out.");

    // Explicitly logout SAML as this isn't done by the SignInManager.
    await HttpContext.SignOutAsync(
        SamlAuthenticationDefaults.AuthenticationScheme,
        new AuthenticationProperties()
    {
        RedirectUri = returnUrl
    });

    return new EmptyResult();
}
```

HttpContext.SignOutAsync initiates SLO.

The SAML authentication handler constructs a SAML logout request and sends it to the identity provider.

Control now moves to the identity provider site.

[Blazor Server Identity Provider](#)

[Configuration](#)

The appsettings.json includes the SAML configuration.

The configuration consists of a single SAML configuration specifying a single local identity provider and multiple partner service providers.

Refer to the SAML for ASP.NET Core Configuration Guide for more information.

[Startup](#)

The ConfigureServices method includes the following code.

```
// Use a unique identity cookie name rather than sharing the cookie across applications in the domain.
services.ConfigureApplicationCookie(options =>
{
    options.Cookie.Name = "BlazorServerIdentityProvider.Identity";
});

// Add SAML SSO services.
services.AddSaml(Configuration.GetSection("SAML"));
```

To avoid the sharing of identity cookies between the BlazorServerIdentityProvider and BlazorServerServiceProvider, unique cookie names are specified.

The SAML services are added using the SAML configurations stored in the appsettings.json.

Although some of this code is specific to this example, most applications will include code to register the SAML configuration and add the SAML services.

[SamlController.InitiateSingleSignOn](#)

The SAML controller includes the following action to support IdP-initiated SSO.

```
[Authorize]
public async Task<IActionResult> InitiateSingleSignOn()
{
    // Get the name of the logged in user.
    var userName = User.Identity.Name;

    // For demonstration purposes, include some claims.
    var attributes = new List<SamlAttribute>()
    {
        new SamlAttribute(ClaimTypes.Email, User.FindFirst(ClaimTypes.Email)?.Value),
        new SamlAttribute(ClaimTypes.GivenName, User.FindFirst(ClaimTypes.GivenName)?.Value),
        new SamlAttribute(ClaimTypes.Surname, User.FindFirst(ClaimTypes.Surname)?.Value),
    };

    var partnerName = _configuration["PartnerName"];
    var relayState = _configuration["RelayState"];

    // Initiate single sign-on to the service provider (IdP-initiated SSO)
    // by sending a SAML response containing a SAML assertion to the SP.
    // The optional relay state normally specifies the target URL once SSO completes.
    await _samlIdentityProvider.InitiateSsoAsync(partnerName, userName, attributes, relayState);

    return new EmptyResult();
}
```

The authorize attribute on the method ensures only authenticated users can initiate SSO.

The user's name and some associated claims, to be included in the SAML assertion sent to the service provider, are retrieved. The user ID and attributes, if any, sent to the service provider may be different depending on your business requirements.

The partner service provider name is retrieved from the application configuration. The method for determining which service provider to select may be different depending on your business requirements.

`InitiateSsoAsync` is called to construct and send a SAML response to the service provider.

Control now moves to the service provider site.

[Identity/Account/Logout Page](#)

The logout page includes the following code to support IdP-initiated SLO.

```
var ssoState = await _samlIdentityProvider.GetStatusAsync();

if (await ssoState.CanSloAsync())
{
    // Request logout at the service provider(s).
    return RedirectToAction("InitiateSingleLogout", "Saml");

    return new EmptyResult();
}
```

If the user clicks the log out link, a check is made to see whether the user has completed SSO and, if so, single logout is initiated.

[SamlController.InitiateSingleLogout](#)

The SAML controller includes the following action to support IdP-initiated SLO.

```
public async Task<IActionResult> InitiateSingleLogout(string returnUrl = null)
{
    // Request logout at the service provider(s).
    await _samlIdentityProvider.InitiateSloAsync(relayState: returnUrl);

    return new EmptyResult();
}
```

`InitiateSloAsync` is called to construct and send a logout request to the service provider(s).

Control now moves to the service provider site.

[SamlController.SingleSignOnService](#)

The SAML controller includes the following code to support SP-initiated SSO.

```
public async Task<IActionResult> SingleSignOnService()
{
    // Receive the authn request from the service provider (SP-initiated SSO).
    await _samlIdentityProvider.ReceiveSsoAsync();

    // If the user is logged in at the identity provider, complete SSO immediately.
    // Otherwise have the user login before completing SSO.
    if (User.Identity.IsAuthenticated)
    {
        await CompleteSsoAsync();
```

```

        return new EmptyResult();
    }
    else
    {
        return RedirectToAction("SingleSignOnServiceCompletion");
    }
}

```

ReceiveSsoAsync receives and processes the SAML authentication request from the service provider.

An internal redirect to the SingleSignOnServiceCompletion action is performed to ensure the user is logged in.

```

[Authorize]
public async Task<ActionResult> SingleSignOnServiceCompletion()
{
    await CompleteSsoAsync();

    return new EmptyResult();
}

```

The authorize attribute on the method ensures only authenticated users can respond to the SSO request.

```

private Task CompleteSsoAsync()
{
    // Get the name of the logged in user.
    var userName = User.Identity.Name;

    // For demonstration purposes, include some claims.
    var attributes = new List<SamlAttribute>()
    {
        new SamlAttribute(ClaimTypes.Email, User.FindFirst(ClaimTypes.Email)?.Value),
        new SamlAttribute(ClaimTypes.GivenName, User.FindFirst(ClaimTypes.GivenName)?.Value),
        new SamlAttribute(ClaimTypes.Surname, User.FindFirst(ClaimTypes.Surname)?.Value),
    };

    // The user is logged in at the identity provider.
    // Respond to the authn request by sending a SAML response containing a SAML assertion to the SP.
    return _samlIdentityProvider.SendSsoAsync(userName, attributes);
}

```

The user's name and some associated claims, to be included in the SAML assertion sent to the service provider, are retrieved. The user ID and attributes, if any, sent to the service provider may be different depending on your business requirements.

SendSsoAsync is called to construct and send a SAML response to the service provider.

Control now returns to the service provider site.

[SamlController.SingleLogoutService](#)

The SAML controller includes the following code to support IdP-initiated and SP-initiated SLO.

```
public async Task<IActionResult> SingleLogoutService()
{
    // Receive the single logout request or response.
    // If a request is received then single logout is being initiated by a partner service provider.
    // If a response is received then this is in response to single logout having been initiated by the identity
    // provider.
    var sloResult = await _samlIdentityProvider.ReceiveSloAsync();

    if (sloResult.IsResponse)
    {
        if (sloResult.HasCompleted)
        {
            // IdP-initiated SLO has completed.
            if (!string.IsNullOrEmpty(sloResult.RelayState))
            {
                return LocalRedirect(sloResult.RelayState);
            }

            return LocalRedirect("~/");
        }
    }
    else
    {
        // Logout locally.
        await _signInManager.SignOutAsync();

        // Respond to the SP-initiated SLO request indicating successful logout.
        await _samlIdentityProvider.SendSloAsync();
    }

    return new EmptyResult();
}
```

`ReceiveSloAsync` is called to receive and process the logout message from the service provider.

For IdP-initiated SLO, a logout response is received. If the results indicate SLO has completed, the user is redirected to the home page.

For SP-initiated SLO, a logout request is received. The user is logged out locally and `SendSloAsync` is called to construct and send a SAML logout response to the service provider. Control now returns to the service provider site.

[SamlController.ArtifactResolutionService](#)

The SAML controller includes the following code to support SAML artifact resolution as part of the HTTP-Artifact binding. If the HTTP-Artifact binding is not supported, this code may be omitted.

```
public async Task<IActionResult> ArtifactResolutionService()
{
    // Resolve the HTTP artifact.
```

```
// This is only required if supporting the HTTP-Artifact binding.
await _samlIdentityProvider.ResolveArtifactAsync();

return new EmptyResult();
}
```

Blazor Server Service Provider

Configuration

The appsettings.json includes the SAML configuration.

The configuration consists of a single SAML configuration specifying a single local service provider and multiple partner identity providers.

Refer to the SAML for ASP.NET Core Configuration Guide for more information.

Startup

The ConfigureServices method includes the following code.

```
// Use a unique identity cookie name rather than sharing the cookie across applications in the domain.
services.ConfigureApplicationCookie(options =>
{
    options.Cookie.Name = "BlazorServerServiceProvider.Identity";
});

// Add SAML SSO services.
services.AddSaml(Configuration.GetSection("SAML"));
```

To avoid the sharing of identity cookies between the BlazorServerIdentityProvider and BlazorServerServiceProvider, unique cookie names are specified.

The SAML services are added using the SAML configurations stored in the appsettings.json.

Although some of this code is specific to this example, most applications will include code to register the SAML configuration and add the SAML services.

SamlController.SingleSignOn

The SAML controller includes the following action to support SP-initiated SSO.

```
public async Task<IActionResult> InitiateSingleSignOn(string returnUrl = null)
{
    // To login automatically at the service provider, initiate single sign-on to the identity provider (SP-
    initiated SSO).
    // The return URL is remembered as SAML relay state.
    var partnerName = _configuration["PartnerName"];

    await _samlServiceProvider.InitiateSsoAsync(partnerName, returnUrl);

    return new EmptyResult();
}
```

The partner identity provider name is retrieved from the application configuration. The method for determining which identity provider to select may be different depending on your business requirements.

`InitiateSSOAsync` is called to construct and send a SAML authentication request to the identity provider.

Control now moves to the identity provider site.

[Identity/Account/Logout Page](#)

The logout page includes the following code to support SP-initiated SLO.

```
var ssoState = await _samlServiceProvider.GetStatusAsync();

if (await ssoState.CanSloAsync())
{
    // Initiate SAML logout.
    return RedirectToAction("InitiateSingleLogout", "Saml");
}
```

If the user clicks the log out link, a check is made to see whether the user has completed SSO and, if so, single logout is initiated.

[SamlController.InitiateSingleLogout](#)

The SAML controller includes the following action to support SP-initiated SLO.

```
public async Task<IActionResult> InitiateSingleLogout(string returnUrl = null)
{
    // Request logout at the identity provider.
    await _samlServiceProvider.InitiateSloAsync(relayState: returnUrl);

    return new EmptyResult();
}
```

`InitiateSloAsync` is called to construct and send a logout request to the identity provider.

Control now moves to the identity provider site.

[SamlController.AssertionConsumerService](#)

The SAML controller includes the following code to support IdP-initiated and SP-initiated SSO.

```
public async Task<IActionResult> AssertionConsumerService()
{
    // Receive and process the SAML assertion contained in the SAML response.
    // The SAML response is received either as part of IdP-initiated or SP-initiated SSO.
    var ssoResult = await _samlServiceProvider.ReceiveSsoAsync();

    // Automatically provision the user.
    // If the user doesn't exist locally then create the user.
    // Automatic provisioning is an optional step.
    var user = await _userManager.FindByNameAsync(ssoResult.UserID);
```

```

if (user == null)
{
    user = new IdentityUser { UserName = ssoResult.UserID, Email = ssoResult.UserID };

    var result = await _userManager.CreateAsync(user);

    if (!result.Succeeded)
    {
        throw new Exception($"The user {ssoResult.UserID} couldn't be created - {result}");
    }

    // For demonstration purposes, create some additional claims.
    if (ssoResult.Attributes != null)
    {
        var samlAttribute = ssoResult.Attributes.SingleOrDefault(a => a.Name == ClaimTypes.Email);

        if (samlAttribute != null)
        {
            await _userManager.AddClaimAsync(user, new Claim(ClaimTypes.Email, samlAttribute.ToString()));
        }

        samlAttribute = ssoResult.Attributes.SingleOrDefault(a => a.Name == ClaimTypes.GivenName);

        if (samlAttribute != null)
        {
            await _userManager.AddClaimAsync(user, new Claim(ClaimTypes.GivenName,
                samlAttribute.ToString()));
        }

        samlAttribute = ssoResult.Attributes.SingleOrDefault(a => a.Name == ClaimTypes.Surname);

        if (samlAttribute != null)
        {
            await _userManager.AddClaimAsync(user, new Claim(ClaimTypes.Surname,
                samlAttribute.ToString()));
        }
    }

    // Automatically login using the asserted identity.
    await _signInManager.SignInAsync(user, isPersistent: false);

    // Redirect to the target URL if specified.
    if (!string.IsNullOrEmpty(ssoResult.RelayState))
    {
        return LocalRedirect(ssoResult.RelayState);
    }

    return LocalRedirect("~/");
}

```

ReceiveSsoAsync receives and processes the SAML response from the identity provider. The SAML response is either the result of IdP-initiated or SP-initiated SSO.

If the user doesn't exist in the user database, they're automatically provisioned. You may or may not support automatic provisioning depending on your business requirements.

The user is logged in automatically at the service provider using information retrieved from the SAML assertion. The user ID and attributes, if any, received by the service provider may be different depending on your business requirements.

For IdP-initiated SSO, the optional relay state sent by the identity provider specifies a URL to support deep web linking. If specified, the user is redirected to this page. Otherwise, the user is redirected to the home page.

[SamlController.SingleLogoutService](#)

The SAML controller includes the following code to support IdP-initiated and SP-initiated SLO.

```
public async Task<IActionResult> SingleLogoutService()
{
    // Receive the single logout request or response.
    // If a request is received then single logout is being initiated by the identity provider.
    // If a response is received then this is in response to single logout having been initiated by the service
    // provider.
    var sloResult = await _samlServiceProvider.ReceiveSloAsync();

    if (sloResult.IsResponse)
    {
        // SP-initiated SLO has completed.
        if (!string.IsNullOrEmpty(sloResult.RelayState))
        {
            return LocalRedirect(sloResult.RelayState);
        }

        return LocalRedirect("~/");
    }
    else
    {
        // Logout locally.
        await _signInManager.SignOutAsync();

        // Respond to the IdP-initiated SLO request indicating successful logout.
        await _samlServiceProvider.SendSloAsync();
    }

    return new EmptyResult();
}
```

`ReceiveSloAsync` is called to receive and process the logout message from the identity provider.

For SP-initiated SLO, a logout response is received. The user is redirected to the home page.

For IdP-initiated SLO, a logout request is received. The user is logged out locally and `SendSloAsync` is called to construct and send a SAML logout response to the identity provider. Control now returns to the identity provider site.

SamlController.ArtifactResolutionService

The SAML controller includes the following code to support SAML artifact resolution as part of the HTTP-Artifact binding. If the HTTP-Artifact binding is not supported, this code may be omitted.

```
public async Task<IActionResult> ArtifactResolutionService()
{
    // Resolve the HTTP artifact.
    // This is only required if supporting the HTTP-Artifact binding.
    await _samlServiceProvider.ResolveArtifactAsync();

    return new EmptyResult();
}
```

ResolveArtifactAsync is called to receive and process the artifact resolve request from the identity provider.

Example Web API

Configuration

The appsettings.json includes the SAML configuration.

The configuration consists of a single SAML configuration specifying a single local service provider and multiple partner identity providers.

Refer to the SAML for ASP.NET Core Configuration Guide for more information.

Startup

The ConfigureServices method includes the following code.

```
// Optionally add support for JWT bearer tokens.
// This is required only if JWT bearer tokens are used to authorize access to a web API.
// It's not required for SAML SSO.
services.AddAuthentication(JwtBearerDefaults.AuthenticationScheme)
    .AddJwtBearer(options =>
{
    options.TokenValidationParameters = new TokenValidationParameters()
    {
        ValidateIssuer = true,
        ValidateAudience = true,
        ValidateLifetime = true,
        ValidateIssuerSigningKey = true,
        ValidIssuer = Configuration["JWT:Issuer"],
        ValidAudience = Configuration["JWT:Issuer"],
        IssuerSigningKey = new SymmetricSecurityKey(Encoding.UTF8.GetBytes(Configuration["JWT:Key"]))
    };
});

// Optionally add cross-origin request sharing services.
// This is only required for the web API.
// It's not required for SAML SSO.
services.AddCors(options =>
{
    options.AddPolicy(DefaultCorsPolicyName,
        builder =>
```

```
{
    builder.WithOrigins("http://localhost:4200");
    builder.AllowAnyMethod();
    builder.AllowAnyHeader();
    builder.AllowCredentials();
});
});

// Optionally add support for sessions.
// This is only required to support issuing JWT bearer tokens.
services.AddSession();

// Add SAML SSO services.
services.AddSaml(Configuration.GetSection("SAML"));
}
```

JWT bearer token support is configured.

CORS support is configured for the web API.

ASP.NET session support is added for saving the JWT.

The SAML services are added using the SAML configurations stored in the appsettings.json.

Although some of this code is specific to this example, most applications will include code to register the SAML configuration and add the SAML services.

[SamlController.InitiateSingleSignOn](#)

The SAML controller includes the following action to support SP-initiated SSO.

```
public async Task<IActionResult> InitiateSingleSignOn(string returnUrl)
{
    // To login automatically at the service provider,
    // initiate single sign-on to the identity provider (SP-initiated SSO).
    var partnerName = _configuration["PartnerName"];

    await _samlServiceProvider.InitiateSsoAsync(partnerName, returnUrl);

    return new EmptyResult();
}
```

The partner identity provider name is retrieved from the application configuration. The method for determining which identity provider to select may be different depending on your business requirements.

InitiateSSOAsync is called to construct and send a SAML authentication request to the identity provider.

Control now moves to the identity provider site.

[SamlController.InitiateSingleLogout](#)

The SAML controller includes the following action to support SP-initiated SLO.

```
public async Task<IActionResult> InitiateSingleLogout(string returnUrl)
{
    // Remove the JWT.
    HttpContext.Session.Remove("JWT");

    var ssoState = await _samlServiceProvider.GetStatusAsync();

    if (await ssoState.CanSloAsync())
    {
        // Request logout at the identity provider.
        await _samlServiceProvider.InitiateSloAsync(relayState: returnUrl);

        return new EmptyResult();
    }

    return Redirect(returnUrl);
}
```

The JWT is removed from the ASP.NET session.

A check is made to see whether the user has completed SSO and, if so, `InitiateSloAsync` is called to construct and send a logout request to the identity provider.

Control now moves to the identity provider site.

[SamlController.AssertionConsumerService](#)

The SAML controller includes the following code to support IdP-initiated and SP-initiated SSO.

```
public async Task<IActionResult> AssertionConsumerService()
{
    // Receive and process the SAML assertion contained in the SAML response.
    // The SAML response is received either as part of IdP-initiated or SP-initiated SSO.
    var ssoResult = await _samlServiceProvider.ReceiveSsoAsync();

    // Create and save a JWT to return when requested.
    var jwtSecurityToken = CreateJwtSecurityToken(ssoResult);
    HttpContext.Session.SetString("JWT", new
        JwtSecurityTokenHandler().WriteToken(jwtSecurityToken));

    // Redirect to the specified URL.
    return Redirect(ssoResult.RelayState);
}
```

`ReceiveSsoAsync` receives and processes the SAML response from the identity provider.

A JWT security token is generated and saved in the ASP.NET session. The authorization API securely returns the JWT in the HTTP response body.

[SamlController.SingleLogoutService](#)

The SAML controller includes the following code to support IdP-initiated and SP-initiated SLO.

```

public async Task<IActionResult> SingleLogoutService()
{
    // Remove the JWT.
    HttpContext.Session.Remove("JWT");

    // Receive the single logout request or response.
    // If a request is received then single logout is being initiated by the identity provider.
    // If a response is received then this is in response to single logout having been initiated by the service
    // provider.
    var sloResult = await _samlServiceProvider.ReceiveSloAsync();

    if (sloResult.IsResponse)
    {
        // SP-initiated SLO has completed.
        return Redirect(sloResult.RelayState);
    }
    else
    {
        // Respond to the IdP-initiated SLO request indicating successful logout.
        await _samlServiceProvider.SendSloAsync();
    }

    return new EmptyResult();
}

```

The JWT is removed from the ASP.NET session.

ReceiveSloAsync is called to receive and process the logout message from the identity provider.

For SP-initiated SLO, a logout response is received. The user is redirected to the application that initiated SLO.

For IdP-initiated SLO, a logout request is received. The user is logged out locally and SendSloAsync is called to construct and send a SAML logout response to the identity provider. Control now returns to the identity provider site.

Example Angular SPA

SAML SSO is initiated by sending an HTTP Get to the example web API (e.g.

<https://localhost:44319/Saml/InitiateSingleSignOn?returnurl=http://localhost:4200>

The returnUrl query string parameter specifies where control should return to once SSO completes.

Similarly, SLO is initiated by sending an HTTP Get to the example web API (e.g.

<https://localhost:44319/Saml/InitiateSingleLogout?returnurl=http://localhost:4200>

The returnUrl query string parameter specifies where control should return to once SLO completes.

SAML SSO and SLO flows cannot be initiated through web API calls as these flows must be through the browser, as required by the SAML protocol, and typically involve prompting the user to login or logoff.

Configuration

The environment specifies the ExampleWebApi URLs for initiating SSO, initiating SLO, retrieving the JWT and invoking the web API.

```
export const environment = {
  production: false,
  samlSsoUrl: 'https://localhost:44319/Saml/InitiateSingleSignOn?returnurl=http://localhost:4200',
  samlSloUrl: 'https://localhost:44319/Saml/InitiateSingleLogout?returnurl=http://localhost:4200',
  samlAuthUrl: 'https://localhost:44319/api/Authorization',
  apiUrl: 'https://localhost:44319/api',
};
```

Auth Service

The auth service includes the following code to retrieve and save the JWT.

In this example, the token is saved in local storage. However, any suitable storage may be used.

Note that when requesting the JWT from the server, withCredentials must be set to true so the ASP.NET session cookie is presented as this is used by the server to retrieve the JWT.

```
export class AuthService {

  constructor(public jwtHelper: JwtHelperService, private http: HttpClient) { }

  public getToken(): string {
    return localStorage.getItem('token');
  }

  public isAuthenticated(): boolean {
    // get the token
    const token = this.getToken();
    // return a boolean reflecting
    // whether or not the token is expired
    return this.jwtHelper.isTokenExpired(token);
  }

  // Get JWT from server
  public retrieveJwt() {
    return this.http.get(environment.samlAuthUrl, { withCredentials: true, responseType: 'text' });
  }
}
```

Token Interceptor

The token interceptor includes the following code to set a JWT bearer authorization header.

```
export class TokenInterceptor implements HttpInterceptor {
  constructor(public auth: AuthService) {}

  intercept(request: HttpRequest<any>, next: HttpHandler): Observable<HttpEvent<any>> {
    // If token is present, send with request
    const token = this.auth.getToken();

    if (token) {
      request = request.clone({
```

```

    setHeaders: {
      Authorization: `Bearer ${token}`
    }
  });

}

return next.handle(request);

}

```

SAML Proxy

Configuration

The appsettings.json includes the SAML configuration.

The configuration consists of a single SAML configuration specifying a single local identity provider, a single local service provider and multiple partner identity and service providers.

Refer to the SAML for ASP.NET Core Configuration Guide for more information.

Startup

The ConfigureServices method includes the following code.

```
// Add SAML SSO services.
services.AddSaml(Configuration.GetSection("SAML"));
```

The SAML services are added using the SAML configurations stored in the appsettings.json.

Although some of this code is specific to this example, most applications will include code to register the SAML configuration and add the SAML services.

IdentityProviderController.SingleSignOnService

The identity provider SAML controller includes the following code to support SP-initiated SSO.

```

public async Task<IActionResult> SingleSignOnService()
{
  // Receive an authn request from a service provider (SP-initiated SSO).
  var idpSsoResult = await _samlIdentityProvider.ReceiveSsoAsync();

  // Determine the identity provider name.
  var partnerName = GetIdentityProviderName();

  // Initiate SSO to the identity provider.
  await _samlServiceProvider.InitiateSsoAsync(partnerName, null, idpSsoResult.SsoOptions);

  return new EmptyResult();
}

```

ReceiveSsoAsync receives and processes the SAML authentication request from the service provider.

InitiateSsoAsync creates and sends a SAML authentication request to the identity provider.

[IdentityProviderController.SingleLogoutService](#)

The SAML controller includes the following code to support IdP-initiated and SP-initiated SLO.

```
public async Task<IActionResult> SingleLogoutService()
{
    // Receive a single logout request or response from a service provider.
    // If a request is received then initiate SLO to the identity provider.
    // If a response is received then complete the SP-initiated SLO.
    var sloResult = await _samlIdentityProvider.ReceiveSloAsync();

    if (sloResult.IsResponse)
    {
        if (sloResult.HasCompleted)
        {
            // SP-initiated SLO has completed.
            await _samlServiceProvider.SendSloAsync();
        }
    }
    else
    {
        // Determine the identity provider name.
        var partnerName = GetIdentityProviderName();

        // Initiate SLO to the identity provider.
        await _samlServiceProvider.InitiateSloAsync(partnerName, sloResult.LogoutReason,
sloResult.RelayState);
    }

    return new EmptyResult();
}
```

`ReceiveSloAsync` is called to receive and process the logout message from the service provider.

For IdP-initiated SLO, a logout response is received. A SAML logout response is sent to the identity provider.

For SP-initiated SLO, a logout request is received. A SAML logout request is sent to the identity provider.

[IdentityProviderController.ArtifactResolutionService](#)

The SAML controller includes the following code to support SAML artifact resolution as part of the HTTP-Artifact binding. If the HTTP-Artifact binding is not supported, this code may be omitted.

```
public async Task<IActionResult> ArtifactResolutionService()
{
    // Resolve the HTTP artifact.
    // This is only required if supporting the HTTP-Artifact binding.
    await _samlIdentityProvider.ResolveArtifactAsync();

    return new EmptyResult();
}
```

[ServiceProviderController.AssertionConsumerService](#)

The SAML controller includes the following code to support IdP-initiated and SP-initiated SSO.

```
public async Task<IActionResult> AssertionConsumerService()
{
    // Receive a SAML response from an identity provider either as part of IdP-initiated or SP-initiated SSO.
    var ssoResult = await _samlServiceProvider.ReceiveSsoAsync();

    if (ssoResult.IsInResponseTo)
    {
        // Complete SP-initiated SSO to the service provider.
        await _samlIdentityProvider.SendSsoAsync(ssoResult.UserID, ssoResult.Attributes,
ssoResult.AuthnContext);
    }
    else
    {
        // Determine the service provider name.
        var partnerName = GetServiceProviderName();

        // Initiate SSO to the service provider.
        await _samlIdentityProvider.InitiateSsoAsync(partnerName, ssoResult.UserID, ssoResult.Attributes,
ssoResult.RelayState, ssoResult.AuthnContext);
    }

    return new EmptyResult();
}
```

`ReceiveSsoAsync` receives and processes the SAML response from the identity provider. The SAML response is either the result of IdP-initiated or SP-initiated SSO. A SAML response is sent to the service provider.

[ServiceProviderController.SingleLogoutService](#)

The SAML controller includes the following code to support IdP-initiated and SP-initiated SLO.

```
public async Task<IActionResult> SingleLogoutService()
{
    // Receive a single logout request or response from an identity provider.
    // If a request is received then initiate SLO to the identity provider.
    // If a response is received then complete the SP-initiated SLO.
    var sloResult = await _samlServiceProvider.ReceiveSloAsync();

    if (sloResult.IsResponse)
    {
        // Respond to the SP-initiated SLO request indicating successful logout.
        await _samlIdentityProvider.SendSloAsync();
    }
    else
    {
        // Request logout at the service provider(s).
        await _samlIdentityProvider.InitiateSloAsync(sloResult.LogoutReason, sloResult.RelayState);
    }

    return new EmptyResult();
}
```

```
}
```

ReceiveSloAsync is called to receive and process the logout message from the identity provider.

For SP-initiated SLO, a logout response is received. A SAML logout response is sent to the service provider.

For IdP-initiated SLO, a logout request is received. A SAML logout request is sent to the service provider.

[ServiceProviderController.ArtifactResolutionService](#)

The SAML controller includes the following code to support SAML artifact resolution as part of the HTTP-Artifact binding. If the HTTP-Artifact binding is not supported, this code may be omitted.

```
public async Task<IActionResult> ArtifactResolutionService()
{
    // Resolve the HTTP artifact.
    // This is only required if supporting the HTTP-Artifact binding.
    await __samlServiceProvider.ResolveArtifactAsync();

    return new EmptyResult();
}
```

ResolveArtifactAsync is called to receive and process the artifact resolve request from the identity provider.

Error Handling

As these are example applications, no error handling is included. Exceptions are not caught and therefore are displayed in the browser.

In a production application, exceptions should be caught and processed.

Refer to the SAML for ASP.NET Core Developer Guide for more information.

[Running the Examples on IIS](#)

[Connection String](#)

Update the connection string in appsettings.json to specify a database server such as SQL Server.

The following is one example of a connection string to SQL Server running on localhost and using Windows authentication.

```
"DefaultConnection": "Server=localhost;Database=aspnet-
ExampleIdentityProvider;Trusted_Connection=True;MultipleActiveResultSets=true"
```

[Database Creation](#)

Refer to the following tutorial for information on creating the database.

<https://docs.microsoft.com/en-us/aspnet/core/data/ef-mvc/migrations>

From the command line, change to the project's folder and run the following commands.


```
dotnet ef migrations add InitialCreate
dotnet ef database update
```

Database Permissions

The account under which the application runs must have permission to access the database.

For a SQL Server database and if Trusted_Connection is specified in the connection string, use the Microsoft SQL Server Management Studio and create a new login by selecting the Security > Logins node and clicking New Login.

In the example below, IIS APPPOOL\DefaultAppPool is specified as this is the account under which the application runs in IIS.

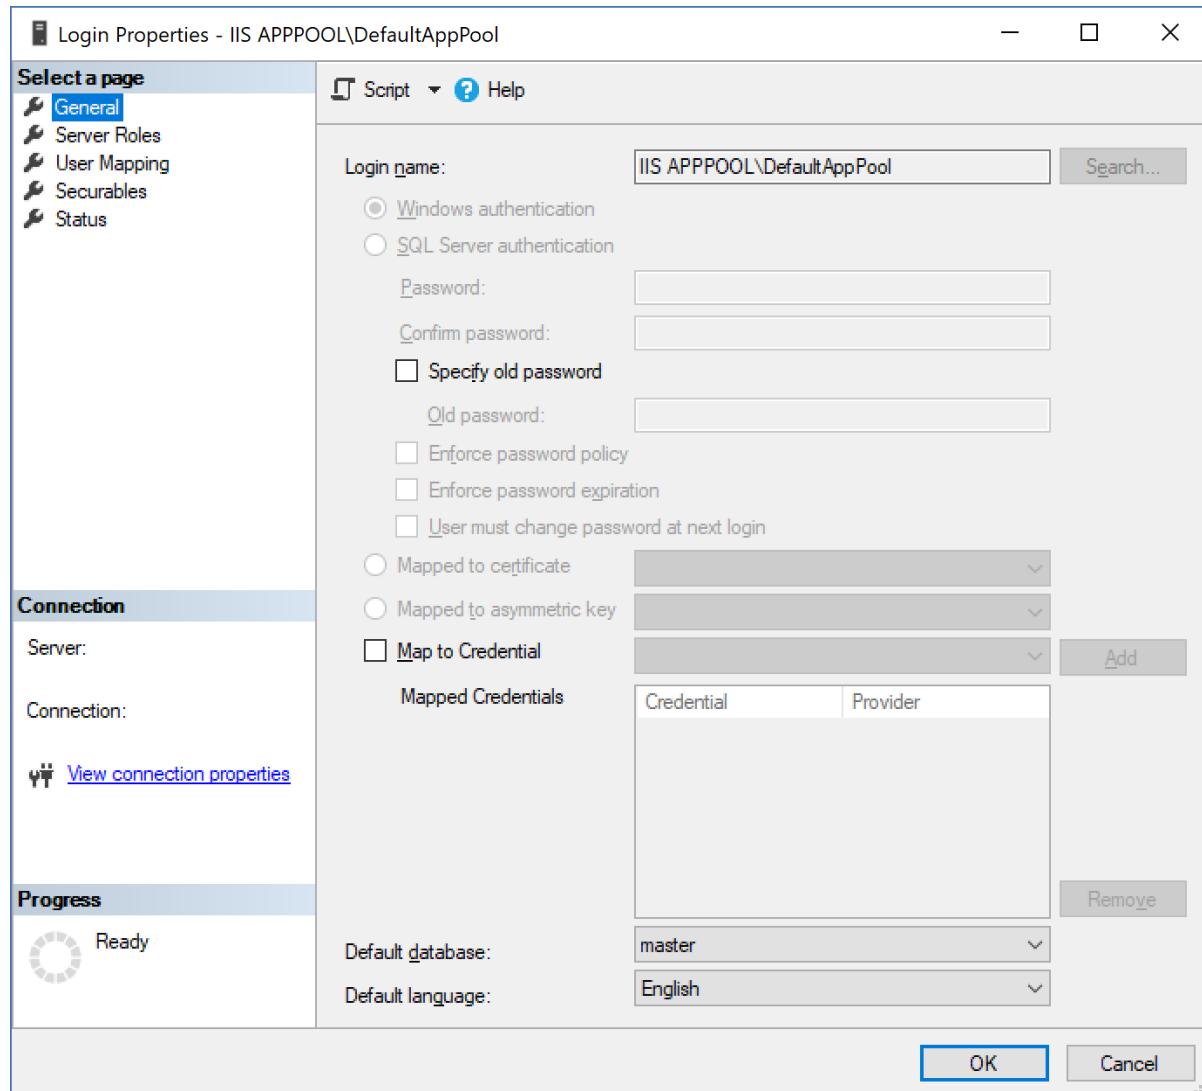

Ensure the account has read and write access to the database.

Login Properties - IIS APPPOOL\DefaultAppPool

Select a page: General, Server Roles, User Mapping (highlighted), Securables, Status.

Script, Help.

Users mapped to this login:

Map	Database	User	Default Schema
<input checked="" type="checkbox"/>	aspnet-ExampleIdentity...	IIS APPPOOL\DefaultA...	dbo
<input checked="" type="checkbox"/>	aspnet-ExampleService...	IIS APPPOOL\DefaultA...	dbo
<input type="checkbox"/>	master		
<input type="checkbox"/>	model		
<input type="checkbox"/>	msdb		
<input type="checkbox"/>	tempdb		

Guest account enabled for: aspnet-ExampleIdentityProvider


Database role membership for: aspnet-ExampleIdentityProvider

<input type="checkbox"/> db_accessadmin
<input type="checkbox"/> db_backupoperator
<input checked="" type="checkbox"/> db_datareader
<input checked="" type="checkbox"/> db_datawriter
<input type="checkbox"/> db_ddladmin
<input type="checkbox"/> db_denydatareader
<input type="checkbox"/> db_denydatawriter
<input type="checkbox"/> db_owner
<input type="checkbox"/> db_securityadmin
<input checked="" type="checkbox"/> public

Connection: Server: (empty), Connection: View connection properties.


Progress: Ready.

OK, Cancel.

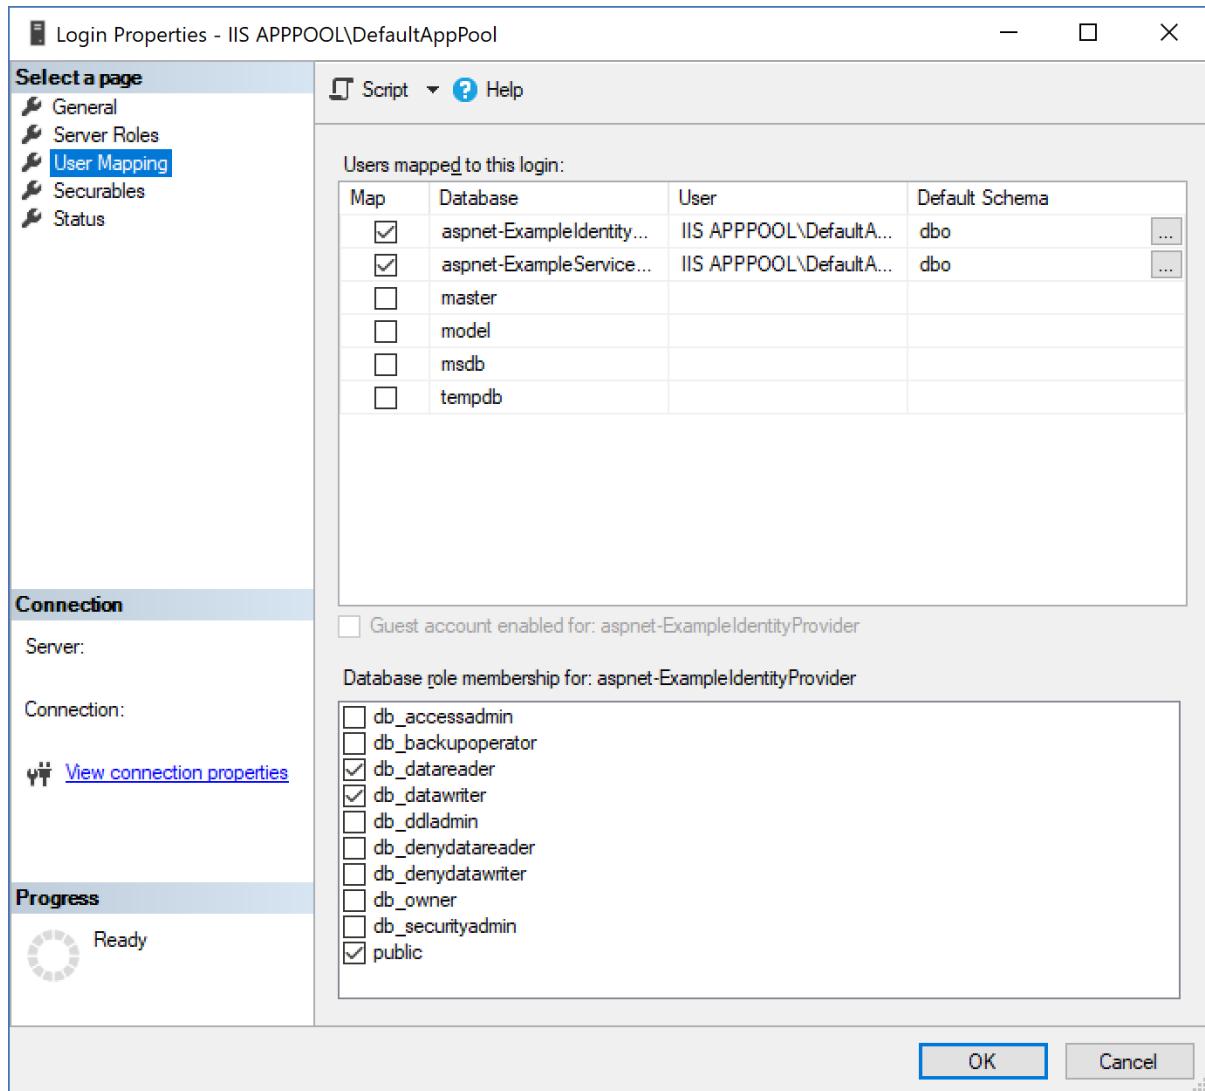

IIS Publication

Publish the application to IIS.

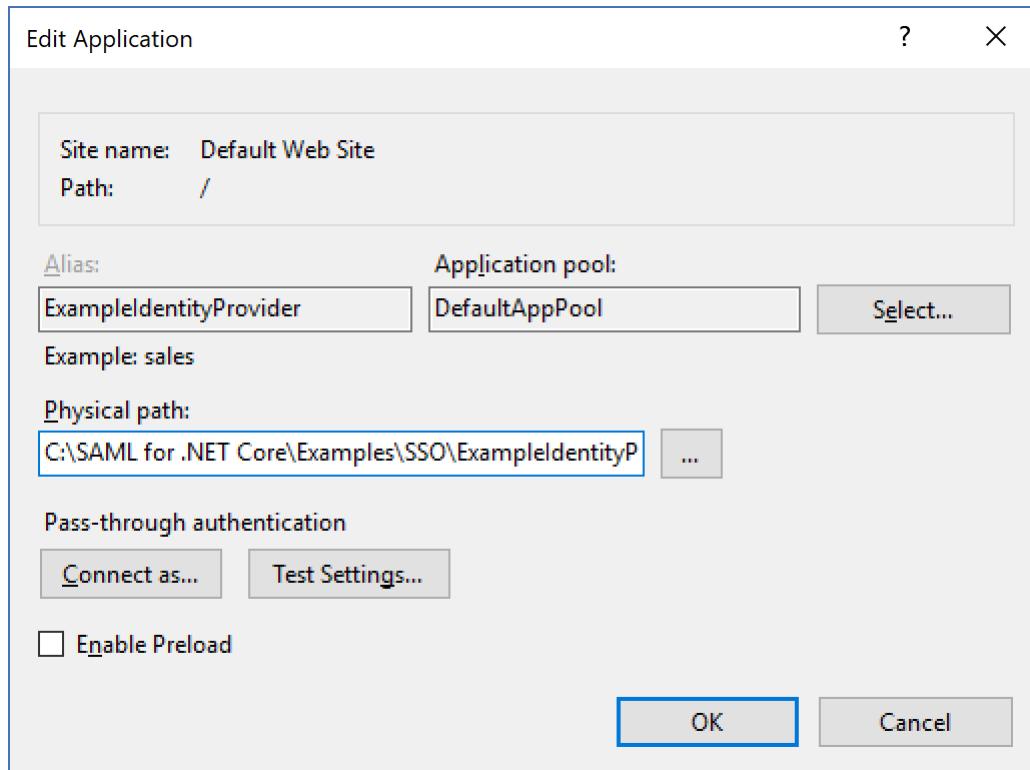

Update SAML Configuration

Ensure all URLs in the SAML configuration are updated as required.