Laboratory Exercise No. 4

Working with Database and MVC in LavaLust
User Management Module

Name: Danielle Psalm V. Rodel


Course: Web Systems and Technologies 2

Render Link: https://rodel-danielle-psalm-lavalust.onrender.com/

---

1. Database Screenshot


mydb.users table browsed via Navicat , confirming all 10 records stored:

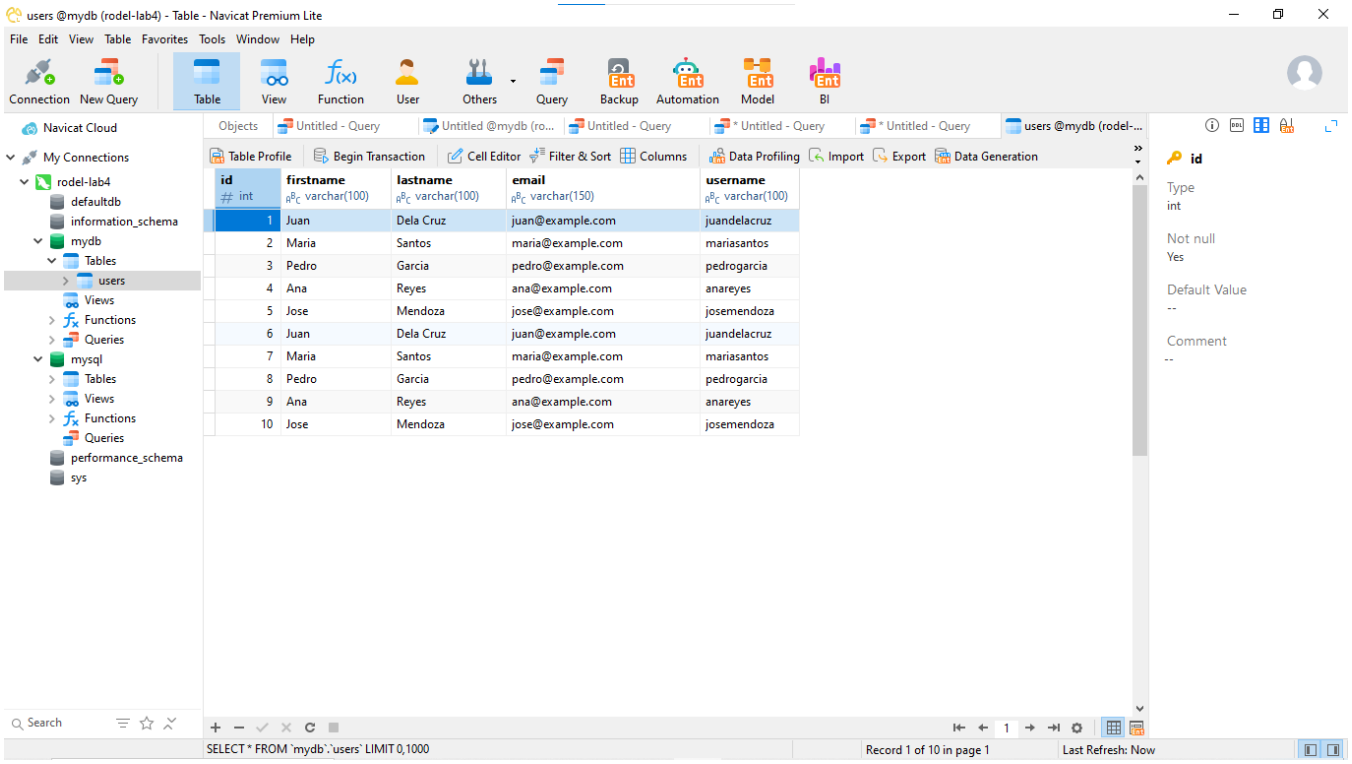


2. Database Configuration Screenshot

app/config/database.php — reads credentials from environment variables (Render). No password is hardcoded or exposed:


.env

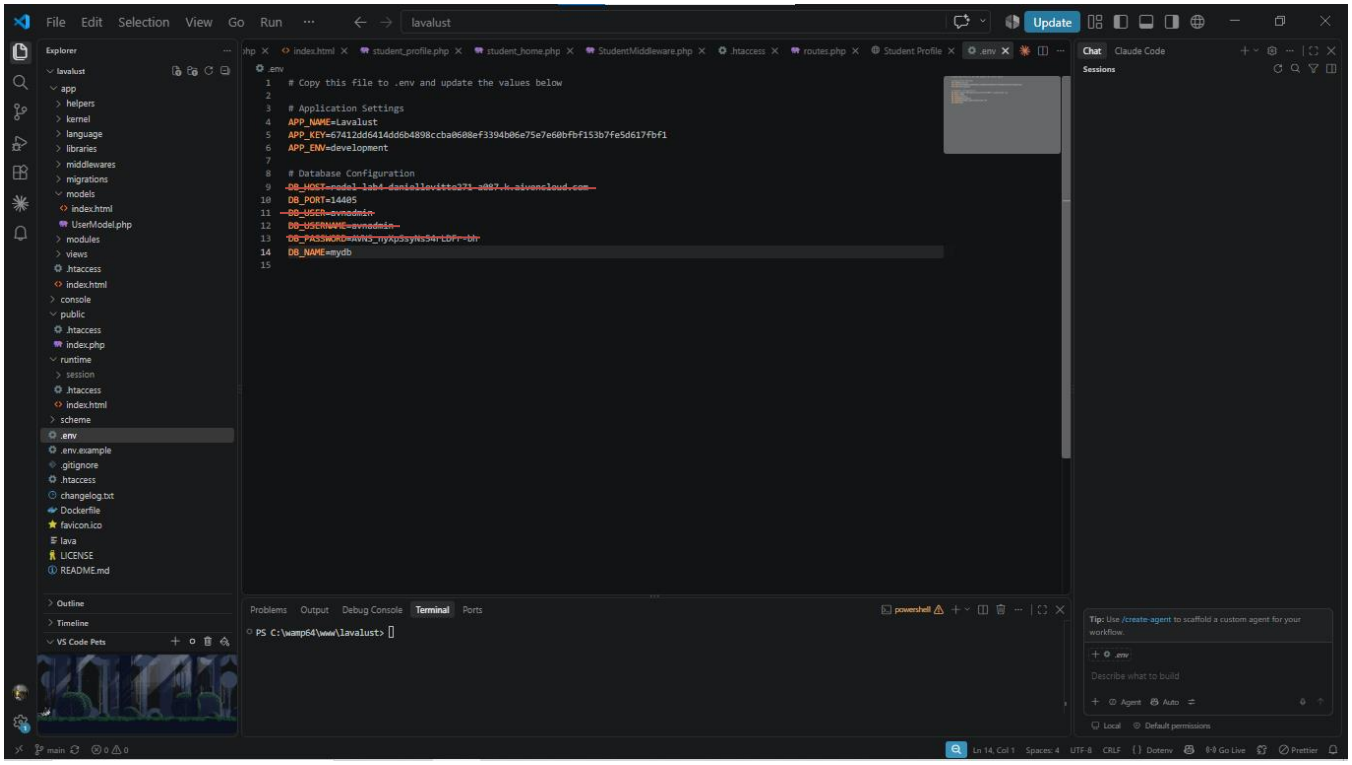
File Edit Selection View Go Run
lavalust
Update
Explorer
.env
Copy this file to .env and update the values below
Application Settings
APP_NAME=Lavalust
APP_KEY=67412dd6414dd6b4898ccba0608ef3394b06e75e7e60bfbf153b7fe5d617fbf1
APP_ENV=development
Database Configuration
DB_HOST=rodel-lab4-daniellevitto271-a087.k.aivencloud.com
DB_PORT=14405
DB_USER=avnadmin
DB_USERNAME=avnadmin
DB_PASSWORD=AVNS_nyXpSsyNs54rLDFr-bh
DB_NAME=mydb
Problems Output Debug Console Terminal Ports
PS C:\wamp64\www\lavalust>
Chat Claude Code
Sessions

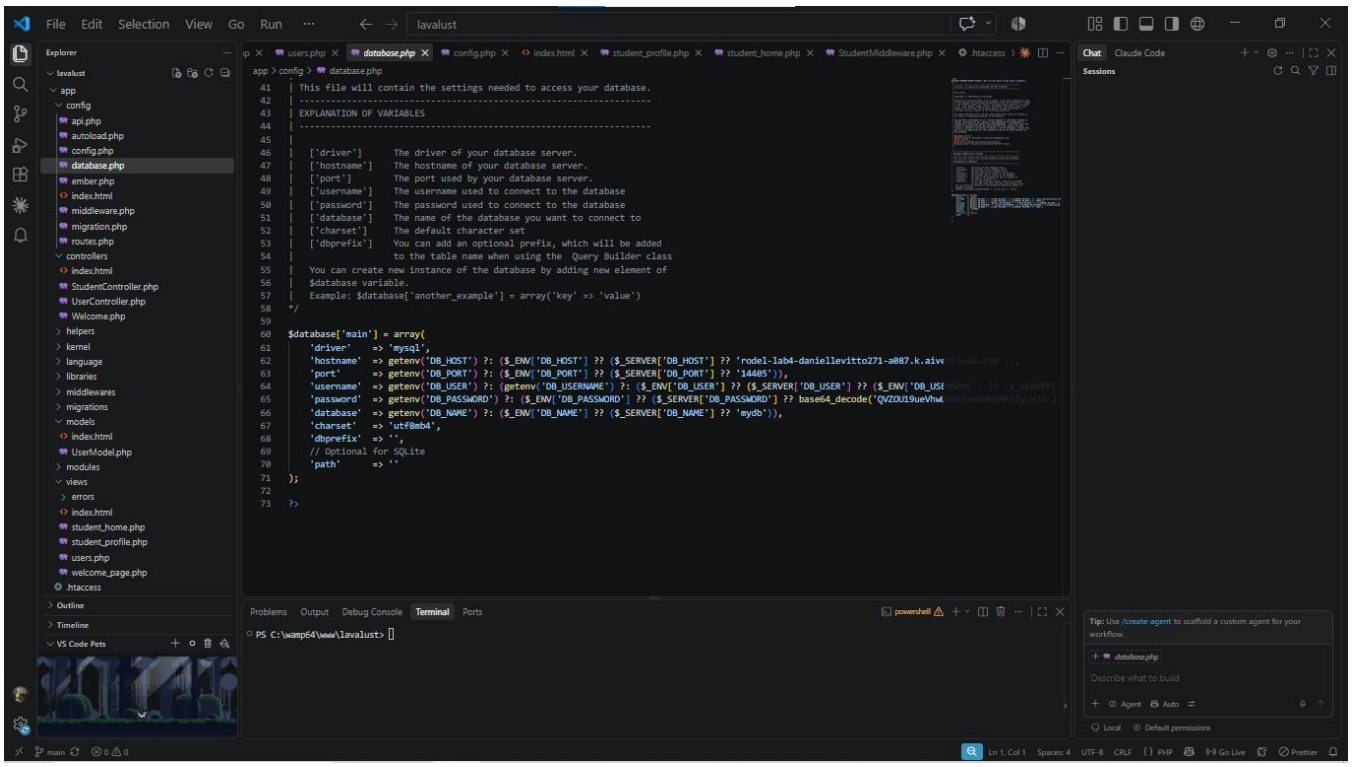
File Edit Selection View Go Run
lavalust
Explorer
database.php
This file will contain the settings needed to access your database.
EXPLANATION OF VARIABLES
['driver'] The driver of your database server.
['hostname'] The hostname of your database server.
['port'] The port used by your database server.
['username'] The username used to connect to the database
['password'] The password used to connect to the database
['database'] The name of the database you want to connect to
['charset'] The default character set
['dbprefix'] You can add an optional prefix, which will be added
to the table name when using the Query Builder class
You can create new instance of the database by adding new element of
$database variable.
Example: $database['another_example'] = array('key' => 'value')
$database['main'] = array(
'driver' => 'mysql',
'hostname' => getenv('DB_HOST') ?: ($_ENV['DB_HOST'] ?? ($_SERVER['DB_HOST'] ?? 'rodel-lab4-daniellevitto271-a087.k.aiv
'port' => getenv('DB_PORT') ?: ($_ENV['DB_PORT'] ?? ($_SERVER['DB_PORT'] ?? '14405')),
'username' => getenv('DB_USER') ?: (getenv('DB_USERNAME') ?: ($_ENV['DB_USER'] ?? ($_SERVER['DB_USER'] ?? ($_ENV['DB_USE
'password' => getenv('DB_PASSWORD') ?: ($_ENV['DB_PASSWORD'] ?? ($_SERVER['DB_PASSWORD'] ?? base64_decode('QVZOU19ueVhw
'database' => getenv('DB_NAME') ?: ($_ENV['DB_NAME'] ?? ($_SERVER['DB_NAME'] ?? 'mydb')),
'charset' => 'utf8mb4',
'dbprefix' => '',
// Optional for SQLite
'path' => ''
);
?>
Problems Output Debug Console Terminal Ports
PS C:\wamp64\www\lavalust>
Chat Claude Code
Sessions


3. Model Screenshot

app/models/UsersModel.php:

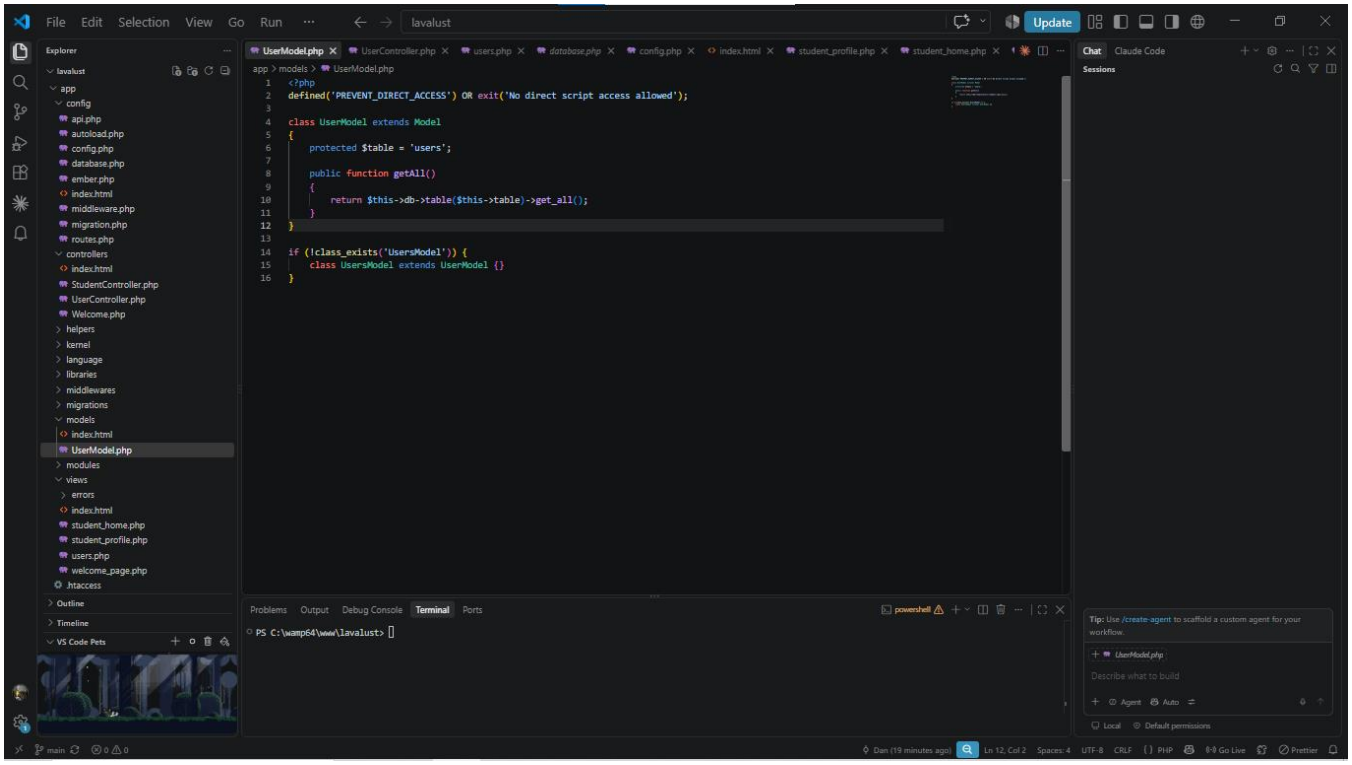


4. Controller Screenshot

app/controllers/UsersController.php — uses UsersModel's all() method:

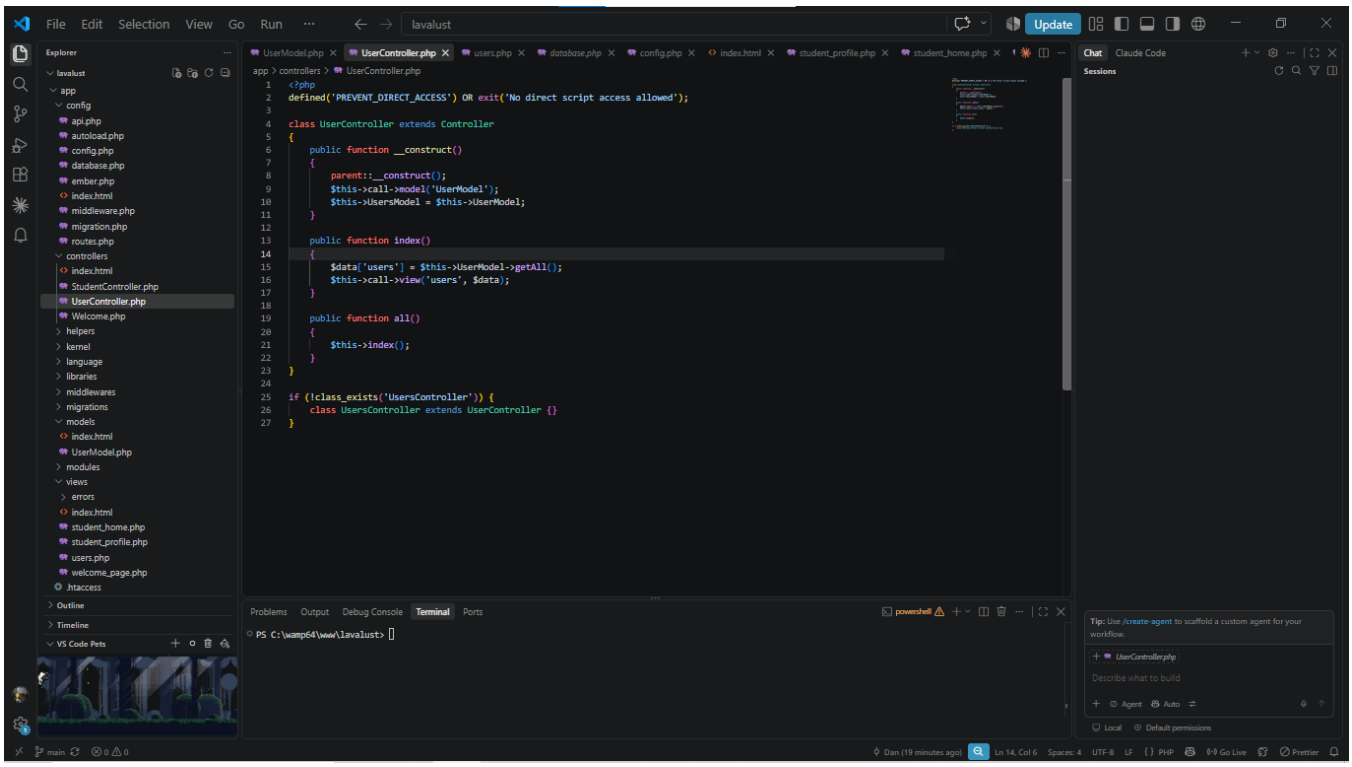


5. View Screenshot

app/views/users_view.php — loops through $users and builds the HTML table dynamically:

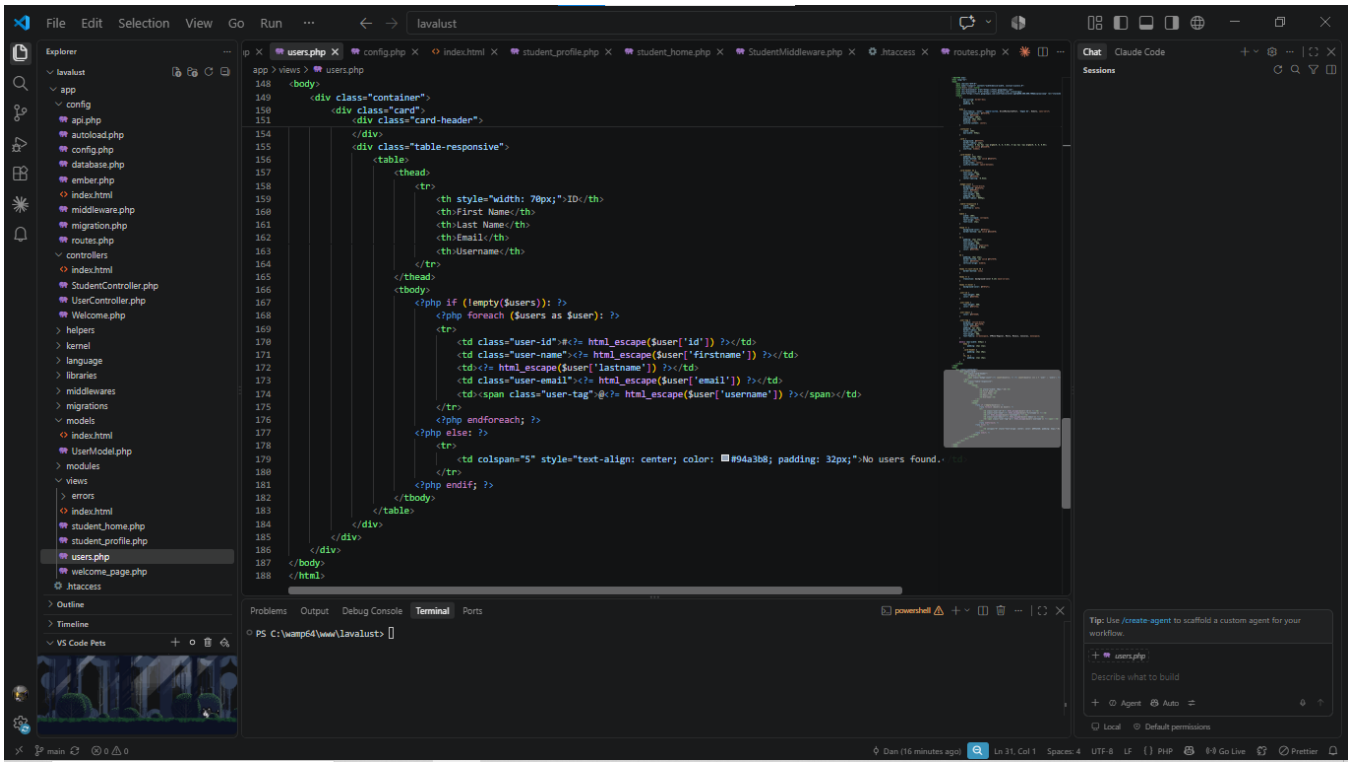

6. Route Screenshot

app/config/routes.php — /users route calling UsersController:

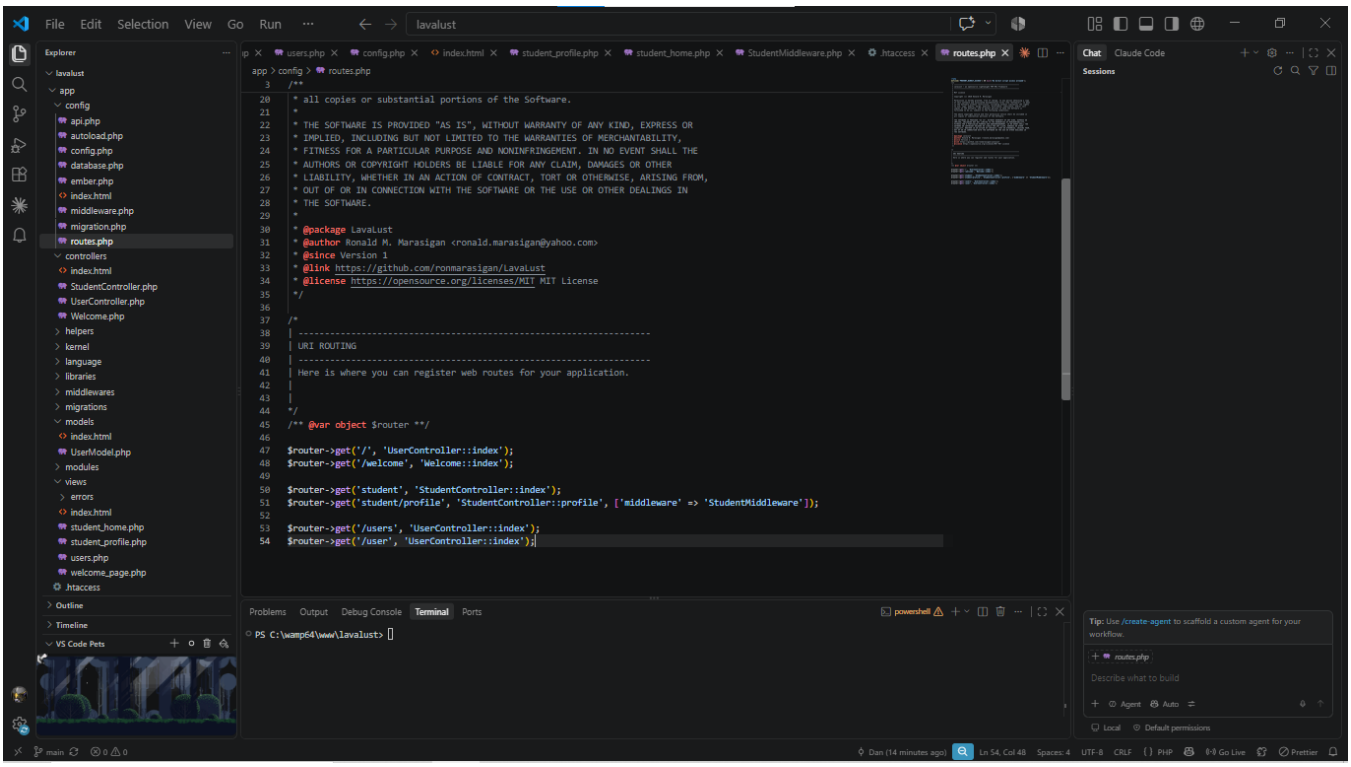

7. Application Output

Live application at hhttps://rodel-danielle-psalm-lavalust.onrender.com/, displaying all10 users dynamically retrieved from the MySQL Navicat database:

