

Advanced Algorithms for Optimization

LINFO2266

Introduction


Prof: Pierre Schaus
TAs: Alice Burlats, Amaury Guichard



Optimization is everywhere!

- Logistics (rail, containers, vehicle routing, warehouse)
- Human Resource (nurse rostering, course, etc)
- Scheduling (industry production, tournaments)
- Networking (TE, routing, network design)
- Data-science and Machine Learning (Neural Networks, etc)
- ...

A multi-disciplinary field

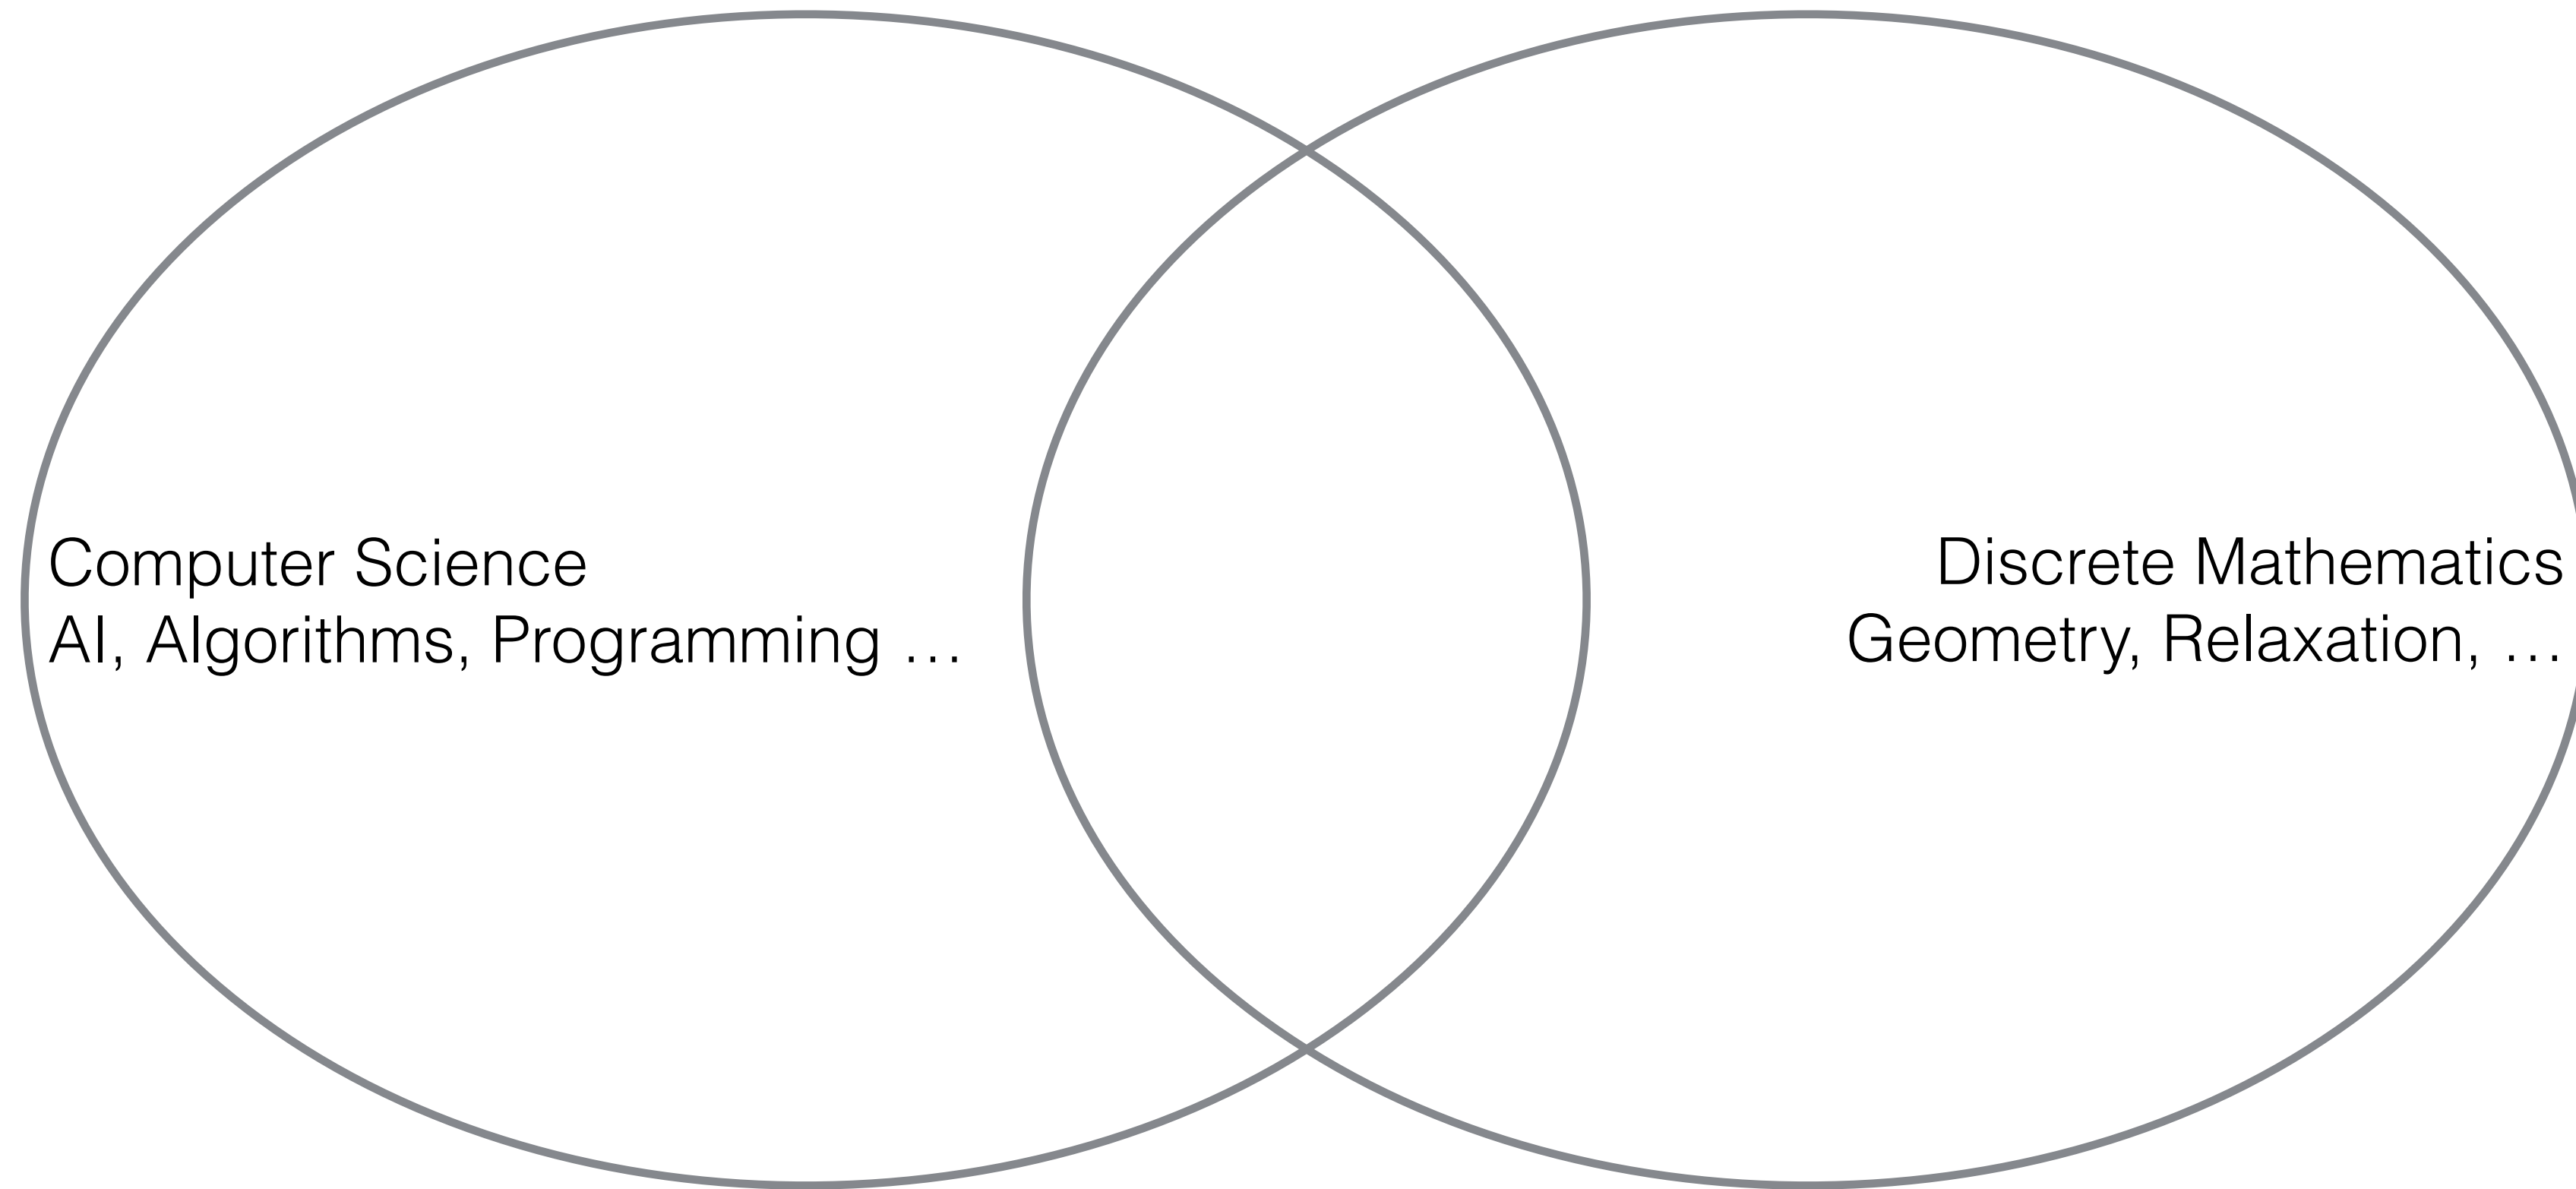

Since this course is more CS oriented, we will focus more on algorithms and computational aspects

Why study Algorithms for Optimization

- Many large companies (IBM, Google, N-SIDE, Hexaly, Artelis, Informs, Quintiq, Dassault, PSI, OM-Partners, Infrabel, Amazon, etc)
 - The return on investment (ROI) when deploying optimization can be huge, especially when large volumes.
- Because implementing advanced algorithms, able to solve problems that you cannot even solve manually is fun!
- Because whatever you do later, being « algorithm and optimization » minded can be useful and a real asset.

Objective of the course

- Be able to understand and formalize a constrained optimization problem.
- Be able to solve and implement well known discrete optimization algorithms using a well designed and generic approach when possible.
- Be able to understand the advantage and weaknesses of each approaches.

Pedagogy = Project based Learning

- *“I hear and I forget. I see and I remember. I do and I understand”*
- Your grade (20 points) is composed of two parts
 - Theory (10 points), January exam on Paper
 - Programming (10 points), S14 on Inginiuous or on Paper in January
- To get ready for the programming part:
 - 6 Inginiuous missions are proposed. The programming part of the exam is based on this content.
- To get ready for the theory part:
 - Practical exercises on paper proposed every week with TA (typical exam questions)



My advise if you want to succeed

- Don't use AI to solve the missions
- Program and debug by yourself
- Target to passe the programming part on Inginiuous rather than on paper (easier with an IDE 😊💧)

Lectures Agenda and deadlines for the projects



Week	Wed. 4h15PM	Lecture	Start Project	Deadline Project (14h)
1	16/09/2026	Intro + DP	P1: DP	
2	23/09/2026			
3	30/09/2026		P2: Branch and Bound	P1: DP
4	07/10/2026			
5	14/10/2026		P3: LP and Flows	P2: Branch and Bound
6	21/10/2026			
7	28/10/2026	Smart-Week (No Lecture)	P4: Local Search	P3: LP and Flows
8	04/11/2026	Constraint Programming		
9	11/11/2026		P5: Constraint Programming	P4: Local Search
10	18/11/2026			
11	25/11/2026	Exam Preparation (No Lecture)	P6: A-star	P5: Constraint Programming
12	02/12/2026	Exam Preparation Theory in auditorium		
13	09/12/2026	Exam Preparation Programming in auditorium (bring your laptop)		P6: A-star
14	16/12/2026	Exam Inginiuous (computer lab)		

The repository of the course

- Website with slides and project statements
 - <https://linfo2266.readthedocs.io>
- Inginious:
 - <https://inginius.info.ucl.ac.be/course/INGI2266>
- Github with the projects and latex templates
 - <https://github.com/pschaus/linfo2266-students>

Submission and projects, how it works ? 1/4

- Step 1: read and approve the “Honor Code Agreement Contract”.
- Step 2: Create your repository, you simply give your GitHub id and you are then invited to be the collaborator of a project with some source-code.

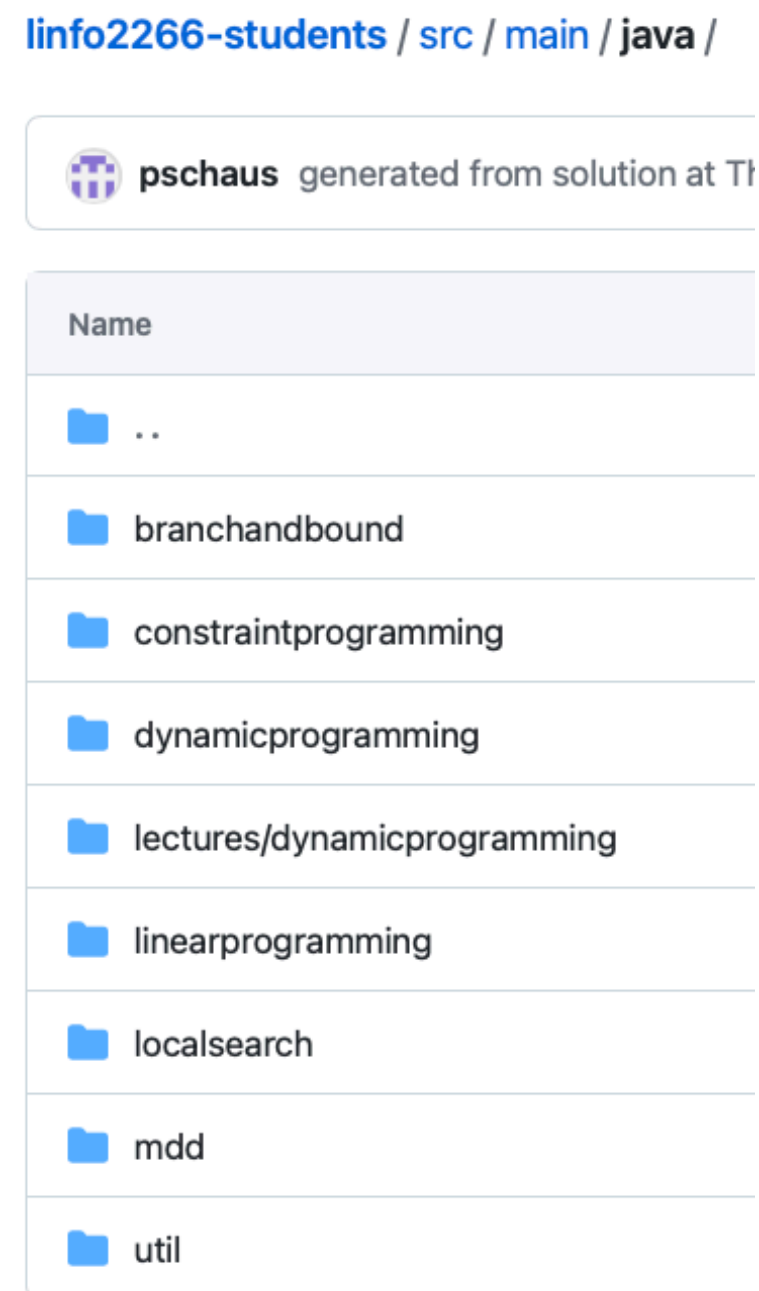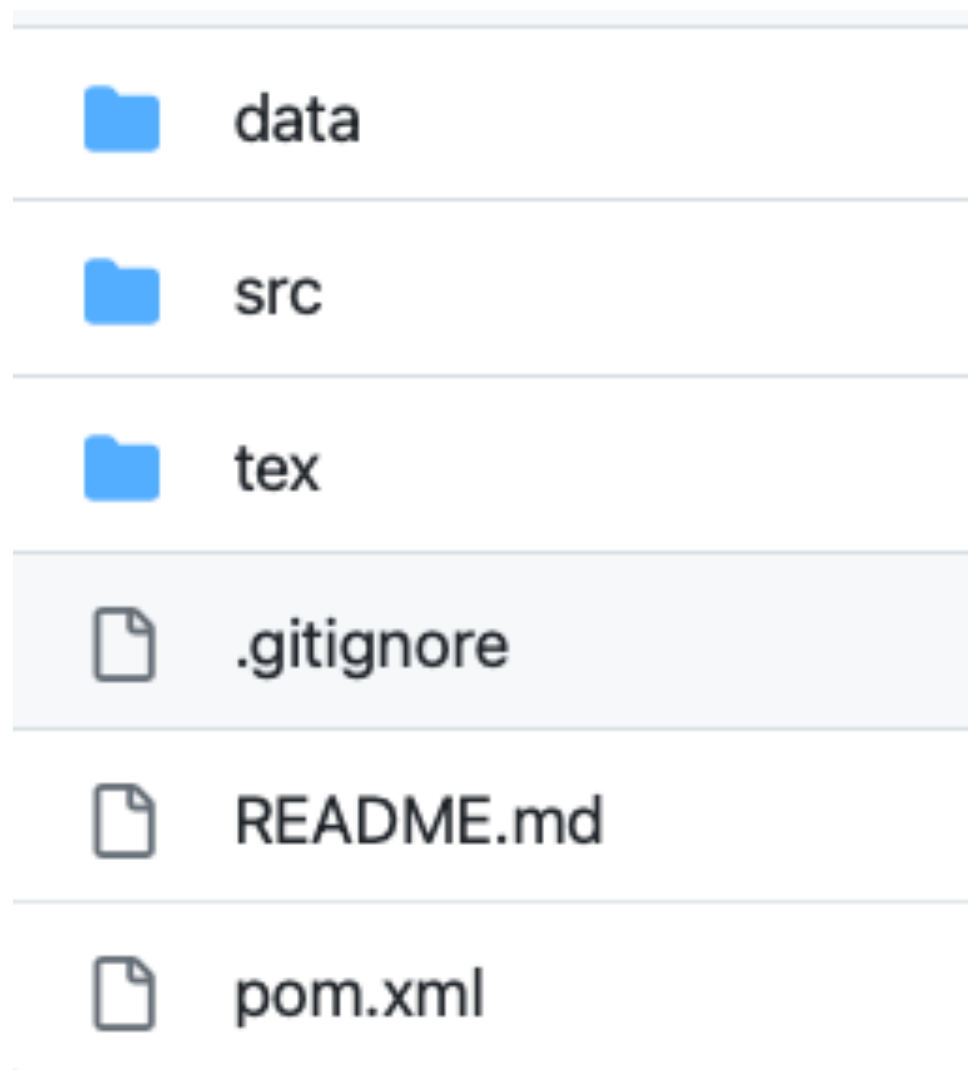

Submission and projects, how it works ? 2/4

- Step 3: You code your solution to the current project (commit frequently to your repository)
- Step 4: Press “submit” button on the task of the current project

Code exercises - Dynamic Programming

Implement the functions from the [dynamicprogramming](#) package to pass the tests

Submit

Submission and projects, how it works ? 3/4

- Inginius will then:
 - Pull your code (with your solution)
 - Run tests (some of them are hidden)
 - Grade your solution
- If happy with the grading, stop there, otherwise work harder.

Motivation




10 GB



GB's of personal data
lost !!!



The problem

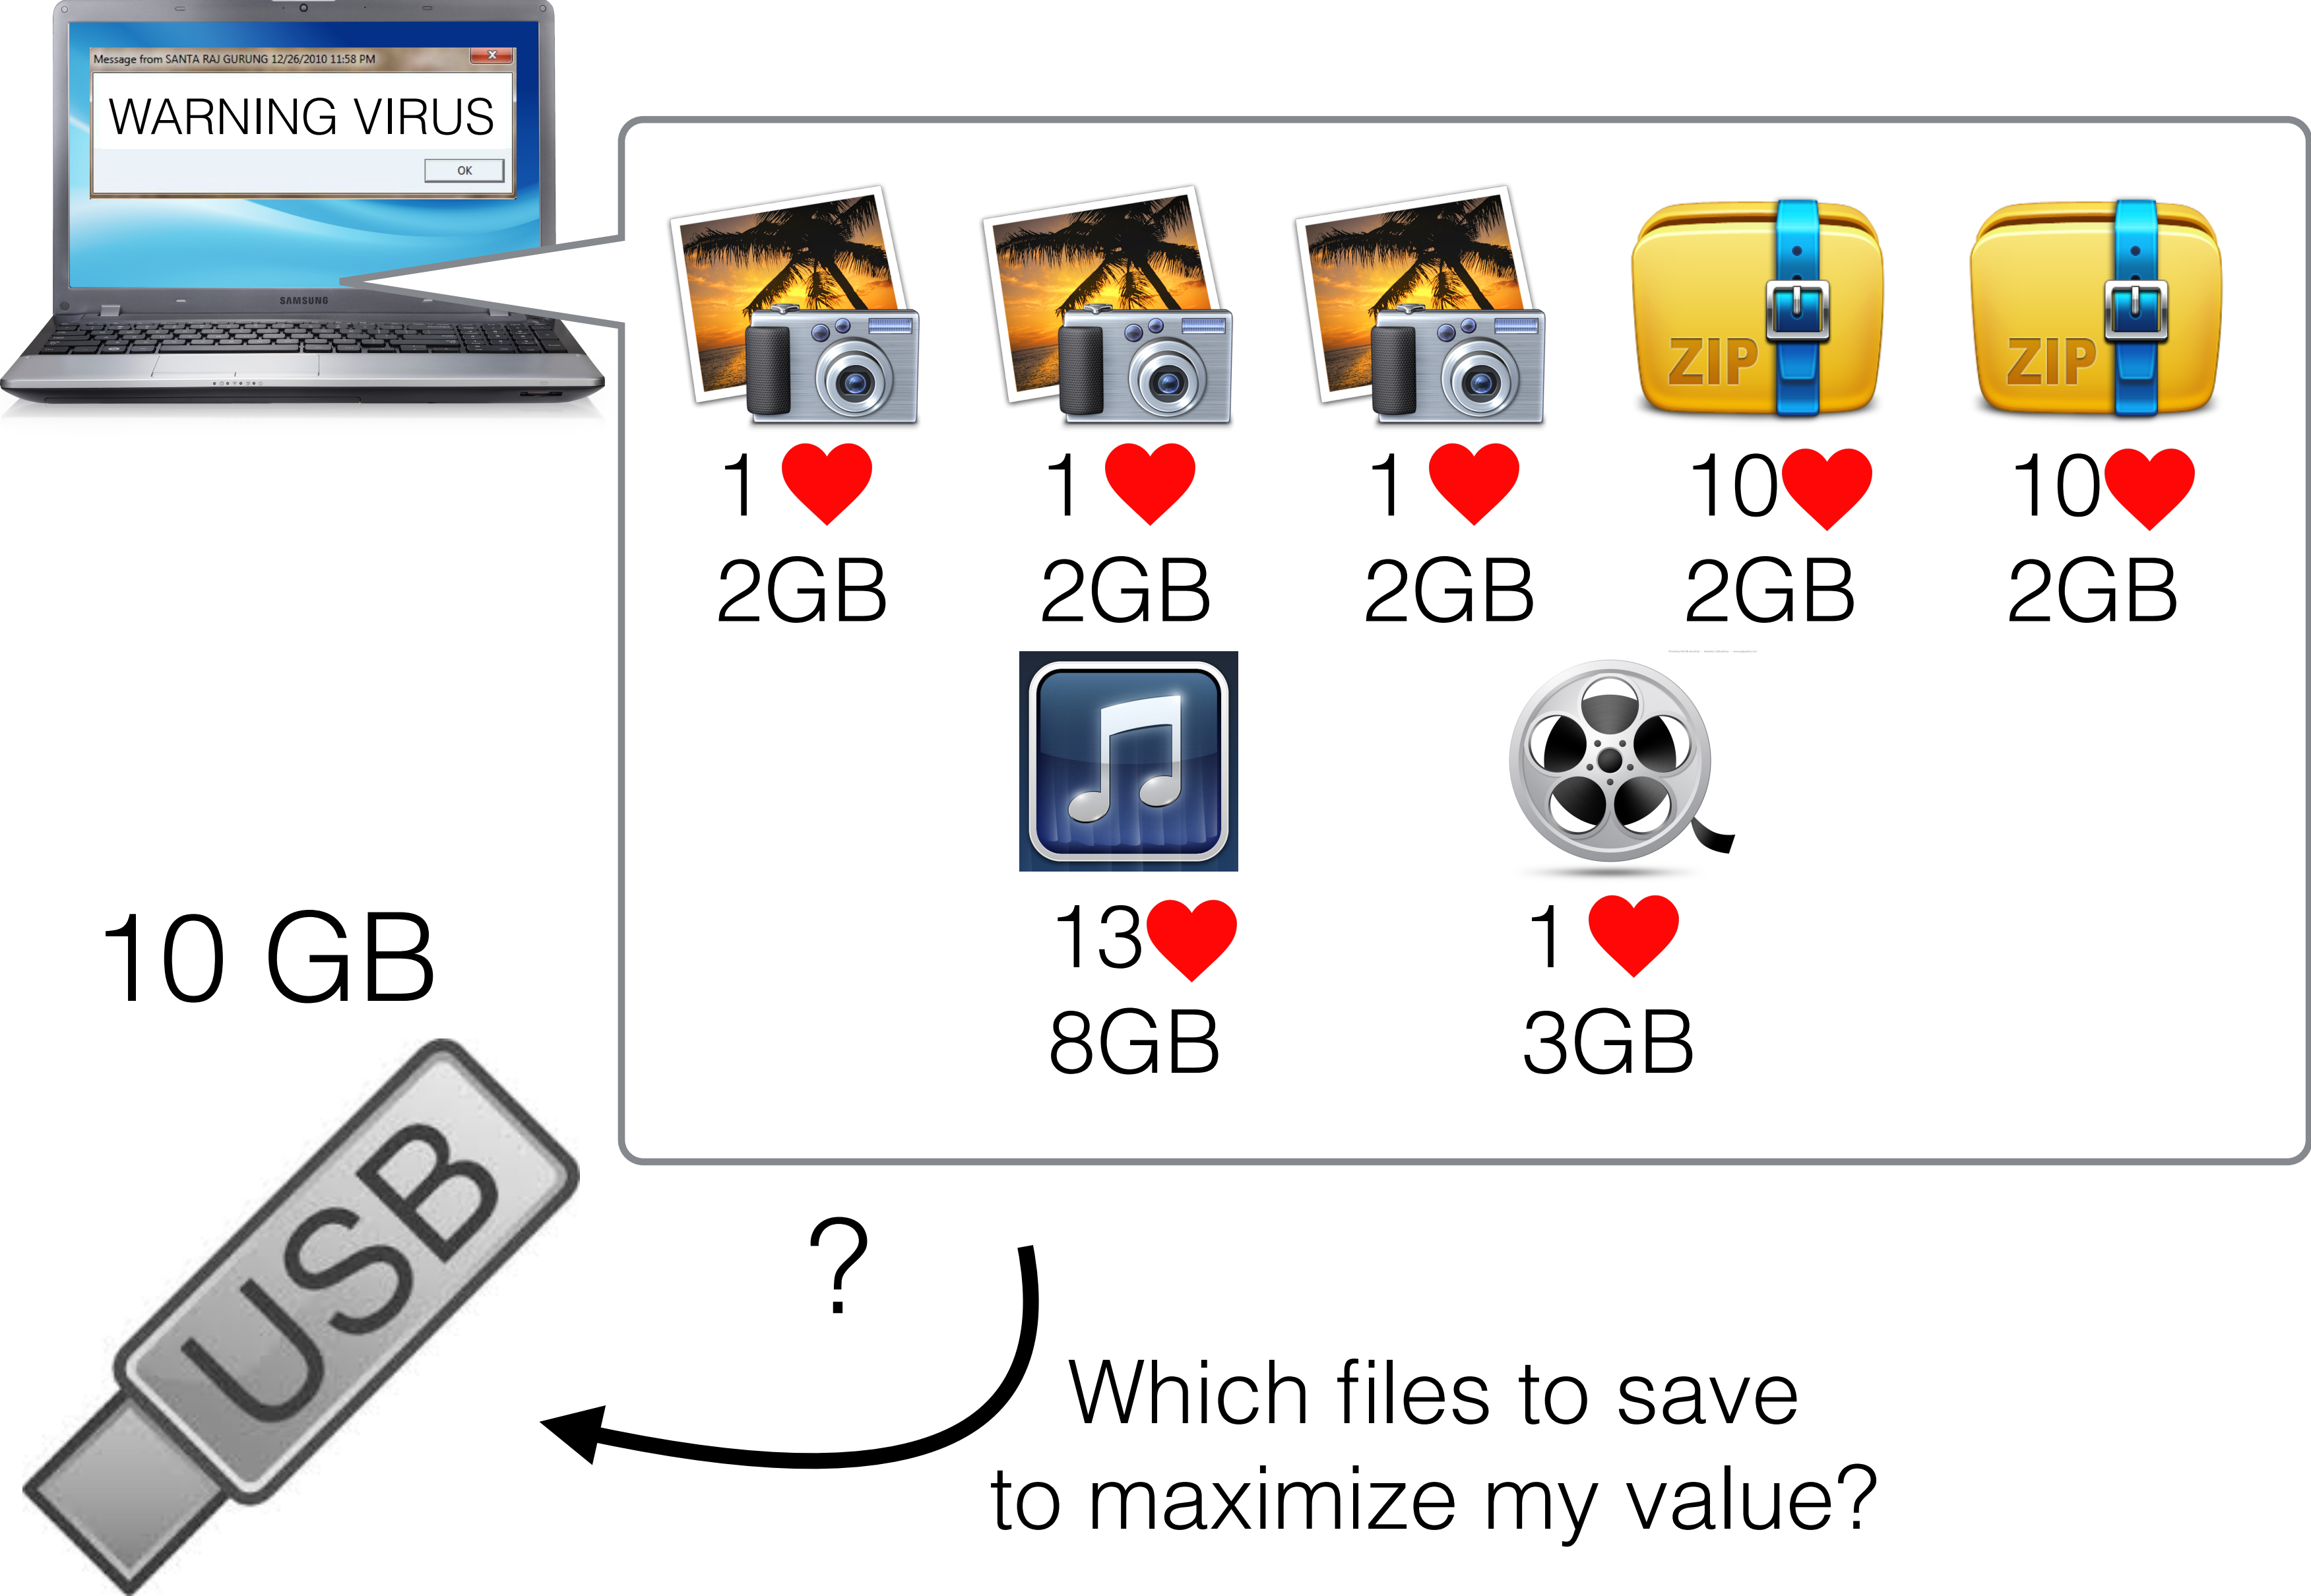

Knapsack Problem

- the set of items: I
- is item i selected: $x_i \in \{0, 1\}$
- Objective: Maximize $\sum_{i \in I} v_i x_i$
- Constraints: $\sum_{i \in I} w_i x_i \leq C$


Maximize value of
selected items

Under capacity
constraint

Reminder Calculability: P, NP and NP-Complete

- **P** is the class of problems with efficient algorithms for solving them (polynomial time in the size of the input)
- **NP** is the class of problems with efficient algorithm for (in)validating a candidate solution
- In NP, there are problems for which there no known algorithm for solving them efficiently (TSP for instance). We call those problems **NP-complete**. This is clique of problems because there is a know polynomial time reduction between any pairs of these.
- This is an open-question whether $P = NP$?
- Nice read: Fortnow, L. (2009). The status of the P versus NP problem. *Communications of the ACM*, 52(9), 78-86.

Summary

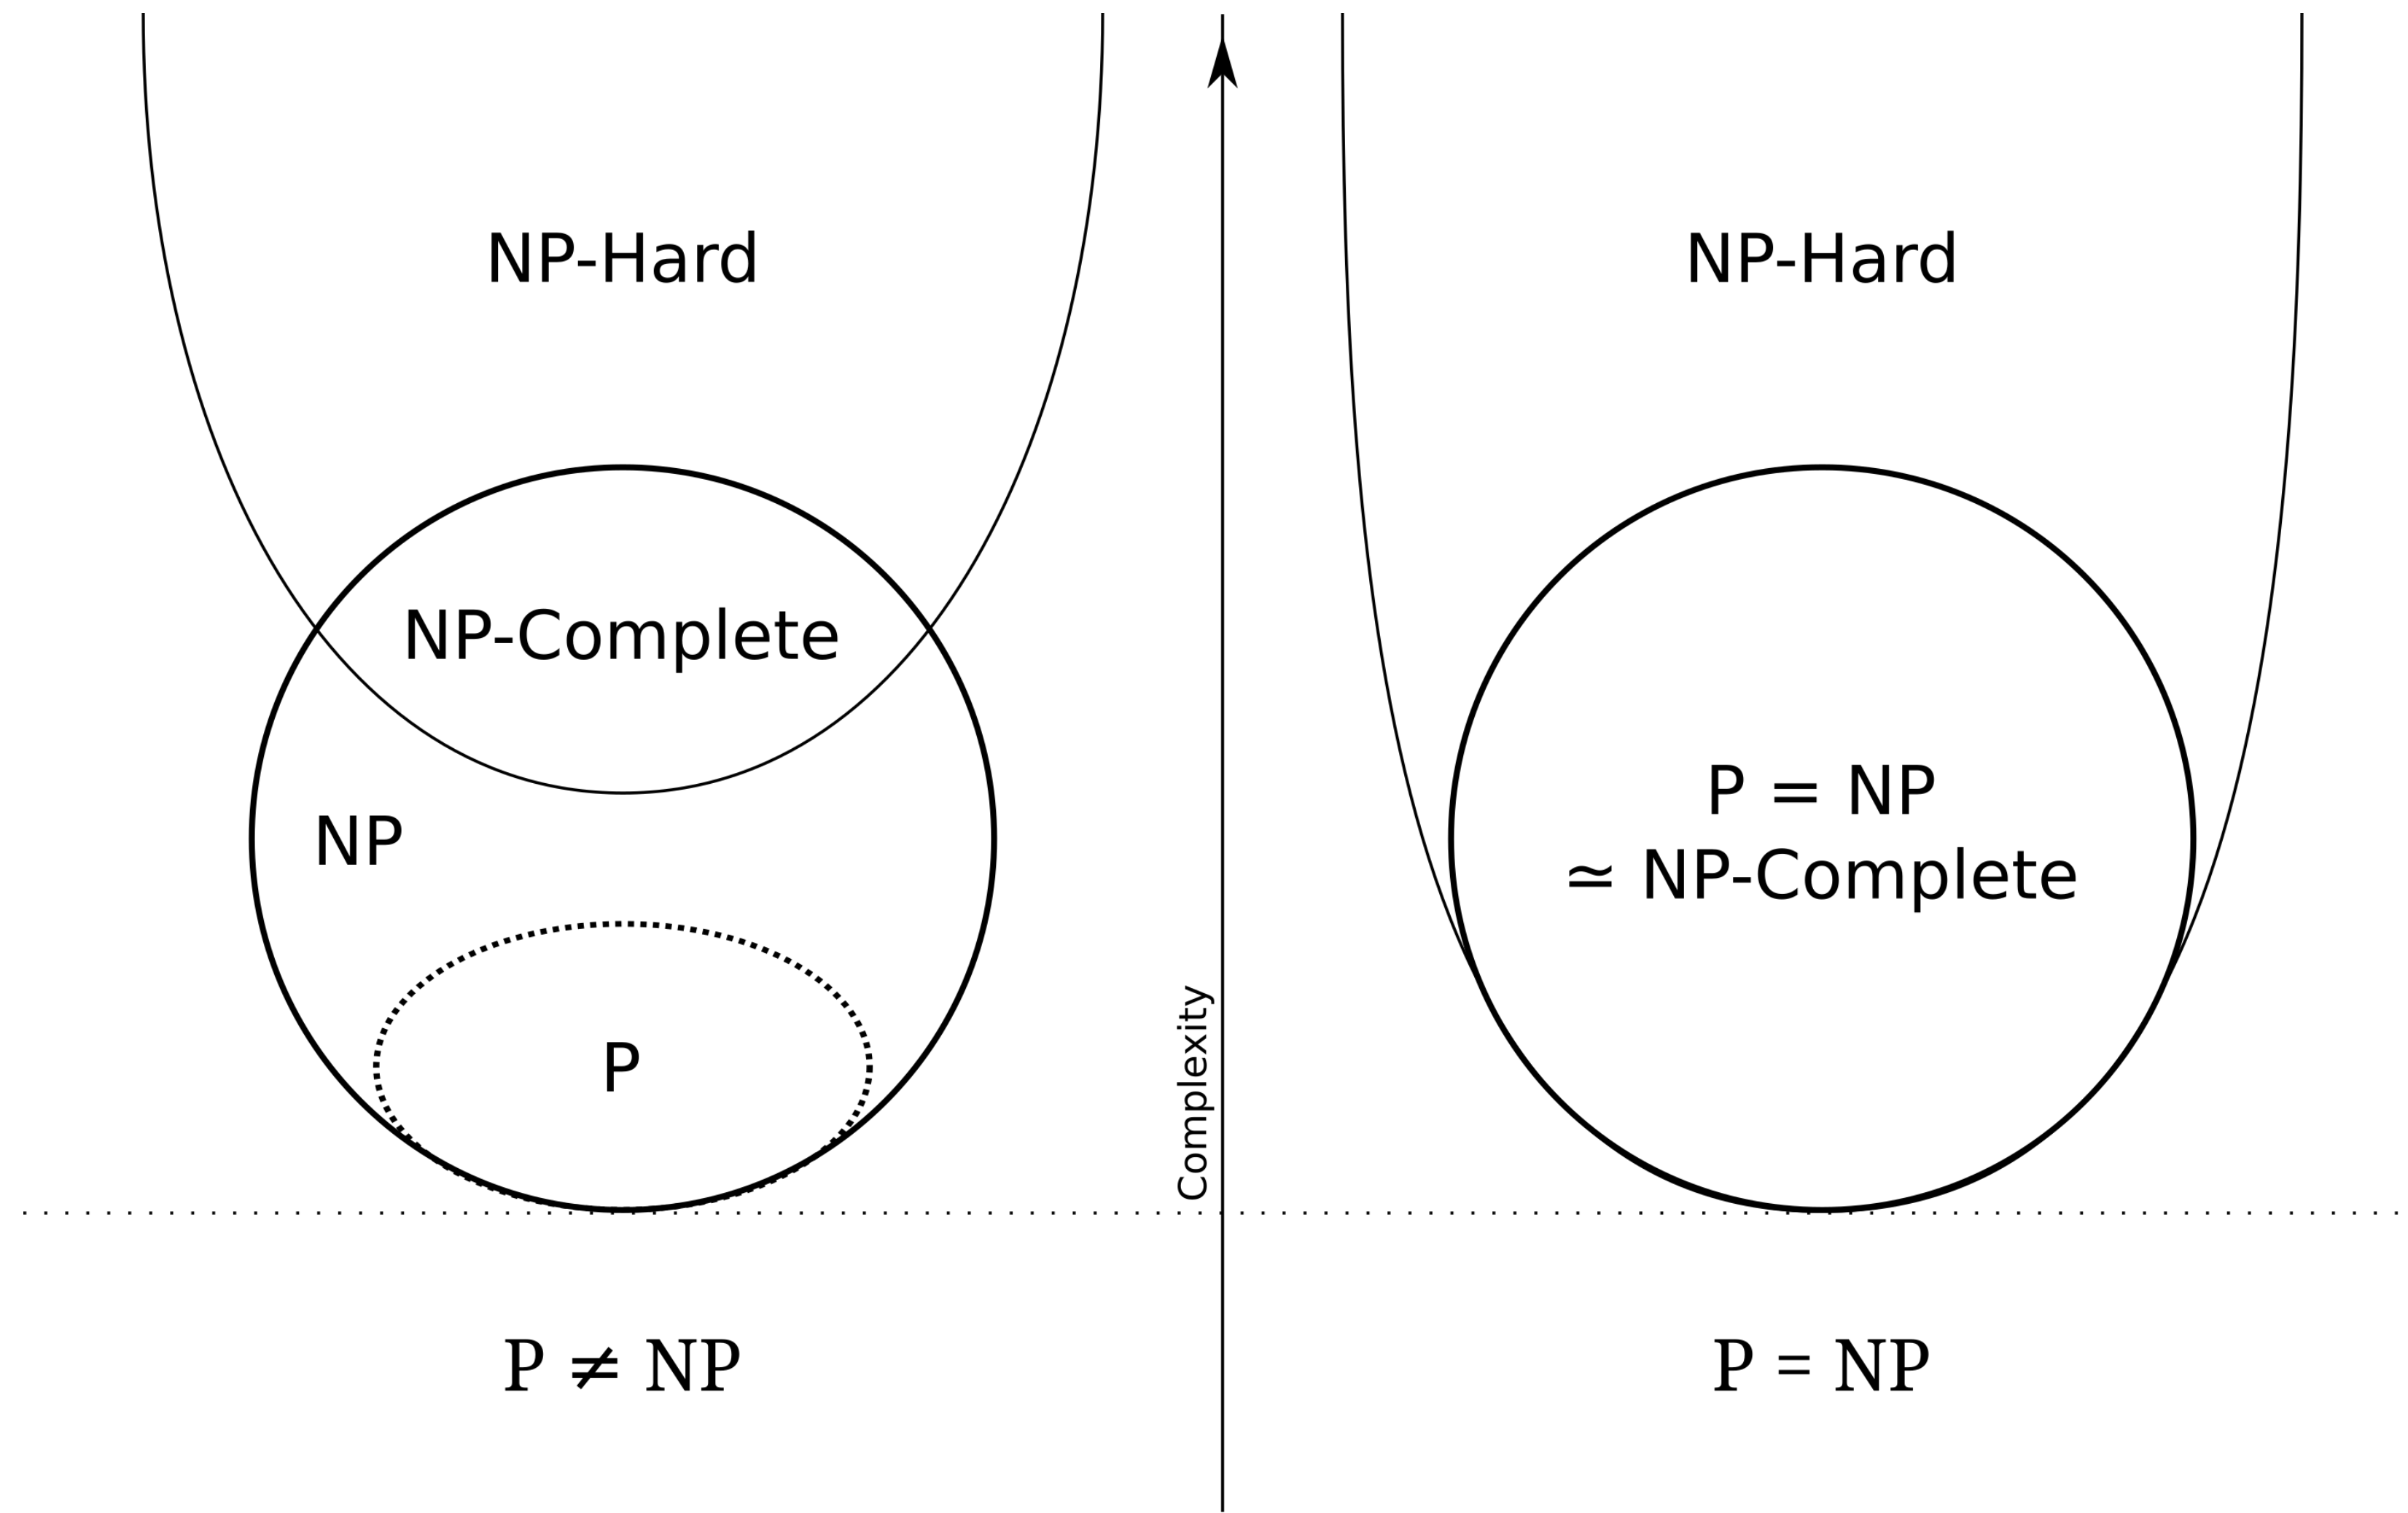

Reminder Reduction

Suppose there is a polynomial-time reduction from problem A to problem B.

Is this statement true ?

- If A has no polynomial-time algorithm then neither does B

Reminder Reduction

Suppose there is a polynomial-time reduction from problem A to problem B.

Is this statement true ?

- If A has no polynomial-time algorithm then neither does B 
- *Suppose that B would have a polynomial time algorithm, then it means that you could also solve A efficiently (using the reduced problem), which contradicts the hypothesis.*
-
- A is the problem of finding a Hamiltonian Cycle in a graph (a **path** in a directed graph that visits each **vertex** exactly once)
- B is problem of sorting numbers.
-

Reminder Reduction

Suppose there is a polynomial-time reduction from problem A to problem B.

Is this statement true ?


- If B has no polynomial-time algorithm then neither does A

Reminder Reduction

Suppose there is a polynomial-time reduction from problem A to problem B.

Is this statement true ?

- If B has no polynomial-time algorithm then neither does A ❌
- Counter example:
 - A is problem of sorting numbers (efficient algorithms exist for sorting)
 - B is the problem of finding a Hamiltonian Cycle in a graph (a **path** in a directed graph that visits each **vertex** exactly once), known to be NP-Complete
 - Reduction: add an arc from i to j if $i < j$ and from the largest to the smallest, a Hamiltonian cycle in this graph corresponds to visiting numbers in increasing order

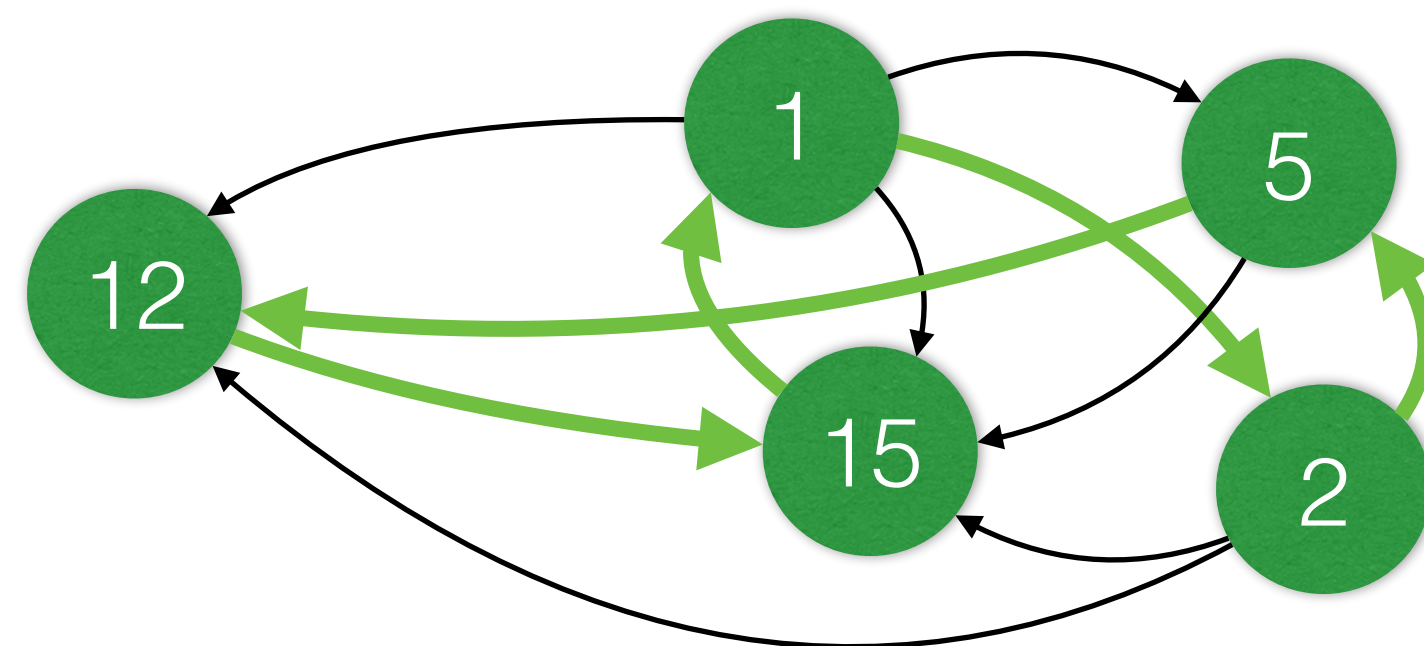

Reminder Reduction

Suppose there is a polynomial-time reduction from problem A to problem B.

Is this statement true ?

- If A is NP-hard and B has a polynomial-time algorithm then $P=NP$

Reminder Calculability

Suppose there is a polynomial-time reduction from problem A to problem B.

Is this statement true ?

- If A is NP-hard and B has a polynomial-time algorithm then $P=NP$ 

First Question (important): Is this problem NP-Hard?

- Yes if the related decision problem is NP-Complete

$$\sum_{i \in I} v_i x_i \geq V$$

- $$\sum_{i \in I} w_i x_i \leq C$$

$$x_i \in \{0, 1\}$$

Natural numbers $c_1, \dots, c_n, K$.

Find $S \subseteq \{1, \dots, n\}$ s.t. $\sum_{j \in S} c_j = K$

First Question (important): Is this problem NP-Hard?

- Yes if the related decision problem is NP-Complete

$$\sum_{i \in I} v_i x_i \geq V$$

$$\sum_{i \in I} w_i x_i \leq C$$

$$x_i \in \{0, 1\}$$

- We know *subset sum* is NP-Complete (a quite similar problem)


Natural numbers $c_1, \dots, c_n, K$.

Find $S \subseteq \{1, \dots, n\}$ s.t. $\sum_{j \in S} c_j = K$

- Exercise: Find a (polynomial) **reduction** from subset sum to knapsack (if you can solve knapsack efficiently, then you can solve subset sum efficiently).

A data-base of NP-Complete problems

This book is used a lot to make reductions for new problems:

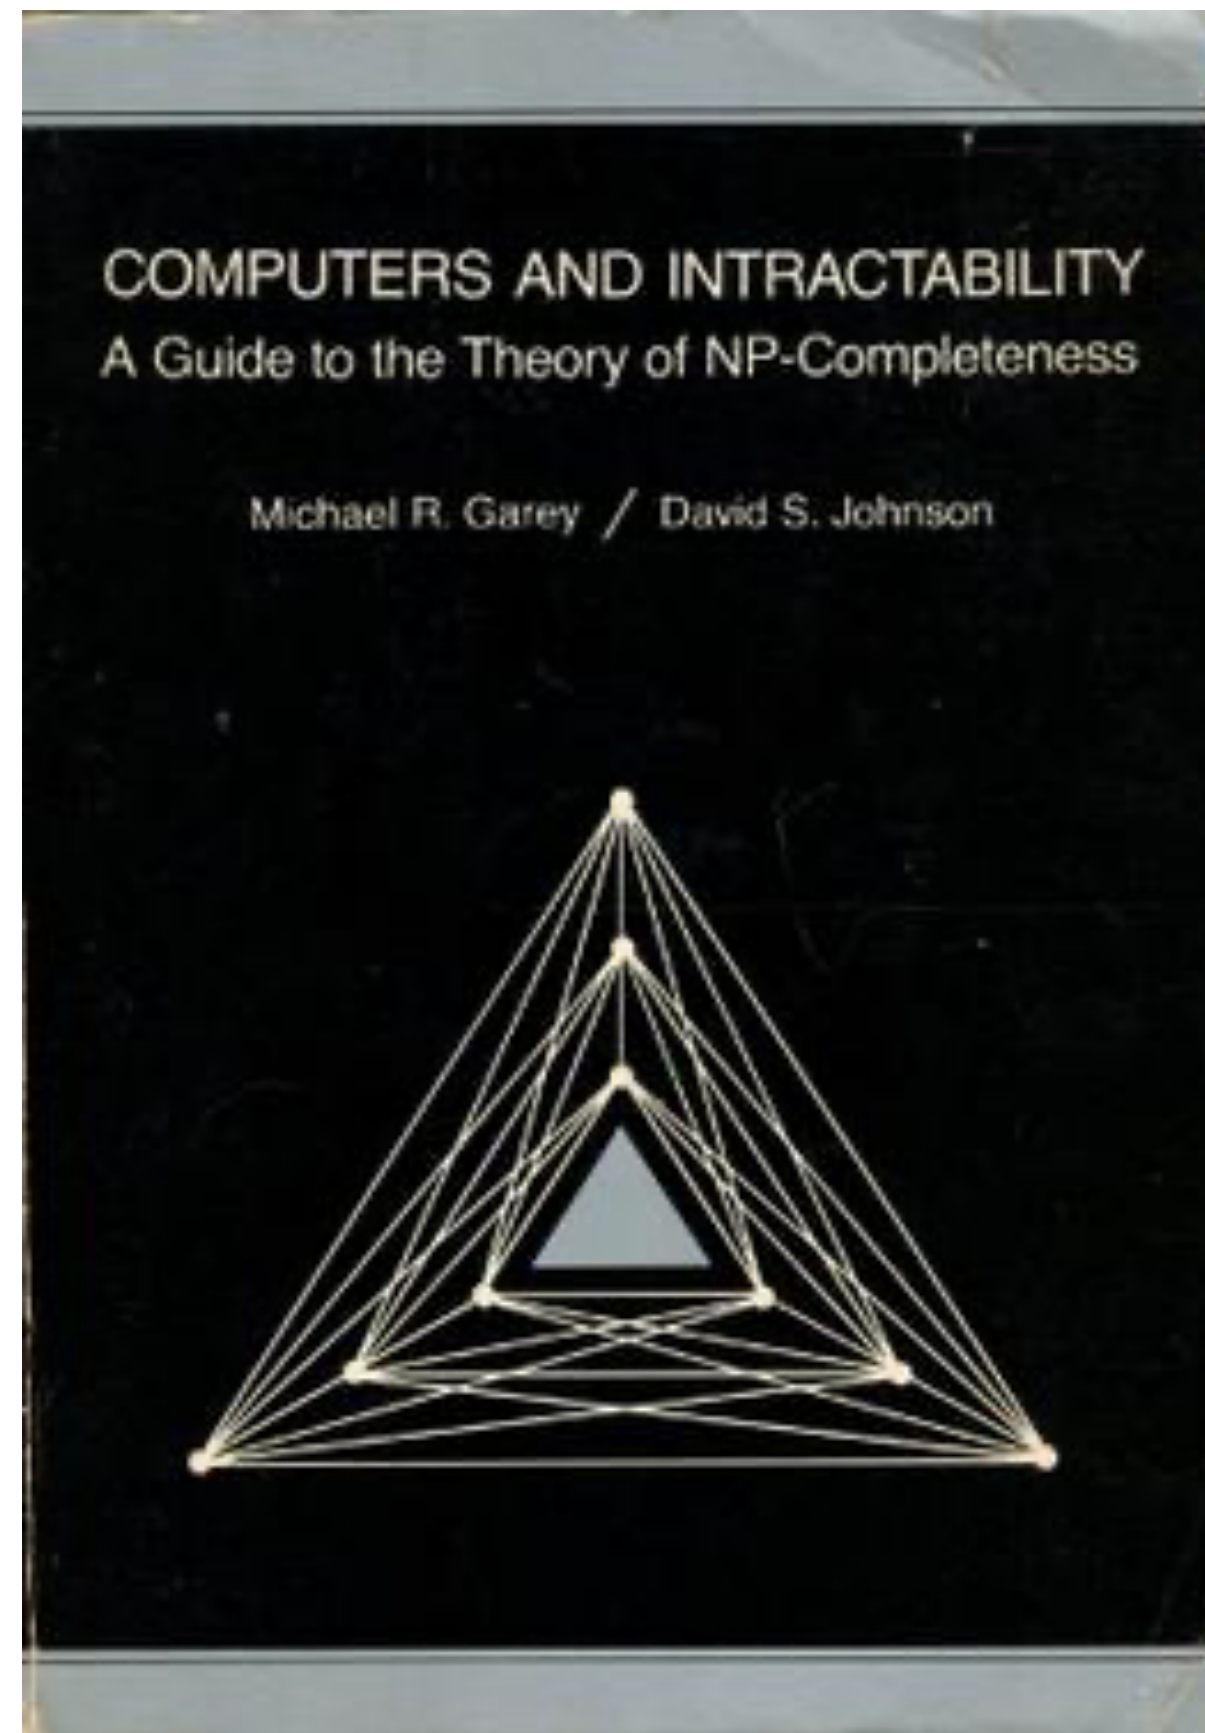

This website is also useful <https://www.csc.kth.se/tcs/compendium/>

A first bad news

- Most of the real-life constrained optimization problems are NP-hard.
- Does-it mean that we should run away and not solve them ?




- Of course not (at least I hope you will be convinced about that after having followed this course)

Second question: what size are the instances ?

- Very small : A naive approach (like brute force) can easily find the best possible solution
- Try every possible solutions
 - n items, 2^n solutions
 - $n = 50$, 1 ms to test one solution, > 30.000 years

Second question: what size are the instances ?


- Medium: I want to find the best solution

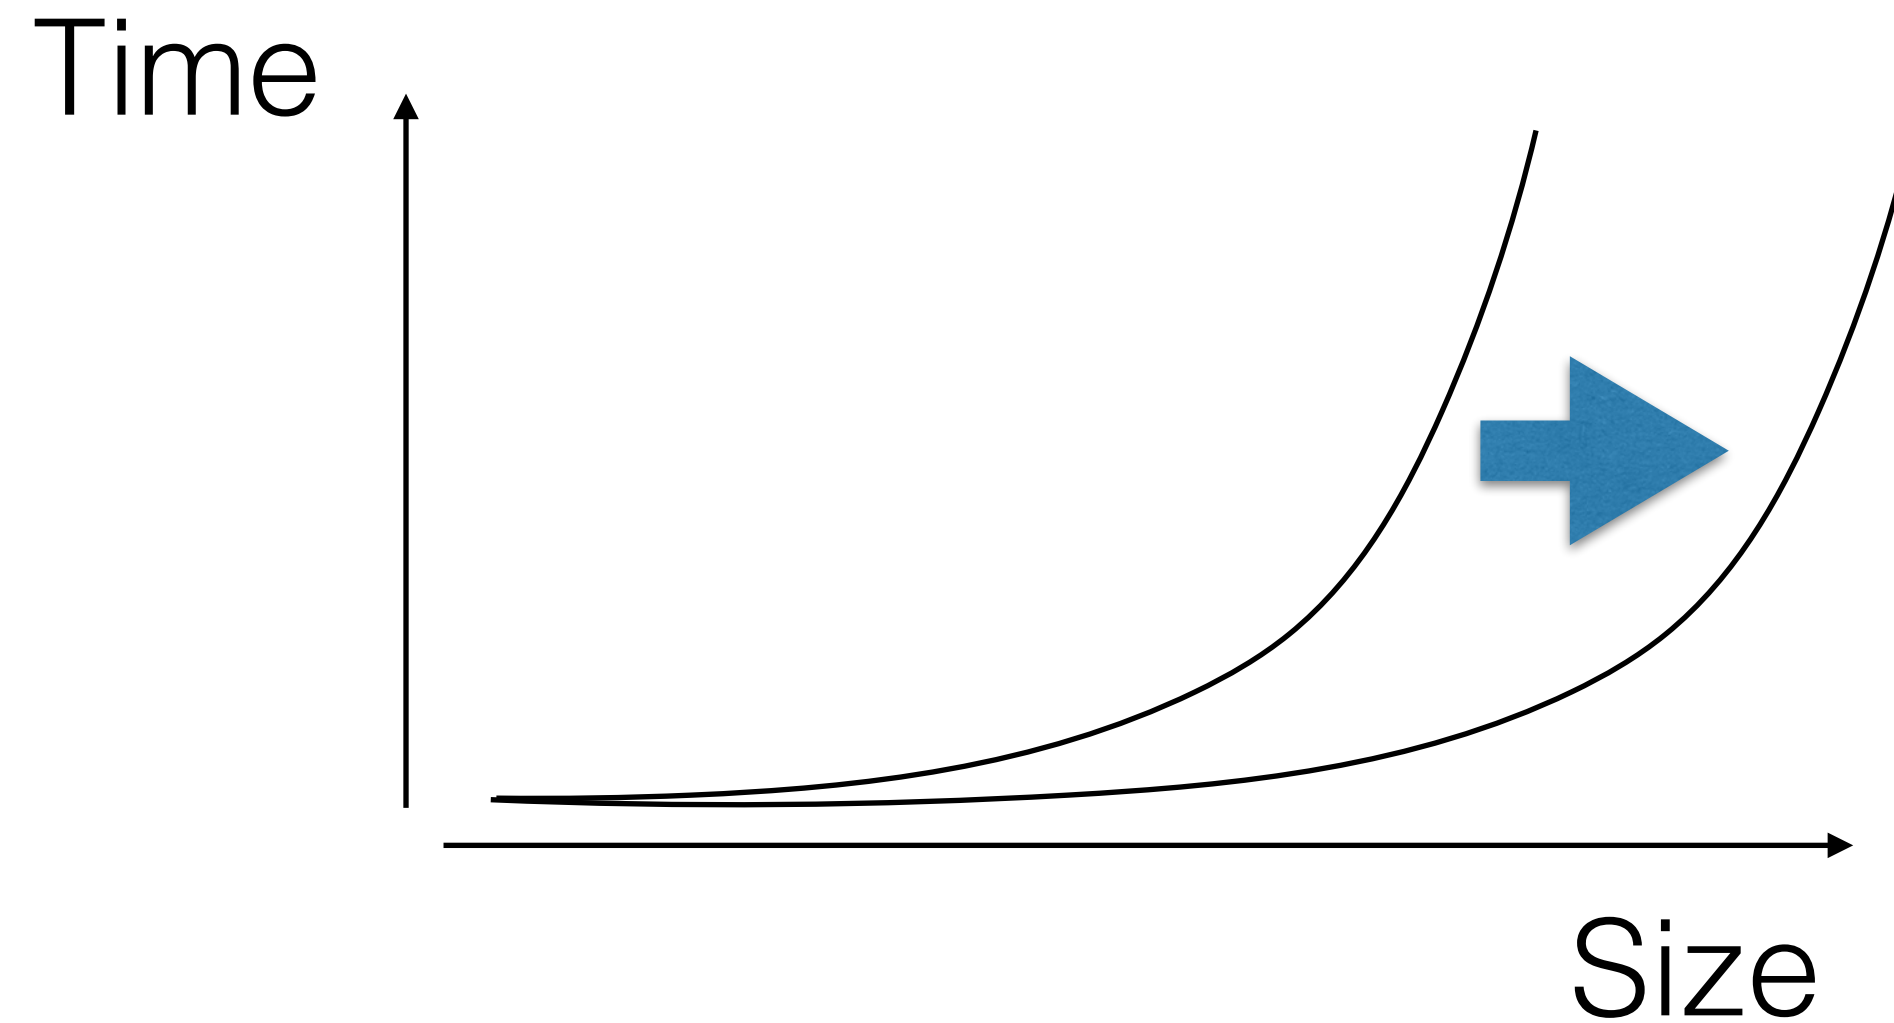

- Objective: shift the exponential behavior as much as possible to the right

How to shift

- Almost all the exact approaches explore a search tree

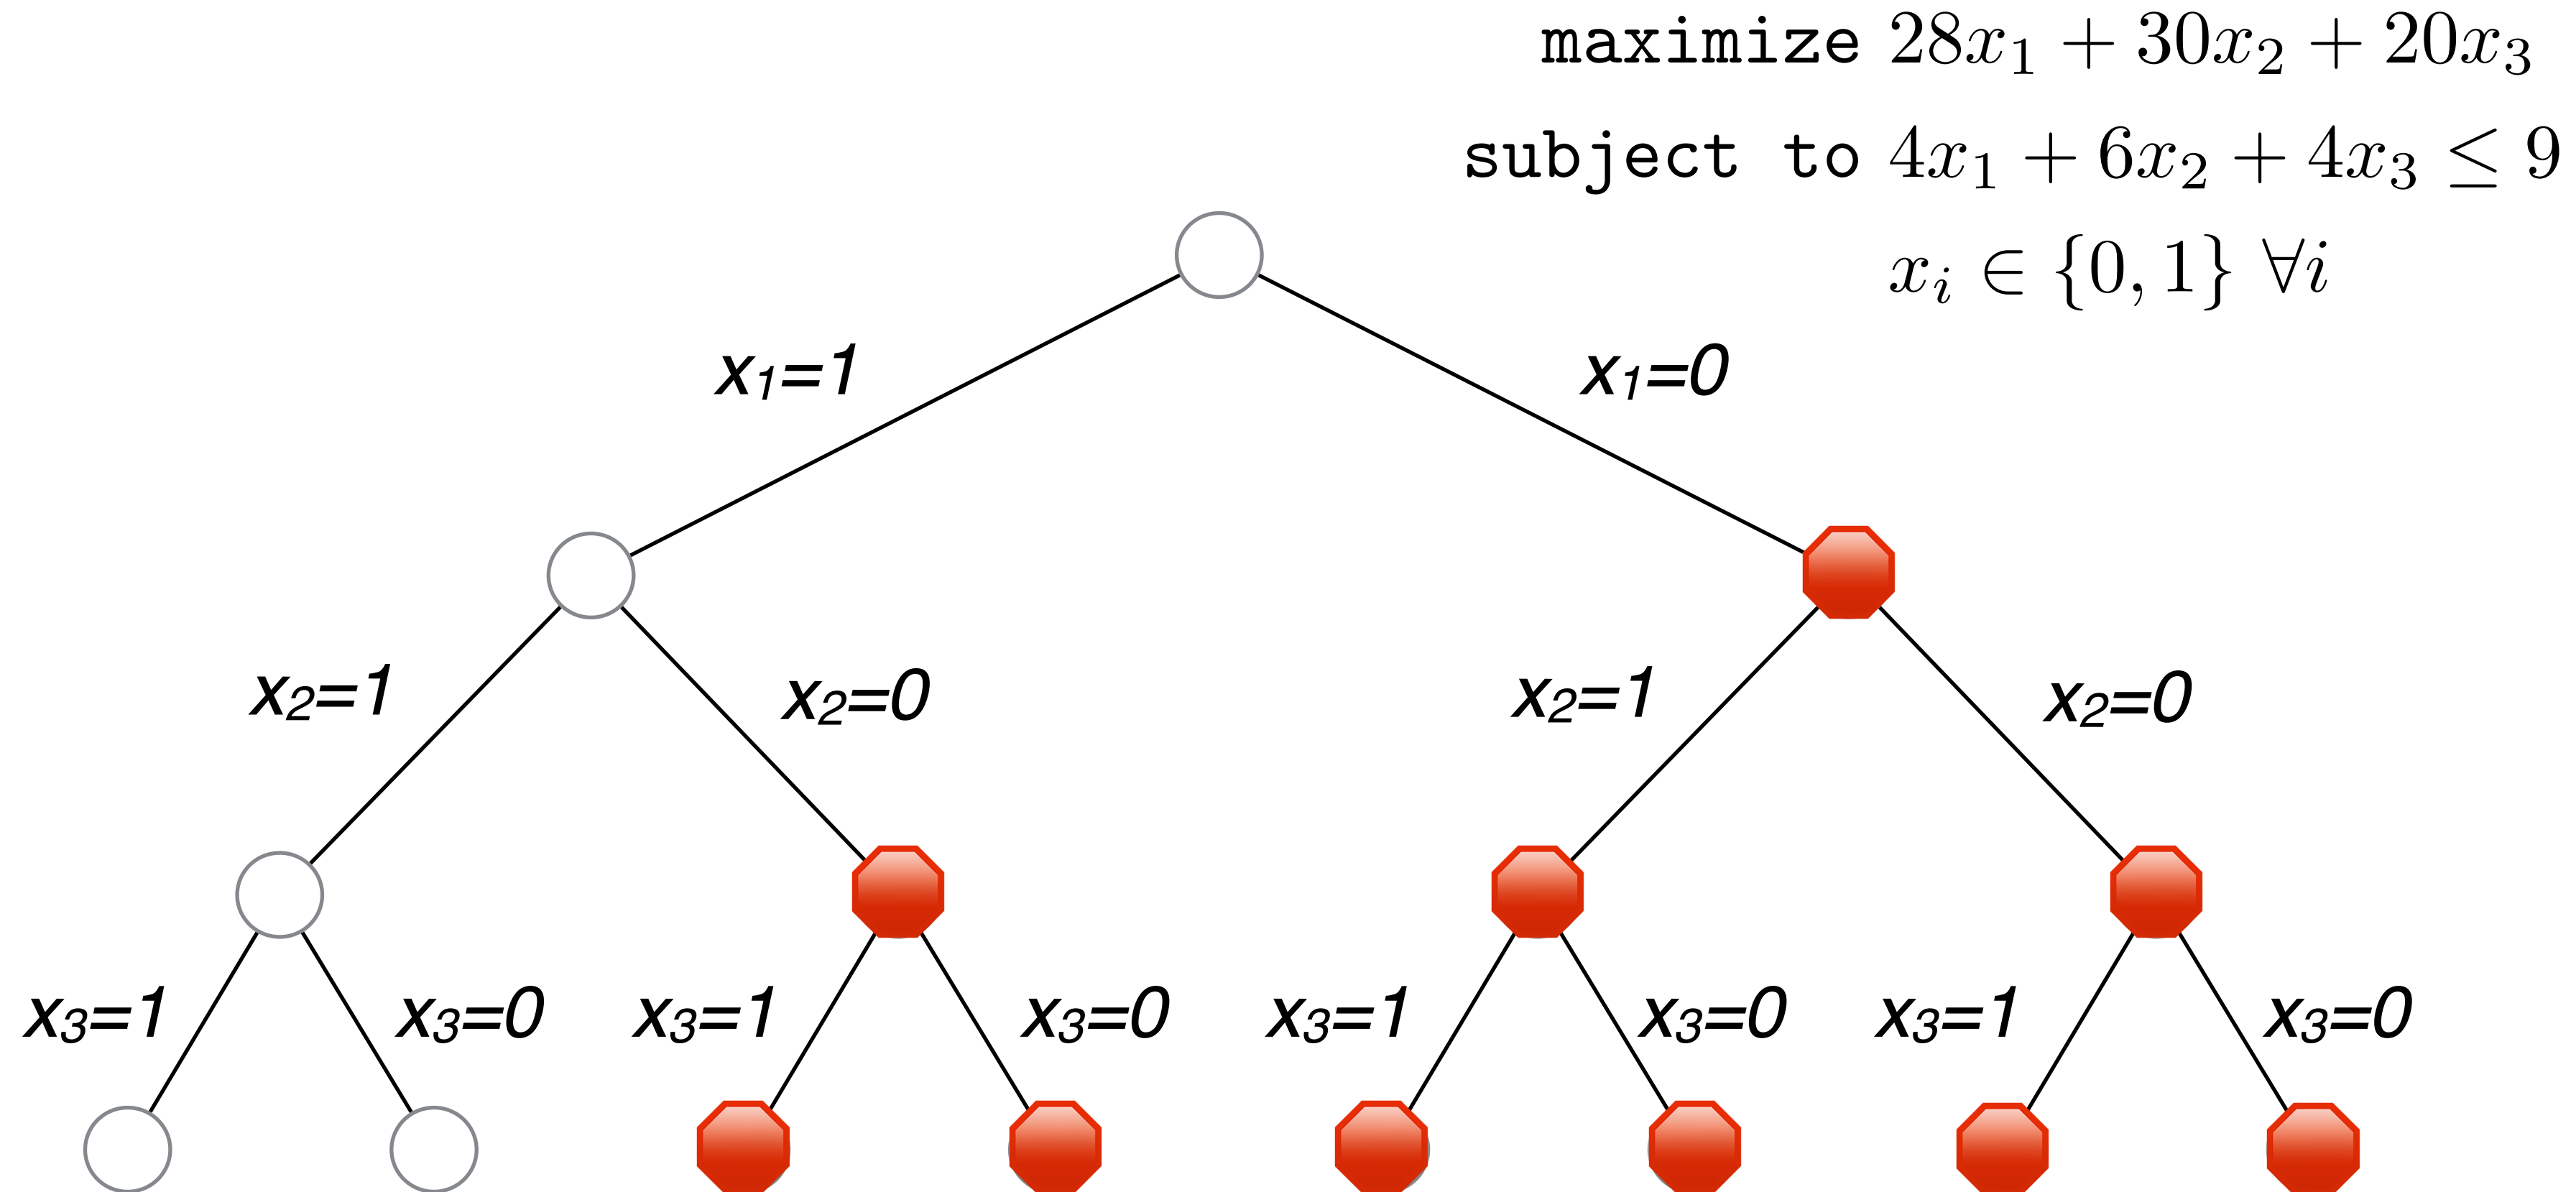


- The goal is then to **prune this search tree** as much as possible to spare time (lower-bounding, dominance, etc)

The role of relaxation

- I have a solution to my knapsack (maximisation) problem with objective O
- How far can it be from the optimal solution O^* ?
- Impossible to know, unless we have an upper bound that can be computed easily UB .
- Being pessimistic, I can guarantee that I am at most $\frac{(O - UB)}{UB}$ suboptimal
- Being able to **find quickly good lower and upper-bounding** is **THE KEY INGREDIENT** in optimization
- Many techniques can help us: Linear Programming, Lagrangian relaxation, Dedicated Bounding algorithms, etc

Second question: what size are the instances ?

- Medium: but you prefer to find a good enough solution quickly (within some time-limit)
- Local Search methods are generally the one we prefer in this case. Gradually apply small (improving) modifications to your solution. You can stop at any time. You can put a lot of intelligence in the exploration and the moves (as we will see in a few lectures)

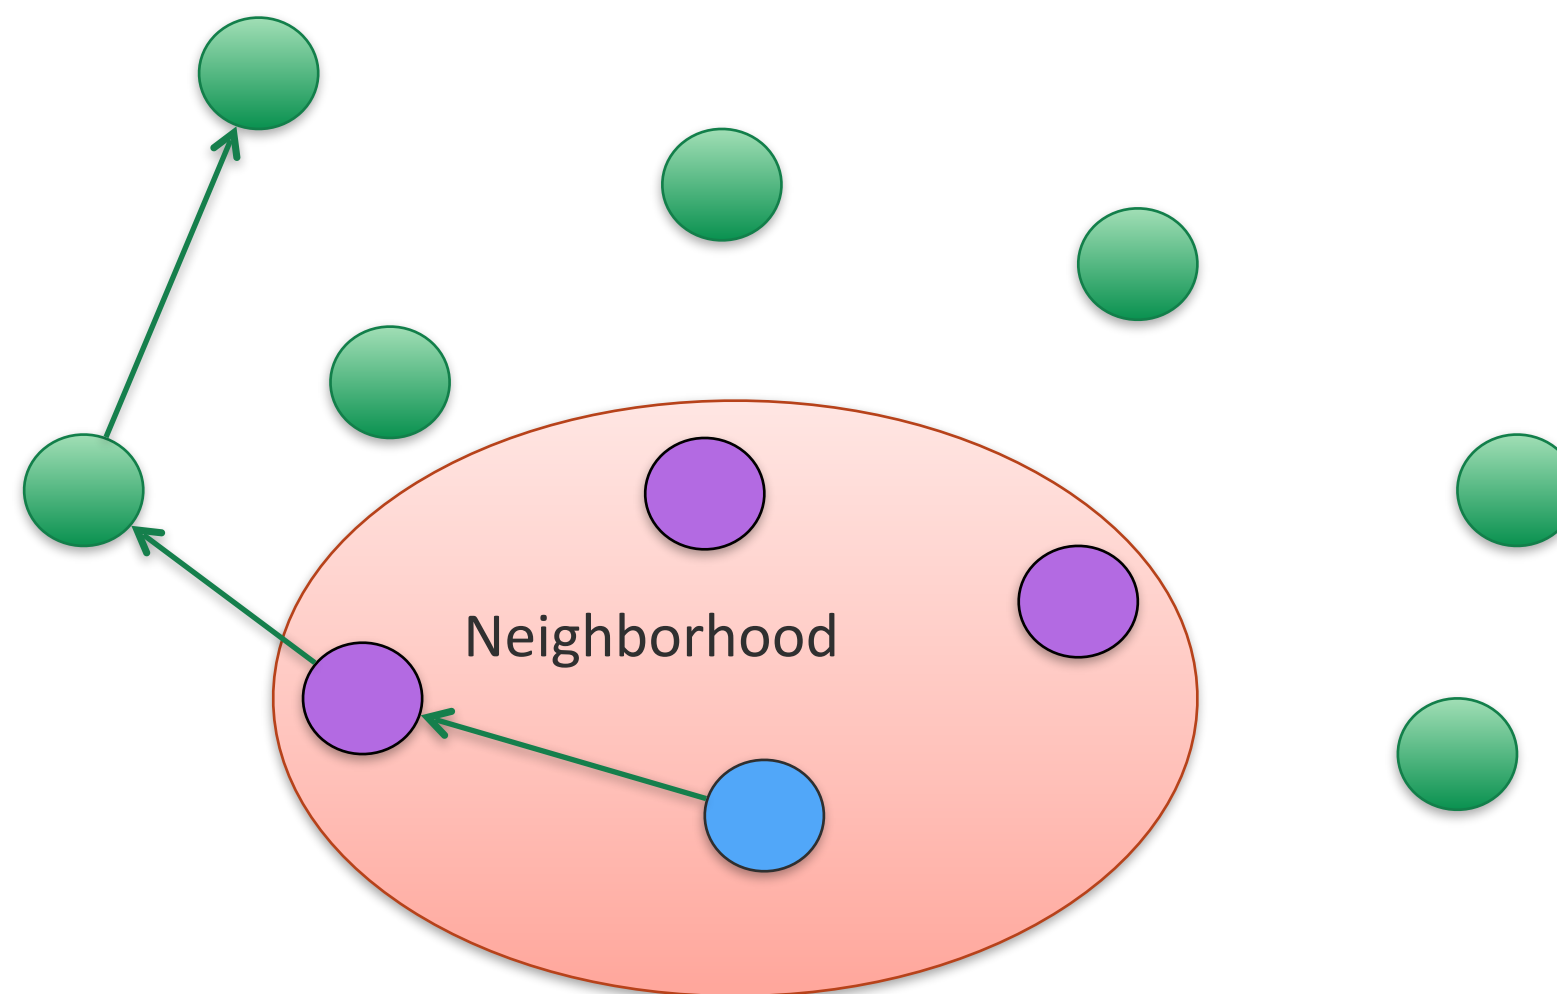

Second question: what size are the instances ?

- Large: Forget about proving optimality. You can generally only apply a greedy heuristic and a few local search moves depending on the time you have.
- Example: Knapsack, what would you do as a greedy heuristic ?

$$\begin{aligned} & \text{maximize} \sum_{i \in I} v_i x_i \\ & \text{subject to} \sum_{i \in I} w_i x_i \leq C \\ & \quad x_i \in \{0, 1\} \end{aligned}$$

Other consideration


- What is the money budget for solving the problem
 - Do you have money to buy 10K \$ licence of a mixed integer programming solver ?
 - How much time do you have to develop a solution for your problem (usually also a cost budget that depends on the return).
- Funny (but important) fact: Your (future) salary may cost (much) more than a licence price. Developing a solution using an existing optimization solver might be the best solution for your employer. Commercial solvers are very good today (Gurobi, Cplex, CP-Optimizer, etc). Some company have an open-source model like Cosling

Some Optimization Projects

- We are working on or have worked on at the INGI department with my team

Computer Networks


- Traffic demand between every pair of nodes in a network (steady state, in MB per second).
- Traffic follow the shortest-path, you remember ?
- Two Traffic Engineering problems:
 - Find weights to put on each link to avoid congestion (accumulated traffic $>$ capacity of the link).
 - Modify the paths (just a little, by introducing waypoints deviation) to avoid congestion

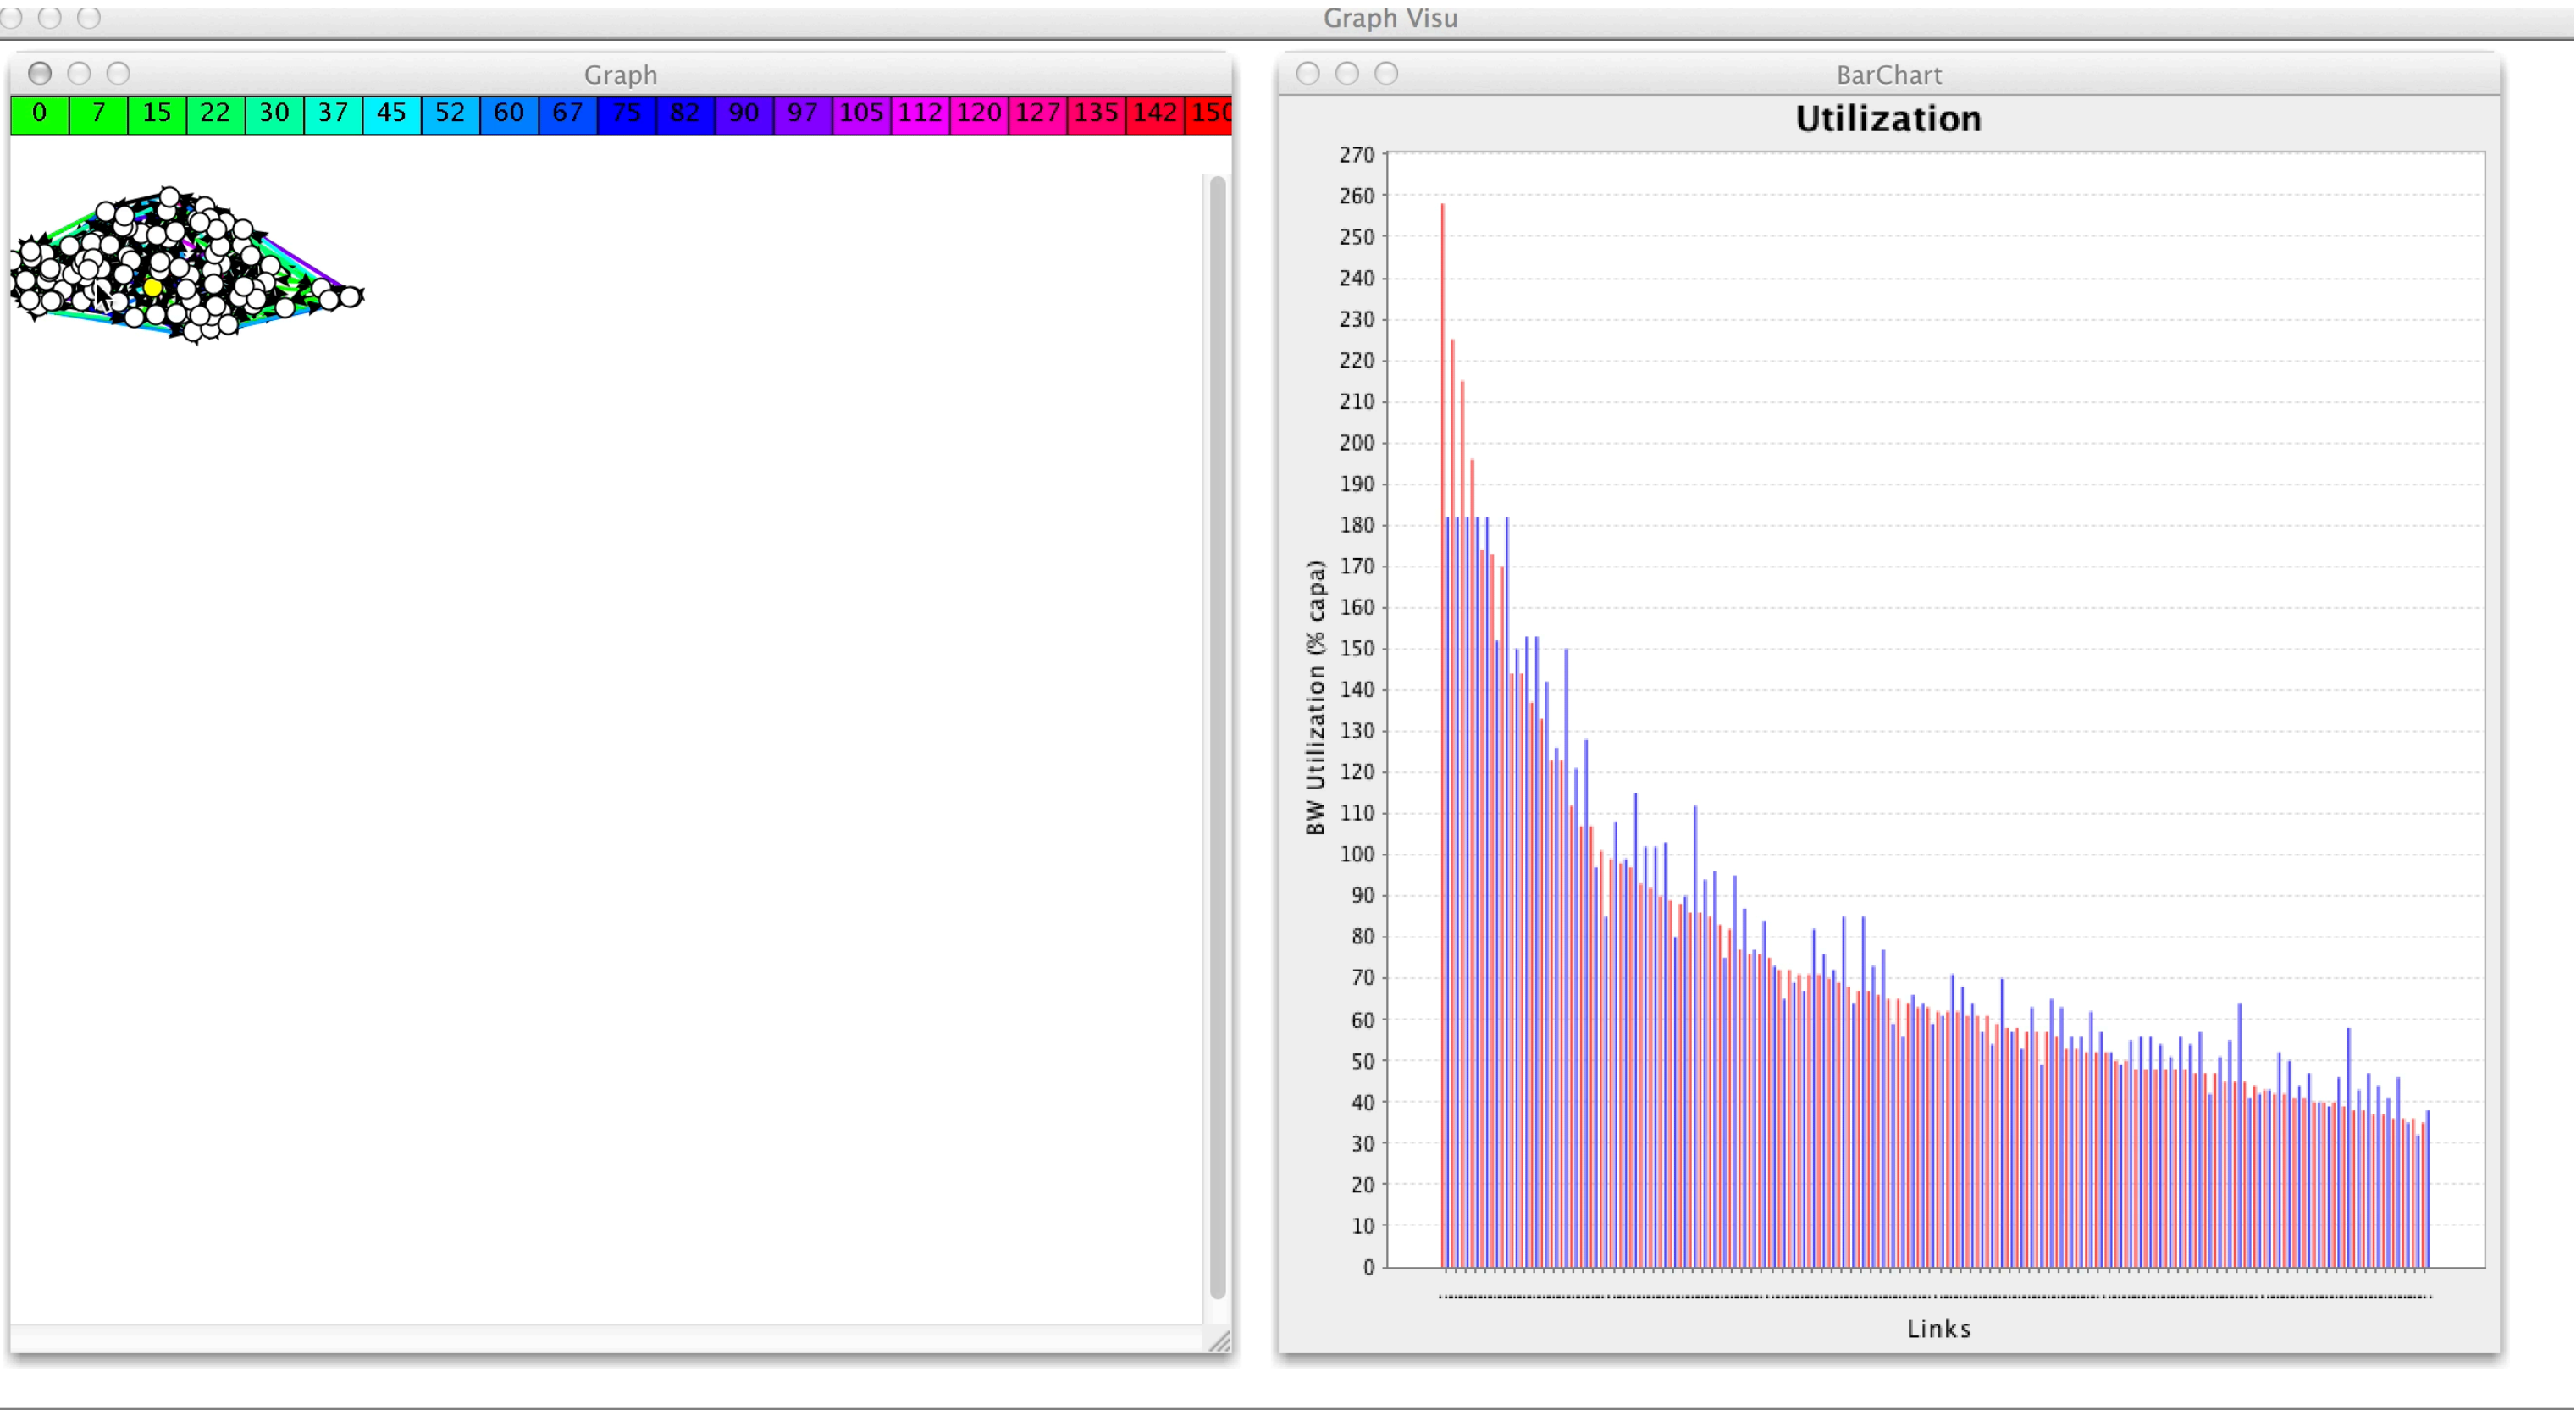


Computer Network Monitoring

- Bad things can happen open a computer network.
- We want to detect it as soon as possible.
- Idea: introduce monitors exchanging between them. Whenever a path is broken, we know something is broken.
- Problem: Where do we place them so that there is a minimal number of them

A. Burlat, C. Pelsser, P. Schaus (2024). Boolean Network Tomography: CP and ILP Models for Effective Failure Detection and Diagnosis}. CPAIOR 2024

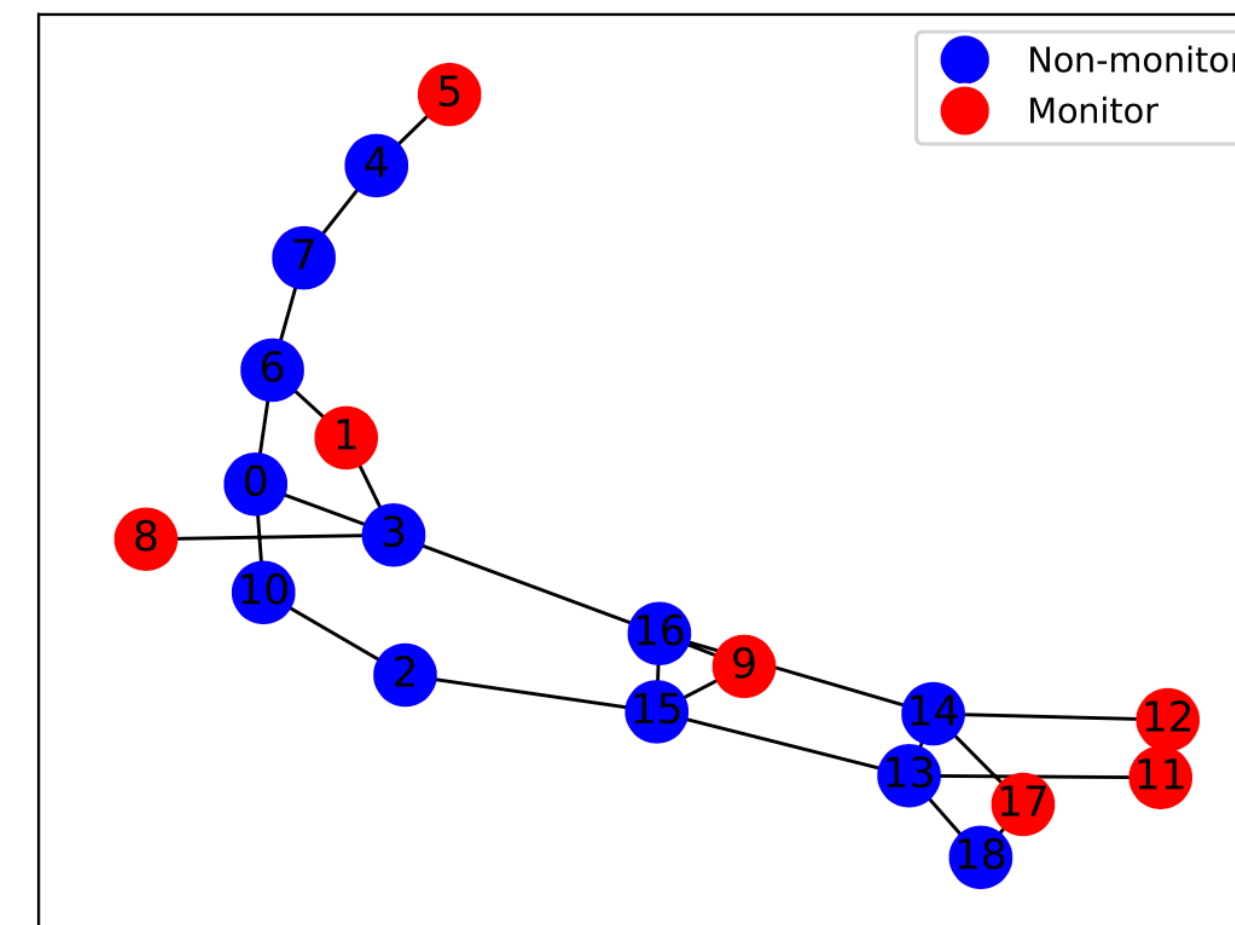

Steel Production Planning

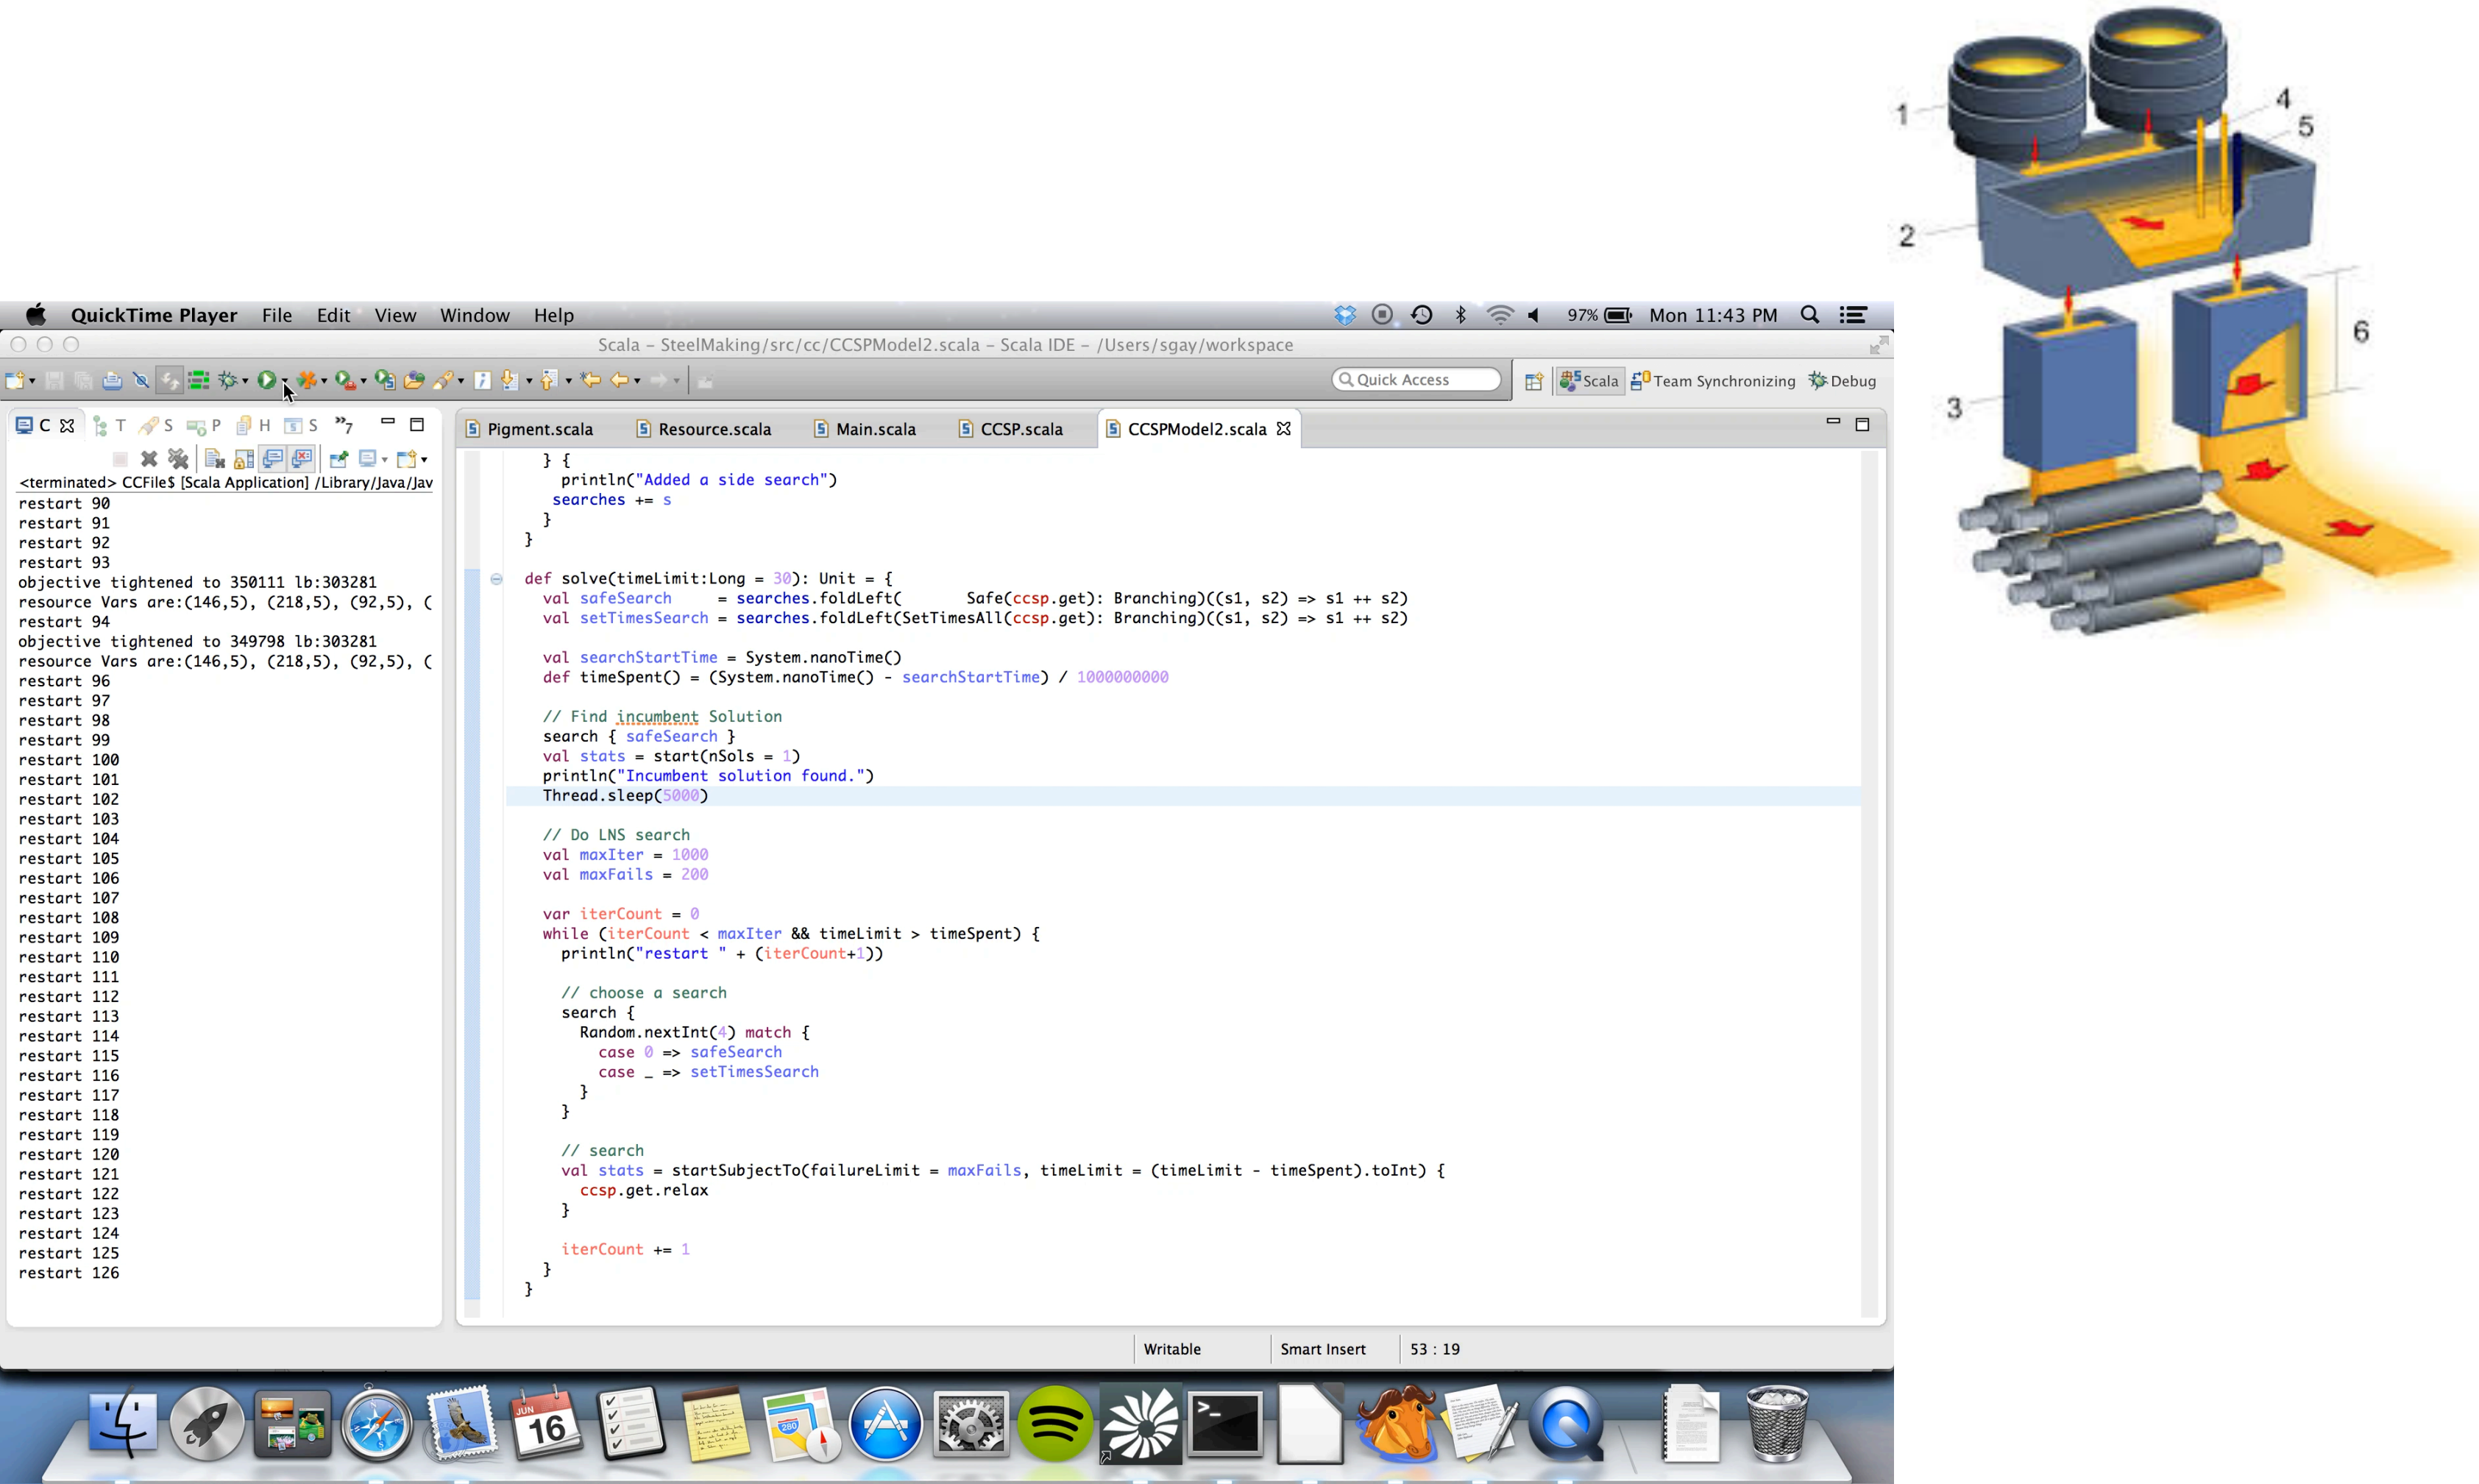

Gay, S., Schaus, P., & De Smedt, V. (2014). Continuous casting scheduling with constraint programming. In *Principles and Practice of Constraint Programming: 20th International Conference, CP 2014, L. Proceedings 20* (pp. 831-845). Springer International Publishing

Rostering of a hospitality management school

- Create the roster for groups of students over the semester. For each group, each week (AM/PM), we must decide the course (atelier) to schedule


Horizontal constraints:

- A theoretical course imposed in some slots
- For some courses: if scheduled must be scheduled two consecutive full weeks
- Some courses must be scheduled the whole week (morning and afternoon)
- Some courses can be scheduled a maximum number of times
- Some courses must be scheduled a minimum number of times (some equivalence)

Vertical Constraints:

- Each course must be scheduled a min/max number of times each AM/PM
- Some courses must be scheduled every week
- Synchronize groups with a same mother language to give them theoretical courses at the same time


Rostering of a hospitality management school

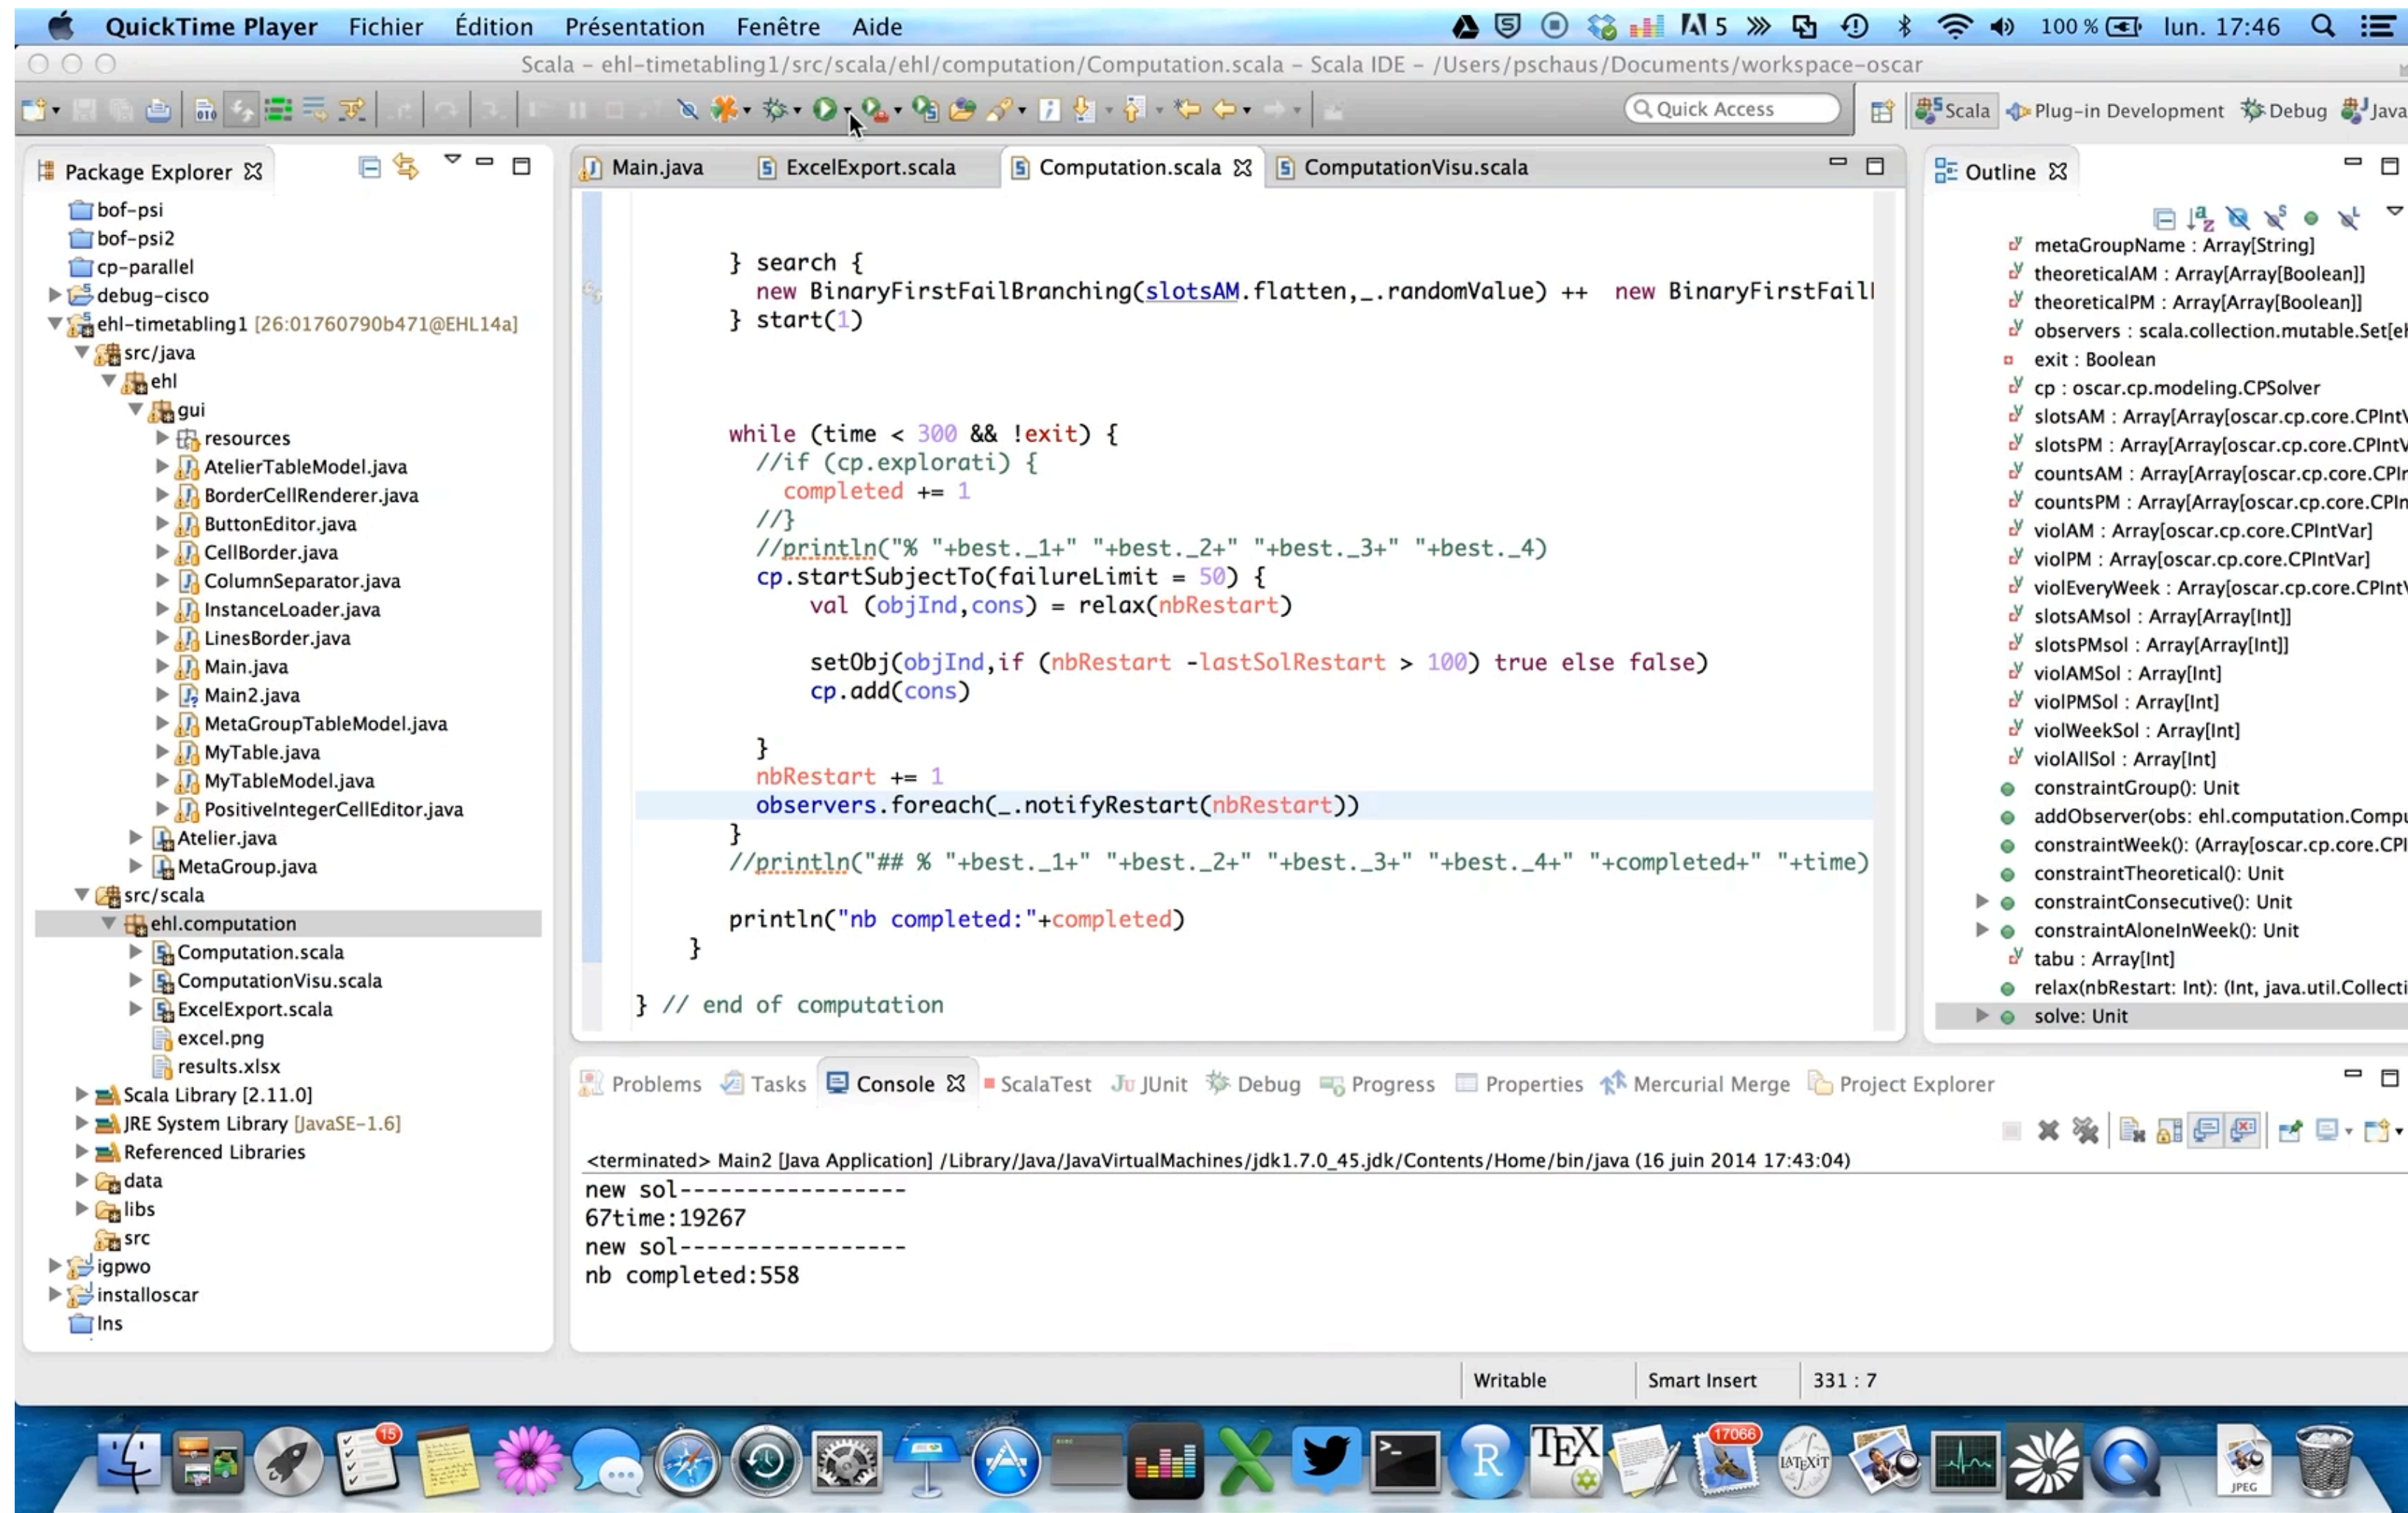

Schaus, P. (2013, November). Variable objective large neighborhood search: A practical approach to solve over-constrained problems. In *2013 IEEE 25th International Conference on Tools with Artificial Intelligence*

Machine Learning: Decision Trees

- Find the decision tree (with limited depth) that minimizes the error rate on a training set

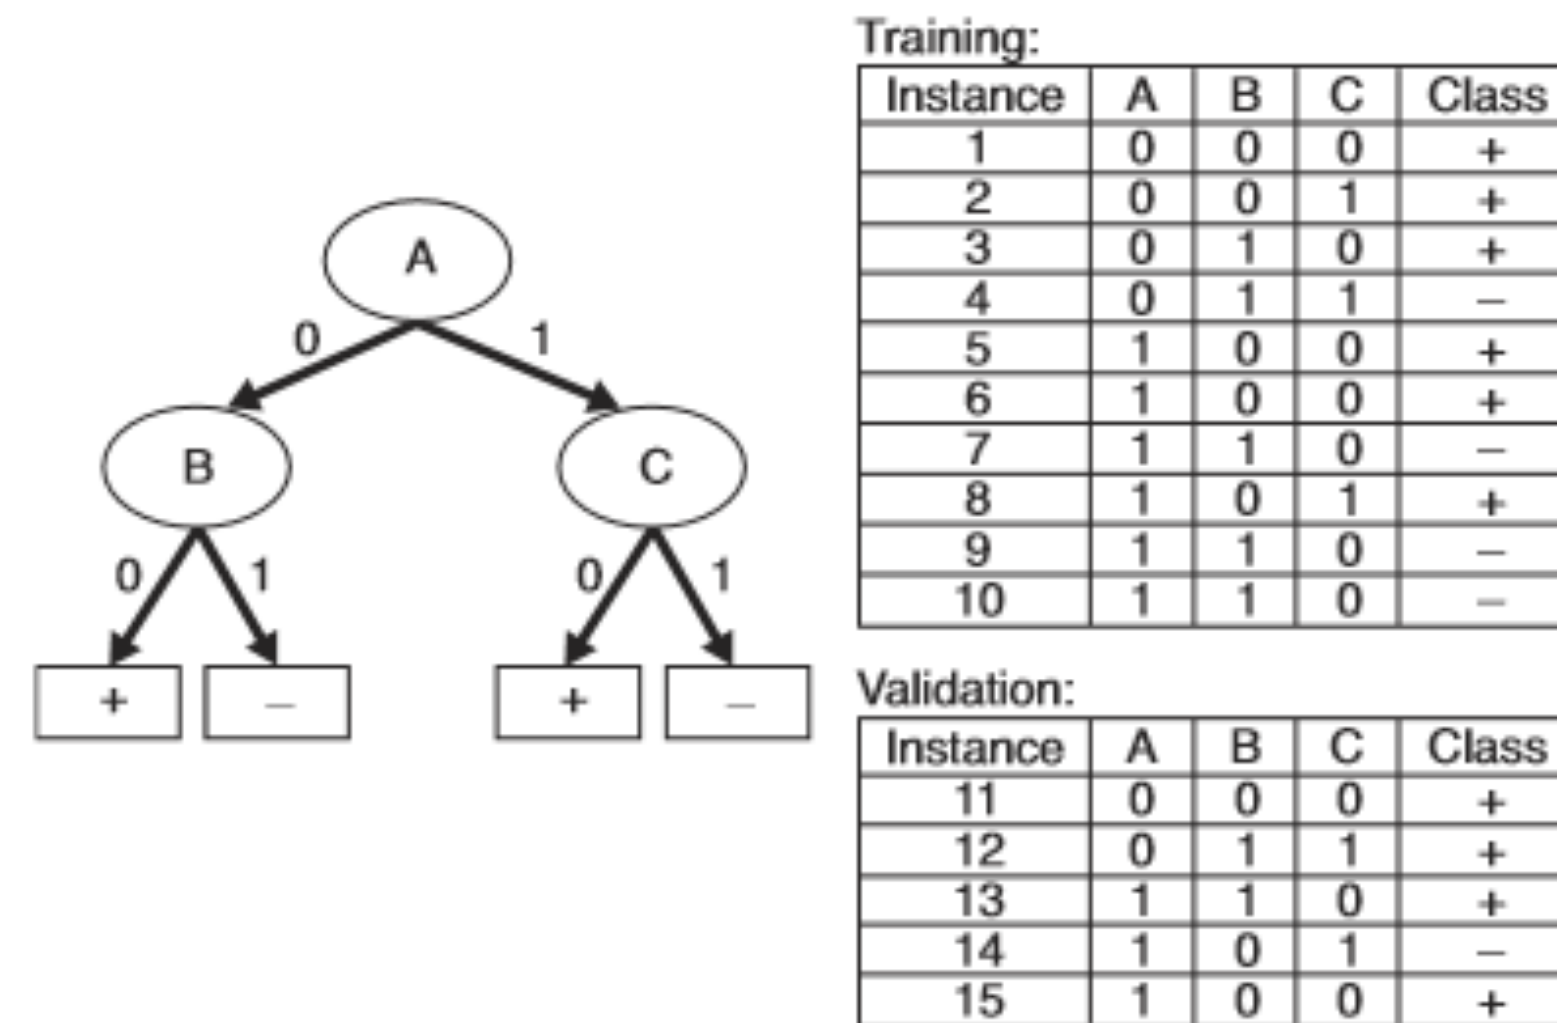


<https://github.com/aia-uclouvain/pydl8.5>

Aglin, G., Nijssen, S., & Schaus, P. (2020, April). Learning optimal decision trees using caching branch-and-bound search. In *Proceedings of the AAAI conference on artificial intelligence* (Vol. 34, No. 04, pp. 3146-3153).

Chemical Tanker


- For each product an amount (liters) to place is given
 - Each tank has a maximum capacity (in liters)
 - A set of chemical products must be placed into tanks on a tanker
- Objective:
- Maximize the empty/unused space while placing all the products

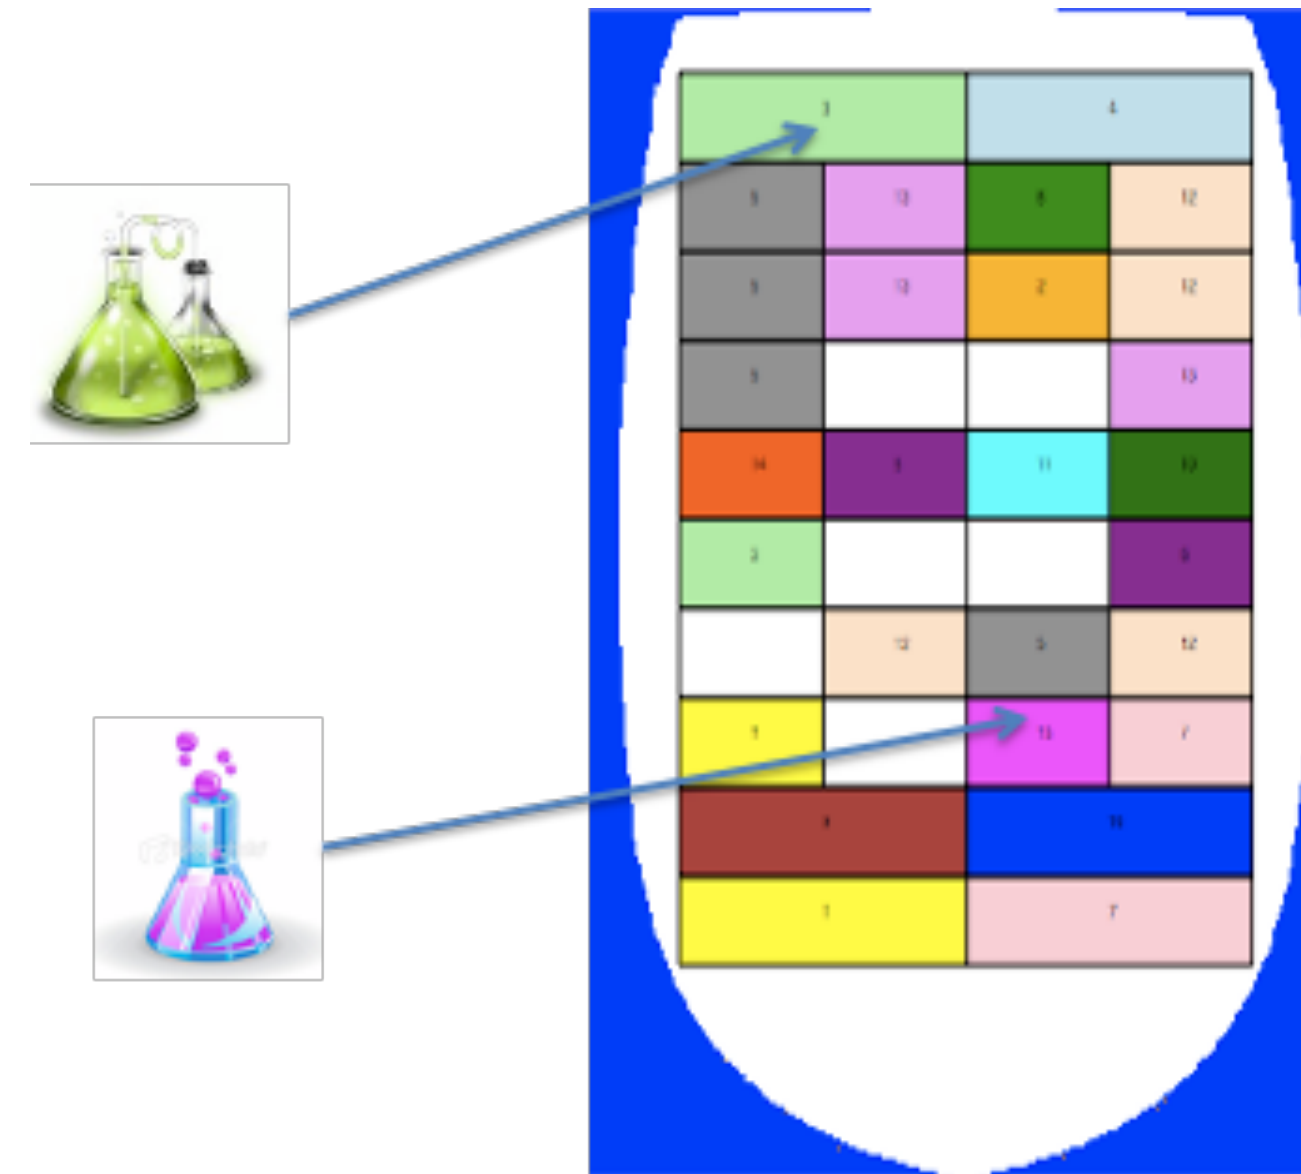

Schaus, P., Régim, J. C., Van Schaeren, R., Dullaert, W., & Raa, B. (2012). Cardinality reasoning for bin-packing constraint: Application to a tank allocation problem. In *Principles and Practice of Constraint Programming, CP 2012, Québec City, QC, Canada, October 8-12, 2012. Proceedings* (pp. 815-822). Springer Berlin Heidelberg.

Patient Transportation Problem (PTP)


- 1: maximize the number of served requests
- 2: minimizing total distance

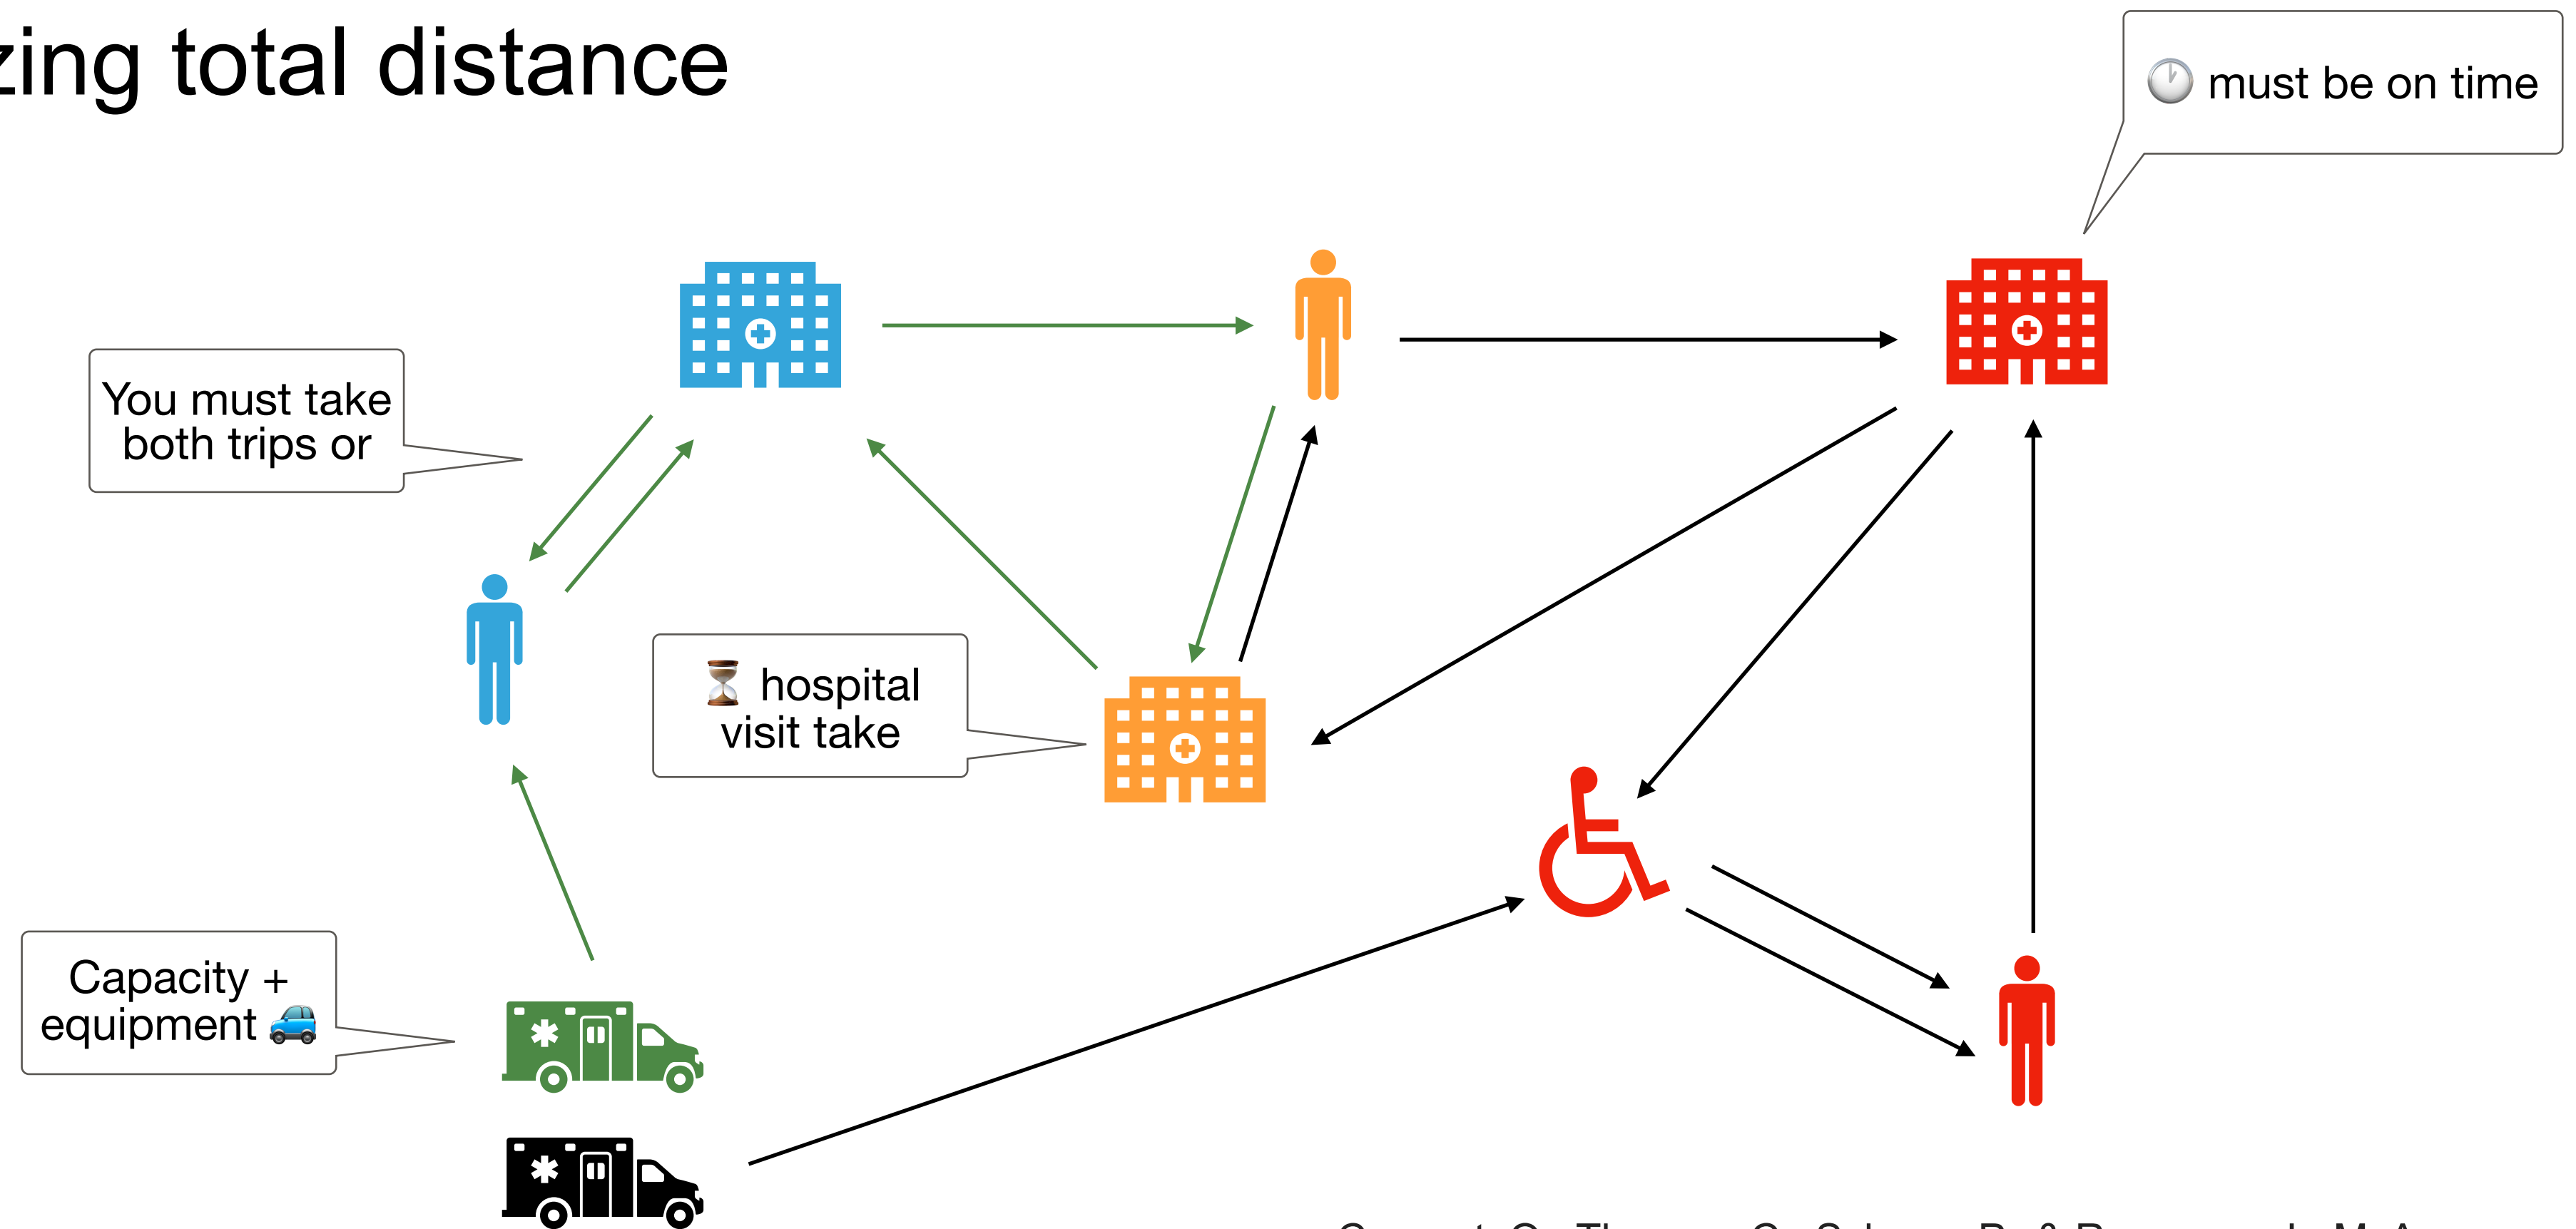

Cappart, Q., Thomas, C., Schaus, P., & Rousseau, L. M. A
constraint programming approach for solving patient transportation
problems. CP2018

Dial A Ride Problem

- Serve all the requests while minimizing total distance

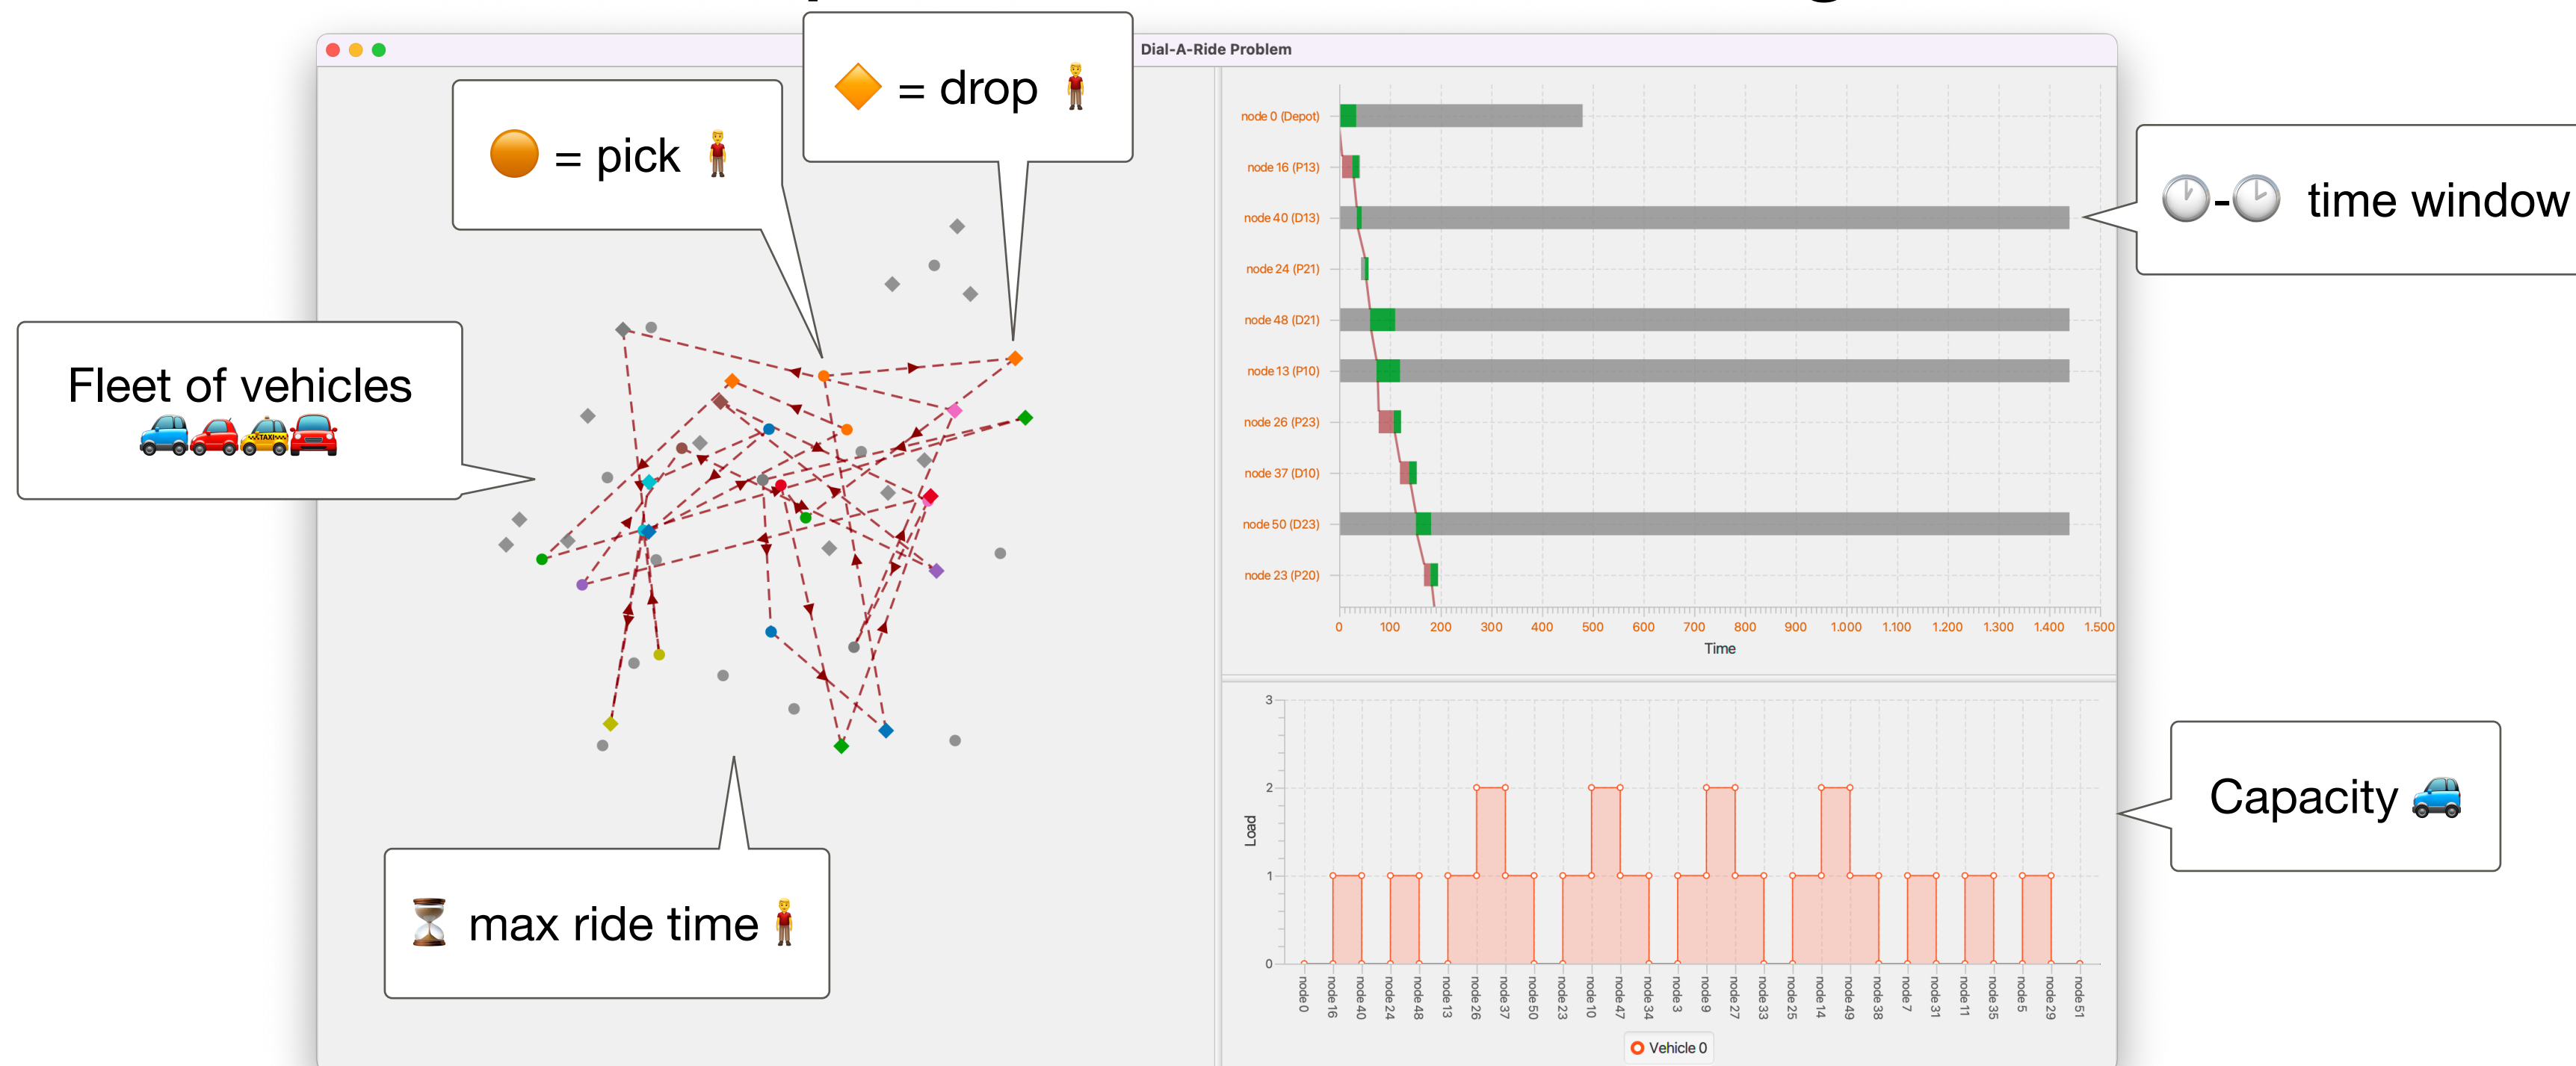





Air Plane Dismantling

- Schedule the dismantling of a plane (with Charles Thomas)
 - Worker skills constraints
 - Precedence constraints
 - Tools and equipment constraints
 - Value objective, minimize makespan



Thomas, C., & Schaus, P. (2024, May). A Constraint Programming Approach for Aircraft Disassembly Scheduling. In *International Conference on the Integration of Constraint Programming, Artificial Intelligence, and Operations Research* (pp. 211-220). Cham: Springer Nature Switzerland.

All the techniques we will see are used!

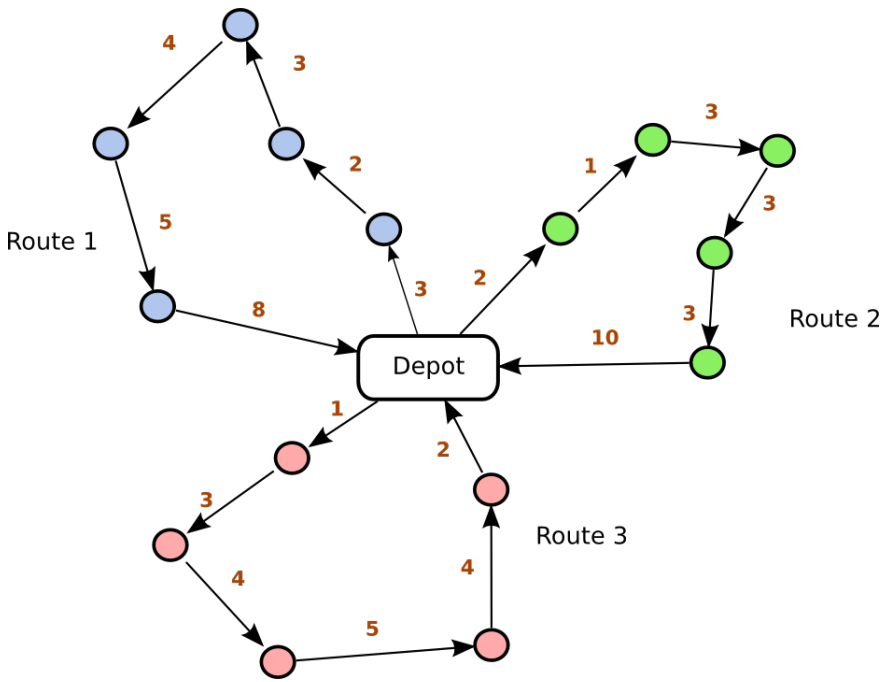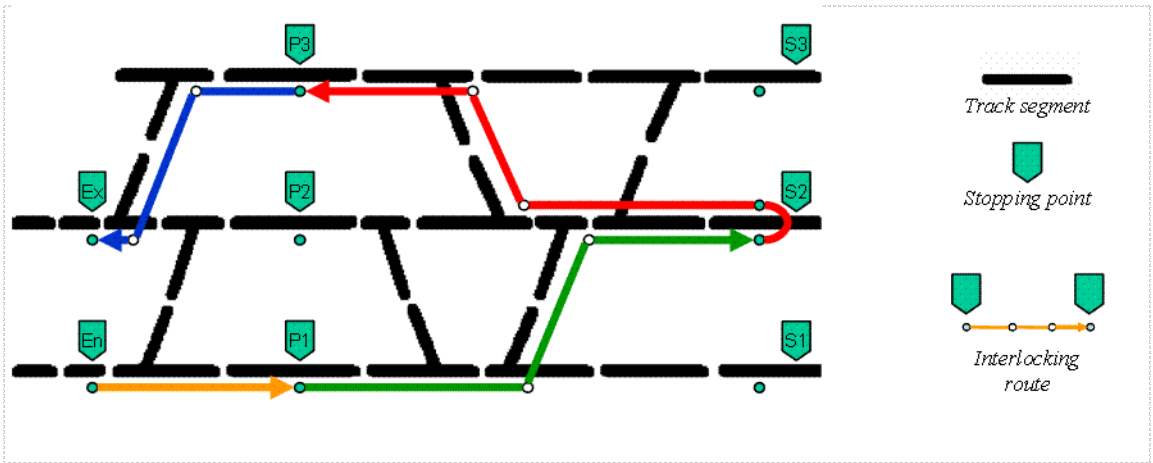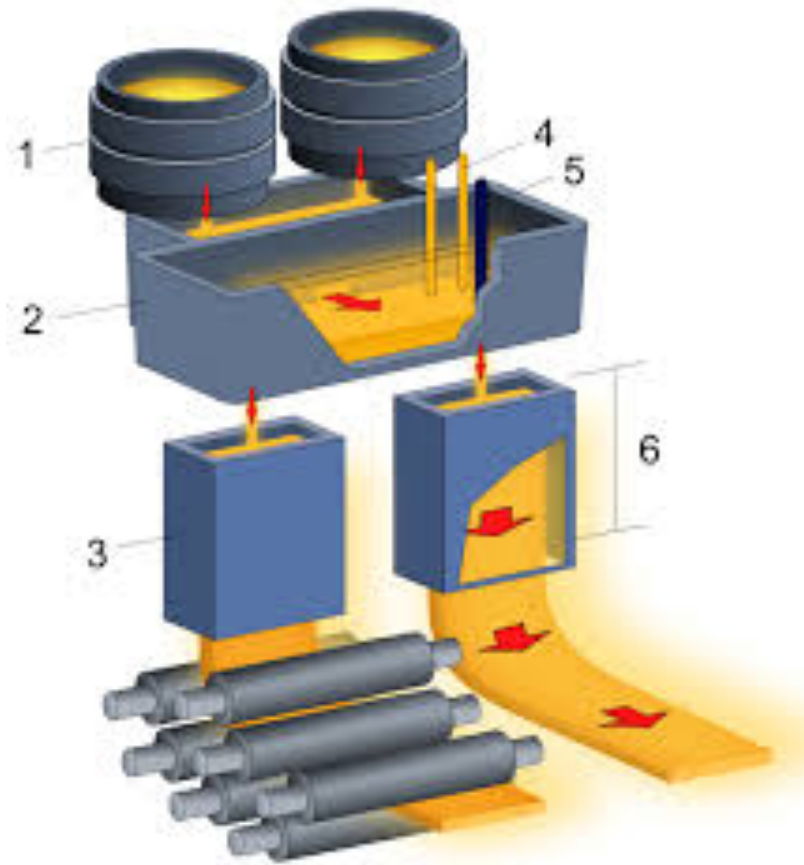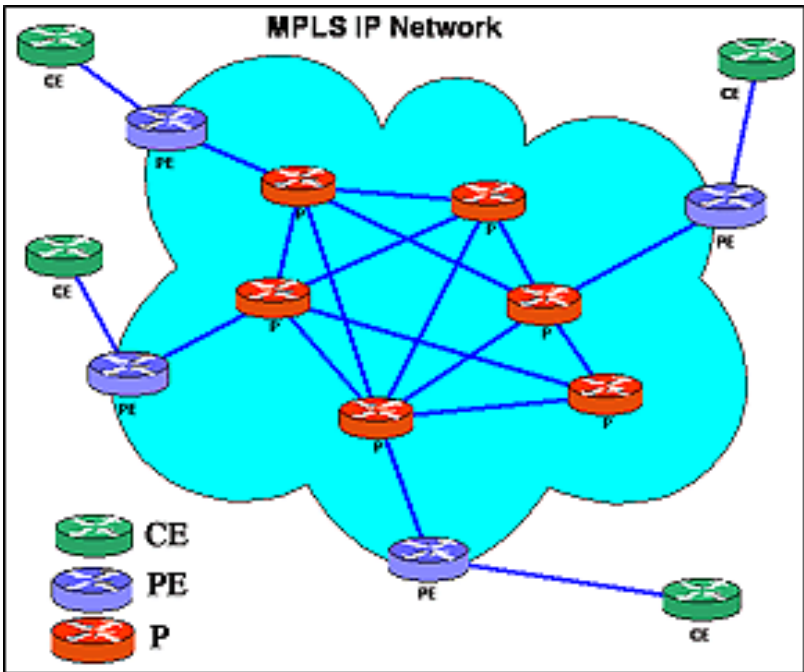

Techniques

- Dynamic Programming
- Branch and Bound
- Lagrangian Relaxation
- Linear Programming
- Network Flows
- Constraint Programming (course LINFO2365 dedicated to this topic in Q2)
- Local Search
- Astar = Decision Diagrams based Optimization

Advanced Algorithms for Optimization

LINFO2266

Introduction

Prof: Pierre Schaus
TAs: Alice Burlats, Amaury Guichard

