OpenTerminalLinux

Phillip Schlomann, COMP-490, USB Attacks

This DigiSpark script's purpose is to open up a terminal in Linux when plugged into the computer.

First, starting with a fresh boot of Kali Linux, waiting at the desktop.

Then, after plugging in the DigiSpark ATTiny85;

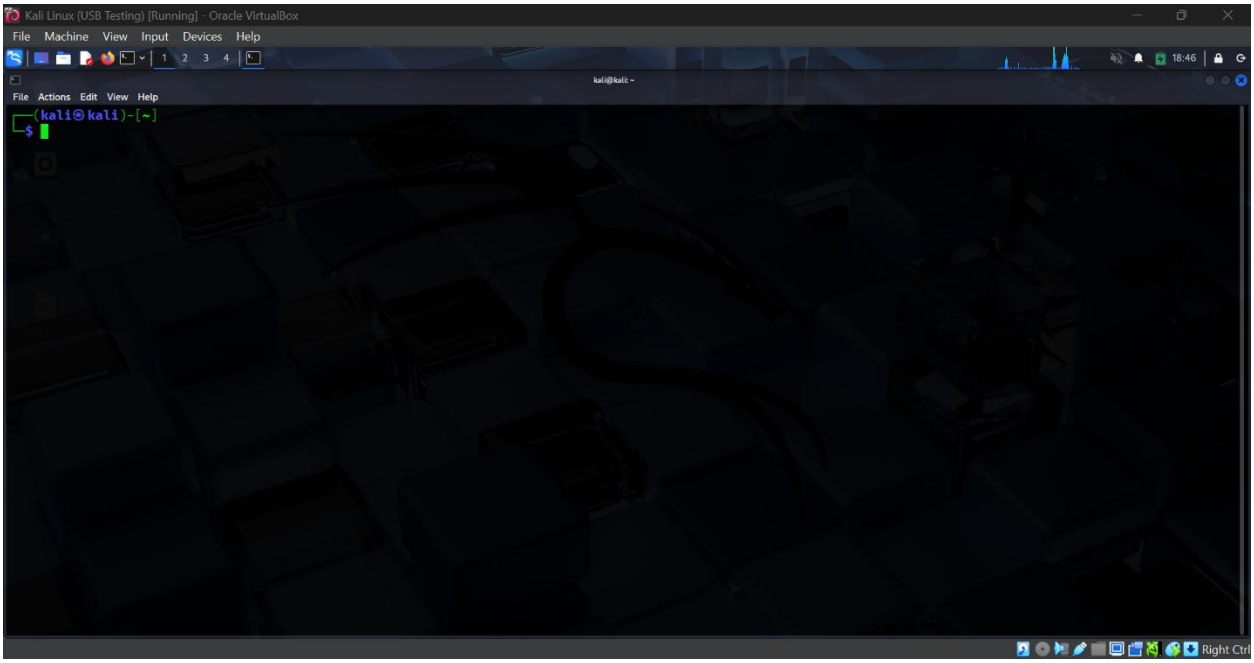

The script itself is relatively simple, using DigiKeyboard commands with delays in-between to allow for the system to run the previous lines. Note that there is nothing in the loop section, since this script only needs to run once.

OpenTerminalLinux.ino

```
#include "DigiKeyboard.h"

void setup() {
  // Wait for the machine to detect the DigiSpark, then send a wake-up signal
  DigiKeyboard.delay(1000);
  DigiKeyboard.sendKeyStroke(0);
  DigiKeyboard.delay(3000);

  // Allow for full keyboard access and open a Terminal
  DigiKeyboard.sendKeyStroke(MOD_CONTROL_RIGHT); // If in VirtualBox, will allow for left CTRL usage
  DigiKeyboard.delay(500);
  DigiKeyboard.sendKeyStroke(KEY_T, MOD_CONTROL_LEFT | MOD_ALT_LEFT);
  DigiKeyboard.delay(500);
}

void loop() {

}
```

Across 7 test runs from fresh boots of Kali in VirtualBox, this payload was successful 7 times.