
laserdata

Prepared for **Coinbase**

Real-time chain events for Coinbase's indexers, on LaserData.

Every block ChainStorage adds, or removes in a reorg, reaches **every indexer in milliseconds**, and a restarted indexer resumes from its checkpoint. It runs beside ChainStorage, so nothing else has to move.

One Ethereum reorg,
as the event log sees it.
Now multiply by every chain and every indexer.

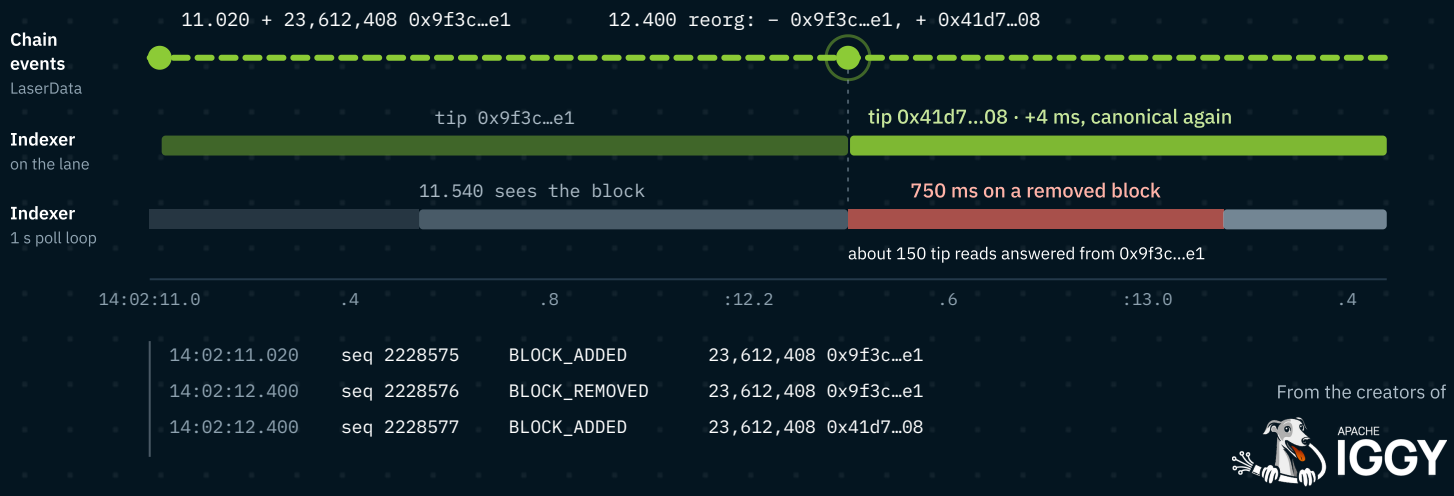

14:02:11.020	seq 2228575	BLOCK_ADDED	23,612,408 0x9f3c…e1
14:02:12.400	seq 2228576	BLOCK_REMOVED	23,612,408 0x9f3c…e1
14:02:12.400	seq 2228577	BLOCK_ADDED	23,612,408 0x41d7…08

From the creators of APACHE IGGY

15×
faster P99 latency
than Apache Kafka

4×
higher throughput
than Apache Kafka

60–70%
lower infrastructure cost
compute, storage and network

Apache Iggy vs Apache Kafka, LaserData testing. Results vary by workload.

What you shared	**ChainStorage logs every chain as + and − events** with a sequence number, served by polling the event table each second. Ethereum freshness 1 to 2 s; up to 1,500 blocks a second; an "ultra-low-latency indexing platform" in the works. (Coinbase blog, ChainStorage repo, job post)
Where it fits	**The chain event lane:** BLOCK_ADDED and BLOCK_REMOVED per chain, read by every indexer, sequence number as offset for checkpoints and rebuilds. The poller, S3, DynamoDB and the gRPC API stay.
Next	**AI agents** that build on Base through CDP read the same chain events, with session, context, memory and replay from Laser SDK.
Underneath	**One durable event log.** LaserData, powered by Apache Iggy.

Try it in 15 minutes. Let the numbers decide.

A ready-made kit for Coinbase: **12 chains at their ChainStorage block times**, reorgs, indexers that restart and rebuild from the log, a backfill next door and a ChainStorage shadow bridge. It prints your lane's p99 and the tip reads served from removed blocks, against the published 1 s loop, every second.

Open the Coinbase kit and write-up →

Then a 2–4 week evaluation on one mirrored chain's events, beside ChainStorage and your indexers. **No advantage, no migration.**

kranti@laserdata.com laserdata.com

© 2026 LaserData, Inc. Apache, Apache Iggy and the Iggy logo are trademarks of The Apache Software Foundation; their use does not imply endorsement by the ASF. The Coinbase name identifies the intended reader only; no affiliation is implied. Facts are from Coinbase's blog ("Part 1: ChainStorage: The Enterprise Blockchain data availability layer", Nov 2023), the open-source coinbase/chainstorage repository (README, api.proto, StreamChainEvents handler and chain configs) and a Coinbase job post (2026). The 1 s poll loop is a model of that open-source code, not a measurement of Coinbase's systems. Sequence numbers, hashes, timestamps and read counts are illustrative.