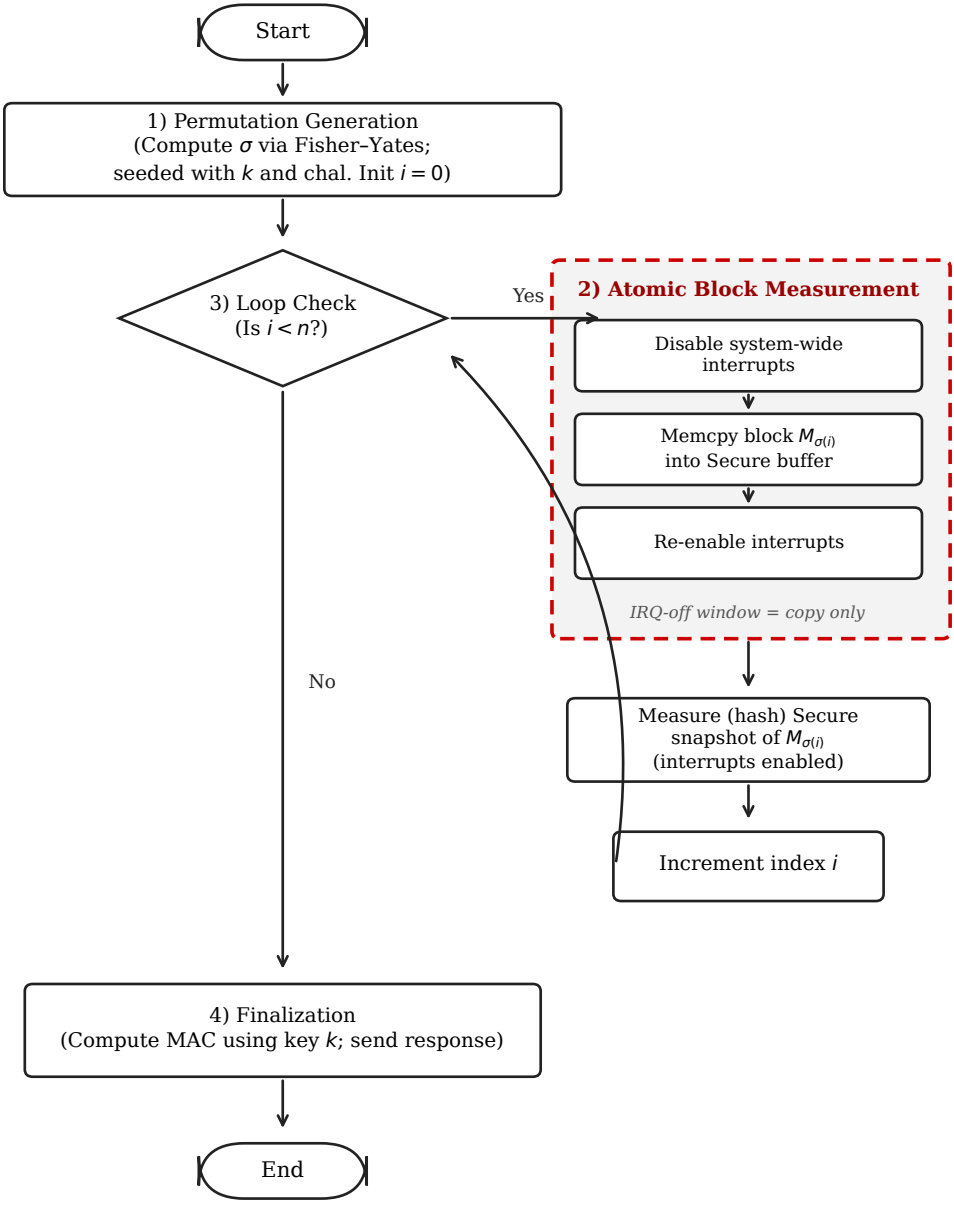
Start
1) Permutation Generation
(Compute σ via Fisher–Yates;
seeded with k and chal. Init $i = 0$)
3) Loop Check
(Is $i < n$?)
Yes
2) Atomic Block Measurement
Disable system-wide interrupts
Memcpy block $M_{\sigma(i)}$ into Secure buffer
Re-enable interrupts
IRQ-off window = copy only
Measure (hash) Secure snapshot of $M_{\sigma(i)}$ (interrupts enabled)
Increment index i
No
4) Finalization
(Compute MAC using key k; send response)
End