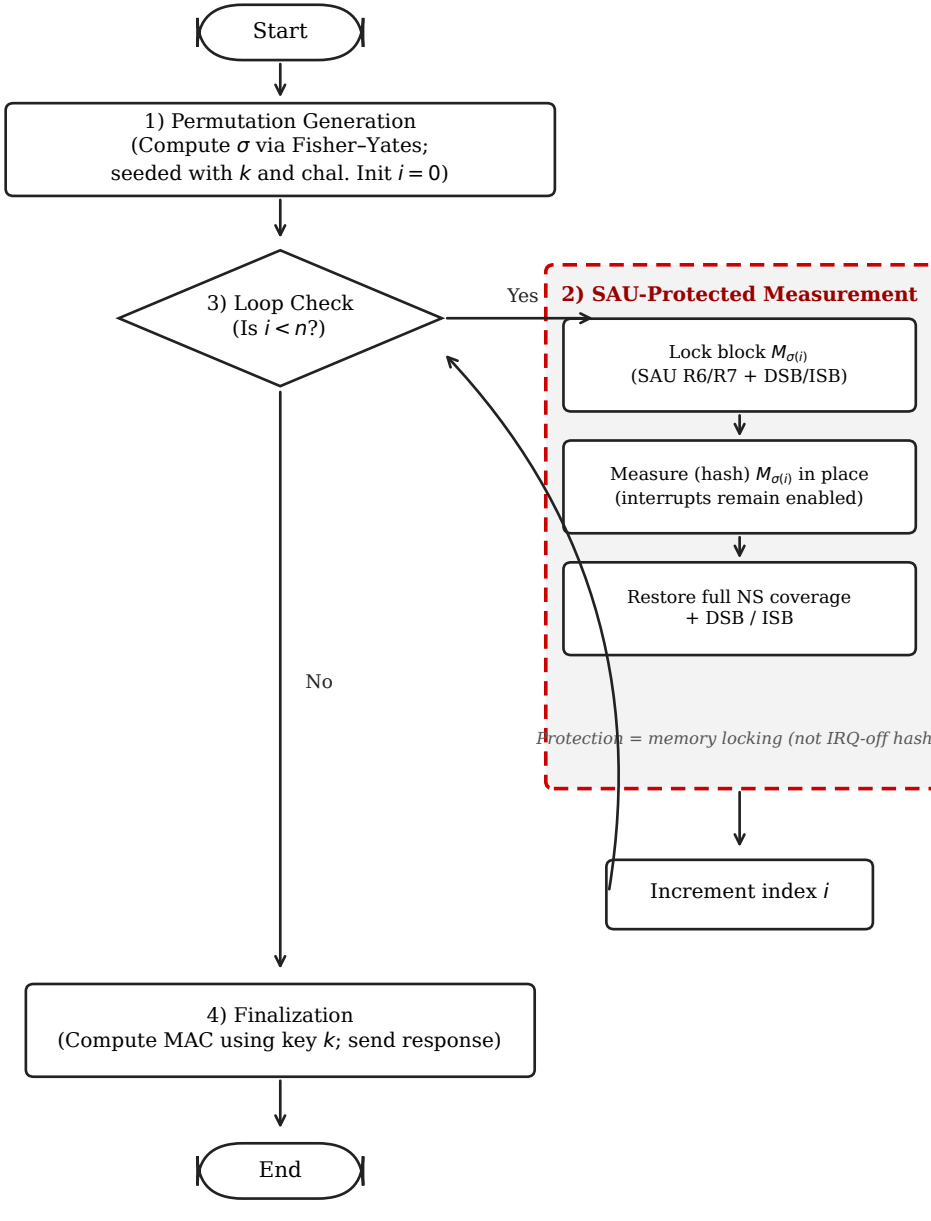
Start
1) Permutation Generation
(Compute σ via Fisher–Yates;
seeded with k and chal. Init $i = 0$)
3) Loop Check
(Is $i < n$?)
Yes
2) SAU-Protected Measurement
Lock block $M_{\sigma(i)}$
(SAU R6/R7 + DSB/ISB)
Measure (hash) $M_{\sigma(i)}$ in place
(interrupts remain enabled)
Restore full NS coverage
+ DSB / ISB
Protection = memory locking (not IRQ-off hash)
Increment index i
No
4) Finalization
(Compute MAC using key k; send response)
End