

# psyphr.read: wrangle and tidy psychophysiological data in R

psyphr


Kathleen E. Wendt, Siqi Zhang, Mallory J. Feldman, G.Brooke Anderson, & J. Douglas Coatsworth

### 1 a burgeoning field

Physiological measures are increasingly popular in social, behavioral, and psychological research but yield unwieldy amounts of data and bring their own challenges [1]. To date, few tools have been developed [2] to support reproducibility, efficiency, and accuracy [3-5] in psychophysiological data processing and management.

#### 2 workflow concerns

- Output files from proprietary software are often compiled/aligned by hand (e.g., via copy-paste)
- Manual processes introduce opportunities for bias and error
- Error-ridden data produces errordriven inferences
- Lack of standardization obstructs share-ability and reproducibility

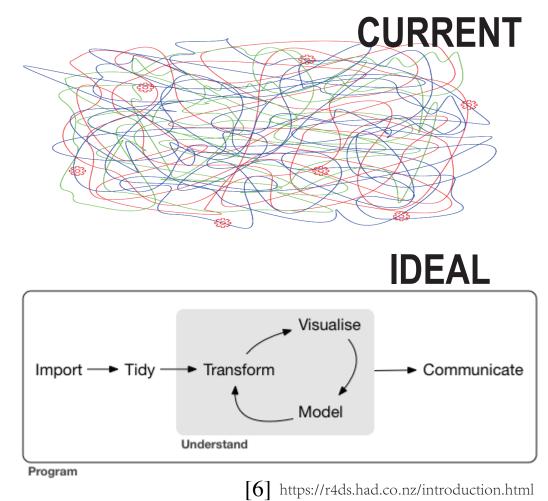



#### 3 tidy data

A main principle of computational reproducibility = tidy data [7].

- Each column as a variable
- Each row as an observation-
- Each table as a measure

Our work extends these tidy principles.

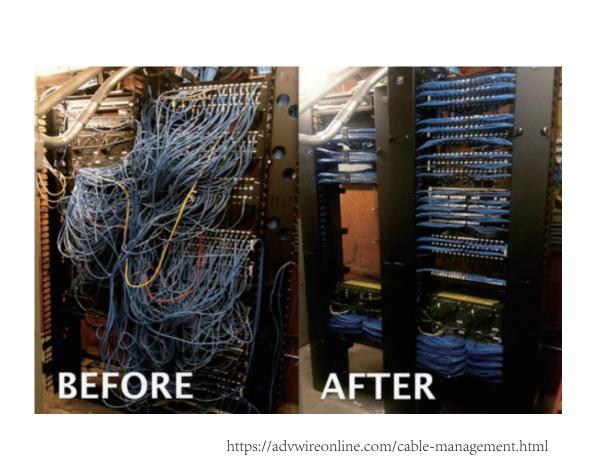

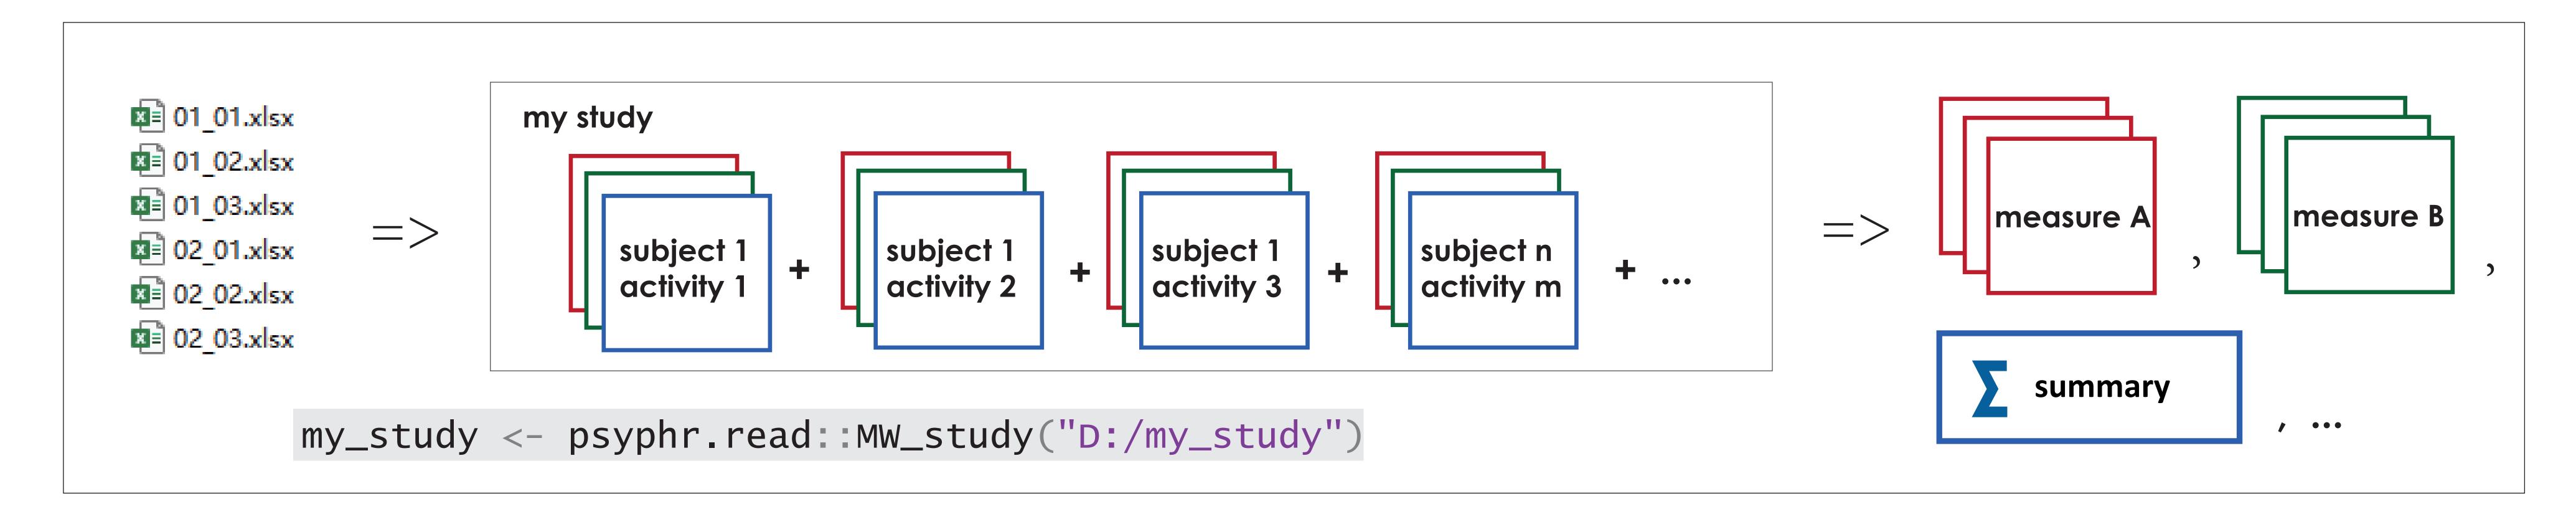

## 4 'psyphr.read' package

... is the first in a suite of R packages.

With one line of code, the user combines and organizes the entire study (see above illustration). In this tidy form, the user can quickly and easily generate summary statistics and exploratory plots.

psyphr.read also includes simple data validation techniques to catch errors or problems early.

## 5 'psyphr' suite; future directions

psyphr.read + psyphr.check +

Ingesting and parsing data from proprietary systems

Sophisticated data validation schemes

psyphr.plot

Publication-grade plots

psyphr.model +

Statistical models for psychophysiological measures

psyphr.bids

Compatibility with Brain Imaging Data Structure (BIDS) [8]

The full psyphr suite will help researchers spend less time on data management and more time "doing science."

This work will provide the foundation of open science practices for psychophysiological research and promote computational reproducibility in fields with increasingly large and complex datasets.







