

Checks

Pierre Talbot

Copyright © 2011 Pierre Talbot

Distributed under the Boost Software License, Version 1.0. (See accompanying file LICENSE_1_0.txt or copy at http://www.boost.org/LICENSE_1_0.txt)

Table of Contents

Checks	3
Preface	3
Status	4
Document Conventions	4
Tutorial	6
Starting with Checks	6
Extending the library	9
Common check algorithms	13
Checksum algorithms	14
Verhoeff algorithm	15
Type of errors	15
Alteration	15
Transposition	15
Length	16
and summary	16
Acknowledgements	16
References	16
Rationale	17
History	17
Version Info	17
Checks Reference	19
Header <boost/checks/amex.hpp>	19
Header <boost/checks/basic_check_algorithm.hpp>	22
Header <boost/checks/basic_checks.hpp>	25
Header <boost/checks/checks_fwd.hpp>	30
Header <boost/checks/ean.hpp>	44
Header <boost/checks/isbn.hpp>	46
Header <boost/checks/iteration_sense.hpp>	48
Header <boost/checks/limits.hpp>	51
Header <boost/checks/luhn.hpp>	53
Header <boost/checks/mastercard.hpp>	55
Header <boost/checks/modulus10.hpp>	58
Header <boost/checks/modulus11.hpp>	60
Header <boost/checks/modulus97.hpp>	63
Header <boost/checks/translation_exception.hpp>	67
Header <boost/checks/upc.hpp>	67
Header <boost/checks/verhoeff.hpp>	68
Header <boost/checks/visa.hpp>	70
Header <boost/checks/weight.hpp>	73
Header <boost/checks/weighted_sum.hpp>	75
Class Index	77
Typedef Index	78
Function Index	80
Macro Index	83

Index	84
-------------	----

DRAFT

Checks

Preface

Checks are required on alphanumeric identifiers in numerous domains such as the distribution chain (product bar codes), banking (bank account, credit cards, fidelity cards, ...) and many others. These codes and numbers are often typed, copied or scanned by humans or machines; and both make errors. We need a way to detect errors and this is why check digits have been designed.

A check digit aims to control the validity of a alphanumeric string and catch the as many changes as possible. ([types of error](#) discuss possible alterations and the efficiency of their detection).

This library provides a collection of functions for validating and creating check digits.


Scott McMurray has identified four fairly distinct types of check:

1. ISBN/ISSN/UPC/EAN/VISA/etc, for catching human-entry errors.
2. hash functions as in hash tables, which only care about distribution.
3. checksums like CRC32, for catching data transmission errors.
4. and cryptographic hash functions, the only ones useful against malicious adversaries.

The functions in this Boost.Checks library are primarily for the first category : catching human-entry errors (though it obviously also provides against a mis-scan or mis-transmit by a device like a bar code or card reader.)

This library supports four families of check : Modulus 10, Modulus 11, Modulus 97-10 and Verhoeff. A lot of other check systems are inherited from these families.

The following diagram shows the hierarchy used in Boost.Checks:

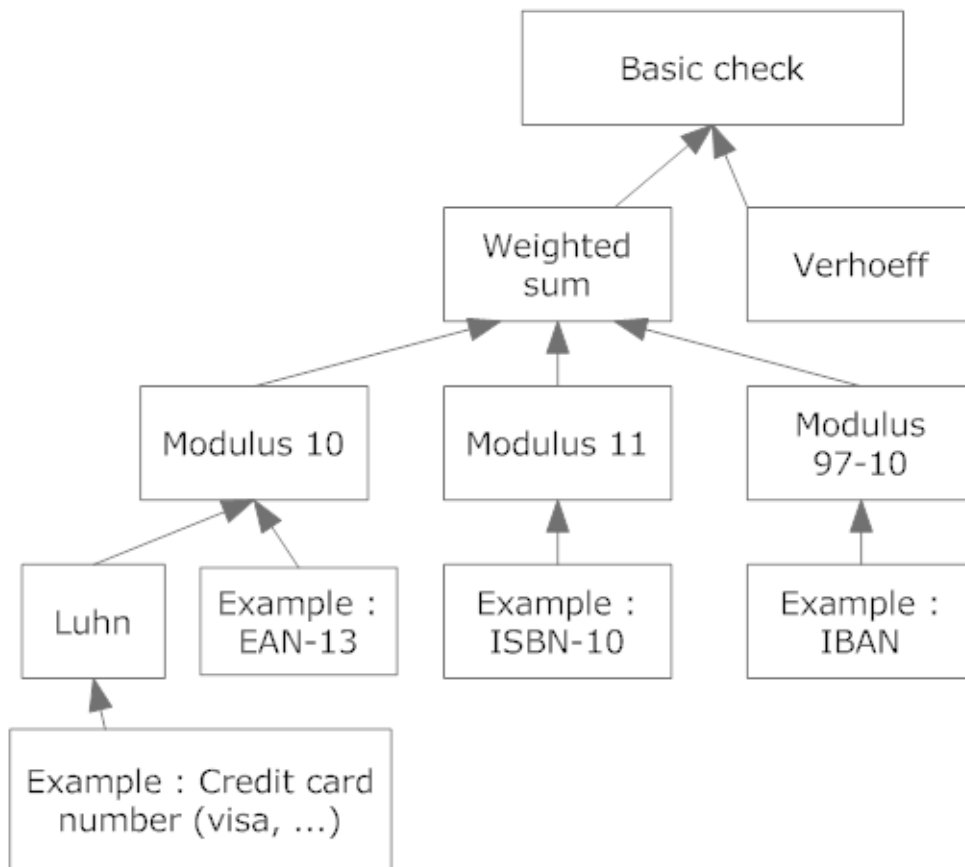

Numerous check algorithms are in use worldwide, and this is why this library is designed to help you to cater for less common checks, and even to create your own check systems. If you are interested, see [extending the library](#).

Status



Important

This is not (yet) an official Boost library. It was a [Google Summer of Code project \(2011\)](#) whose mentor organization was Boost. It remains a library under construction, the code is quite functional, but interfaces, library structure, and names may still be changed without notice. The current version is available at

<https://svn.boost.org/svn/boost/sandbox/SOC/2011/checks/libs/checks/doc/checks.pdf> PDF documentation.

<https://svn.boost.org/svn/boost/sandbox/SOC/2011/checks/libs/checks/doc/html/index.html> HTML documentation.

<https://svn.boost.org/svn/boost/sandbox/SOC/2011/checks/boost/checks/boost/> Boost Sandbox checks source code.



Note

Comments and suggestions (even bugs!) to Pierre Talbot (ptalbot@mopong.net)

Document Conventions

- **Tutorials** are listed in the *Table of Contents* and include many examples that should help you get started quickly.

- **Source code** of the many *Examples* will often be your quickest starting point.
- **Reference section** prepared using Doxygen will provide the function and class signatures, but there is also an *index* of these.
- The main *index* will also help, especially if you know a word describing what it does, without needing to know the exact name chosen for the function.

This documentation makes use of the following naming and formatting conventions.

- C++ Code is in `fixed width font` and is syntax-highlighted in color.
- Other code is in `teletype fixed-width font`.
- Replaceable text that you will need to supply is in *italics*.
- If a name refers to a free function, it is specified like this: `free_function()`; that is, it is in *code font* and its name is followed by `()` to indicate that it is a free function.
- If a name refers to a class template, it is specified like this: `class_template<>`; that is, it is in code font and its name is followed by `<>` to indicate that it is a class template.
- If a name refers to a function-like macro, it is specified like this: `MACRO()`; that is, it is uppercase in code font and its name is followed by `()` to indicate that it is a function-like macro. Object-like macros appear without the trailing `()`.
- Names that refer to *concepts* in the generic programming sense are specified in CamelCase.
- Many code snippets assume an implicit namespace, for example, `std::` or `boost::checks`.
- If you have a feature request, or if it appears that the implementation is in error, please check the TODO section first, as well as the rationale section.

If you do not find your idea/complaint, please reach the author either through the Boost development list, or email the author(s) direct .

Admonishments



Note

In addition, notes such as this one specify non-essential information that provides additional background or rationale.



Tip

These blocks contain information that you may find helpful while coding.



Important

These contain information that is imperative to understanding a concept. Failure to follow suggestions in these blocks will probably result in undesired behavior. Read all of these you find.



Warning

Failure to heed this will lead to incorrect, and very likely undesired, results.

Tutorial

In this section, we will quickly learn to use this library. But most important is this quote of Lao Tseu :

“Give a Man a Fish, Feed Him For a Day. Teach a Man to Fish, Feed Him For a Lifetime.”

So we'll also learn to extend this library and create your own check functions.

Starting with Checks

There are two main functions for each check system.

- to validate a sequence: `check_<number>`.
- to provides a check digit for a sequence: `compute_<number>`.

All the examples of this section are in the file [checks_examples.cpp](#).

Credit card numbers check

We will start with some credit card numbers checking.

Please first include these headers:

```
#include <boost/checks/visa.hpp>
#include <boost/checks/amex.hpp>
#include <boost/checks/mastercard.hpp>
```

Three credit card checks are implemented: [Visa credit card](#), [Mastercard credit card](#), and American Express. The following examples show us how to compute and check numbers:

```
std::string visa_credit_card_number = "4000 0807 0620 0007" ;
if( boost::checks::check_visa( visa_credit_card_number ) )
    std::cout << "The VISA credit card number : " << visa_credit_card_number << " is valid." << std::endl ;

std::string amex_credit_card_number = "3458 2531 9273 09" ;
char amex_checkdigit = boost::checks::compute_amex( amex_credit_card_number ) ;
std::cout << "The check digit of the American Express number : " << amex_credit_card_number << " is " << amex_checkdigit << "." << std::endl ;

std::string mastercard_credit_card_number = "5320 1274 8562 157" ;
mastercard_credit_card_number += boost::checks::compute_mastercard( mastercard_credit_card_number ) ;
std::cout << "This is a valid Mastercard number : " << mastercard_credit_card_number << std::endl ;
```

This provides the output:

```
The VISA credit card number : 4000 0807 0620 0007 is valid.
The check digit of the American Express number : 3458 2531 9273 09 is 4.
This is a valid Mastercard number : 5320 1274 8562 1570
```

Multi check digits

Some checks use two check digits, for example, the mod97-10 algorithm used to calculate the check digits of the [International Bank Account Number \(IBAN\)](#).

We add an extra parameter to retrieve the two check digits. The include file is:

```
#include <boost/checks/modulus97.hpp>
```

and the next example shows us how to use this function:

```
std::string mod97_10_number = "1234567890123456789" ;
std::string mod97_10_checkdigits = " " ;
boost::checks::compute_mod97_10 ( mod97_10_number , mod97_10_checkdigits.begin() ) ;
std::cout << "The number : " << mod97_10_number << " have the check digits : " << mod97_10_checkdigits << "." << std::endl ;

mod97_10_number = "85212547851652 " ;
boost::checks::compute_mod97_10 ( mod97_10_number , mod97_10_number.end() - 2 );
std::cout << "A complete mod97-10 number : " << mod97_10_number << std::endl ;
```

which provides the output:

```
The number : 1234567890123456789 have the check digits : 68.
A complete mod97-10 number : 8521254785165211
```

Catching errors

We will now see how the library reacts with simple errors. The first error is that the number of characters (size of sequence) doesn't fit the requirements. The second error shows that some number must respect pattern, here the three first digit of an ISBN-13 must be "978" or "979". An exception is thrown if any one of these errors are encountered. We will use the [International Article Number \(EAN\)](#) and [International Standard Book Number \(ISBN\)](#) headers:

```
#include <boost/checks/ean.hpp>
```

```
#include <boost/checks/isbn.hpp>
```

Two examples of number error:

```
std::string ean13_number = "540011301748" ; // Incorrect size.
try
{
    boost::checks::check_ean13 ( ean13_number ) ;
}
catch ( std::invalid_argument e )
{
    std::cout << e.what() << std::endl ;
}

std::string isbn13_number = "977-0321227256" ; // Third digit altered.
try
{
    boost::checks::check_isbn13( isbn13_number ) ;
}
catch ( std::invalid_argument e )
{
    std::cout << e.what() << std::endl ;
}
```

The output shows us the detailed message the exception provides:

```
Too few or too much valid values in the sequence.
The third digit should be 8 or 9.
```

And with integer array

The C-arrays of integers are also supported. In the other examples, we check "number" but with an ASCII code, we can use integer value as well. The following will show us the result of the computation of two same numbers but in different format. We'll use the header:

```
#include <boost/checks/isbn.hpp>
```

And the examples:

```
std::string isbn10_number = "020163371" ; // More Effective C++: 35 New Ways to Improve Your Programs and Designs, Scott Meyers.
int isbn10_integer_number[] = {0,2,0,1,6,3,3,7,1} ;

std::cout << "ISBN10 : " << isbn10_number << ". Check digit : " << boost::checks::compute_isbn10( isbn10_number ) << std::endl ;
std::cout << "ISBN10 integer version. Check digit : " << boost::checks::compute_isbn10( isbn10_integer_number ) << std::endl ;
```

As you can see in the output, the "X" check digit is represented by its integer value (10) with the integer C-array:


```
ISBN10 : 020163371. Check digit : X
ISBN10 integer version. Check digit : 10
```

Extending the library

The re-usability of this library is an important feature. In fact, we can't code every existing check systems - there are dozens of checksums in use worldwide. This section gives examples of how to extend this library to cater for existing check systems not yet provided, and even to create your own check system.

Example with the Routing transit number

We will show how to extend this library with the [Routing transit number \(RTN\)](#). The first thing to do is to read the check digit calculation procedure. So we can notice few points:

1. It is a weighted sum and the weight sequence is: 3,7,1.
2. It is using a modulus 10.
3. The size of the RTN is 9.

We can create the [rtn.hpp](#) file.

The library supports the weighted sum and the modulus 10 algorithm, so the work will be easy. We can run through the number from right to left or left to right (sense) depending on the weight sequence. We will begin with the leftmost digit because it is more "readable" (at least for Latin language users).

We need these include files.

```
#include <boost/checks/modulus10.hpp>
#include <boost/checks/basic_checks.hpp>
```

```
#define RTN_SIZE 9
#define RTN_SIZE_WITHOUT_CHECKDIGIT 8

typedef boost::checks::weight<3,7,1> rtn_weight ;
typedef boost::checks::leftmost rtn_sense ;
```

We must put the weights and the sense together into an algorithm type:

```
typedef boost::checks::modulus10_algorithm < rtn_weight, rtn_sense, 0> rtn_check_algorithm ;
typedef boost::checks::modulus10_algorithm < rtn_weight, rtn_sense, 0> rtn_compute_algorithm ;
```

As the hard part is already done, we can build our check functions now:

```

template <typename check_range>
bool check_rtn (const check_range& check_seq)
{
    return boost::checks::check_sequence<rtn_check_algorithm, RTN_SIZE> ( check_seq ) ;
}

template <typename check_range>
typename rtn_compute_algorithm::checkdigit<check_range>::type compute_rtn (const check_range& check_seq)
{
    return boost::checks::compute_checkdigit<rtn_compute_algorithm, RTN_SIZE_WITHOUT_CHECKDIGIT> ( check_seq ) ;
}

```

And that's all!



Note

`boost::checks::compute_checkdigit` and `boost::checks::check_sequence` are both defined in [basic_checks.hpp](#)

We can code a RTN sample in the file [checks_tutorial.cpp](#):

```

std::string rtn_number = "111000025" ;
if ( check_rtn ( rtn_number ) )
    std::cout << "The Routing Transit Number: " << rtn_number << " is valid." << std::endl ;
rtn_number = "11100002";
std::cout << "The check digit of the number: " << rtn_number << " is " << compute_rtn (rtn_number) << "." << std::endl ;

```

and the output is:

```

The Routing Transit Number: 111000025 is valid.
The check digit of the number: 11100002 is 5.

```

Example with the Vehicle Identification Number (VIN)

This second example is quite more complex because the [Vehicle Identification Number \(VIN\)](#) is not a default implemented check algorithm. Like for the [Routing transit number \(RTN\)](#), we must read the documentation first, and then we can extract a few elements:

- The number contains letters that must be translated to compute or check the check digit.
- The check digit is not at the end of the number. It's at the 9th position, in the midst of the number.
- The letters Q, I, or O are not valid (presumably to avoid confusion with digits 0 and 1).
- This uses a custom modulus 11 algorithm, so the check digit range is [0..9, X]

The library already has support for modulus 11 algorithm in the header:

```
#include <boost/checks/modulus11.hpp>
```

We create the [vin.hpp](#) file. Step by step, let's now complete this file.

1. The weight sequence is : 2,3,4,5,6,7,8,9,10.

2. We run through the sequence from right to left.

We create the types associated with these two observations:

```
#include <boost/checks/modulus11.hpp>
#include <boost/checks/basic_checks.hpp>

#define VIN_SIZE 17
#define VIN_SIZE_WITHOUT_CHECKDIGIT 16
#define VIN_CHECKDIGIT_POS 8

typedef boost::checks::weight<2,3,4,5,6,7,8,9,10> vin_weight ;
typedef boost::checks::rightmost vin_sense ;
```

We will now attack the harder part of the work: we need to build the adapted structure. To create our own algorithm, first we need to declare the structure with inheritance:

```
template <unsigned int number_of_virtual_value_skipped = 0>
struct vin_algorithm : boost::checks::modulus11_algorithm<vin_weight, vin_sense, number_of_virtual_value_skipped>
```

The classic modulus 11 algorithm doesn't permit the translation of letters (only the 'x' if it's the check digit). But the VIN number uses nearly the full latin alphabet (they omitted O, Q, and I to avoid confusion with numerals 1 and 0). We choose to launch the `std::invalid_argument` exception (that has the effect of stopping the algorithm) if one of these letter is encountered. The other letters must be transformed using this table:

Table 1. Letter to digit VIN conversion table

Conversion value	1	2	3	4	5	6	7	8	9
	A (1)	B (2)	C (3)	D (4)	E (5)	F (6)	G (7)	H (8)	I (N/A)
	J (10)	K (11)	L (12)	M (13)	N (14)	O (N/A)	P (16)	Q (N/A)	R (18)
		S (19)	T (20)	U (21)	V (22)	W (23)	X (24)	Y (25)	Z (26)

We need to find an algorithm that converts a letter into its conversion value, the following function does the job:

```
X = X % 10 + X/10 + ((X > 18) ? 1 : 0) .
```

Also the check digit can only be in the range $[0..9,X]$, so we choose to launch the `std::invalid_argument` exception if another letter is read. With the check digit, and following the modulus 11 algorithm, if the check digit is equal to X, the integer value is 10. But this algorithm is different and we must subtract the check digit from 11.

Let's see the code now:

```

template <typename value>
static int translate_to_valid_value(const value &current_value, const unsigned int val_id_value_counter )
{
    int valid_value = 0;
    try
    {
        valid_value = boost::lexical_cast<int>( current_value ) ;
    }
    catch( boost::bad_lexical_cast )
    {
        // Transform the value to be between 1 and 26.
        if( current_value >= 'a' && current_value <= 'z' )
            valid_value = current_value - 'a' + 1 ;
        else if( current_value >= 'A' && current_value <= 'Z' )
            valid_value = current_value - 'A' + 1 ;
        else
            throw boost::checks::translation_exception() ;

        if ( valid_value == 9 || valid_value == 15 || valid_value == 17)
            throw std::invalid_argument( "The letter I, O and Q are not allowed." );

        if ( valid_value_counter == VIN_CHECKDIGIT_POS && number_of_virtual_value_skipped == 0)
        {
            if ( valid_value != 24 )
                throw std::invalid_argument( "The check digit should be a digit or X or x." );
            else
                valid_value = 10 ;
            valid_value = 11 - valid_value ;
        }
        else
            valid_value = valid_value % 10 + valid_value / 10 + (valid_value > 18) ;
    }
    if( valid_value > 10)
        throw boost::checks::translation_exception() ;

    return valid_value ;
}

```

The operation function is partially copied from the function `operate_on_valid_value` in the file [weighted_sum.hpp](#). We need to control the fact that the check digit is in the midst of the number. If there is a check digit into the sequence, we mustn't apply a weight, and we must avoid shift of the full weight sequence for the future iteration.

```

static void operate_on_valid_value( const int current_valid_value, const unsigned int val_id_value_counter, int &checksum )
{
    if( number_of_virtual_value_skipped == 0 && valid_value_counter == VIN_CHECKDIGIT_POS )
        checksum += current_valid_value ;
    else
    {
        unsigned int weight_position = valid_value_counter - (number_of_virtual_value_skipped == 0 && valid_value_counter > VIN_CHECKDIGIT_POS) ;
        int current_weight = vin_weight::weight_associated_with_pos( weight_position ) ;
        checksum += current_valid_value * current_weight ;
    }
}

```

Finally the calculation of the check digit is different from the classic modulus 11 algorithm, so we need to re-implement it:

```
template <typename checkdigit>
static typename checkdigit compute_checkdigit( int checksum )
{
    typedef typename boost::checks::modulus11_algorithm<vin_weight, vin_sense, number_of_virtual_value_skipped> mod11 ;
    return mod11::translate_checkdigit<checkdigit>(checksum % 11) ;
}
```

We can now write the VIN type algorithm:

```
typedef vin_algorithm <0> vin_check_algorithm ;
typedef vin_algorithm <1> vin_compute_algorithm ;
```

And write the functions:

```
template <typename check_range>
bool check_vin (const check_range& check_seq)
{
    return boost::checks::check_sequence<vin_check_algorithm, VIN_SIZE> ( check_seq ) ;
}

template <typename check_range>
typename vin_compute_algorithm::checkdigit<check_range>::type compute_vin (const check_range& check_seq)
{
    return boost::checks::compute_checkdigit<vin_compute_algorithm, VIN_SIZE_WITHOUT_CHECKDIGIT> ( check_seq ) ;
}
```



Note

This algorithm doesn't support full integer array that are not pre-computed (Example: (A) 10 -> 1 ; (M) 13 -> 4). It can be an exercise for the reader.

Some basic examples are coded in the file [checks_tutorial.cpp](#) .

```
std::string vin_number = "1M8GDM9AXKP042788";
if ( check_vin ( vin_number ) )
    std::cout << "The Vehicle Identification Number: " << vin_number << " is correct." << std::endl ;

vin_number = "1M8GDM9AKP042788" ;
std::cout << "The check digit of " << vin_number << " is " << compute_vin ( vin_number ) << std::endl ;
```

that provides the following output:

```
The Vehicle Identification Number: 1M8GDM9AXKP042788 is correct.
The check digit of 1M8GDM9AKP042788 is X
```

Common check algorithms

This section will discuss the objectives of the algorithms used in Boost.Checks. A check algorithm is firstly designed to:

1. Catch the most errors as possible that a human (or machine) can make.
2. Minimize the cost of the check digit for fast computation.

3. Minimize the size (or number) of the check digit(s).

We cannot have our cake and eat it, that's why we often choose between the size or the efficiency. Critical numbers, for example, the [International Bank Account Number \(IBAN\)](#), use two check digits.

The main difference between these algorithms and the other checksum algorithms such as CRC or cryptographic hashes is we don't analyse the binary content of the sequence but the lexical values meaning, so "123" is equivalent to 123. It also means we could skip the undesirable values.

Checksum algorithms

Boost.Checks provides only checksum algorithm excepts for the Verhoeff algorithm.

Trivial digital sum

The most basic algorithm we could create is to sum every digit in a sequence. For example the digit sum of 58215478 is:

$$5 + 8 + 2 + 1 + 5 + 4 + 7 + 8 = 40$$

The check digit would be 40 so the complete sequence 5821547840. The size of the check digit grown with the sum.

Modular sum

We must restrict the check digit's size so we take the remainder of the sum by a choosen modulus. This will impact the range of the check digit. For example, the supports for 3 types of modulus is implemented in Boost.Checks, the following table points the differents modulus:

Table 2. Modulus impact on check digit range

Modulus	Check digit range	Check digit size
10	0 to 9	1
11	0 to 10	1
97	0 to 96	2

The range of the modulus 11 is restrained to an unique check digit where 10 is replaced by another character (commonly the letter 'X').

Weighted sum

The simple sum is a fiasco for detecting transposition errors. The proof is simple: the addition is *commutative*, so the digit order is not important. The solution is to attribute fixed *weight* to each position.

The choice of the weight pattern should respect the following statements:

1. The weights must be less than the modulus. The explanation is:

If $\text{weight} = \text{modulus}$, then $\text{weight} = 0$ because $\text{weight} * C \% \text{modulus} = \text{modulus} \% \text{modulus} = 0$
 So if $\text{weight} = \text{modulus} + n$, then $\text{weight} = n \% \text{modulus}$ because $\text{weight} * C \% \text{modulus} = (\text{modulus} + n) \% \text{modulus} = n \% \text{modulus}$.

It proves that a weight has the same impact on the checksum as the same weight plus the modulus.

1. A weight must be coprime to the modulus. It means the greatest common divisor between the weight and the modulus is 1. If a and b are not coprime to the modulus, than it exists a number n that verify the following equation:

$$a * n \% \text{modulus} = b * n \% \text{modulus}$$

And this number is a common divisor between a,b and the modulus.



Note

By consequence, all prime modulus can use any weights because they are all coprime.

Luhn algorithm

It's a weighted sum with a modulus 10 and a weight pattern of '12'. The sum is computed from right to left. The peculiarity of this algorithm is the treatment on the digits weighted. For example, when the weight multiply by the digit exceeds 9, we subtract 9 from it. This scheme catches every transposition but 9 and 0. It's because $9*2 = 18$ and $18-9 = 9$. So 9 multiply by the weight '1' give the same result than multiply it by the weight '2'.

Verhoeff algorithm

The Verhoeff algorithm has been designed to catch all transpositions of two adjacent digits and all alterations. It produces a single check digit. Badly, this check can't easily be performed by hand from memory.

It uses the properties of the dihedral group D5, the elements in this group are not commutative. Whatever the manner we can compute these elements, we use three precomputed tables: d, p and inv.

Type of errors

This section will describe some common errors that an user or a device can make. It will also discuss the factors that affect the testability of these errors. We will focus on the weighted sum algorithms.

A good test algorithm will satisfied these measurements :

1. Test each digit which influence the final result differently. This often include a specific test for the check digit or the different weights.
2. Test these with all combinations the algorithm supports (it often the digit from 0 to 9 and sometimes letters from A to Z).

Alteration

Single error

The single error is always detected if the modulus is equal or greater than the range of the value in the number. For example, if an algorithm accept the values from 0 to 9 and A to Z (whether 36 different values), the modulus should be greater or equal than 36. If it's respected, the single error will be detected.

Multiple error

If more than one digit is altered, a simple sum can't ensure that the check digit will be different. In fact, it depends on the compensation of the altered digits. For example : $1 + 2 + 3 = 6$. If we alter 2 digits, the sum could become : $2 + 2 + 2 = 6$. The result is equal because $1 + 3 = 2 + 2$, the digits altered are compensated.

Transposition

A transposition error is caught if the two digits transposed have a different weight and if their values with their weight or the weight of the other digit are not the same. For example, $3*2 = 2*3$ so a transposition of 2 and 3 with those weights is not detected.

Length

The length is not often a problem because many codes and numbers have a fixed length. But if the user doesn't specify the size, an error could be uncaught if the check digit of the new sequence is equal to the last digit of the old sequence.

and summary

1. An error in the checksum is detected if $| \text{new_checksum} - \text{checksum} | \neq \text{modulus}$.
2. The assertion: "check digit = check digit expected" doesn't mean that the number is error-free. Digits can be compensated or the check digit altered.

Table 3. Error catching summary

	1 Alteration	2 Alterations	Twin transpositions
Luhn	18/18 (100%)		88/90 (97.78%)
Verhoeff	18/18 (100%)		90/90 (100%)
Other tests coming soon !			

Acknowledgements

The author thanks

- Paul A. Bristow who was the mentor of this Google Summer of Code project for his infinite patience and his wise advice.
- Google for funding this Google Summer of Code 2011 project.
- Joseph A Gallian for his assistance with tables of values for the Verhoeff algorithm.

References

1. [Routing transit number \(RTN\)](#)
2. [Vehicle Identification Number \(VIN\)](#)
3. [Code 39](#)
4. Verhoeff, J, Error Detecting Codes, Mathematical Centre Tract 29, The Mathematical Centre, Amsterdam 1969.
5. [Verhoeff_algorithm](#)
6. H. Peter Gumm, New class of check-digit methods for arbitrary number systems, IEEE Trans. on Information Theory, 31(1985) 102-105.
7. Paul Putter, & Neal R Wagner, Communication of ther ACM, Jan 1989, Vol 32, pages 106 - 110. Jonathan Mohr <http://www.augustana.ab.ca/~mohrj/>
8. Numerical Recipes in C++, p 904 - 905 W H Press, S A Teukolsky, W T Vetterling, B P Flannery, ISBN 0 521 75033 4.
9. SNOMED Clinical Terms (First Release Technical Reference Manual)
10. First Release (January 2002), Annex B. Check-digit computation, p 30 to 34

11. http://www.snomed.org/Spanish%20Documents/SNOMEDCT_Core_Technical%20Reference%20Manual_US.pdf uses Jonathan Mohr Javascript checkdigit.htm (copy in checkdigit.txt) based on code at <http://www.augustana.ab.ca/~mohrj/algorithms/check-digit.html>

12. J A Gallian, Table 3 p 514, Error detection methods, ACM Surveys, 28(3) 504-517 ISSN 0360-0300 (1996)

13. J A Gallian & S Winters, American Math Monthly, 95, (1988) Modular Arithmetic in the Marketplace, p 548 - 551.

Rationale

This section records the rationale and compromises for some design decisions.

Scope of the project

- Scott McMurray has identified four fairly distinct types of check:
 1. ISBN/ISSN/UPC/EAN/VISA/etc, for catching human-entry errors.
 2. hash functions as in hash tables, which only care about distribution.
 3. checksums like CRC32, for catching data transmission errors.
 4. and cryptographic hash functions, the only ones useful against malicious adversaries.

This project is directed first at the first class. Others might be the subject of future additions or other libraries.

Function parameter

- For more flexibility, this library uses the range concept. So you can use old C-array or std::string,...
- If there is only one check digit in the number, this check digit is returned in the same raw type than in the range sequence.
- If there is more than one check digit, an extra parameter is required. This must be an OutputIterator, the function returns an iterator at one pass the end of the check digit stored into this iterator.

Use of template parameters to pass size and weights

- This feature means that much of the commonality between the various check systems can be implemented in one place and reused.
- It also makes it possible to implement other check systems (of which there are very many in use worldwide) and to devise new ones without writing new code.

Performance

- Performance is not a major objective, but all the current algorithms are implemented with a $O(n)$ complexity, where n is the number of digits or characters.

History

1. Project started by Pierre Talbot June 2011 as a Google Summer of Code Project.
2. First Boost Sandbox release for public comment Sep 2011.

Version Info

Last edit to Quickbook file checks.qbk was at 11:54:25 AM on 2011-Nov-09.

**Warning**

Home page "Last revised" is GMT, not local time. Last edit date is local time.

DRAFT

Checks Reference

Header `<boost/checks/amex.hpp>`

This file provides tools to compute and validate an American Express credit card number.

```
AMEX_SIZE
AMEX_SIZE_WITHOUT_CHECKDIGIT
```

```
namespace boost {
    namespace checks {
        template<unsigned int number_of_virtual_value_skipped = 0>
            class amex_algorithm;

        typedef amex_algorithm< 0 > amex_check_algorithm; // This is the type of the Amex algorithm
        for validating a check digit.
        typedef amex_algorithm< 1 > amex_compute_algorithm; // This is the type of the Amex al
        gorithm for computing a check digit.
        template<typename check_range> bool check_amex(const check_range &);
        template<typename check_range>
            boost::checks::amex_compute_algorithm::checkdigit< check_range >::type
            compute_amex(const check_range &);
    }
}
```

Class template `amex_algorithm`

`boost::checks::amex_algorithm` — This class can be used to compute or validate checksum with the Luhn algorithm, but filter following the Amex pattern.

Synopsis

```
// In header: <boost/checks/amex.hpp>

template<unsigned int number_of_virtual_value_skipped = 0>
class amex_algorithm :
    public boost::checks::luhn_algorithm< number_of_virtual_value_skipped >
{
public:

    // public static functions
    static checkdigit compute_checkdigit(int);
    static checkdigits_iter compute_multicheckdigit(int, checkdigits_iter);
    static void filter_valid_value_with_pos(
        const unsigned int,
        const unsigned int);
    static void operate_on_valid_value(const int, const unsigned int, int &);
    static int translate_to_valid_value(const value &, const unsigned int);
    static bool validate_checksum(int);
};
```

Description

`<varlistentry>`Template Parameters:

number_of_virtu-
al_value_skipped
</varlistentry>

Help functions to provide same behavior on sequence with and without check digits. No "real" value in the sequence will be skipped.

amex_algorithm public static functions

1.

```
static checkdigit compute_checkdigit(int checksum);
```

Compute the check digit with a simple modulus 10.

Parameters: checksum is the checksum used to extract the check digit.
Returns: The modulus 10 check digit of checksum.
Throws: boost::checks::translation_exception if the check digit cannot be translated into the checkdigit type.

2.

```
static checkdigits_iter  
compute_multicheckdigit(int checksum, checkdigits_iter checkdigits);
```

Compute the check digit(s) of a sequence.

This function should be overloaded if you want your algorithm to compute more than one check digit (through it works for just one check digit too).

Parameters: checkdigits is the iterator with which the check digit(s) will be written.
checksum is the checksum used to extract the check digit(s).
Requires: checkdigits must be a valid initialized iterator.
Returns: checkdigits.

3.

```
static void filter_valid_value_with_pos(const unsigned int current_valid_value,  
const unsigned int current_value_position);
```

Verify that a number matches the Amex pattern.

This function use the macro AMEX_SIZE to find the real position from left to right.

Parameters: current_valid_value is the current valid value analysed.
current_value_position is the number of valid value already counted (the current value is not included).
This is also the position (above the valid values) of the current value analysed (0 <= valid_value_counter < n).

Throws: std::invalid_argument if the first character is not equal to 3 or the second is not equal to 4 or 7. The exception contains a descriptive message of what was expected.

4.

```
static void operate_on_valid_value(const int current_valid_value,  
const unsigned int valid_value_counter,  
int & checksum);
```

Compute the Luhn algorithm operation on the checksum.

This function become obsolete if you don't use luhn_weight. It is using operator "<<" to make internal multiplication.

Parameters: checksum is the current checksum.
current_valid_value is the current valid value analysed.
valid_value_counter is the number of valid value already counted (the current value is not included).
This is also the position (above the valid values) of the current value analysed (0 <= valid_value_counter < n).

Postconditions: checksum is equal to the new computed checksum.

```
5. static int translate_to_valid_value(const value & current_value,
                                     const unsigned int valid_value_counter);
```

translate a value of the sequence into an integer valid value.

Parameters: `current_value` is the current value analysed in the sequence that must be translated.
 `valid_value_counter` is the number of valid value(s) already counted (the current value is not included).
 This is also the position (beyond the valid values) of the current value analysed ($0 \leq \text{valid_value_counter} < n$).
 Returns: the translation of the current value in the range [0..9].
 Throws: `boost::checks::translation_exception` is thrown if the translation of `current_value` failed.
 This will automatically throw if the value is not a digit ($0 \leq i < 11$).

```
6. static bool validate_checksum(int checksum);
```

Validate a checksum with a simple modulus 10.

Parameters: `checksum` is the checksum to validate.
 Returns: `true` if the checksum is correct, `false` otherwise.

Function template `check_amex`

`boost::checks::check_amex` — Validate a sequence according to the `amex_check_algorithm` type.

Synopsis

```
// In header: <boost/checks/amex.hpp>

template<typename check_range> bool check_amex(const check_range & check_seq);
```

Description

Parameters: `check_seq` is the sequence of value to check.
 Template Parameters: `check_range` is a valid range type.
 Requires: `check_seq` is a valid range.
 Returns: `true` if the check digit is correct, `false` otherwise.
 Throws: `std::invalid_argument` if `check_seq` doesn't contain exactly `AMEX_SIZE` digits. if the two first digits (from the leftmost) don't match the Amex pattern.

Function template `compute_amex`

`boost::checks::compute_amex` — Calculate the check digit of a sequence according to the `amex_compute_algorithm` type.

Synopsis

```
// In header: <boost/checks/amex.hpp>

template<typename check_range>
boost::checks::amex_compute_algorithm::checkdigit< check_range >::type
compute_amex(const check_range & check_seq);
```

Description

Parameters:	<code>check_seq</code> is the sequence of value to check.
Template Parameters:	<code>check_range</code> is a valid range type.
Requires:	<code>check_seq</code> is a valid range.
Returns:	The check digit. The check digit is in the range [0..9].
Throws:	<code>std::invalid_argument</code> if <code>check_seq</code> doesn't contain exactly <code>AMEX_SIZE_WITHOUT_CHECKDIGIT</code> digits. if the two first digits (from the leftmost) don't match the amex pattern. if the check digit cannot be translated into the checkdigit type.

Macro AMEX_SIZE

`AMEX_SIZE` — This macro defines the size of a American Express card number (15).

Synopsis

```
// In header: <boost/checks/amex.hpp>

AMEX_SIZE
```

Macro AMEX_SIZE_WITHOUT_CHECKDIGIT

`AMEX_SIZE_WITHOUT_CHECKDIGIT` — This macro defines the size of a American Express card number without its check digit (14).

Synopsis

```
// In header: <boost/checks/amex.hpp>

AMEX_SIZE_WITHOUT_CHECKDIGIT
```

Header <boost/checks/basic_check_algorithm.hpp>

This file provides a class that should be used as an "interface" because most of the static functions should be re-implemented using inheritance.

The class implements static functions that are common to many algorithms.

```
namespace boost {
    namespace checks {
        template<typename iteration_sense,
                unsigned int number_of_virtual_value_skipped = 0>
        class basic_check_algorithm;
    }
}
```

Class template basic_check_algorithm

`boost::checks::basic_check_algorithm` — The main check algorithm class that provides every static function that can be overloaded. Most of the functions must be re-implemented to have the desired behavior.

Synopsis

```
// In header: <boost/checks/basic_check_algorithm.hpp>

template<typename iteration_sense,
        unsigned int number_of_virtual_value_skipped = 0>
class basic_check_algorithm {
public:
    // types
    typedef iteration_sense iteration_sense; // This is the sense or direction of the iteration ↴
    (begins with the right or the leftmost value).

    // member classes/structs/unions

    // Template rebinding class used to define the type of the check digit(s) of
    // check_range.
    template<typename check_range>
    class checkdigit {
    public:
        // types
        typedef boost::range_value< check_range >::type type;
    };

    // public static functions
    template<typename checkdigit> static checkdigit compute_checkdigit(int);
    template<typename checkdigits_iter>
        static checkdigits_iter compute_multicheckdigit(int, checkdigits_iter);
    static void filter_valid_value_with_pos(const unsigned int,
                                           const unsigned int);
    static void operate_on_valid_value(const int, const unsigned int, int &);
    template<typename value>
        static int translate_to_valid_value(const value &, const unsigned int);
    static bool validate_checksum(int);
};
```

Description

<varlistentry>Template Parameters:

<code>iteration_sense</code>	must meet the <code>iteration_sense</code> concept requirements.
<code>number_of_virtual_value_skipped</code>	Helper functions to provide the same behavior on sequence with and without checkdigits. No "real" value in the sequence will be skipped.

</varlistentry>

`basic_check_algorithm` public static functions

1.

```
template<typename checkdigit>
    static checkdigit compute_checkdigit(int checksum);
```

Compute the check digit of a sequence.

This function should be overloaded if you want to compute the check digit of a sequence.

Parameters: `checksum` is the checksum used to extract the check digit.

Template Parameters: `checkdigit` is the type of the check digit desired.

Requires: The type `checkdigit` must provides the default initialisation feature.

Returns: default initialized value of `checkdigit`.

2.

```
template<typename checkdigits_iter>
    static checkdigits_iter
    compute_multicheckdigit(int checksum, checkdigits_iter checkdigits);
```

Compute the check digit(s) of a sequence.

This function should be overloaded if you want your algorithm to compute more than one check digit (through it works for just one check digit too).

Parameters:	<code>checkdigits</code> is the iterator with which the check digit(s) will be written.
	<code>checksum</code> is the checksum used to extract the check digit(s).
Template Parameters:	<code>checkdigits_iter</code> must meet the OutputIterator requirements.
Requires:	<code>checkdigits</code> must be a valid initialized iterator.
Returns:	<code>checkdigits</code> .

[illegible]

Filtering of a valid value according to its position.

This function should be overloaded if you want to filter the values with their positions.

Parameters:	<code>current_valid_value</code>	is the current valid value analysed.
	<code>current_value_position</code>	is the position (above the valid values) of the current value analysed ($0 \leq \text{valid_value_counter} < n$).

Postconditions: Do nothing.

```
4. static void operate_on_valid_value(const int current_valid_value,
                                     const unsigned int valid_value_counter,
                                     int & checksum);
```

Compute an operation on the checksum with the current valid value.

This function should be overloaded if you want to calculate the checksum of a sequence.

Parameters:	checksum	is the current checksum.
	current_valid_value	is the current valid value analysed.
	valid_value_counter	is the number of valid value(s) already counted (the current value is not included).
		This is also the position (above the valid values) of the current value analysed ($0 \leq \text{valid_value_counter} < n$).

Postconditions: Do nothing. The checksum is unchanged.

```
5. template<typename value>  
    static int translate_to_valid_value(const value & current_value,  
                                         const unsigned int valid_value_counter);
```

translate a value of the sequence into an integer valid value.

Parameters:	<code>current_value</code>	is the current value analysed in the sequence that must be translated.
	<code>valid_value_counter</code>	is the number of valid value(s) already counted (the current value is not included). This is also the position (beyond the valid values) of the current value analysed ($0 \leq \text{valid_value_counter} < n$).

Template Parameters: `value` is the type of a value in the sequence.

Returns: the translation of the current value in the range [0..9].

Throws: `boost::checks::translation_exception` is thrown if the translation of `current_value` failed. This will automatically throw if the value is not a digit ($0 \leq i < 11$).

```
6. static bool validate_checksum(int checksum);
```

Validate the checksum.

This function should be overloaded if you want to check a sequence.

Parameters: checksum is the checksum to validate.

Returns: true always (unless overloaded to check a sequence).

Class template checkdigit

boost::checks::basic_check_algorithm::checkdigit — Template rebinding class used to define the type of the check digit(s) of check_range.

Synopsis

```
// In header: <boost/checks/basic_check_algorithm.hpp>

// Template rebinding class used to define the type of the check digit(s) of
// check_range.
template<typename check_range>
class checkdigit {
public:
    // types
    typedef boost::range_value< check_range >::type type;
};
```

Description

This function should be overloaded if you want to change the type of the check digit.

<varlistentry>Template Parameters:

check_range The type of the sequence to check.

</varlistentry>

Header <boost/checks/basic_checks.hpp>

This file provides a set of basic functions used to compute and validate check digit(s) and checksum.

```

namespace boost {
    namespace checks {
        template<typename algorithm, typename check_range>
            bool check_sequence(const check_range &);
        template<typename algorithm, size_t size_expected, typename check_range>
            bool check_sequence(const check_range &);
        template<typename algorithm, typename check_range>
            algorithm::checkdigit< check_range >::type
            compute_checkdigit(const check_range &);
        template<typename algorithm, size_t size_expected, typename check_range>
            algorithm::checkdigit< check_range >::type
            compute_checkdigit(const check_range &);
        template<typename algorithm, typename size_contract, typename iterator>
            int compute_checksum(iterator, iterator);
        template<typename algorithm, typename size_contract, typename check_range>
            int compute_checksum(const check_range &);
        template<typename algorithm, typename check_range,
            typename checkdigit_iterator>
            checkdigit_iterator
            compute_multicheckdigit(const check_range &, checkdigit_iterator);
        template<typename algorithm, size_t size_expected, typename check_range,
            typename checkdigit_iterator>
            checkdigit_iterator
            compute_multicheckdigit(const check_range &, checkdigit_iterator);
    }
}

```

Function template check_sequence

boost::checks::check_sequence — Validate a sequence according to algorithm.

Synopsis

```

// In header: <boost/checks/basic_checks.hpp>

template<typename algorithm, typename check_range>
    bool check_sequence(const check_range & check_seq);

```

Description

Parameters:	check_seq	is the sequence of value to check.
Template Parameters:	algorithm	is a set of static method use to translate, filter and calculate or verify the check-digit.
	check_range	is a valid range type.
Requires:	check_seq	is a valid range.
Returns:		true if the checkdigit is correct, false otherwise.
Throws:		std::invalid_argument if check_seq contains no valid value.

Function template check_sequence

boost::checks::check_sequence — Validate a sequence according to algorithm.

Synopsis

```
// In header: <boost/checks/basic_checks.hpp>

template<typename algorithm, size_t size_expected, typename check_range>
bool check_sequence(const check_range & check_seq);
```

Description

Parameters: `check_seq` is the sequence of value to check.

Template Parameters: `algorithm` is a set of static method use to translate, filter and calculate or verify the checkdigit.

`check_range` is a valid range type.

`size_expected` is the number of valid value expected in the sequence.

Requires: `check_seq` is a valid range.

`size_expected > 0` (enforced by static assert).

Returns: `true` if the checkdigit is correct, `false` otherwise.

Throws: `std::invalid_argument` if `check_seq` doesn't contain `size_expected` valid values.

Function template `compute_checkdigit`

`boost::checks::compute_checkdigit` — Calculate the check digit of a sequence according to algorithm.

Synopsis

```
// In header: <boost/checks/basic_checks.hpp>

template<typename algorithm, typename check_range>
algorithm::checkdigit< check_range >::type
compute_checkdigit(const check_range & check_seq);
```

Description

Parameters: `check_seq` is the sequence of value to check.

Template Parameters: `algorithm` is a set of static method use to translate, filter and calculate or verify the check-digit.

`check_range` is a valid range type.

Requires: `check_seq` is a valid range.

Returns: The check digit of the type of a value in `check_seq`.

Throws: `std::invalid_argument` if `check_seq` contains no valid value.

Function template `compute_checkdigit`

`boost::checks::compute_checkdigit` — Calculate the check digit of a sequence according to algorithm.

Synopsis

```
// In header: <boost/checks/basic_checks.hpp>

template<typename algorithm, size_t size_expected, typename check_range>
    algorithm::checkdigit< check_range >::type
    compute_checkdigit(const check_range & check_seq);
```

Description

Parameters: `check_seq` is the sequence of value to check.

Template Parameters: `algorithm` is a set of static methods used to translate, filter and calculate or verify the checkdigit.

`check_range` is a valid range type.

`size_expected` is the number of valid value expected in the sequence.

Requires: `check_seq` is a valid range.

`size_expected > 0` (enforced by static assert).

Returns: The check digit of the type of a value in `check_seq`.

Throws: `std::invalid_argument` if `check_seq` doesn't contain `size_expected` valid values.

Function template compute_checksum

`boost::checks::compute_checksum` — Run through a sequence and calculate the checksum with the algorithm policy class.

Synopsis

```
// In header: <boost/checks/basic_checks.hpp>

template<typename algorithm, typename size_contract, typename iterator>
    int compute_checksum(iterator seq_begin, iterator seq_end);
```

Description

Parameters: `seq_begin` Beginning of the sequence.

`seq_end` Ending of the sequence.

Template Parameters: `algorithm` is a set of static method use to translate, filter and calculate or verify the checksum.

`iterator` Must meet the InputIterator requirements.

`size_contract` is a contract concerning the size of the sequence.

Requires: `seq_begin` and `seq_end` are valid iterators.

Returns: The checksum of the sequence calculated with `algorithm`.

Throws: `size_contract::exception_size_failure` If the terms of the contract are not respected.

Function template compute_checksum

`boost::checks::compute_checksum` — Create iterators according to the `algorithm::iterator` policy. And call the iterator overload version of `compute_checksum`.

Synopsis

```
// In header: <boost/checks/basic_checks.hpp>

template<typename algorithm, typename size_contract, typename check_range>
int compute_checksum(const check_range & check_seq);
```

Description

Parameters: `check_seq` is the sequence of value to check.

Template Parameters: `algorithm` is a set of static methods used to translate, filter and calculate or verify the checkdigit.

`check_range` is a valid range type.

`size_contract` is a contract concerning the size of the sequence.

Requires: `check_seq` is a valid range.

Returns: The checksum of the sequence calculated with `algorithm`.

Throws: `size_contract::exception_size_failure` If the terms of the contract are not respected.

Function template `compute_multicheckdigit`

`boost::checks::compute_multicheckdigit` — Calculate the checkdigits of a sequence according to `algorithm`.

Synopsis

```
// In header: <boost/checks/basic_checks.hpp>

template<typename algorithm, typename check_range,
        typename checkdigit_iterator>
checkdigit_iterator
compute_multicheckdigit(const check_range & check_seq,
                        checkdigit_iterator checkdigits);
```

Description

Parameters: `check_seq` is the sequence of value to check.

`checkdigits` is the output iterator in which the check digits will be written.

Template Parameters: `algorithm` is a set of static methods used to translate, filter and calculate or verify the checkdigits.

`check_range` is a valid range type.

`checkdigit_iterator` must meet the `OutputIterator` requirements.

Requires: `check_seq` is a valid range.

`checkdigits` is a valid initialized iterator and have enough reserved place to store the check digits.

Returns: An iterator initialized at one pass the end of checkdigits.

Throws: `std::invalid_argument` if `check_seq` contains no valid value.

Function template `compute_multicheckdigit`

`boost::checks::compute_multicheckdigit` — Calculate the checkdigits of a sequence according to `algorithm`.

Synopsis

```
// In header: <boost/checks/basic_checks.hpp>

template<typename algorithm, size_t size_expected, typename check_range,
        typename checkdigit_iterator>
checkdigit_iterator
compute_multicheckdigit(const check_range & check_seq,
                        checkdigit_iterator checkdigits);
```

Description

Parameters:	check_seq	is the sequence of value to check.
	checkdigits	is the output iterator in which the check digits will be written.
Template Parameters:	algorithm	is a set of static method use to translate, filter and calculate or verify the checkdigits.
	check_range	is a valid range type.
	checkdigit_iterator	must meet the OutputIterator requirements.
	size_expected	is the number of valid value expected in the sequence.
Requires:	check_seq	is a valid range.
	checkdigits	is a valid initialized iterator and have enough reserved place to store the check digits.
	size_expected	> 0 (enforced by static assert).
Returns:		An iterator initialized at one pass the end of checkdigits.
Throws:		std::invalid_argument if check_seq doesn't contain size_expected valid values.

Header <boost/checks/checks_fwd.hpp>

Boost.Checks forward declaration of function signatures.

This file can be used to copy a function signature, but is mainly provided for testing purposes.

```

namespace boost {
    namespace checks {
        template<typename check_range> bool check_ean13(const check_range &);
        template<typename check_range> bool check_ean8(const check_range &);
        template<typename check_range> bool check_isbn10(const check_range &);
        template<typename check_range> bool check_isbn13(const check_range &);
        template<size_t size_expected, typename check_range>
            bool check_luhn(const check_range &);
        template<typename check_range> bool check_luhn(const check_range &);
        template<typename check_range> bool check_mastercard(const check_range &);
        template<size_t size_expected, typename check_range>
            bool check_mod97_10(const check_range &);
        template<typename check_range> bool check_mod97_10(const check_range &);
        template<size_t size_expected, typename check_range>
            bool check_modulus11(const check_range &);
        template<typename check_range> bool check_modulus11(const check_range &);
        template<typename check_range> bool check_upca(const check_range &);
        template<size_t size_expected, typename check_range>
            bool check_verhoeff(const check_range &);
        template<typename check_range> bool check_verhoeff(const check_range &);
        template<typename check_range> bool check_visa(const check_range &);
        template<typename check_range>
            boost::checks::ean_compute_algorithm::checkdigit< check_range >::type
            compute_ean13(const check_range &);
        template<typename check_range>
            boost::checks::ean_compute_algorithm::checkdigit< check_range >::type
            compute_ean8(const check_range &);
        template<typename check_range>
            boost::checks::mod11_compute_algorithm::checkdigit< check_range >::type
            compute_isbn10(const check_range &);
        template<typename check_range>
            boost::checks::isbn13_compute_algorithm::checkdigit< check_range >::type
            compute_isbn13(const check_range &);
        template<size_t size_expected, typename check_range>
            boost::checks::luhn_compute_algorithm::checkdigit< check_range >::type
            compute_luhn(const check_range &);
        template<typename check_range>
            boost::checks::luhn_compute_algorithm::checkdigit< check_range >::type
            compute_luhn(const check_range &);
        template<typename check_range>
            boost::checks::mastercard_compute_algorithm::checkdigit< check_range >::type
            compute_mastercard(const check_range &);
        template<size_t size_expected, typename check_range,
            typename checkdigits_iter>
            checkdigits_iter compute_mod97_10(const check_range &, checkdigits_iter);
        template<typename check_range, typename checkdigits_iter>
            checkdigits_iter compute_mod97_10(const check_range &, checkdigits_iter);
        template<size_t size_expected, typename check_range>
            boost::checks::mod11_compute_algorithm::checkdigit< check_range >::type
            compute_modulus11(const check_range &);
        template<typename check_range>
            boost::checks::mod11_compute_algorithm::checkdigit< check_range >::type
            compute_modulus11(const check_range &);
        template<typename check_range>
            boost::checks::upc_compute_algorithm::checkdigit< check_range >::type
            compute_upca(const check_range &);
        template<size_t size_expected, typename check_range>
            boost::checks::verhoeff_compute_algorithm::checkdigit< check_range >::type
            compute_verhoeff(const check_range &);
        template<typename check_range>
            boost::checks::verhoeff_compute_algorithm::checkdigit< check_range >::type
    }
}

```

```
compute_verhoeff(const check_range &);  
template<typename check_range>  
boost::checks::visa_compute_algorithm::checkdigit< check_range >::type  
compute_visa(const check_range &);  
}  
}
```

Function template check_ean13

boost::checks::check_ean13 — Validate a sequence according to the ean_check_algorithm type.

Synopsis

```
// In header: <boost/checks/checks_fwd.hpp>  
  
template<typename check_range> bool check_ean13(const check_range & check_seq);
```

Description

Parameters: check_seq is the sequence of value to check.
Template Parameters: check_range is a valid range type.
Requires: check_seq is a valid range.
Returns: true if the check digit is correct, false otherwise.
Throws: std::invalid_argument if check_seq doesn't contain exactly EAN13_SIZE digits.

Function template check_ean8

boost::checks::check_ean8 — Validate a sequence according to the ean_check_algorithm type.

Synopsis

```
// In header: <boost/checks/checks_fwd.hpp>  
  
template<typename check_range> bool check_ean8(const check_range & check_seq);
```

Description

Parameters: check_seq is the sequence of value to check.
Template Parameters: check_range is a valid range type.
Requires: check_seq is a valid range.
Returns: true if the check digit is correct, false otherwise.
Throws: std::invalid_argument if check_seq doesn't contain exactly EAN8_SIZE digits.

Function template check_isbn10

boost::checks::check_isbn10 — Validate a sequence according to the mod11_check_algorithm type.

Synopsis

```
// In header: <boost/checks/checks_fwd.hpp>

template<typename check_range>
    bool check_isbn10(const check_range & check_seq);
```

Description

Parameters: `check_seq` is the sequence of value to check.
Template Parameters: `check_range` is a valid range type.
Requires: `check_seq` is a valid range.
Returns: `true` if the check digit is correct, `false` otherwise.
Throws: `std::invalid_argument` if `check_seq` doesn't contain exactly ISBN10_SIZE digits.

Function template `check_isbn13`

`boost::checks::check_isbn13` — Validate a sequence according to the `isbn13_check_algorithm` type.

Synopsis

```
// In header: <boost/checks/checks_fwd.hpp>

template<typename check_range>
    bool check_isbn13(const check_range & check_seq);
```

Description

Parameters: `check_seq` is the sequence of value to check.
Template Parameters: `check_range` is a valid range type.
Requires: `check_seq` is a valid range.
Returns: `true` if the check digit is correct, `false` otherwise.
Throws: `std::invalid_argument` if `check_seq` doesn't contain exactly EAN13_SIZE digits.

Function template `check_luhn`

`boost::checks::check_luhn` — Validate a sequence according to the `luhn_check_algorithm` type.

Synopsis

```
// In header: <boost/checks/checks_fwd.hpp>

template<size_t size_expected, typename check_range>
    bool check_luhn(const check_range & check_seq);
```

Description

Parameters: `check_seq` is the sequence of value to check.
Template Parameters: `check_range` is a valid range type.
`size_expected` is the number of valid value expected in the sequence.
Requires: `check_seq` is a valid range.

Returns: `size_expected > 0` (enforced by static assert).
true if the check digit is correct, false otherwise.
Throws: `std::invalid_argument` if `check_seq` doesn't contain `size_expected` valid values.

Function template `check_luhn`

`boost::checks::check_luhn` — Validate a sequence according to the `luhn_check_algorithm` type.

Synopsis

```
// In header: <boost/checks/checks_fwd.hpp>

template<typename check_range> bool check_luhn(const check_range & check_seq);
```

Description

Parameters: `check_seq` is the sequence of value to check.
Template Parameters: `check_range` is a valid range type.
Requires: `check_seq` is a valid range.
Returns: true if the check digit is correct, false otherwise.
Throws: `std::invalid_argument` if `check_seq` contains no valid value.

Function template `check_mastercard`

`boost::checks::check_mastercard` — Validate a sequence according to the `mastercard_check_algorithm` type.

Synopsis

```
// In header: <boost/checks/checks_fwd.hpp>

template<typename check_range>
bool check_mastercard(const check_range & check_seq);
```

Description

Parameters: `check_seq` is the sequence of value to check.
Template Parameters: `check_range` is a valid range type.
Requires: `check_seq` is a valid range.
Returns: True if the check digit is correct, false otherwise.
Throws: `std::invalid_argument` if `check_seq` doesn't contain exactly `MASTERCARD_SIZE` digits. if the two first digits (from the leftmost) don't match the Mastercard pattern.

Function template `check_mod97_10`

`boost::checks::check_mod97_10` — Validate a sequence according to the `mod97_10_check_algorithm` type.

Synopsis

```
// In header: <boost/checks/checks_fwd.hpp>

template<size_t size_expected, typename check_range>
bool check_mod97_10(const check_range & check_seq);
```

Description

Parameters: `check_seq` is the sequence of value to check.

Template Parameters: `check_range` is a valid range type.

`size_expected` is the number of valid value expected in the sequence.

Requires: `check_seq` is a valid range.

`size_expected > 0` (enforced by static assert).

Returns: True if the two check digits are correct, false otherwise.

Throws: `std::invalid_argument` if `check_seq` doesn't contain `size_expected` valid values.

Function template `check_mod97_10`

`boost::checks::check_mod97_10` — Validate a sequence according to the `mod97_10_check_algorithm` type.

Synopsis

```
// In header: <boost/checks/checks_fwd.hpp>

template<typename check_range>
bool check_mod97_10(const check_range & check_seq);
```

Description

Parameters: `check_seq` is the sequence of value to check.

Template Parameters: `check_range` is a valid range type.

Requires: `check_seq` is a valid range.

Returns: `true` if the two check digits are correct, `false` otherwise.

Throws: `std::invalid_argument` if `check_seq` contains no valid value.

Function template `check_modulus11`

`boost::checks::check_modulus11` — Validate a sequence according to the `mod11_check_algorithm` type.

Synopsis

```
// In header: <boost/checks/checks_fwd.hpp>

template<size_t size_expected, typename check_range>
bool check_modulus11(const check_range & check_seq);
```

Description

Parameters: `check_seq` is the sequence of value to check.

Template Parameters: `check_range` is a valid range type.

Requires: `size_expected` is the number of valid value expected in the sequence.
`check_seq` is a valid range.
`size_expected > 0` (enforced by static assert).
Returns: `true` if the check digit is correct, `false` otherwise.
Throws: `std::invalid_argument` if `check_seq` doesn't contain `size_expected` valid values.

Function template `check_modulus11`

`boost::checks::check_modulus11` — Validate a sequence according to the `mod11_check_algorithm` type.

Synopsis

```
// In header: <boost/checks/checks_fwd.hpp>

template<typename check_range>
    bool check_modulus11(const check_range & check_seq);
```

Description

Parameters: `check_seq` is the sequence of value to check.
Template Parameters: `check_range` is a valid range type.
Requires: `check_seq` is a valid range.
Returns: `true` if the check digit is correct, `false` otherwise.
Throws: `std::invalid_argument` if `check_seq` contains no valid value.

Function template `check_upca`

`boost::checks::check_upca` — Validate a sequence according to the `upc_check_algorithm` type.

Synopsis

```
// In header: <boost/checks/checks_fwd.hpp>

template<typename check_range> bool check_upca(const check_range & check_seq);
```

Description

Parameters: `check_seq` is the sequence of value to check.
Template Parameters: `check_range` is a valid range type.
Requires: `check_seq` is a valid range.
Returns: `true` if the check digit is correct, `false` otherwise.
Throws: `std::invalid_argument` if `check_seq` doesn't contain exactly `UPCA_SIZE` digits.

Function template `check_verhoeff`

`boost::checks::check_verhoeff` — Validate a sequence according to the `verhoeff_check_algorithm` type.

Synopsis

```
// In header: <boost/checks/checks_fwd.hpp>

template<size_t size_expected, typename check_range>
    bool check_verhoeff(const check_range & check_seq);
```

Description

Parameters: `check_seq` is the sequence of value to check.
Template Parameters: `check_range` is a valid range type.
`size_expected` is the number of valid value expected in the sequence.
Requires: `check_seq` is a valid range.
`size_expected > 0` (enforced by static assert).
Returns: `true` if the check digit is correct, `false` otherwise.
Throws: `std::invalid_argument` if `check_seq` doesn't contain `size_expected` valid values.

Function template `check_verhoeff`

`boost::checks::check_verhoeff` — Validate a sequence according to the `verhoeff_check_algorithm` type.

Synopsis

```
// In header: <boost/checks/checks_fwd.hpp>

template<typename check_range>
    bool check_verhoeff(const check_range & check_seq);
```

Description

Parameters: `check_seq` is the sequence of value to check.
Template Parameters: `check_range` is a valid range type.
Requires: `check_seq` is a valid range.
Returns: `true` if the check digit is correct, `false` otherwise.
Throws: `std::invalid_argument` if `check_seq` contains no valid value.

Function template `check_visa`

`boost::checks::check_visa` — Validate a sequence according to the `visa_check_algorithm` type.

Synopsis

```
// In header: <boost/checks/checks_fwd.hpp>

template<typename check_range> bool check_visa(const check_range & check_seq);
```

Description

Parameters: `check_seq` is the sequence of value to check.
Template Parameters: `check_range` is a valid range type.
Requires: `check_seq` is a valid range.

Returns: `true` if the check digit is correct, `false` otherwise.

Throws: `std::invalid_argument` if `check_seq` doesn't contain exactly `VISA_SIZE` digits. if the first digit (from the leftmost) doesn't match the Visa pattern.

Function template `compute_ean13`

`boost::checks::compute_ean13` — Calculate the check digit of a sequence according to the `ean_compute_algorithm` type.

Synopsis

```
// In header: <boost/checks/checks_fwd.hpp>

template<typename check_range>
    boost::checks::ean_compute_algorithm::checkdigit< check_range >::type
    compute_ean13(const check_range & check_seq);
```

Description

Parameters: `check_seq` is the sequence of value to check.

Template Parameters: `check_range` is a valid range type.

Requires: `check_seq` is a valid range.

Returns: The check digit. The check digit is in the range `[0..9]`.

Throws: `std::invalid_argument` if `check_seq` doesn't contain exactly `EAN13_SIZE_WITHOUT_CHECKDIGIT` digits. if the check digit cannot be translated into the `checkdigit` type.

Function template `compute_ean8`

`boost::checks::compute_ean8` — Calculate the check digit of a sequence according to the `ean_compute_algorithm` type.

Synopsis

```
// In header: <boost/checks/checks_fwd.hpp>

template<typename check_range>
    boost::checks::ean_compute_algorithm::checkdigit< check_range >::type
    compute_ean8(const check_range & check_seq);
```

Description

Parameters: `check_seq` is the sequence of value to check.

Template Parameters: `check_range` is a valid range type.

Requires: `check_seq` is a valid range.

Returns: The check digit. The check digit is in the range `[0..9]`.

Throws: `std::invalid_argument` if `check_seq` doesn't contain exactly `EAN8_SIZE_WITHOUT_CHECKDIGIT` digits. if the check digit cannot be translated into the `checkdigit` type.

Function template `compute_isbn10`

`boost::checks::compute_isbn10` — Calculate the check digit of a sequence according to the `mod11_compute_algorithm` type.

Synopsis

```
// In header: <boost/checks/checks_fwd.hpp>

template<typename check_range>
    boost::checks::mod11_compute_algorithm::checkdigit< check_range >::type
    compute_isbn10(const check_range & check_seq);
```

Description

Parameters: `check_seq` is the sequence of value to check.

Template Parameters: `check_range` is a valid range type.

Requires: `check_seq` is a valid range.

Returns: The check digit. The check digit is in the range [0..9,X].

Throws: `std::invalid_argument` if `check_seq` doesn't contain exactly ISBN10_SIZE_WITHOUT_CHECKDIGIT digits. if the check digit cannot be translated into the `checkdigit` type.

Function template compute_isbn13

`boost::checks::compute_isbn13` — Calculate the check digit of a sequence according to the `isbn13_compute_algorithm` type.

Synopsis

```
// In header: <boost/checks/checks_fwd.hpp>

template<typename check_range>
    boost::checks::isbn13_compute_algorithm::checkdigit< check_range >::type
    compute_isbn13(const check_range & check_seq);
```

Description

Parameters: `check_seq` is the sequence of value to check.

Template Parameters: `check_range` is a valid range type.

Requires: `check_seq` is a valid range.

Returns: The check digit. The check digit is in the range [0..9].

Throws: `std::invalid_argument` if `check_seq` doesn't contain exactly EAN13_SIZE_WITHOUT_CHECKDIGIT digits. if the check digit cannot be translated into the `checkdigit` type.

Function template compute_luhn

`boost::checks::compute_luhn` — Calculate the check digit of a sequence according to the `luhn_compute_algorithm` type.

Synopsis

```
// In header: <boost/checks/checks_fwd.hpp>

template<size_t size_expected, typename check_range>
    boost::checks::luhn_compute_algorithm::checkdigit< check_range >::type
    compute_luhn(const check_range & check_seq);
```

Description

Parameters:	<code>check_seq</code> is the sequence of value to check.
Template Parameters:	<code>check_range</code> is a valid range type.
	<code>size_expected</code> is the number of valid value expected in the sequence. (So the check digit is not included.)
Requires:	<code>check_seq</code> is a valid range. <code>size_expected > 0</code> (enforced by static assert).
Returns:	The check digit. The check digit is in the range [0..9].
Throws:	<code>std::invalid_argument</code> if <code>check_seq</code> doesn't contain <code>size_expected</code> valid values. if the check digit cannot be translated into the checkdigit type.

Function template `compute_luhn`

`boost::checks::compute_luhn` — Calculate the check digit of a sequence according to the `luhn_compute_algorithm` type.

Synopsis

```
// In header: <boost/checks/checks_fwd.hpp>

template<typename check_range>
    boost::checks::luhn_compute_algorithm::checkdigit< check_range >::type
    compute_luhn(const check_range & check_seq);
```

Description

Parameters:	<code>check_seq</code> is the sequence of value to check.
Template Parameters:	<code>check_range</code> is a valid range type.
Requires:	<code>check_seq</code> is a valid range.
Returns:	The check digit. The check digit is in the range [0..9].
Throws:	<code>std::invalid_argument</code> if <code>check_seq</code> contains no valid value. if the check digit cannot be translated into the checkdigit type.

Function template `compute_mastercard`

`boost::checks::compute_mastercard` — Calculate the check digit of a sequence according to the `mastercard_compute_algorithm` type.

Synopsis

```
// In header: <boost/checks/checks_fwd.hpp>

template<typename check_range>
    boost::checks::mastercard_compute_algorithm::checkdigit< check_range >::type
    compute_mastercard(const check_range & check_seq);
```

Description

Parameters:	<code>check_seq</code> is the sequence of value to check.
Template Parameters:	<code>check_range</code> is a valid range type.
Requires:	<code>check_seq</code> is a valid range.
Returns:	The check digit. The check digit is in the range [0..9].

Throws: `std::invalid_argument` if `check_seq` doesn't contain exactly `MASTER-CARD_SIZE_WITHOUT_CHECKDIGIT` digits. if the two first digits (from the leftmost) do not match the Mastercard pattern. if the check digit cannot be translated into the checkdigit type.

Function template `compute_mod97_10`

`boost::checks::compute_mod97_10` — Calculate the check digits of a sequence according to the `mod97_10_compute_algorithm` type.

Synopsis

```
// In header: <boost/checks/checks_fwd.hpp>

template<size_t size_expected, typename check_range,
        typename checkdigits_iter>
checkdigits_iter
compute_mod97_10(const check_range & check_seq,
                 checkdigits_iter mod97_checkdigits);
```

Description

Parameters:	<code>check_seq</code>	is the sequence of value to check.
	<code>mod97_checkdigits</code>	is the OutputIterator in which the two check digits will be stored.
Template Parameters:	<code>check_range</code>	is a valid range type.
	<code>checkdigits_iter</code>	must meet the OutputIterator requirements.
	<code>size_expected</code>	is the number of valid value expected in the sequence. (So the check digits are not included.)
Requires:	<code>check_seq</code> is a valid range. <code>size_expected > 0</code> (enforced by static assert). <code>mod97_checkdigits</code> should have enough reserved place to store the two check digits.	
Returns:	The check digits are stored into <code>mod97_checkdigits</code> . The range of these is <code>[0..9][0..9]</code> .	
Throws:	<code>std::invalid_argument</code> if <code>check_seq</code> doesn't contain <code>size_expected</code> valid values. if the check digits cannot be translated into the <code>checkdigits_iter</code> type.	

Function template `compute_mod97_10`

`boost::checks::compute_mod97_10` — Calculate the check digits of a sequence according to the `mod97_10_compute_algorithm` type.

Synopsis

```
// In header: <boost/checks/checks_fwd.hpp>

template<typename check_range, typename checkdigits_iter>
checkdigits_iter
compute_mod97_10(const check_range & check_seq,
                 checkdigits_iter mod97_checkdigits);
```

Description

Parameters:	<code>check_seq</code>	is the sequence of value to check.
	<code>mod97_checkdigits</code>	is the OutputIterator in which the two check digits will be stored.
Template Parameters:	<code>check_range</code>	is a valid range type.

Requires: `checkdigits_iter` must meet the `OutputIterator` requirements.
`check_seq` is a valid range.
`mod97_checkdigits` should have enough reserved place to store the two check digits.

Returns: The check digits are stored into `mod97_checkdigits`. The range of these is `[0..9][0..9]`.

Throws: `std::invalid_argument` if `check_seq` contains no valid value. if the check digits cannot be translated into the `checkdigits_iter` type.

Function template `compute_modulus11`

`boost::checks::compute_modulus11` — Calculate the check digit of a sequence according to the `mod11_compute_algorithm` type.

Synopsis

```
// In header: <boost/checks/checks_fwd.hpp>

template<size_t size_expected, typename check_range>
    boost::checks::mod11_compute_algorithm::checkdigit< check_range >::type
    compute_modulus11(const check_range & check_seq);
```

Description

Parameters: `check_seq` is the sequence of value to check.

Template Parameters: `check_range` is a valid range type.
`size_expected` is the number of valid value expected in the sequence. (So the check digit is not included.)

Requires: `check_seq` is a valid range.
`size_expected > 0` (enforced by static assert).

Returns: The check digit. The check digit is in the range `[0..9,X]`.

Throws: `std::invalid_argument` if `check_seq` doesn't contain `size_expected` valid values. if the check digit cannot be translated into the `checkdigit` type.

Function template `compute_modulus11`

`boost::checks::compute_modulus11` — Calculate the check digit of a sequence according to the `mod11_compute_algorithm` type.

Synopsis

```
// In header: <boost/checks/checks_fwd.hpp>

template<typename check_range>
    boost::checks::mod11_compute_algorithm::checkdigit< check_range >::type
    compute_modulus11(const check_range & check_seq);
```

Description

Parameters: `check_seq` is the sequence of value to check.

Template Parameters: `check_range` is a valid range type.

Requires: `check_seq` is a valid range.

Returns: The check digit. The check digit is in the range `[0..9,X]`.

Throws: `std::invalid_argument` if `check_seq` contains no valid value. if the check digit cannot be translated into the `checkdigit` type.

Function template compute_upca

boost::checks::compute_upca — Calculate the check digit of a sequence according to the upc_compute_algorithm type.

Synopsis

```
// In header: <boost/checks/checks_fwd.hpp>

template<typename check_range>
    boost::checks::upc_compute_algorithm::checkdigit< check_range >::type
    compute_upca(const check_range & check_seq);
```

Description

Parameters: `check_seq` is the sequence of value to check.
 Template Parameters: `check_range` is a valid range type.
 Requires: `check_seq` is a valid range.
 Returns: The check digit. The check digit is in the range [0..9].
 Throws: `std::invalid_argument` if `check_seq` doesn't contain exactly UPCA_SIZE_WITHOUT_CHECKDIGIT digits. if the check digit cannot be translated into the checkdigit type.

Function template compute_verhoeff

boost::checks::compute_verhoeff — Calculate the check digit of a sequence according to the verhoeff_compute_algorithm type.

Synopsis

```
// In header: <boost/checks/checks_fwd.hpp>

template<size_t size_expected, typename check_range>
    boost::checks::verhoeff_compute_algorithm::checkdigit< check_range >::type
    compute_verhoeff(const check_range & check_seq);
```

Description

Parameters: `check_seq` is the sequence of value to check.
 Template Parameters: `check_range` is a valid range type.
 `size_expected` is the number of valid value expected in the sequence. (So the check digit is not included.)
 Requires: `check_seq` is a valid range.
 `size_expected > 0` (enforced by static assert).
 Returns: The check digit. The check digit is in the range [0..9].
 Throws: `std::invalid_argument` if `check_seq` doesn't contain `size_expected` valid values. if the check digit cannot be translated into the checkdigit type.

Function template compute_verhoeff

boost::checks::compute_verhoeff — Calculate the check digit of a sequence according to the verhoeff_compute_algorithm type.

Synopsis

```
// In header: <boost/checks/checks_fwd.hpp>

template<typename check_range>
    boost::checks::verhoeff_compute_algorithm::checkdigit< check_range >::type
    compute_verhoeff(const check_range & check_seq);
```

Description

Parameters: `check_seq` is the sequence of value to check.

Template Parameters: `check_range` is a valid range type.

Requires: `check_seq` is a valid range.

Returns: The check digit. The check digit is in the range [0..9].

Throws: `std::invalid_argument` if `check_seq` contains no valid value. if the check digit cannot be translated into the checkdigit type.

Function template `compute_visa`

`boost::checks::compute_visa` — Calculate the check digit of a sequence according to the `visa_compute_algorithm` type.

Synopsis

```
// In header: <boost/checks/checks_fwd.hpp>

template<typename check_range>
    boost::checks::visa_compute_algorithm::checkdigit< check_range >::type
    compute_visa(const check_range & check_seq);
```

Description

Parameters: `check_seq` is the sequence of value to check.

Template Parameters: `check_range` is a valid range type.

Requires: `check_seq` is a valid range.

Returns: The check digit. The check digit is in the range [0..9].

Throws: `std::invalid_argument` if `check_seq` doesn't contain exactly `VISA_SIZE_WITHOUT_CHECKDIGIT` digits. if the first digit (from the leftmost) doesn't match the Visa pattern. if the check digit cannot be translated into the checkdigit type.

Header `<boost/checks/ean.hpp>`

This file provides tools to compute and validate an European Article Numbering (EAN) of size 8 or 13.

```
EAN13_SIZE
EAN13_SIZE_WITHOUT_CHECKDIGIT
EAN8_SIZE
EAN8_SIZE_WITHOUT_CHECKDIGIT
```

```
namespace boost {
    namespace checks {
        typedef boost::checks::modulus10_algorithm< ean_weight, ean_sense, 0 > ean_check_algorithm; ↵
        // This is the type of the EAN algorithm for validating a check digit.
        typedef boost::checks::modulus10_algorithm< ean_weight, ean_sense, 1 > ean_compute_algorithm; ↵
        // This is the type of the EAN algorithm for computing a check digit.
        typedef boost::checks::rightmost ean_sense; // This is the running sense or direction to ↵
        check an EAN.
        typedef boost::checks::weight< 1, 3 > ean_weight; // This is the weight used by EAN system.
    }
}
```

Macro EAN13_SIZE

EAN13_SIZE — This macro defines the size of an EAN-13 (13).

Synopsis

```
// In header: <boost/checks/ean.hpp>
```

```
EAN13_SIZE
```

Macro EAN13_SIZE_WITHOUT_CHECKDIGIT

EAN13_SIZE_WITHOUT_CHECKDIGIT — This macro defines the size of an EAN-13 without its check digit (12).

Synopsis

```
// In header: <boost/checks/ean.hpp>
```

```
EAN13_SIZE_WITHOUT_CHECKDIGIT
```

Macro EAN8_SIZE

EAN8_SIZE — This macro defines the size of an EAN-8 (8).

Synopsis

```
// In header: <boost/checks/ean.hpp>
```

```
EAN8_SIZE
```

Macro EAN8_SIZE_WITHOUT_CHECKDIGIT

EAN8_SIZE_WITHOUT_CHECKDIGIT — This macro defines the size of a EAN-8 without its check digit (7).

Synopsis

```
// In header: <boost/checks/ean.hpp>
```

```
EAN8_SIZE_WITHOUT_CHECKDIGIT
```

Header <boost/checks/isbn.hpp>

This file provides tools to compute and validate an International Standard Book Number (ISBN) of size 10 or 13.

The ISBN-13 is derived from the EAN number, so EAN macro or type are used.

```
ISBN10_SIZE
ISBN10_SIZE_WITHOUT_CHECKDIGIT
```

```
namespace boost {
  namespace checks {
    template<unsigned int number_of_virtual_value_skipped = 0>
      class isbn13_algorithm;

    typedef boost::checks::isbn13_algorithm< 0 > isbn13_check_algorithm; // This is the type ↴
of the ISBN-13 algorithm for validating a check digit.
    typedef boost::checks::isbn13_algorithm< 1 > isbn13_compute_algorithm; // This is the type ↴
of the ISBN-13 algorithm for computing a check digit.
  }
}
```

Class template isbn13_algorithm

boost::checks::isbn13_algorithm — This class can be used to compute or validate checksum with a basic modulus 10 but using a custom filter for the ISBN-13 prefix.

Synopsis

```
// In header: <boost/checks/isbn.hpp>

template<unsigned int number_of_virtual_value_skipped = 0>
class isbn13_algorithm : public boost::checks::modulus10_algorithm< boost::checks::ean_weight, ↴
boost::checks::ean_sense, number_of_virtual_value_skipped >
{
public:

  // public static functions
  static checkdigit compute_checkdigit(int);
  static checkdigits_iter compute_multicheckdigit(int, checkdigits_iter);
  static void filter_valid_value_with_pos(const unsigned int,
                                         const unsigned int);
  static void operate_on_valid_value(const int, const unsigned int, int &);
  static int translate_to_valid_value(const value &, const unsigned int);
  static bool validate_checksum(int);
};
```

Description

<varlistentry>Template Parameters:

number_of_virtu-
al_value_skipped

</varlistentry>

Help functions to provide same behavior on sequence with and without check digits. No "real" value in the sequence will be skipped.

isbn13_algorithm public static functions

1.

```
static checkdigit compute_checkdigit(int checksum);
```

Compute the check digit with a simple modulus 10.

Parameters: checksum is the checksum used to extract the check digit.
 Returns: The modulus 10 check digit of checksum.
 Throws: boost::checks::translation_exception if the check digit cannot be translated into the checkdigit type.

2.

```
static checkdigits_iter  
compute_multicheckdigit(int checksum, checkdigits_iter checkdigits);
```

Compute the check digit(s) of a sequence.

This function should be overloaded if you want your algorithm to compute more than one check digit (through it works for just one check digit too).

Parameters: checkdigits is the iterator with which the check digit(s) will be written.
 checksum is the checksum used to extract the check digit(s).
 Requires: checkdigits must be a valid initialized iterator.
 Returns: checkdigits.

3.

```
static void filter_valid_value_with_pos(const unsigned int current_valid_value,  
                                       const unsigned int current_value_position);
```

Verify that a number matches the ISBN-13 pattern.

This function use the macro EAN13_SIZE to find the real position from left to right.

Parameters: current_valid_value is the current valid value analysed.
 current_value_position is the number of valid value already counted (the current value is not included).
 This is also the position (above the valid values) of the current value analysed (0 <= valid_value_counter < n).
 Throws: std::invalid_argument if the three first character are not equal to 978 or 979. The exception contains a descriptive message of what was expected.

4.

```
static void operate_on_valid_value(const int current_valid_value,  
                                  const unsigned int valid_value_counter,  
                                  int & checksum);
```

Compute an operation on the checksum with the current valid value.

Parameters: checksum is the current checksum.
 current_valid_value is the current valid value analysed.
 valid_value_counter is the number of valid values already counted (the current value is not included).
 This is also the position (above the valid values) of the current value analysed (0 <= valid_value_counter < n).
 Postconditions: The current weight multiplied by the current value is added to the checksum.

5.

```
static int translate_to_valid_value(const value & current_value,  
                                   const unsigned int valid_value_counter);
```

translate a value of the sequence into an integer valid value.

Parameters: current_value is the current value analysed in the sequence that must be translated.

`valid_value_counter` is the number of valid value(s) already counted (the current value is not included).
This is also the position (beyond the valid values) of the current value analysed ($0 \leq \text{valid_value_counter} < n$).

Returns: the translation of the current value in the range [0..9].

Throws: [boost::checks::translation_exception](#) is thrown if the translation of `current_value` failed.
This will automatically throw if the value is not a digit ($0 \leq i < 11$).

6.

```
static bool validate_checksum(int checksum);
```

Validate a checksum with a simple modulus 10.

Parameters: `checksum` is the checksum to validate.

Returns: true if the checksum is correct, false otherwise.

Macro ISBN10_SIZE

ISBN10_SIZE — This macro defines the size of an ISBN-10.

Synopsis

```
// In header: <boost/checks/isbn.hpp>

ISBN10_SIZE
```

Macro ISBN10_SIZE_WITHOUT_CHECKDIGIT

ISBN10_SIZE_WITHOUT_CHECKDIGIT — This macro defines the size of an ISBN-10 without its check digit.

Synopsis

```
// In header: <boost/checks/isbn.hpp>

ISBN10_SIZE_WITHOUT_CHECKDIGIT
```

Header [<boost/checks/iteration_sense.hpp>](#)

Provides two sense or direction of iteration to run through the sequence, either from right to left or left to right.

```
namespace boost {
    namespace checks {
        class leftmost;
        class rightmost;
    }
}
```

Class leftmost

`boost::checks::leftmost` — Policy class that provides methods to run through a sequence from left to right.

Synopsis

```
// In header: <boost/checks/iteration_sense.hpp>

class leftmost {
public:
    // member classes/structs/unions

    // Template rebinding class used to define the type of a const iterator for
    // seq_range.
    template<typename seq_range>
    class iterator {
    public:
        // types
        typedef boost::range_const_iterator< seq_range >::type type;
    };

    // public static functions
    template<typename seq_range>
        static iterator< seq_range >::type begin(seq_range &);
    template<typename seq_range>
        static iterator< seq_range >::type end(seq_range &);
};
```

Description

leftmost public static functions

1.

```
template<typename seq_range>
    static iterator< seq_range >::type begin(seq_range & sequence);
```

Get the beginning of the sequence.

Template Parameters: `seq_range` The type of the sequence to check.
Returns: An iterator represents the beginning of the sequence.

2.

```
template<typename seq_range>
    static iterator< seq_range >::type end(seq_range & sequence);
```

Get the ending of the sequence.

Template Parameters: `seq_range` The type of the sequence to check.
Returns: An iterator represents one past the end of the sequence.

Class template iterator

`boost::checks::leftmost::iterator` — Template rebinding class used to define the type of a const iterator for `seq_range`.

Synopsis

```
// In header: <boost/checks/iteration_sense.hpp>

// Template rebinding class used to define the type of a const iterator for
// seq_range.
template<typename seq_range>
class iterator {
public:
    // types
    typedef boost::range_const_iterator< seq_range >::type type;
};
```

Description

<varlistentry>Template Parameters:

seq_range The type of the sequence to check.

</varlistentry>

Class rightmost

boost::checks::rightmost — Policy class that provides methods to run through a sequence from right to left.

Synopsis

```
// In header: <boost/checks/iteration_sense.hpp>

class rightmost {
public:
    // member classes/structs/unions

    // Template rebinding class used to define the type of a const reverse
    // iterator for seq_range.
    template<typename seq_range>
    class iterator {
    public:
        // types
        typedef boost::range_const_reverse_iterator< seq_range >::type type;
    };

    // public static functions
    template<typename seq_range>
    static iterator< seq_range >::type begin(seq_range &);
    template<typename seq_range>
    static iterator< seq_range >::type end(seq_range &);
};
```

Description

rightmost public static functions

1.

```
template<typename seq_range>
static iterator< seq_range >::type begin(seq_range & sequence);
```

Get the beginning of the sequence.

Template Parameters: `seq_range` The type of the sequence to check.
 Returns: A reverse iterator representing the beginning of the sequence.

2.

```
template<typename seq_range>
static iterator< seq_range >::type end(seq_range & sequence);
```

Get the ending of the sequence.

Template Parameters: `seq_range` The type of the sequence to check.
 Returns: A reverse iterator represents one past the end of the sequence.

Class template iterator

`boost::checks::rightmost::iterator` — Template rebinding class used to define the type of a const reverse iterator for `seq_range`.

Synopsis

```
// In header: <boost/checks/iteration_sense.hpp>

// Template rebinding class used to define the type of a const reverse
// iterator for seq_range.
template<typename seq_range>
class iterator {
public:
    // types
    typedef boost::range_const_reverse_iterator< seq_range >::type type;
};
```

Description

<varlistentry>Template Parameters:
`seq_range` The type of the sequence to check.
 </varlistentry>

Header <boost/checks/limits.hpp>

Provides two types of size contract to manage the expected size of the check sequence.

```
namespace boost {
    namespace checks {
        template<typename exception_size_failure = std::invalid_argument>
        class no_null_size_contract;
        template<size_t expected_size,
                typename exception_size_failure = std::invalid_argument>
        class strict_size_contract;
    }
}
```

Class template no_null_size_contract

`boost::checks::no_null_size_contract` — This is a contract class used to verify that a sequence does not have a size of zero.

Synopsis

```
// In header: <boost/checks/limits.hpp>

template<typename exception_size_failure = std::invalid_argument>
class no_null_size_contract {
public:

    // public static functions
    static bool reach_one_past_the_end(const size_t);
    static void respect_size_contract(const size_t);
};
```

Description

<varlistentry>Template Parameters:

exception_size_failure If the size is null, a exception_size_failure exception will be thrown. Default exception class is std::invalid_argument.

</varlistentry>

no_null_size_contract public static functions

1.

```
static bool reach_one_past_the_end(const size_t);
```
2.

```
static void respect_size_contract(const size_t valid_value_counter);
```

Warns if the expected interval of value [0..n) is exceeded.

Returns: false.

Enforce the size contract.

Parameters: **valid_value_counter** Number of valid values in the sequence.

Throws: **exception_size_failure** if the terms of the contract are not respected. (valid_value_counter == 0).

Class template strict_size_contract

boost::checks::strict_size_contract — This is a contract class used to verify that a sequence has the expected size.

Synopsis

```
// In header: <boost/checks/limits.hpp>

template<size_t expected_size,
        typename exception_size_failure = std::invalid_argument>
class strict_size_contract {
public:

    // public static functions
    static bool reach_one_past_the_end(const size_t);
    static void respect_size_contract(const size_t);
};
```

Description

<varlistentry>Template Parameters:

`exception_size_failure` If the size is not respected an `exception_size_failure` exception will be thrown. Default exception class is `std::invalid_argument`.

`expected_size` The expected size of the sequence. (`Expected_size > 0`, enforced with static assert).

</varlistentry>

strict_size_contract public static functions

1.

```
static bool reach_one_past_the_end(const size_t valid_value_counter);
```

Tells if the expected interval of value [0..n) is outstripped.

Parameters: `valid_value_counter` Number of valid values in the sequence already counted.
Returns: true if `valid_value_counter` is one past the end of the expected size, else false.

2.

```
static void respect_size_contract(const size_t valid_value_counter);
```

Enforce the size contract.

Parameters: `valid_value_counter` Number of valid values in the sequence.
Throws: `exception_size_failure` If the terms of the contract are not respected. (`valid_value_counter != expected_size`).

Header <boost/checks/luhn.hpp>

This file provides tools to compute and validate sequence with the Luhn algorithm.

```
namespace boost {
    namespace checks {
        template<unsigned int number_of_virtual_value_skipped = 0>
            class luhn_algorithm;

        typedef luhn_algorithm< 0 > luhn_check_algorithm; // This is the type of the Luhn algorithm ↓
        for validating a check digit.
        typedef luhn_algorithm< 1 > luhn_compute_algorithm; // This is the type of the Luhn al↓
        gorithm for computing a check digit.
        typedef boost::checks::rightmost luhn_sense; // This is the running sense to check an Luhn ↓
        number.
        typedef boost::checks::weight< 1, 2 > luhn_weight; // This is the weight used by the Luhn ↓
        algorithm.
    }
}
```

Class template luhn_algorithm

`boost::checks::luhn_algorithm` — This class can be used to compute or validate checksum with the Luhn algorithm.

Synopsis

```
// In header: <boost/checks/luhn.hpp>

template<unsigned int number_of_virtual_value_skipped = 0>
class luhn_algorithm : public boost::checks::modulus10_algorithm< luhn_weight, luhn_sense, number_of_virtual_value_skipped >
{
public:

    // public static functions
    static checkdigit compute_checkdigit(int);
    static checkdigits_iter compute_multicheckdigit(int, checkdigits_iter);
    static void filter_valid_value_with_pos(const unsigned int,
                                           const unsigned int);
    static void operate_on_valid_value(const int, const unsigned int, int &);
    static int translate_to_valid_value(const value &, const unsigned int);
    static bool validate_checksum(int);
};
```

Description

<varlistentry>Template Parameters:

number_of_virtual_value_skipped

Help functions to provide same behavior on sequence with and without check digits. No "real" value in the sequence will be skipped.

</varlistentry>

luhn_algorithm public static functions

1.

```
static checkdigit compute_checkdigit(int checksum);
```

Compute the check digit with a simple modulus 10.

Parameters: checksum is the checksum used to extract the check digit.
 Returns: The modulus 10 check digit of checksum.
 Throws: [boost::checks::translation_exception](#) if the check digit cannot be translated into the checkdigit type.

2.

```
static checkdigits_iter
compute_multicheckdigit(int checksum, checkdigits_iter checkdigits);
```

Compute the check digit(s) of a sequence.

This function should be overloaded if you want your algorithm to compute more than one check digit (through it works for just one check digit too).

Parameters: checkdigits is the iterator with which the check digit(s) will be written.
 checksum is the checksum used to extract the check digit(s).
 Requires: checkdigits must be a valid initialized iterator.
 Returns: checkdigits.

3.

```
static void filter_valid_value_with_pos(const unsigned int current_valid_value,
                                       const unsigned int current_value_position);
```

Filtering of a valid value according to its position.

This function should be overloaded if you want to filter the values with their positions.

Parameters: current_valid_value is the current valid value analysed.

`current_value_position` is the position (above the valid values) of the current value analysed ($0 \leq \text{valid_value_counter} < n$).

Postconditions: Do nothing.

4.

```
static void operate_on_valid_value(const int current_valid_value,
                                  const unsigned int valid_value_counter,
                                  int & checksum);
```

Compute the Luhn algorithm operation on the checksum.

This function become obsolete if you don't use `luhn_weight`. It is using operator "<<" to make internal multiplication.

Parameters: `checksum` is the current checksum.
`current_valid_value` is the current valid value analysed.
`valid_value_counter` is the number of valid value already counted (the current value is not included).
This is also the position (above the valid values) of the current value analysed ($0 \leq \text{valid_value_counter} < n$).

Postconditions: `checksum` is equal to the new computed checksum.

5.

```
static int translate_to_valid_value(const value & current_value,
                                   const unsigned int valid_value_counter);
```

translate a value of the sequence into an integer valid value.

Parameters: `current_value` is the current value analysed in the sequence that must be translated.
`valid_value_counter` is the number of valid value(s) already counted (the current value is not included).
This is also the position (beyond the valid values) of the current value analysed ($0 \leq \text{valid_value_counter} < n$).

Returns: the translation of the current value in the range [0..9].

Throws: `boost::checks::translation_exception` is thrown if the translation of `current_value` failed.
This will automatically throw if the value is not a digit ($0 \leq i < 11$).

6.

```
static bool validate_checksum(int checksum);
```

Validate a checksum with a simple modulus 10.

Parameters: `checksum` is the checksum to validate.

Returns: `true` if the checksum is correct, `false` otherwise.

Header <boost/checks/mastercard.hpp>

This file provides tools to compute and validate a Mastercard credit card number.

```
MASTERCARD_SIZE
MASTERCARD_SIZE_WITHOUT_CHECKDIGIT
```

```

namespace boost {
    namespace checks {
        template<unsigned int number_of_virtual_value_skipped = 0>
            class mastercard_algorithm;

        typedef mastercard_algorithm< 0 > mastercard_check_algorithm; // This is the type of the ↵
Mastercard algorithm for validating a check digit.
        typedef mastercard_algorithm< 1 > mastercard_compute_algorithm; // This is the type of the ↵
Mastercard algorithm for computing a check digit.
    }
}

```

Class template mastercard_algorithm

`boost::checks::mastercard_algorithm` — This class can be used to compute or validate checksum with the Luhn algorithm, but filter following the Mastercard pattern.

Synopsis

```

// In header: <boost/checks/mastercard.hpp>

template<unsigned int number_of_virtual_value_skipped = 0>
class mastercard_algorithm :
    public boost::checks::luhn_algorithm< number_of_virtual_value_skipped >
{
public:

    // public static functions
    static checkdigit compute_checkdigit(int);
    static checkdigits_iter compute_multicheckdigit(int, checkdigits_iter);
    static void filter_valid_value_with_pos(const unsigned int,
                                           const unsigned int);
    static void operate_on_valid_value(const int, const unsigned int, int &);
    static int translate_to_valid_value(const value &, const unsigned int);
    static bool validate_checksum(int);
};

```

Description

<varlistentry>Template Parameters:

`number_of_virtu-
al_value_skipped`
</varlistentry>

Help functions to provide same behavior on sequence with and without check digits. No "real" value in the sequence will be skipped.

mastercard_algorithm public static functions

1. `static checkdigit compute_checkdigit(int checksum);`

Compute the check digit with a simple modulus 10.

Parameters: `checksum` is the checksum used to extract the check digit.

Returns: The modulus 10 check digit of checksum.

Throws: `boost::checks::translation_exception` if the check digit cannot be translated into the checkdigit type.

2. `static checkdigits_iter
compute_multicheckdigit(int checksum, checkdigits_iter checkdigits);`

Compute the check digit(s) of a sequence.

This function should be overloaded if you want your algorithm to compute more than one check digit (through it works for just one check digit too).

Parameters: `checkdigits` is the iterator with which the check digit(s) will be written.
 `checksum` is the checksum used to extract the check digit(s).
 Requires: `checkdigits` must be a valid initialized iterator.
 Returns: `checkdigits`.

3.

```
static void filter_valid_value_with_pos(const unsigned int current_valid_value,
                                     const unsigned int current_value_position);
```

Verify that a number matches the Mastercard pattern.

This function use the macro `MASTERCARD_SIZE` to find the real position from left to right.

Parameters: `current_valid_value` is the current valid value analysed.
 `current_value_position` is the number of valid values already counted (the current value is not included).
 This is also the position (above the valid values) of the current value analysed ($0 \leq \text{valid_value_counter} < n$).
 Throws: `std::invalid_argument` if the first character is not equal to 5 or the second is not between 1 and 5. The exception contains a descriptive message of what was expected.

4.

```
static void operate_on_valid_value(const int current_valid_value,
                                  const unsigned int valid_value_counter,
                                  int & checksum);
```

Compute the Luhn algorithm operation on the checksum.

This function become obsolete if you don't use `luhn_weight`. It is using operator "<<" to make internal multiplication.

Parameters: `checksum` is the current checksum.
 `current_valid_value` is the current valid value analysed.
 `valid_value_counter` is the number of valid value already counted (the current value is not included).
 This is also the position (above the valid values) of the current value analysed ($0 \leq \text{valid_value_counter} < n$).
 Postconditions: `checksum` is equal to the new computed checksum.

5.

```
static int translate_to_valid_value(const value & current_value,
                                   const unsigned int valid_value_counter);
```

translate a value of the sequence into an integer valid value.

Parameters: `current_value` is the current value analysed in the sequence that must be translated.
 `valid_value_counter` is the number of valid value(s) already counted (the current value is not included).
 This is also the position (beyond the valid values) of the current value analysed ($0 \leq \text{valid_value_counter} < n$).
 Returns: the translation of the current value in the range [0..9].
 Throws: `boost::checks::translation_exception` is thrown if the translation of `current_value` failed.
 This will automatically throw if the value is not a digit ($0 \leq i < 11$).

6.

```
static bool validate_checksum(int checksum);
```

Validate a checksum with a simple modulus 10.

Parameters: `checksum` is the checksum to validate.

Returns: true if the checksum is correct, false otherwise.

Macro **MASTERCARD_SIZE**

MASTERCARD_SIZE — This macro defines the size of a Mastercard number.

Synopsis

```
// In header: <boost/checks/mastercard.hpp>

MASTERCARD_SIZE
```

Macro **MASTERCARD_SIZE_WITHOUT_CHECKDIGIT**

MASTERCARD_SIZE_WITHOUT_CHECKDIGIT — This macro defines the size of a Mastercard number without its check digit.

Synopsis

```
// In header: <boost/checks/mastercard.hpp>

MASTERCARD_SIZE_WITHOUT_CHECKDIGIT
```

Header **<boost/checks/modulus10.hpp>**

This file provides tools to compute and validate classic modulus 10 checksum.

```
namespace boost {
    namespace checks {
        template<typename mod10_weight, typename iteration_sense,
                unsigned int number_of_virtual_value_skipped = 0>
            class modulus10_algorithm;
    }
}
```

Class template **modulus10_algorithm**

boost::checks::modulus10_algorithm — This class can be used to compute or validate checksum with a basic modulus 10.

Synopsis

```
// In header: <boost/checks/modulus10.hpp>

template<typename mod10_weight, typename iteration_sense,
        unsigned int number_of_virtual_value_skipped = 0>
class modulus10_algorithm : public boost::checks::weighted_sum_algorithm< mod10_weight, itera-
tion_sense, number_of_virtual_value_skipped >
{
public:

    // public static functions
    template<typename checkdigit> static checkdigit compute_checkdigit(int);
    static checkdigits_iter compute_multicheckdigit(int, checkdigits_iter);
    static void filter_valid_value_with_pos(const unsigned int,
                                           const unsigned int);

    static void operate_on_valid_value(const int, const unsigned int, int &);
    static int translate_to_valid_value(const value &, const unsigned int);
    static bool validate_checksum(int);
};
```

Description

<varlistentry>Template Parameters:

<code>iteration_sense</code>	must meet the <code>iteration_sense</code> concept requirements.
<code>mod10_weight</code>	must meet the <code>weight</code> concept requirements.
<code>number_of_virtu- al_value_skipped</code>	Help functions to provide same behavior on sequence with and without check digits. No "real" value in the sequence will be skipped.

`modulus10_algorithm` public static functions

1.

```
template<typename checkdigit>
static checkdigit compute_checkdigit(int checksum);
```

Compute the check digit with a simple modulus 10.

Parameters:	<code>checksum</code> is the checksum used to extract the check digit.
Template Parameters:	<code>checkdigit</code> is the type of the check digit desired.
Returns:	The modulus 10 check digit of checksum.
Throws:	<code>boost::checks::translation_exception</code> if the check digit cannot be translated into the <code>checkdigit</code> type.

2.

```
static checkdigits_iter
compute_multicheckdigit(int checksum, checkdigits_iter checkdigits);
```

Compute the check digit(s) of a sequence.

This function should be overloaded if you want your algorithm to compute more than one check digit (through it works for just one check digit too).

Parameters:	<code>checkdigits</code> is the iterator with which the check digit(s) will be written.
	<code>checksum</code> is the checksum used to extract the check digit(s).
Requires:	<code>checkdigits</code> must be a valid initialized iterator.
Returns:	<code>checkdigits</code> .

3.

```
static void filter_valid_value_with_pos(const unsigned int current_valid_value,
                                       const unsigned int current_value_position);
```

Filtering of a valid value according to its position.

This function should be overloaded if you want to filter the values with their positions.

Parameters:	<code>current_valid_value</code>	is the current valid value analysed.
	<code>current_value_position</code>	is the position (above the valid values) of the current value analysed ($0 \leq \text{valid_value_counter} < n$).

Postconditions: Do nothing.

```
4. static void operate_on_valid_value(const int current_valid_value,
                                     const unsigned int valid_value_counter,
                                     int & checksum);
```

Compute an operation on the checksum with the current valid value.

Parameters:	checksum	is the current checksum.
	current_valid_value	is the current valid value analysed.
	valid_value_counter	is the number of valid values already counted (the current value is not included).
		This is also the position (above the valid values) of the current value analysed ($0 \leq \text{valid_value_counter} < n$).

Postconditions: The current weight multiplied by the current value is added to the checksum.

[illegible]

translate a value of the sequence into an integer valid value.

Parameters:	<code>current_value</code>	is the current value analysed in the sequence that must be translated.
	<code>valid_value_counter</code>	is the number of valid value(s) already counted (the current value is not included). This is also the position (beyond the valid values) of the current value analysed ($0 \leq \text{valid_value_counter} < n$).

Returns: the translation of the current value in the range [0..9].

Throws: [boost::checks::translation_exception](#) is thrown if the translation of `current_value` failed. This will automatically throw if the value is not a digit ($0 \leq i < 11$).

```
6. static bool validate_checksum(int checksum);
```

Validate a checksum with a simple modulus 10.

Parameters: checksum is the checksum to validate.
Returns: true if the checksum is correct, false otherwise.

Header `<boost/checks/modulus11.hpp>`

This file provides tools to compute and validate classic modulus 11 checksum.

```

namespace boost {
    namespace checks {
        template<typename mod11_weight, typename iteration_sense,
                unsigned int number_of_virtual_value_skipped = 0>
        class modulus11_algorithm;

        typedef modulus11_algorithm< mod11_weight, mod11_sense, 0 > mod11_check_algorithm; // This is
        is the type of the most common modulus 11 algorithm for validating a check digit.
        typedef modulus11_algorithm< mod11_weight, mod11_sense, 1 > mod11_compute_algorithm; // This
        This is the type of the most common modulus 11 algorithm for computing a check digit.
        typedef boost::checks::rightmost mod11_sense; // The most common iteration sense or direc-
        tion used with a modulus 11 algorithm (right to left).
        typedef boost::checks::weight< 1, 2, 3, 4, 5, 6, 7, 8, 9, 10 > mod11_weight; // The most
        common weight pattern used with a modulus 11 algorithm.
    }
}

```

Class template modulus11_algorithm

boost::checks::modulus11_algorithm — This class can be used to compute or validate checksum with a basic modulus 11.

Synopsis

```

// In header: <boost/checks/modulus11.hpp>

template<typename mod11_weight, typename iteration_sense,
        unsigned int number_of_virtual_value_skipped = 0>
class modulus11_algorithm : public boost::checks::weighted_sum_algorithm< mod11_weight, itera-
tion_sense, number_of_virtual_value_skipped >
{
public:

    // public static functions
    template<typename checkdigit> static checkdigit compute_checkdigit(int);
    static checkdigits_iter compute_multicheckdigit(int, checkdigits_iter);
    static void filter_valid_value_with_pos(const unsigned int,
        const unsigned int);
    static void operate_on_valid_value(const int, const unsigned int, int &);
    template<typename value>
        static int translate_to_valid_value(const value &, const unsigned int);
    static bool validate_checksum(int);

    // protected static functions
    template<typename checkdigit> static checkdigit translate_checkdigit(int);
};

```

Description

The range of the check digit is [0..10], the tenth element is translated as the letter 'X'.

<varlistentry>Template Parameters:

iteration_sense	must meet the iteration_sense concept requirements.
mod11_weight	must meet the weight concept requirements.
number_of_virtu- al_value_skipped	Help functions to provide same behavior on sequence with and without check digits. No "real" value in the sequence will be skipped.

</varlistentry>

modulus11_algorithm public static functions

1.

```
template<typename checkdigit>
    static checkdigit compute_checkdigit(int checksum);
```

Compute the check digit with a simple modulus 11.

Parameters: checksum is the checksum used to extract the check digit.
 Template Parameters: checkdigit is the type of the check digit desired.
 Returns: The modulus 11 check digit of checksum. 'X' is returned if the check digit value is equal to 10.
 Throws: [boost::checks::translation_exception](#) if the check digit cannot be translated into the checkdigit type.

2.

```
static checkdigits_iter
compute_multicheckdigit(int checksum, checkdigits_iter checkdigits);
```

Compute the check digit(s) of a sequence.

This function should be overloaded if you want your algorithm to compute more than one check digit (through it works for just one check digit too).

Parameters: checkdigits is the iterator with which the check digit(s) will be written.
 checksum is the checksum used to extract the check digit(s).
 Requires: checkdigits must be a valid initialized iterator.
 Returns: checkdigits.

3.

```
static void filter_valid_value_with_pos(const unsigned int current_valid_value,
                                       const unsigned int current_value_position);
```

Filtering of a valid value according to its position.

This function should be overloaded if you want to filter the values with their positions.

Parameters: current_valid_value is the current valid value analysed.
 current_value_position is the position (above the valid values) of the current value analysed (0 <= valid_value_counter < n).
 Postconditions: Do nothing.

4.

```
static void operate_on_valid_value(const int current_valid_value,
                                   const unsigned int valid_value_counter,
                                   int & checksum);
```

Compute an operation on the checksum with the current valid value.

Parameters: checksum is the current checksum.
 current_valid_value is the current valid value analysed.
 valid_value_counter is the number of valid values already counted (the current value is not included).
 This is also the position (above the valid values) of the current value analysed (0 <= valid_value_counter < n).
 Postconditions: The current weight multiplied by the current value is added to the checksum.

5.

```
template<typename value>
    static int translate_to_valid_value(const value & current_value,
                                       const unsigned int valid_value_counter);
```

translate the current value into an integer valid value.

Parameters:	<code>current_value</code>	is the current value analysed in the sequence that must be translated.
	<code>valid_value_counter</code>	is the number of valid value already counted (the current value is not included). This is also the position (above the valid values) of the current value analysed ($0 \leq \text{valid_value_counter} < n$).
Template Parameters:	<code>value</code>	is the type of a value in the sequence.
Returns:		the translation of the current value in the range $[0..10]$.
Throws:		boost::checks::translation_exception is thrown if the translation of <code>current_value</code> failed. The translation will fail if the current value is not a digit ($0 \leq i < 10$), unless it is the rightmost digit, when the value 10 or the 'x' or 'X' character is allowed.

6.

```
static bool validate_checksum(int checksum);
```

Validate a checksum with a simple modulus 11.

Parameters:	<code>checksum</code>	is the checksum to validate.
Returns:		true if the checksum is correct, false otherwise.

`modulus11_algorithm` protected static functions

1.

```
template<typename checkdigit>
static checkdigit translate_checkdigit(int _checkdigit);
```

Header `<boost/checks/modulus97.hpp>`

This file provides tools to compute and validate the classic modulus 97 checksum. It provides functions for convenience with the mod97-10 algorithm (ISO/IEC 7064:2003).

```
MOD97_weight_maker(z, n, unused)
NEXT(z, n, unused)
```

```
namespace boost {
    namespace checks {
        template<unsigned int weight_value> class make_mod97_weight;

        template<> struct make_mod97_weight<68>;

        template<typename mod97_weight, typename iteration_sense,
                unsigned int number_of_virtual_value_skipped = 0>
            class modulus97_algorithm;

        typedef make_mod97_weight< 1 > initial_mod97_weight; // This is the initial weight for the ↵
mod97-10 weights series.
        typedef modulus97_algorithm< mod97_10_weight, mod97_10_sense, 0 > mod97_10_check_algorithm; ↵
// This is the type of the modulus 97-10 algorithm for validating a check digit.
        typedef modulus97_algorithm< mod97_10_weight, mod97_10_sense, 2 > mod97_10_compute_algorithm; ↵
// This is the type of the modulus 97-10 algorithm for computing a check digit.
        typedef boost::checks::rightmost mod97_10_sense; // The iteration sense or direction of ↵
the sequence. From right to left.
        typedef boost::checks::weight< BOOST_PP_ENUM(96, MOD97_weight_maker,~) > mod97_10_weight; ↵
// This is weight of the mod97-10 algorithm.
    }
}
```

Class template make_mod97_weight

boost::checks::make_mod97_weight — This class is used to pre-compute the weight of the mod97-10 algorithm ($a = 1$; $a = a * 10 \% 97$;).

Synopsis

```
// In header: <boost/checks/modulus97.hpp>

template<unsigned int weight_value>
class make_mod97_weight {
public:
    // types
    typedef make_mod97_weight< weight_value *10%97 > next;

    // public data members
    static const unsigned int value;
};
```

Description

This class is the terminal specialisation of [make_mod97_weight](#), so the recursion can finish.

The last value is 68, so we specialize [make_mod97_weight](#) to terminate the template recursion.

<varlistentry>Template Parameters:

weight_value is the weight value stored by [make_mod97_weight](#).

</varlistentry>

Struct make_mod97_weight<68>

boost::checks::make_mod97_weight<68>

Synopsis

```
// In header: <boost/checks/modulus97.hpp>

struct make_mod97_weight<68> {
    // types
    typedef make_mod97_weight type;

    // public data members
    static const unsigned int value;
};
```

Class template modulus97_algorithm

boost::checks::modulus97_algorithm — This class can be used to compute or validate a checksum with a basic modulus 97.

Synopsis

```
// In header: <boost/checks/modulus97.hpp>

template<typename mod97_weight, typename iteration_sense,
        unsigned int number_of_virtual_value_skipped = 0>
class modulus97_algorithm : public boost::checks::weighted_sum_algorithm< mod97_weight, itera-
tion_sense, number_of_virtual_value_skipped >
{
public:

    // public static functions
    static checkdigit compute_checkdigit(int);
    template<typename checkdigits_iter>
        static checkdigits_iter compute_multicheckdigit(int, checkdigits_iter);
    static void filter_valid_value_with_pos(const unsigned int,
                                           const unsigned int);

    static void operate_on_valid_value(const int, const unsigned int, int &);
    static int translate_to_valid_value(const value &, const unsigned int);
    static bool validate_checksum(int);
};
```

Description

The mod97-10 algorithm (ISO/IEC 7064:2003 Information technology -- Security techniques -- Check character systems) uses two check digits.

This algorithm use two check digits.

<varlistentry>Template Parameters:

iteration_sense	must meet the iteration_sense concept requirements.
mod97_weight	must meet the weight concept requirements.
number_of_virtu- al_value_skipped	Help functions to provide same behavior on sequence with and without check digits. No "real" value in the sequence will be skipped.

modulus97_algorithm public static functions

1.

```
static checkdigit compute_checkdigit(int checksum);
```

Compute the check digit of a sequence.

This function should be overloaded if you want to compute the check digit of a sequence.

Parameters: checksum is the checksum used to extract the check digit.

Requires: The type checkdigit must provides the default initialisation feature.

Returns: default initialized value of checkdigit.

2.

```
template<typename checkdigits_iter>
static checkdigits_iter
compute_multicheckdigit(int checksum, checkdigits_iter checkdigits);
```

Compute the two check digits with a simple modulus 97.

Parameters: checkdigits is the output iterator in which the two check digits will be written.
checksum is the checksum used to extract the check digit.

Template Parameters: checkdigits_iter must meet the OutputIterator requirements.

Requires: checkdigits should have enough reserved place to store the two check digits.

Postconditions: The two check digits are stored into checkdigits.

Returns: An iterator initialized at one pass to the end of the two check digits.

Throws: `boost::checks::translation_exception` if the check digits cannot be translated into the check digits_iter type.

```
3. static void filter_valid_value_with_pos(const unsigned int current_valid_value,
                                         const unsigned int current_value_position);
```

Filtering of a valid value according to its position.

This function should be overloaded if you want to filter the values with their positions.

Parameters: `current_valid_value` is the current valid value analysed.
`current_value_position` is the position (above the valid values) of the current value analysed
(0 <= `valid_value_counter` < n).

Postconditions: Do nothing.

```
4. static void operate_on_valid_value(const int current_valid_value,
                                     const unsigned int valid_value_counter,
                                     int & checksum);
```

Compute an operation on the checksum with the current valid value.

Parameters: `checksum` is the current checksum.
`current_valid_value` is the current valid value analysed.
`valid_value_counter` is the number of valid values already counted (the current value is not included).
This is also the position (above the valid values) of the current value analysed (0 <= `valid_value_counter` < n).

Postconditions: The current weight multiplied by the current value is added to the checksum.

```
5. static int translate_to_valid_value(const value & current_value,
                                     const unsigned int valid_value_counter);
```

translate a value of the sequence into an integer valid value.

Parameters: `current_value` is the current value analysed in the sequence that must be translated.
`valid_value_counter` is the number of valid value(s) already counted (the current value is not included).
This is also the position (beyond the valid values) of the current value analysed (0 <= `valid_value_counter` < n).

Returns: the translation of the current value in the range [0..9].

Throws: `boost::checks::translation_exception` is thrown if the translation of `current_value` failed.
This will automatically throw if the value is not a digit (0 <= `i` < 11).

```
6. static bool validate_checksum(int checksum);
```

Validate a checksum with a simple modulus 97.

Parameters: `checksum` is the checksum to validate.

Returns: true if the checksum is correct, false otherwise.

Macro MOD97_weight_maker

MOD97_weight_maker — This macro is used to access to n-th value of `initial_mod97_weight`. (By using `make_mod97_weight`).

Synopsis

```
// In header: <boost/checks/modulus97.hpp>

MOD97_weight_maker(z, n, unused)
```

Macro NEXT

NEXT — This macro is used to access the next type.

Synopsis

```
// In header: <boost/checks/modulus97.hpp>

NEXT(z, n, unused)
```

Header <boost/checks/translation_exception.hpp>

This file provides an exception class used when the translation of a value failed.

```
namespace boost {
    namespace checks {
        class translation_exception;
    }
}
```

Class translation_exception

boost::checks::translation_exception — This class provides support for translation failure. For example, sequence value into integer, or integer into check digit type.

Synopsis

```
// In header: <boost/checks/translation_exception.hpp>

class translation_exception {
};
```

Header <boost/checks/upc.hpp>

This file provides tools to compute and validate an Universal Product Code.

```
UPCA_SIZE
UPCA_SIZE_WITHOUT_CHECKDIGIT
```

```

namespace boost {
    namespace checks {
        typedef boost::checks::modulus10_algorithm< upc_weight, upc_sense, 0 > upc_check_algorithm;
        // This is the type of the UPC algorithm for validating a check digit.
        typedef boost::checks::modulus10_algorithm< upc_weight, upc_sense, 1 > upc_compute_algorithm;
        // This is the type of the UPC algorithm for computing a check digit.
        typedef boost::checks::rightmost upc_sense; // This is the running sense or direction to
        check an UPC.
        typedef boost::checks::weight< 1, 3 > upc_weight; // This is the weight used by UPC system.
    }
}

```

Macro UPCA_SIZE

UPCA_SIZE — This macro defines the size of an UPC-A.

Synopsis

```
// In header: <boost/checks/upc.hpp>
```

```
UPCA_SIZE
```

Macro UPCA_SIZE_WITHOUT_CHECKDIGIT

UPCA_SIZE_WITHOUT_CHECKDIGIT — This macro defines the size of an UPC-A without its check digit.

Synopsis

```
// In header: <boost/checks/upc.hpp>
```

```
UPCA_SIZE_WITHOUT_CHECKDIGIT
```

Header <boost/checks/verhoeff.hpp>

This file provides tools to compute a Verhoeff checksum.

See http://en.wikipedia.org/wiki/Verhoeff_algorithm

```

namespace boost {
    namespace checks {
        template<unsigned int number_of_virtual_value_skipped = 0>
        class verhoeff_algorithm;

        typedef verhoeff_algorithm< 0 > verhoeff_check_algorithm; // This is the type of the Ver-
        hoeff algorithm for validating a check digit.
        typedef verhoeff_algorithm< 1 > verhoeff_compute_algorithm; // This is the type of the Ver-
        hoeff algorithm for computing a check digit.
        typedef boost::checks::rightmost verhoeff_iteration_sense; // This is the sense of the Ver-
        hoeff sequence iteration.
    }
}

```

Class template verhoeff_algorithm

boost::checks::verhoeff_algorithm — This class can be used to compute or validate checksum with the Verhoeff algorithm.

Synopsis

```
// In header: <boost/checks/verhoeff.hpp>

template<unsigned int number_of_virtual_value_skipped = 0>
class verhoeff_algorithm : public boost::checks::basic_check_algorithm< verhoeff_iteration_sense, ↓
number_of_virtual_value_skipped >
{
public:

    // public static functions
    template<typename checkdigit> static checkdigit compute_checkdigit(int);
    static checkdigits_iter compute_multicheckdigit(int, checkdigits_iter);
    static void filter_valid_value_with_pos(const unsigned int,
                                           const unsigned int);
    static void operate_on_valid_value(const int, const unsigned int, int &);
    static int translate_to_valid_value(const value &, const unsigned int);
    static bool validate_checksum(int);
};
```

Description

<varlistentry>Template Parameters:

number_of_virtu-
al_value_skipped

Help functions to provide same behavior on sequence with and without check digits. No "real" value in the sequence will be skipped.

</varlistentry>

verhoeff_algorithm public static functions

1.

```
template<typename checkdigit>
static checkdigit compute_checkdigit(int checksum);
```

Compute the check digit with the Verhoeff inverse table.

Parameters: checksum is the checksum used to extract the check digit.

Template Parameters: checkdigit is the type of the check digit desired.

Returns: The Verhoeff check digit of checksum.

Throws: [boost::checks::translation_exception](#) if the check digit cannot be translated into the checkdigit type.

2.

```
static checkdigits_iter
compute_multicheckdigit(int checksum, checkdigits_iter checkdigits);
```

Compute the check digit(s) of a sequence.

This function should be overloaded if you want your algorithm to compute more than one check digit (through it works for just one check digit too).

Parameters: checkdigits is the iterator with which the check digit(s) will be written.

checksum is the checksum used to extract the check digit(s).

Requires: checkdigits must be a valid initialized iterator.

Returns: checkdigits.

[illegible]

Filtering of a valid value according to its position.

This function should be overloaded if you want to filter the values with their positions.

Parameters:	<code>current_valid_value</code>	is the current valid value analysed.
	<code>current_value_position</code>	is the position (above the valid values) of the current value analysed ($0 \leq \text{valid_value_counter} < n$).

Postconditions: Do nothing.

```
4. static void operate_on_valid_value(const int current_valid_value,
                                     const unsigned int valid_value_counter,
                                     int & checksum);
```

Compute the Verhoeff scheme on the checksum with the current valid value.

This function use the classic table d and p of the Verhoeff algorithm.

Parameters:	checksum	is the current checksum.
	current_valid_value	is the current valid value analysed.
	valid_value_counter	is the number of valid value already counted (the current value is not included).
		This is also the position (above the valid values) of the current value analysed ($0 \leq \text{valid_value_counter} < n$).

Postconditions: checksum is equal to the new computed checksum.

[illegible]

translate a value of the sequence into an integer valid value.

Parameters:	<code>current_value</code>	is the current value analysed in the sequence that must be translated.
	<code>valid_value_counter</code>	is the number of valid value(s) already counted (the current value is not included). This is also the position (beyond the valid values) of the current value analysed ($0 \leq \text{valid_value_counter} < n$).

Returns: the translation of the current value in the range [0..9].

Throws: [boost::checks::translation_exception](#) is thrown if the translation of `current_value` failed.

This will automatically throw if the value is not a digit ($0 \leq i < 11$).

```
6. static bool validate_checksum(int checksum);
```

Validate the Verhoeff checksum.

Parameters: checksum is the checksum to validate.

Returns: true if the checksum is correct, false otherwise.

Header **<boost/checks/visa.hpp>**

This file provides tools to compute and validate a Visa credit card number.

```
VISA_SIZE
VISA_SIZE WITHOUT CHECKDIGIT
```

```

namespace boost {
    namespace checks {
        template<unsigned int number_of_virtual_value_skipped = 0>
            class visa_algorithm;

        typedef visa_algorithm< 0 > visa_check_algorithm; // This is the type of the Visa algorithm for validating a check digit.
        typedef visa_algorithm< 1 > visa_compute_algorithm; // This is the type of the Visa algorithm for computing a check digit.
    }
}

```

Class template visa_algorithm

boost::checks::visa_algorithm — This class can be used to compute or validate checksum with the Luhn algorithm, but filter following the Visa pattern.

Synopsis

```

// In header: <boost/checks/visa.hpp>

template<unsigned int number_of_virtual_value_skipped = 0>
class visa_algorithm :
    public boost::checks::luhn_algorithm< number_of_virtual_value_skipped >
{
public:

    // public static functions
    static checkdigit compute_checkdigit(int);
    static checkdigits_iter compute_multicheckdigit(int, checkdigits_iter);
    static void filter_valid_value_with_pos(const unsigned int,
                                           const unsigned int);
    static void operate_on_valid_value(const int, const unsigned int, int &);
    static int translate_to_valid_value(const value &, const unsigned int);
    static bool validate_checksum(int);
};

```

Description

<varlistentry>Template Parameters:

number_of_virtual_value_skipped

Helper functions to provide same behavior on a sequence with and without check digits. No "real" value in the sequence will be skipped.

visa_algorithm public static functions

1.

```
static checkdigit compute_checkdigit(int checksum);
```

Compute the check digit with a simple modulus 10.

Parameters: checksum is the checksum used to extract the check digit.

Returns: The modulus 10 check digit of checksum.

Throws: boost::checks::translation_exception if the check digit cannot be translated into the checkdigit type.

2.

```
static checkdigits_iter
compute_multicheckdigit(int checksum, checkdigits_iter checkdigits);
```

Compute the check digit(s) of a sequence.

This function should be overloaded if you want your algorithm to compute more than one check digit (through it works for just one check digit too).

Parameters: `checkdigits` is the iterator with which the check digit(s) will be written.
 `checksum` is the checksum used to extract the check digit(s).
 Requires: `checkdigits` must be a valid initialized iterator.
 Returns: `checkdigits`.

3.

```
static void filter_valid_value_with_pos(const unsigned int current_valid_value,
                                     const unsigned int current_value_position);
```

Verify that a number matches the Visa pattern.

This function use the macro `VISA_SIZE` to find the real position from left to right.

Parameters: `current_valid_value` is the current valid value analysed.
 `current_value_position` is the number of valid value already counted (the current value is not included).
 This is also the position (above the valid values) of the current value analysed ($0 \leq \text{valid_value_counter} < n$).
 Throws: `std::invalid_argument` if the first character is not equal to 4. The exception contains a descriptive message of what was expected.

4.

```
static void operate_on_valid_value(const int current_valid_value,
                                  const unsigned int valid_value_counter,
                                  int & checksum);
```

Compute the Luhn algorithm operation on the checksum.

This function become obsolete if you don't use `luhn_weight`. It is using operator "<<" to make internal multiplication.

Parameters: `checksum` is the current checksum.
 `current_valid_value` is the current valid value analysed.
 `valid_value_counter` is the number of valid value already counted (the current value is not included).
 This is also the position (above the valid values) of the current value analysed ($0 \leq \text{valid_value_counter} < n$).
 Postconditions: `checksum` is equal to the new computed checksum.

5.

```
static int translate_to_valid_value(const value & current_value,
                                   const unsigned int valid_value_counter);
```

translate a value of the sequence into an integer valid value.

Parameters: `current_value` is the current value analysed in the sequence that must be translated.
 `valid_value_counter` is the number of valid value(s) already counted (the current value is not included).
 This is also the position (beyond the valid values) of the current value analysed ($0 \leq \text{valid_value_counter} < n$).
 Returns: the translation of the current value in the range [0..9].
 Throws: `boost::checks::translation_exception` is thrown if the translation of `current_value` failed.
 This will automatically throw if the value is not a digit ($0 \leq i < 11$).

6.

```
static bool validate_checksum(int checksum);
```

Validate a checksum with a simple modulus 10.

Parameters: `checksum` is the checksum to validate.

Returns: true if the checksum is correct, false otherwise.

Macro VISA_SIZE

VISA_SIZE — This macro defines the size of a Visa number (16).

Synopsis

```
// In header: <boost/checks/visa.hpp>

VISA_SIZE
```

Macro VISA_SIZE_WITHOUT_CHECKDIGIT

VISA_SIZE_WITHOUT_CHECKDIGIT — This macro defines the size of a Visa number without its check digit (15).

Synopsis

```
// In header: <boost/checks/visa.hpp>

VISA_SIZE_WITHOUT_CHECKDIGIT
```

Header <boost/checks/weight.hpp>

Provides a template overridden struct to encapsulate a compile-time weight sequence.

```
_WEIGHT_factory(z, weight_size, unused)
BOOST_CHECK_LIMIT_WEIGHTS
```

```
namespace boost {
  namespace checks {
    template<BOOST_PP_ENUM_BINARY_PARAMS(BOOST_CHECK_LIMIT_WEIGHTS, int weight_value,=0 BOOST_PP_INC)
    TERCEPT> >
      class weight;
  }
}
```

Class template weight

boost::checks::weight — The weight metafunction encapsulate 0 to BOOST_CHECK_LIMIT_WEIGHTS weights.

Synopsis

```
// In header: <boost/checks/weight.hpp>

template<BOOST_PP_ENUM_BINARY_PARAMS(BOOST_CHECK_LIMIT_WEIGHTS, int weight_value,=0 BOOST_PP_IN_
TERCEPT) >
class weight {
public:

    // public static functions
    static int weight_associated_with_pos(const unsigned int);
};
```

Description

There are BOOST_CHECK_LIMIT_WEIGHTS partial specialisations of this class.

weight public static functions

1. `static int weight_associated_with_pos(const unsigned int value_pos);`

Get the weight at the current value position.

Parameters: value_pos is the position of the current value. (0 <= value_pos < n).
Returns: The weight value at the position value_pos.

Macro _WEIGHT_factory

_WEIGHT_factory

Synopsis

```
// In header: <boost/checks/weight.hpp>

_WEIGHT_factory(z, weight_size, unused)
```

Macro BOOST_CHECK_LIMIT_WEIGHTS

BOOST_CHECK_LIMIT_WEIGHTS — The BOOST_CHECK_LIMIT_WEIGHTS macro defines the maximum number of weights accepted by the library.

Synopsis

```
// In header: <boost/checks/weight.hpp>

BOOST_CHECK_LIMIT_WEIGHTS
```

Description

This macro expands to 100. For compile-time saving, you can decrease it if the algorithm(s) used have a lower weight size sequence. A contrario, you can increase it till 236 (see Boost.Preprocessor for more details about this limit.)

Header <boost/checks/weighted_sum.hpp>

This file provides tools to compute weighted sum.

```
namespace boost {
  namespace checks {
    template<typename weight, typename iteration_sense,
             unsigned int number_of_virtual_value_skipped = 0>
    struct weighted_sum_algorithm;
  }
}
```

Struct template weighted_sum_algorithm

boost::checks::weighted_sum_algorithm — This class permits to add to the current checksum the weight multiplied by the current value.

Synopsis

```
// In header: <boost/checks/weighted_sum.hpp>

template<typename weight, typename iteration_sense,
         unsigned int number_of_virtual_value_skipped = 0>
struct weighted_sum_algorithm :
    public boost::checks::basic_check_algorithm< iteration_sense >
{
    // public static functions
    static checkdigit compute_checkdigit(int);
    static checkdigits_iter compute_multicheckdigit(int, checkdigits_iter);
    static void filter_valid_value_with_pos(const unsigned int,
                                           const unsigned int);
    static void operate_on_valid_value(const int, const unsigned int, int &);
    static int translate_to_valid_value(const value &, const unsigned int);
    static bool validate_checksum(int);
};
```

Description

<varlistentry>Template Parameters:

iteration_sense	must meet the iteration_sense concept requirements.
number_of_virtual_value_skipped	Helper function to provide same behavior on sequence with and without checkdigits. No "real" value in the sequence will be skipped.
weight	must meet the weight concept requirements.

weighted_sum_algorithm public static functions

1. `static checkdigit compute_checkdigit(int checksum);`

Compute the check digit of a sequence.

This function should be overloaded if you want to compute the check digit of a sequence.

Parameters: checksum is the checksum used to extract the check digit.

Requires: The type checkdigit must provides the default initialisation feature.

Returns: default initialized value of checkdigit.

```
2. static checkdigits_iter
   compute_multicheckdigit(int checksum, checkdigits_iter checkdigits);
```

Compute the check digit(s) of a sequence.

This function should be overloaded if you want your algorithm to compute more than one check digit (through it works for just one check digit too).

Parameters: `checkdigits` is the iterator with which the check digit(s) will be written.

checksum is the checksum used to extract the check digit(s).

Requires: checkdigits must be a valid initialized iterator.

Returns: checkdigits.

[illegible]

Filtering of a valid value according to its position.

This function should be overloaded if you want to filter the values with their positions.

Parameters: `current_valid_value` is the current valid value analysed.

`current_value_position` is the position (above the valid values) of the current value analysed (0 <= `valid_value_counter` < n).

Postconditions: Do nothing.

```
4. static void operate_on_valid_value(const int current_valid_value,
                                     const unsigned int valid_value_counter,
                                     int & checksum);
```

Compute an operation on the checksum with the current valid value.

Parameters: checksum is the current checksum.

`current_valid_value` is the current valid value analysed.

`valid_value_counter` is the number of valid values already counted (the current value is not included).

This is also the position (above the valid values) of the current value analysed ($0 \leq \text{valid_value_counter} < n$).

Postconditions: The current weight multiplied by the current value is added to the checksum.

[illegible]

translate a value of the sequence into an integer valid value.

Parameters: `current_value` is the current value analysed in the sequence that must be translated.

`valid_value_counter` is the number of valid value(s) already counted (the current value is not included).

This is also the position (beyond the valid values) of the current value analysed ($0 \leq \text{valid_value_counter} < n$).

Returns: the translation of the current value in the range [0..9].

Throws: [boost::checks::translation_exception](#) is thrown if the translation of `current_value` failed.

This will automatically throw if the value is not a digit ($0 \leq i < 11$).

```
6. static bool validate_checksum(int checksum);
```

Validate the checksum.

This function should be overloaded if you want to check a sequence.

Parameters: checksum is the checksum to validate.
Returns: true always (unless overloaded to check a sequence).

Class Index

Symbols

A

amex_algorithm

Header < boost/checks/amex.hpp >, 19

B

basic_check_algorithm

Header < boost/checks/basic_check_algorithm.hpp >, 23

Header < boost/checks/verhoeff.hpp >, 69

Header < boost/checks/weighted_sum.hpp >, 75

C

checkdigit

Header < boost/checks/basic_check_algorithm.hpp >, 23, 25

I

isbn13_algorithm

Header < boost/checks/isbn.hpp >, 46

iterator

Header < boost/checks/iteration_sense.hpp >, 49, 50, 51

L

leftmost

Header < boost/checks/iteration_sense.hpp >, 49

luhn_algorithm

Header < boost/checks/amex.hpp >, 19

Header < boost/checks/luhn.hpp >, 54

Header < boost/checks/mastercard.hpp >, 56

Header < boost/checks/visa.hpp >, 71

M

make_mod97_weight

Header < boost/checks/modulus97.hpp >, 64

mastercard_algorithm

Header < boost/checks/mastercard.hpp >, 56

modulus10_algorithm

Header < boost/checks/isbn.hpp >, 46

Header < boost/checks/luhn.hpp >, 54

Header < boost/checks/modulus10.hpp >, 59

modulus11_algorithm

Header < boost/checks/modulus11.hpp >, 61

modulus97_algorithm

Header < boost/checks/modulus97.hpp >, 65

N

no_null_size_contract

Header < boost/checks/limits.hpp >, 52

R

rightmost

Header < boost/checks/iteration_sense.hpp >, 50

S

strict_size_contract

Header < boost/checks/limits.hpp >, 52

T

translation_exception

Header < boost/checks/translation_exception.hpp >, 67

V

verhoeff_algorithm

Header < boost/checks/verhoeff.hpp >, 69

visa_algorithm

Header < boost/checks/visa.hpp >, 71

W

weight

Header < boost/checks/weight.hpp >, 74

weighted_sum_algorithm

Header < boost/checks/modulus10.hpp >, 59

Header < boost/checks/modulus11.hpp >, 61

Header < boost/checks/modulus97.hpp >, 65

Header < boost/checks/weighted_sum.hpp >, 75

Typedef Index

Symbols

A

amex_check_algorithm

Header < boost/checks/amex.hpp >, 19

amex_compute_algorithm

Header < boost/checks/amex.hpp >, 19

E

ean_check_algorithm

Header < boost/checks/ean.hpp >, 44

ean_compute_algorithm

Header < boost/checks/ean.hpp >, 44

ean_sense

Header < boost/checks/ean.hpp >, 44

ean_weight

Header < boost/checks/ean.hpp >, 44

I

initial_mod97_weight

Header < boost/checks/modulus97.hpp >, 63

isbn13_check_algorithm

Header < boost/checks/isbn.hpp >, 46

isbn13_compute_algorithm

Header < boost/checks/isbn.hpp >, 46

iteration_sense

Header < boost/checks/basic_check_algorithm.hpp >, 23

L

luhn_check_algorithm

Header < boost/checks/luhn.hpp >, 53

luhn_compute_algorithm

Header < boost/checks/luhn.hpp >, 53

luhn_sense

Header < boost/checks/luhn.hpp >, 53

luhn_weight

Header < boost/checks/luhn.hpp >, 53

M

mastercard_check_algorithm

Header < boost/checks/mastercard.hpp >, 55

mastercard_compute_algorithm

Header < boost/checks/mastercard.hpp >, 55

mod11_check_algorithm

Header < boost/checks/modulus11.hpp >, 60

mod11_compute_algorithm

Header < boost/checks/modulus11.hpp >, 60

mod11_sense

Header < boost/checks/modulus11.hpp >, 60

mod11_weight

Header < boost/checks/modulus11.hpp >, 60

mod97_10_check_algorithm

Header < boost/checks/modulus97.hpp >, 63

mod97_10_compute_algorithm

Header < boost/checks/modulus97.hpp >, 63

mod97_10_sense

Header < boost/checks/modulus97.hpp >, 63

mod97_10_weight

Header < boost/checks/modulus97.hpp >, 63

N

next

Header < boost/checks/modulus97.hpp >, 64

T

type

Header < boost/checks/basic_check_algorithm.hpp >, 23, 25

Header < boost/checks/iteration_sense.hpp >, 49, 50, 51

Header < boost/checks/modulus97.hpp >, 64

U

upc_check_algorithm

Header < boost/checks/upc.hpp >, 67

upc_compute_algorithm

Header < boost/checks/upc.hpp >, 67

upc_sense

Header < boost/checks/upc.hpp >, 67

upc_weight

Header < boost/checks/upc.hpp >, 67

V

verhoeff_check_algorithm

Header < boost/checks/verhoeff.hpp >, 68

verhoeff_compute_algorithm

Header < boost/checks/verhoeff.hpp >, 68

verhoeff_iteration_sense

Header < boost/checks/verhoeff.hpp >, 68

visa_check_algorithm

Header < boost/checks/visa.hpp >, 70

visa_compute_algorithm

Header < boost/checks/visa.hpp >, 70

Function Index

Symbols

B

begin

Header < boost/checks/iteration_sense.hpp >, 49, 50

C

check_amex

Header < boost/checks/amex.hpp >, 19, 21

check_ean13

Header < boost/checks/checks_fwd.hpp >, 30, 32

check_ean8

Header < boost/checks/checks_fwd.hpp >, 30, 32

check_isbn10

Header < boost/checks/checks_fwd.hpp >, 30, 33

check_isbn13

Header < boost/checks/checks_fwd.hpp >, 30, 33

check_luhn

Header < boost/checks/checks_fwd.hpp >, 30, 33, 34

check_mastercard

Header < boost/checks/checks_fwd.hpp >, 30, 34

check_mod97_10

Header < boost/checks/checks_fwd.hpp >, 30, 35

check_modulus11

Header < boost/checks/checks_fwd.hpp >, 30, 35, 36

check_sequence

Header < boost/checks/basic_checks.hpp >, 25, 26, 27

check_upca

Header < boost/checks/checks_fwd.hpp >, 30, 36

check_verhoeff

Header < boost/checks/checks_fwd.hpp >, 30, 37

check_visa

Header < boost/checks/checks_fwd.hpp >, 30, 37

compute_amex

Header < boost/checks/amex.hpp >, 19, 21

compute_checkdigit

Extending the library, 9

Header < boost/checks/amex.hpp >, 19, 20

Header < boost/checks/basic_checks.hpp >, 25, 27, 28

Header < boost/checks/basic_check_algorithm.hpp >, 23

Header < boost/checks/isbn.hpp >, 46, 47

Header < boost/checks/luhn.hpp >, 54
Header < boost/checks/mastercard.hpp >, 56
Header < boost/checks/modulus10.hpp >, 59
Header < boost/checks/modulus11.hpp >, 61, 62
Header < boost/checks/modulus97.hpp >, 65
Header < boost/checks/verhoeff.hpp >, 69
Header < boost/checks/visa.hpp >, 71
Header < boost/checks/weighted_sum.hpp >, 75
compute_checksum
Header < boost/checks/basic_checks.hpp >, 25, 28, 29
compute_ean13
Header < boost/checks/checks_fwd.hpp >, 30, 38
compute_ean8
Header < boost/checks/checks_fwd.hpp >, 30, 38
compute_isbn10
Header < boost/checks/checks_fwd.hpp >, 30, 39
compute_isbn13
Header < boost/checks/checks_fwd.hpp >, 30, 39
compute_luhn
Header < boost/checks/checks_fwd.hpp >, 30, 39, 40
compute_mastercard
Header < boost/checks/checks_fwd.hpp >, 30, 40
compute_mod97_10
Header < boost/checks/checks_fwd.hpp >, 30, 41
compute_modulus11
Header < boost/checks/checks_fwd.hpp >, 30, 42
compute_multicheckdigit
Header < boost/checks/amex.hpp >, 19, 20
Header < boost/checks/basic_checks.hpp >, 25, 29, 30
Header < boost/checks/basic_check_algorithm.hpp >, 23
Header < boost/checks/isbn.hpp >, 46, 47
Header < boost/checks/luhn.hpp >, 54
Header < boost/checks/mastercard.hpp >, 56
Header < boost/checks/modulus10.hpp >, 59
Header < boost/checks/modulus11.hpp >, 61, 62
Header < boost/checks/modulus97.hpp >, 65
Header < boost/checks/verhoeff.hpp >, 69
Header < boost/checks/visa.hpp >, 71
Header < boost/checks/weighted_sum.hpp >, 75, 76
compute_upca
Header < boost/checks/checks_fwd.hpp >, 30, 43
compute_verhoeff
Header < boost/checks/checks_fwd.hpp >, 30, 43, 44
compute_visa
Header < boost/checks/checks_fwd.hpp >, 30, 44

E

end

Header < boost/checks/iteration_sense.hpp >, 49, 50, 51

F

filter_valid_value_with_pos

Header < boost/checks/amex.hpp >, 19, 20
Header < boost/checks/basic_check_algorithm.hpp >, 23, 24
Header < boost/checks/isbn.hpp >, 46, 47
Header < boost/checks/luhn.hpp >, 54
Header < boost/checks/mastercard.hpp >, 56, 57

Header < boost/checks/modulus10.hpp >, 59
Header < boost/checks/modulus11.hpp >, 61, 62
Header < boost/checks/modulus97.hpp >, 65, 66
Header < boost/checks/verhoeff.hpp >, 69, 70
Header < boost/checks/visa.hpp >, 71, 72
Header < boost/checks/weighted_sum.hpp >, 75, 76

O

operate_on_valid_value

Extending the library, 9

Header < boost/checks/amex.hpp >, 19, 20
Header < boost/checks/basic_check_algorithm.hpp >, 23, 24
Header < boost/checks/isbn.hpp >, 46, 47
Header < boost/checks/luhn.hpp >, 54, 55
Header < boost/checks/mastercard.hpp >, 56, 57
Header < boost/checks/modulus10.hpp >, 59, 60
Header < boost/checks/modulus11.hpp >, 61, 62
Header < boost/checks/modulus97.hpp >, 65, 66
Header < boost/checks/verhoeff.hpp >, 69, 70
Header < boost/checks/visa.hpp >, 71, 72
Header < boost/checks/weighted_sum.hpp >, 75, 76

R

reach_one_past_the_end

Header < boost/checks/limits.hpp >, 52, 53

respect_size_contract

Header < boost/checks/limits.hpp >, 52, 53

T

translate_checkdigit

Header < boost/checks/modulus11.hpp >, 61, 63

translate_to_valid_value

Extending the library, 9

Header < boost/checks/amex.hpp >, 19, 21
Header < boost/checks/basic_check_algorithm.hpp >, 23, 24
Header < boost/checks/isbn.hpp >, 46, 47
Header < boost/checks/luhn.hpp >, 54, 55
Header < boost/checks/mastercard.hpp >, 56, 57
Header < boost/checks/modulus10.hpp >, 59, 60
Header < boost/checks/modulus11.hpp >, 61, 62
Header < boost/checks/modulus97.hpp >, 65, 66
Header < boost/checks/verhoeff.hpp >, 69, 70
Header < boost/checks/visa.hpp >, 71, 72
Header < boost/checks/weighted_sum.hpp >, 75, 76

V

validate_checksum

Header < boost/checks/amex.hpp >, 19, 21
Header < boost/checks/basic_check_algorithm.hpp >, 23, 24
Header < boost/checks/isbn.hpp >, 46, 48
Header < boost/checks/luhn.hpp >, 54, 55
Header < boost/checks/mastercard.hpp >, 56, 57
Header < boost/checks/modulus10.hpp >, 59, 60
Header < boost/checks/modulus11.hpp >, 61, 63
Header < boost/checks/modulus97.hpp >, 65, 66
Header < boost/checks/verhoeff.hpp >, 69, 70
Header < boost/checks/visa.hpp >, 71, 72

Header < boost/checks/weighted_sum.hpp >, 75, 76

W

weight_associated_with_pos

Header < boost/checks/weight.hpp >, 74

Macro Index

Symbols

_WEIGHT_factory

Header < boost/checks/weight.hpp >, 73, 74

A

AMEX_SIZE

Header < boost/checks/amex.hpp >, 19, 20, 21, 22

AMEX_SIZE_WITHOUT_CHECKDIGIT

Header < boost/checks/amex.hpp >, 19, 22

B

BOOST_CHECK_LIMIT_WEIGHTS

Header < boost/checks/weight.hpp >, 73, 74

E

EAN13_SIZE

Header < boost/checks/checks_fwd.hpp >, 32, 33

Header < boost/checks/ean.hpp >, 44, 45

Header < boost/checks/isbn.hpp >, 47

EAN13_SIZE_WITHOUT_CHECKDIGIT

Header < boost/checks/checks_fwd.hpp >, 38, 39

Header < boost/checks/ean.hpp >, 44, 45

EAN8_SIZE

Header < boost/checks/checks_fwd.hpp >, 32

Header < boost/checks/ean.hpp >, 44, 45

EAN8_SIZE_WITHOUT_CHECKDIGIT

Header < boost/checks/checks_fwd.hpp >, 38

Header < boost/checks/ean.hpp >, 44, 45

I

ISBN10_SIZE

Header < boost/checks/checks_fwd.hpp >, 33

Header < boost/checks/isbn.hpp >, 46, 48

ISBN10_SIZE_WITHOUT_CHECKDIGIT

Header < boost/checks/checks_fwd.hpp >, 39

Header < boost/checks/isbn.hpp >, 46, 48

M

MASTERCARD_SIZE

Header < boost/checks/checks_fwd.hpp >, 34

Header < boost/checks/mastercard.hpp >, 55, 57, 58

MASTERCARD_SIZE_WITHOUT_CHECKDIGIT

Header < boost/checks/checks_fwd.hpp >, 41

Header < boost/checks/mastercard.hpp >, 55, 58

MOD97_weight_maker

Header < boost/checks/modulus97.hpp >, 63, 66, 67

N

NEXT

Header < boost/checks/modulus97.hpp >, 63, 67

U

UPCA_SIZE

Header < boost/checks/checks_fwd.hpp >, 36

Header < boost/checks/upc.hpp >, 67, 68

UPCA_SIZE_WITHOUT_CHECKDIGIT

Header < boost/checks/checks_fwd.hpp >, 43

Header < boost/checks/upc.hpp >, 67, 68

V

VISA_SIZE

Header < boost/checks/checks_fwd.hpp >, 38

Header < boost/checks/visa.hpp >, 70, 72, 73

VISA_SIZE_WITHOUT_CHECKDIGIT

Header < boost/checks/checks_fwd.hpp >, 44

Header < boost/checks/visa.hpp >, 70, 73

Index

Symbols

_WEIGHT_factory

Header < boost/checks/weight.hpp >, 73, 74

A

acknowledgements

Acknowledgements, 16

Acknowledgements

acknowledgements, 16

C++, 16

Verhoeff, 16

Alteration

C++, 15

example, 15

modulus, 15

amex_algorithm

Header < boost/checks/amex.hpp >, 19

amex_check_algorithm

Header < boost/checks/amex.hpp >, 19

amex_compute_algorithm

Header < boost/checks/amex.hpp >, 19

AMEX_SIZE

Header < boost/checks/amex.hpp >, 19, 20, 21, 22

AMEX_SIZE_WITHOUT_CHECKDIGIT

Header < boost/checks/amex.hpp >, 19, 22

and summary

C++, 16

modulus, 16

B

basic_check_algorithm

Header < boost/checks/basic_check_algorithm.hpp >, 23

Header < boost/checks/verhoeff.hpp >, 69

Header < boost/checks/weighted_sum.hpp >, 75
 begin
 Header < boost/checks/iteration_sense.hpp >, 49, 50
 book
 Header < boost/checks/isbn.hpp >, 46
 Starting with Checks, 6
 BOOST_CHECK_LIMIT_WEIGHTS
 Header < boost/checks/weight.hpp >, 73, 74

C

C++

Acknowledgements, 16
 Alteration, 15
 and summary, 16
 Checks, 1, 2, 3
 Checks Reference, 19
 Checksum algorithms, 14
 Common check algorithms, 13, 14
 Document Conventions, 4, 5
 Error catching summary, 16
 Extending the library, 9, 10
 Header < boost/checks/amex.hpp >, 19, 20, 21, 22
 Header < boost/checks/basic_checks.hpp >, 25, 26, 27, 28, 29, 30
 Header < boost/checks/basic_check_algorithm.hpp >, 22, 23, 24, 25
 Header < boost/checks/checks_fwd.hpp >, 30, 32, 33, 34, 35, 36, 37, 38, 39, 40, 41, 42, 43, 44
 Header < boost/checks/ean.hpp >, 44, 45
 Header < boost/checks/isbn.hpp >, 46, 47, 48
 Header < boost/checks/iteration_sense.hpp >, 48, 49, 50, 51
 Header < boost/checks/limits.hpp >, 51, 52, 53
 Header < boost/checks/luhn.hpp >, 53, 54, 55
 Header < boost/checks/mastercard.hpp >, 55, 56, 57, 58
 Header < boost/checks/modulus10.hpp >, 58, 59, 60
 Header < boost/checks/modulus11.hpp >, 60, 61, 62, 63
 Header < boost/checks/modulus97.hpp >, 63, 64, 65, 66, 67
 Header < boost/checks/translation_exception.hpp >, 67
 Header < boost/checks/upc.hpp >, 67, 68
 Header < boost/checks/verhoeff.hpp >, 68, 69, 70
 Header < boost/checks/visa.hpp >, 70, 71, 72, 73
 Header < boost/checks/weight.hpp >, 73, 74
 Header < boost/checks/weighted_sum.hpp >, 75, 76, 77
 History, 17
 Length, 16
 Letter to digit VIN conversion table, 9
 Modulus impact on check digit range, 14
 Preface, 3
 Rationale, 17
 References, 16, 17
 Starting with Checks, 6
 Status, 4
 Transposition, 15
 Tutorial, 6
 Type of errors, 15
 Verhoeff algorithm, 15
 Version Info, 17
 card
 Header < boost/checks/amex.hpp >, 19, 22
 Header < boost/checks/mastercard.hpp >, 55

Header < boost/checks/visa.hpp >, 70
Preface, 3
Starting with Checks, 6
checkdigit
Header < boost/checks/basic_check_algorithm.hpp >, 23, 25
Checks
C++, 1, 2, 3
index, 2
version, 1
Checks Reference
C++, 19
Checksum algorithms
C++, 14
equations, 14
example, 14
Luhn, 14
modulus, 14
Verhoeff, 14
check_amex
Header < boost/checks/amex.hpp >, 19, 21
check_ean13
Header < boost/checks/checks_fwd.hpp >, 30, 32
check_ean8
Header < boost/checks/checks_fwd.hpp >, 30, 32
check_isbn10
Header < boost/checks/checks_fwd.hpp >, 30, 33
check_isbn13
Header < boost/checks/checks_fwd.hpp >, 30, 33
check_luhn
Header < boost/checks/checks_fwd.hpp >, 30, 33, 34
check_mastercard
Header < boost/checks/checks_fwd.hpp >, 30, 34
check_mod97_10
Header < boost/checks/checks_fwd.hpp >, 30, 35
check_modulus11
Header < boost/checks/checks_fwd.hpp >, 30, 35, 36
check_sequence
Header < boost/checks/basic_checks.hpp >, 25, 26, 27
check_upca
Header < boost/checks/checks_fwd.hpp >, 30, 36
check_verhoeff
Header < boost/checks/checks_fwd.hpp >, 30, 37
check_visa
Header < boost/checks/checks_fwd.hpp >, 30, 37
Common check algorithms
C++, 13, 14
example, 13
compute_amex
Header < boost/checks/amex.hpp >, 19, 21
compute_checkdigit
Extending the library, 9
Header < boost/checks/amex.hpp >, 19, 20
Header < boost/checks/basic_checks.hpp >, 25, 27, 28
Header < boost/checks/basic_check_algorithm.hpp >, 23
Header < boost/checks/isbn.hpp >, 46, 47
Header < boost/checks/luhn.hpp >, 54
Header < boost/checks/mastercard.hpp >, 56
Header < boost/checks/modulus10.hpp >, 59

Header < boost/checks/modulus11.hpp >, 61, 62
Header < boost/checks/modulus97.hpp >, 65
Header < boost/checks/verhoeff.hpp >, 69
Header < boost/checks/visa.hpp >, 71
Header < boost/checks/weighted_sum.hpp >, 75
compute_checksum
Header < boost/checks/basic_checks.hpp >, 25, 28, 29
compute_ean13
Header < boost/checks/checks_fwd.hpp >, 30, 38
compute_ean8
Header < boost/checks/checks_fwd.hpp >, 30, 38
compute_isbn10
Header < boost/checks/checks_fwd.hpp >, 30, 39
compute_isbn13
Header < boost/checks/checks_fwd.hpp >, 30, 39
compute_luhn
Header < boost/checks/checks_fwd.hpp >, 30, 39, 40
compute_mastercard
Header < boost/checks/checks_fwd.hpp >, 30, 40
compute_mod97_10
Header < boost/checks/checks_fwd.hpp >, 30, 41
compute_modulus11
Header < boost/checks/checks_fwd.hpp >, 30, 42
compute_multicheckdigit
Header < boost/checks/amex.hpp >, 19, 20
Header < boost/checks/basic_checks.hpp >, 25, 29, 30
Header < boost/checks/basic_check_algorithm.hpp >, 23
Header < boost/checks/isbn.hpp >, 46, 47
Header < boost/checks/luhn.hpp >, 54
Header < boost/checks/mastercard.hpp >, 56
Header < boost/checks/modulus10.hpp >, 59
Header < boost/checks/modulus11.hpp >, 61, 62
Header < boost/checks/modulus97.hpp >, 65
Header < boost/checks/verhoeff.hpp >, 69
Header < boost/checks/visa.hpp >, 71
Header < boost/checks/weighted_sum.hpp >, 75, 76
compute_upca
Header < boost/checks/checks_fwd.hpp >, 30, 43
compute_verhoeff
Header < boost/checks/checks_fwd.hpp >, 30, 43, 44
compute_visa
Header < boost/checks/checks_fwd.hpp >, 30, 44
credit
Header < boost/checks/amex.hpp >, 19
Header < boost/checks/mastercard.hpp >, 55
Header < boost/checks/visa.hpp >, 70
Preface, 3
Starting with Checks, 6

D

Document Conventions

C++, 4, 5
Doxygen, 5
example, 4, 5
index, 5
italic, 5
pre-conditions, 5

snippet, 5
Doxygen
Document Conventions, 5

E

EAN13_SIZE

Header < boost/checks/checks_fwd.hpp >, 32, 33
Header < boost/checks/ean.hpp >, 44, 45
Header < boost/checks/isbn.hpp >, 47

EAN13_SIZE_WITHOUT_CHECKDIGIT

Header < boost/checks/checks_fwd.hpp >, 38, 39
Header < boost/checks/ean.hpp >, 44, 45

EAN8_SIZE

Header < boost/checks/checks_fwd.hpp >, 32
Header < boost/checks/ean.hpp >, 44, 45

EAN8_SIZE_WITHOUT_CHECKDIGIT

Header < boost/checks/checks_fwd.hpp >, 38
Header < boost/checks/ean.hpp >, 44, 45

ean_check_algorithm

Header < boost/checks/ean.hpp >, 44

ean_compute_algorithm

Header < boost/checks/ean.hpp >, 44

ean_sense

Header < boost/checks/ean.hpp >, 44

ean_weight

Header < boost/checks/ean.hpp >, 44

end

Header < boost/checks/iteration_sense.hpp >, 49, 50, 51

equations

Checksum algorithms, 14

Error catching summary

C++, 16
Luhn, 16
Verhoeff, 16

example

Alteration, 15
Checksum algorithms, 14
Common check algorithms, 13
Document Conventions, 4, 5
Extending the library, 9
Header < boost/checks/translation_exception.hpp >, 67
Starting with Checks, 6
Transposition, 15

Extending the library

C++, 9, 10
compute_checkdigit, 9
example, 9
modulus, 9, 10
operate_on_valid_value, 9
pre-conditions, 9, 10
translate_to_valid_value, 9

F

filter_valid_value_with_pos

Header < boost/checks/amex.hpp >, 19, 20
Header < boost/checks/basic_check_algorithm.hpp >, 23, 24
Header < boost/checks/isbn.hpp >, 46, 47

Header < boost/checks/luhn.hpp >, 54
Header < boost/checks/mastercard.hpp >, 56, 57
Header < boost/checks/modulus10.hpp >, 59
Header < boost/checks/modulus11.hpp >, 61, 62
Header < boost/checks/modulus97.hpp >, 65, 66
Header < boost/checks/verhoeff.hpp >, 69, 70
Header < boost/checks/visa.hpp >, 71, 72
Header < boost/checks/weighted_sum.hpp >, 75, 76

G

Gumm

References, 16

H

Header < boost/checks/amex.hpp >
 amex_algorithm, 19
 amex_check_algorithm, 19
 amex_compute_algorithm, 19
 AMEX_SIZE, 19, 20, 21, 22
 AMEX_SIZE_WITHOUT_CHECKDIGIT, 19, 22
 C++, 19, 20, 21, 22
 card, 19, 22
 check_amex, 19, 21
 compute_amex, 19, 21
 compute_checkdigit, 19, 20
 compute_multicheckdigit, 19, 20
 credit, 19
 filter_valid_value_with_pos, 19, 20
 Luhn, 19, 20
 luhn_algorithm, 19
 modulus, 20, 21
 operate_on_valid_value, 19, 20
 post-conditions, 20
 translate_to_valid_value, 19, 21
 validate_checksum, 19, 21
Header < boost/checks/basic_checks.hpp >
 C++, 25, 26, 27, 28, 29, 30
 check_sequence, 25, 26, 27
 compute_checkdigit, 25, 27, 28
 compute_checksum, 25, 28, 29
 compute_multicheckdigit, 25, 29, 30
 version, 28
Header < boost/checks/basic_check_algorithm.hpp >
 basic_check_algorithm, 23
 C++, 22, 23, 24, 25
 checkdigit, 23, 25
 compute_checkdigit, 23
 compute_multicheckdigit, 23
 filter_valid_value_with_pos, 23, 24
 iteration_sense, 23
 operate_on_valid_value, 23, 24
 post-conditions, 24
 translate_to_valid_value, 23, 24
 type, 23, 25
 validate_checksum, 23, 24
Header < boost/checks/checks_fwd.hpp >
 C++, 30, 32, 33, 34, 35, 36, 37, 38, 39, 40, 41, 42, 43, 44

check_ean13, 30, 32
check_ean8, 30, 32
check_isbn10, 30, 33
check_isbn13, 30, 33
check_luhn, 30, 33, 34
check_mastercard, 30, 34
check_mod97_10, 30, 35
check_modulus11, 30, 35, 36
check_upca, 30, 36
check_verhoeff, 30, 37
check_visa, 30, 37
compute_ean13, 30, 38
compute_ean8, 30, 38
compute_isbn10, 30, 39
compute_isbn13, 30, 39
compute_luhn, 30, 39, 40
compute_mastercard, 30, 40
compute_mod97_10, 30, 41
compute_modulus11, 30, 42
compute_upca, 30, 43
compute_verhoeff, 30, 43, 44
compute_visa, 30, 44
EAN13_SIZE, 32, 33
EAN13_SIZE_WITHOUT_CHECKDIGIT, 38, 39
EAN8_SIZE, 32
EAN8_SIZE_WITHOUT_CHECKDIGIT, 38
ISBN10_SIZE, 33
ISBN10_SIZE_WITHOUT_CHECKDIGIT, 39
Mastercard, 34, 41
MASTERCARD_SIZE, 34
MASTERCARD_SIZE_WITHOUT_CHECKDIGIT, 41
UPCA_SIZE, 36
UPCA_SIZE_WITHOUT_CHECKDIGIT, 43
VISA, 38, 44
VISA_SIZE, 38
VISA_SIZE_WITHOUT_CHECKDIGIT, 44
Header < boost/checks/ean.hpp >
C++, 44, 45
EAN13_SIZE, 44, 45
EAN13_SIZE_WITHOUT_CHECKDIGIT, 44, 45
EAN8_SIZE, 44, 45
EAN8_SIZE_WITHOUT_CHECKDIGIT, 44, 45
ean_check_algorithm, 44
ean_compute_algorithm, 44
ean_sense, 44
ean_weight, 44
Header < boost/checks/isbn.hpp >
book, 46
C++, 46, 47, 48
compute_checkdigit, 46, 47
compute_multicheckdigit, 46, 47
EAN13_SIZE, 47
filter_valid_value_with_pos, 46, 47
ISBN, 46, 47, 48
ISBN10_SIZE, 46, 48
ISBN10_SIZE_WITHOUT_CHECKDIGIT, 46, 48
isbn13_algorithm, 46
isbn13_check_algorithm, 46

isbn13_compute_algorithm, 46
modulus, 46, 47, 48
modulus10_algorithm, 46
operate_on_valid_value, 46, 47
post-conditions, 47
pre-conditions, 46
translate_to_valid_value, 46, 47
validate_checksum, 46, 48

Header < boost/checks/iteration_sense.hpp >
begin, 49, 50
C++, 48, 49, 50, 51
end, 49, 50, 51
iterator, 49, 50, 51
leftmost, 49
rightmost, 50
type, 49, 50, 51

Header < boost/checks/limits.hpp >
C++, 51, 52, 53
no_null_size_contract, 52
reach_one_past_the_end, 52, 53
respect_size_contract, 52, 53
strict_size_contract, 52

Header < boost/checks/luhn.hpp >
C++, 53, 54, 55
compute_checkdigit, 54
compute_multicheckdigit, 54
filter_valid_value_with_pos, 54
Luhn, 53, 54, 55
luhn_algorithm, 54
luhn_check_algorithm, 53
luhn_compute_algorithm, 53
luhn_sense, 53
luhn_weight, 53
modulus, 54, 55
modulus10_algorithm, 54
operate_on_valid_value, 54, 55
post-conditions, 55
translate_to_valid_value, 54, 55
validate_checksum, 54, 55

Header < boost/checks/mastercard.hpp >
C++, 55, 56, 57, 58
card, 55
compute_checkdigit, 56
compute_multicheckdigit, 56
credit, 55
filter_valid_value_with_pos, 56, 57
Luhn, 56, 57
luhn_algorithm, 56
Mastercard, 55, 56, 57, 58
mastercard_algorithm, 56
mastercard_check_algorithm, 55
mastercard_compute_algorithm, 55
MASTERCARD_SIZE, 55, 57, 58
MASTERCARD_SIZE_WITHOUT_CHECKDIGIT, 55, 58
modulus, 56, 57
operate_on_valid_value, 56, 57
post-conditions, 57
translate_to_valid_value, 56, 57

validate_checksum, 56, 57
Header < boost/checks/modulus10.hpp >
C++, 58, 59, 60
compute_checkdigit, 59
compute_multicheckdigit, 59
filter_valid_value_with_pos, 59
modulus, 58, 59, 60
modulus10_algorithm, 59
operate_on_valid_value, 59, 60
post-conditions, 60
translate_to_valid_value, 59, 60
validate_checksum, 59, 60
weighted_sum_algorithm, 59
Header < boost/checks/modulus11.hpp >
C++, 60, 61, 62, 63
compute_checkdigit, 61, 62
compute_multicheckdigit, 61, 62
filter_valid_value_with_pos, 61, 62
mod11_check_algorithm, 60
mod11_compute_algorithm, 60
mod11_sense, 60
mod11_weight, 60
modulus, 60, 61, 62, 63
modulus11_algorithm, 61
operate_on_valid_value, 61, 62
post-conditions, 62
translate_checkdigit, 61, 63
translate_to_valid_value, 61, 62
validate_checksum, 61, 63
weighted_sum_algorithm, 61
Header < boost/checks/modulus97.hpp >
C++, 63, 64, 65, 66, 67
compute_checkdigit, 65
compute_multicheckdigit, 65
filter_valid_value_with_pos, 65, 66
initial_mod97_weight, 63
make_mod97_weight, 64
mod97_10_check_algorithm, 63
mod97_10_compute_algorithm, 63
mod97_10_sense, 63
mod97_10_weight, 63
MOD97_weight_maker, 63, 66, 67
modulus, 63, 64, 65, 66
modulus97_algorithm, 65
NEXT, 63, 67
next, 64
operate_on_valid_value, 65, 66
post-conditions, 65, 66
pre-conditions, 64
translate_to_valid_value, 65, 66
type, 64
validate_checksum, 65, 66
weighted_sum_algorithm, 65
Header < boost/checks/translation_exception.hpp >
C++, 67
example, 67
translation_exception, 67
Header < boost/checks/upc.hpp >

C++, 67, 68
UPCA_SIZE, 67, 68
UPCA_SIZE_WITHOUT_CHECKDIGIT, 67, 68
upc_check_algorithm, 67
upc_compute_algorithm, 67
upc_sense, 67
upc_weight, 67
Header < boost/checks/verhoeff.hpp >
basic_check_algorithm, 69
C++, 68, 69, 70
compute_checkdigit, 69
compute_multicheckdigit, 69
filter_valid_value_with_pos, 69, 70
operate_on_valid_value, 69, 70
post-conditions, 70
translate_to_valid_value, 69, 70
validate_checksum, 69, 70
Verhoeff, 68, 69, 70
verhoeff_algorithm, 69
verhoeff_check_algorithm, 68
verhoeff_compute_algorithm, 68
verhoeff_iteration_sense, 68
Header < boost/checks/visa.hpp >
C++, 70, 71, 72, 73
card, 70
compute_checkdigit, 71
compute_multicheckdigit, 71
credit, 70
filter_valid_value_with_pos, 71, 72
Luhn, 71, 72
luhn_algorithm, 71
modulus, 71, 72
operate_on_valid_value, 71, 72
post-conditions, 72
translate_to_valid_value, 71, 72
validate_checksum, 71, 72
VISA, 70, 71, 72, 73
visa_algorithm, 71
visa_check_algorithm, 70
visa_compute_algorithm, 70
VISA_SIZE, 70, 72, 73
VISA_SIZE_WITHOUT_CHECKDIGIT, 70, 73
Header < boost/checks/weight.hpp >
BOOST_CHECK_LIMIT_WEIGHTS, 73, 74
C++, 73, 74
pre-conditions, 74
weight, 74
weight_associated_with_pos, 74
_WEIGHT_factory, 73, 74
Header < boost/checks/weighted_sum.hpp >
basic_check_algorithm, 75
C++, 75, 76, 77
compute_checkdigit, 75
compute_multicheckdigit, 75, 76
filter_valid_value_with_pos, 75, 76
operate_on_valid_value, 75, 76
post-conditions, 76
translate_to_valid_value, 75, 76

validate_checksum, 75, 76
weighted_sum_algorithm, 75

History

C++, 17

I

index

Checks, 2
Document Conventions, 5
Status, 4

initial_mod97_weight

Header < boost/checks/modulus97.hpp >, 63

ISBN

Header < boost/checks/isbn.hpp >, 46, 47, 48
Preface, 3
Rationale, 17
References, 16
Starting with Checks, 6

ISBN10_SIZE

Header < boost/checks/checks_fwd.hpp >, 33
Header < boost/checks/isbn.hpp >, 46, 48

ISBN10_SIZE_WITHOUT_CHECKDIGIT

Header < boost/checks/checks_fwd.hpp >, 39
Header < boost/checks/isbn.hpp >, 46, 48

isbn13_algorithm

Header < boost/checks/isbn.hpp >, 46

isbn13_check_algorithm

Header < boost/checks/isbn.hpp >, 46

isbn13_compute_algorithm

Header < boost/checks/isbn.hpp >, 46

ISSN

Preface, 3
Rationale, 17
References, 17

italic

Document Conventions, 5

iteration_sense

Header < boost/checks/basic_check_algorithm.hpp >, 23

iterator

Header < boost/checks/iteration_sense.hpp >, 49, 50, 51

L

leftmost

Header < boost/checks/iteration_sense.hpp >, 49

Length

C++, 16

Letter to digit VIN conversion table

C++, 9

Luhn

Checksum algorithms, 14
Error catching summary, 16
Header < boost/checks/amex.hpp >, 19, 20
Header < boost/checks/luhn.hpp >, 53, 54, 55
Header < boost/checks/mastercard.hpp >, 56, 57
Header < boost/checks/visa.hpp >, 71, 72

luhn_algorithm

Header < boost/checks/amex.hpp >, 19

Header < boost/checks/luhn.hpp >, 54
 Header < boost/checks/mastercard.hpp >, 56
 Header < boost/checks/visa.hpp >, 71
 luhn_check_algorithm
 Header < boost/checks/luhn.hpp >, 53
 luhn_compute_algorithm
 Header < boost/checks/luhn.hpp >, 53
 luhn_sense
 Header < boost/checks/luhn.hpp >, 53
 luhn_weight
 Header < boost/checks/luhn.hpp >, 53

M

make_mod97_weight
 Header < boost/checks/modulus97.hpp >, 64
 Mastercard
 Header < boost/checks/checks_fwd.hpp >, 34, 41
 Header < boost/checks/mastercard.hpp >, 55, 56, 57, 58
 Starting with Checks, 6
 mastercard_algorithm
 Header < boost/checks/mastercard.hpp >, 56
 mastercard_check_algorithm
 Header < boost/checks/mastercard.hpp >, 55
 mastercard_compute_algorithm
 Header < boost/checks/mastercard.hpp >, 55
 MASTERCARD_SIZE
 Header < boost/checks/checks_fwd.hpp >, 34
 Header < boost/checks/mastercard.hpp >, 55, 57, 58
 MASTERCARD_SIZE_WITHOUT_CHECKDIGIT
 Header < boost/checks/checks_fwd.hpp >, 41
 Header < boost/checks/mastercard.hpp >, 55, 58
 mod11_check_algorithm
 Header < boost/checks/modulus11.hpp >, 60
 mod11_compute_algorithm
 Header < boost/checks/modulus11.hpp >, 60
 mod11_sense
 Header < boost/checks/modulus11.hpp >, 60
 mod11_weight
 Header < boost/checks/modulus11.hpp >, 60
 mod97_10_check_algorithm
 Header < boost/checks/modulus97.hpp >, 63
 mod97_10_compute_algorithm
 Header < boost/checks/modulus97.hpp >, 63
 mod97_10_sense
 Header < boost/checks/modulus97.hpp >, 63
 mod97_10_weight
 Header < boost/checks/modulus97.hpp >, 63
 MOD97_weight_maker
 Header < boost/checks/modulus97.hpp >, 63, 66, 67
 modulus
 Alteration, 15
 and summary, 16
 Checksum algorithms, 14
 Extending the library, 9, 10
 Header < boost/checks/amex.hpp >, 20, 21
 Header < boost/checks/isbn.hpp >, 46, 47, 48
 Header < boost/checks/luhn.hpp >, 54, 55

Header < boost/checks/mastercard.hpp >, 56, 57
 Header < boost/checks/modulus10.hpp >, 58, 59, 60
 Header < boost/checks/modulus11.hpp >, 60, 61, 62, 63
 Header < boost/checks/modulus97.hpp >, 63, 64, 65, 66
 Header < boost/checks/visa.hpp >, 71, 72
 Modulus impact on check digit range, 14
 Preface, 3
 Modulus impact on check digit range
 C++, 14
 modulus, 14
 modulus10_algorithm
 Header < boost/checks/isbn.hpp >, 46
 Header < boost/checks/luhn.hpp >, 54
 Header < boost/checks/modulus10.hpp >, 59
 modulus11_algorithm
 Header < boost/checks/modulus11.hpp >, 61
 modulus97_algorithm
 Header < boost/checks/modulus97.hpp >, 65

N

NEXT

Header < boost/checks/modulus97.hpp >, 63, 67
 next
 Header < boost/checks/modulus97.hpp >, 64
 no_null_size_contract
 Header < boost/checks/limits.hpp >, 52

O

operate_on_valid_value

Extending the library, 9
 Header < boost/checks/amex.hpp >, 19, 20
 Header < boost/checks/basic_check_algorithm.hpp >, 23, 24
 Header < boost/checks/isbn.hpp >, 46, 47
 Header < boost/checks/luhn.hpp >, 54, 55
 Header < boost/checks/mastercard.hpp >, 56, 57
 Header < boost/checks/modulus10.hpp >, 59, 60
 Header < boost/checks/modulus11.hpp >, 61, 62
 Header < boost/checks/modulus97.hpp >, 65, 66
 Header < boost/checks/verhoeff.hpp >, 69, 70
 Header < boost/checks/visa.hpp >, 71, 72
 Header < boost/checks/weighted_sum.hpp >, 75, 76

P

post-conditions

Header < boost/checks/amex.hpp >, 20
 Header < boost/checks/basic_check_algorithm.hpp >, 24
 Header < boost/checks/isbn.hpp >, 47
 Header < boost/checks/luhn.hpp >, 55
 Header < boost/checks/mastercard.hpp >, 57
 Header < boost/checks/modulus10.hpp >, 60
 Header < boost/checks/modulus11.hpp >, 62
 Header < boost/checks/modulus97.hpp >, 65, 66
 Header < boost/checks/verhoeff.hpp >, 70
 Header < boost/checks/visa.hpp >, 72
 Header < boost/checks/weighted_sum.hpp >, 76

pre-conditions

Document Conventions, 5

Extending the library, 9, 10
Header < boost/checks/isbn.hpp >, 46
Header < boost/checks/modulus97.hpp >, 64
Header < boost/checks/weight.hpp >, 74
Preface, 3
References, 16
Verhoeff algorithm, 15

Preface

C++, 3
card, 3
credit, 3
ISBN, 3
ISSN, 3
modulus, 3
pre-conditions, 3
Verhoeff, 3
VISA, 3

Q

Quickbook

Version Info, 17

R

Rationale

C++, 17
ISBN, 17
ISSN, 17
VISA, 17

reach_one_past_the_end

Header < boost/checks/limits.hpp >, 52, 53

References

C++, 16, 17
Gumm, 16
ISBN, 16
ISSN, 17
pre-conditions, 16
Verhoeff, 16

respect_size_contract

Header < boost/checks/limits.hpp >, 52, 53

rightmost

Header < boost/checks/iteration_sense.hpp >, 50

S

snippet

Document Conventions, 5

Starting with Checks

book, 6
C++, 6
card, 6
credit, 6
example, 6
ISBN, 6
Mastercard, 6
version, 6
VISA, 6

Status

C++, 4

- index, 4
- version, 4
- strict_size_contract
 - Header < boost/checks/limits.hpp >, 52

T

- translate_checkdigit
 - Header < boost/checks/modulus11.hpp >, 61, 63
- translate_to_valid_value
 - Extending the library, 9
 - Header < boost/checks/amex.hpp >, 19, 21
 - Header < boost/checks/basic_check_algorithm.hpp >, 23, 24
 - Header < boost/checks/isbn.hpp >, 46, 47
 - Header < boost/checks/luhn.hpp >, 54, 55
 - Header < boost/checks/mastercard.hpp >, 56, 57
 - Header < boost/checks/modulus10.hpp >, 59, 60
 - Header < boost/checks/modulus11.hpp >, 61, 62
 - Header < boost/checks/modulus97.hpp >, 65, 66
 - Header < boost/checks/verhoeff.hpp >, 69, 70
 - Header < boost/checks/visa.hpp >, 71, 72
 - Header < boost/checks/weighted_sum.hpp >, 75, 76
- translation_exception
 - Header < boost/checks/translation_exception.hpp >, 67
- Transposition
 - C++, 15
 - example, 15
- Tutorial
 - C++, 6
- type
 - Header < boost/checks/basic_check_algorithm.hpp >, 23, 25
 - Header < boost/checks/iteration_sense.hpp >, 49, 50, 51
 - Header < boost/checks/modulus97.hpp >, 64
- Type of errors
 - C++, 15

U

- UPCA_SIZE
 - Header < boost/checks/checks_fwd.hpp >, 36
 - Header < boost/checks/upc.hpp >, 67, 68
- UPCA_SIZE_WITHOUT_CHECKDIGIT
 - Header < boost/checks/checks_fwd.hpp >, 43
 - Header < boost/checks/upc.hpp >, 67, 68
- upc_check_algorithm
 - Header < boost/checks/upc.hpp >, 67
- upc_compute_algorithm
 - Header < boost/checks/upc.hpp >, 67
- upc_sense
 - Header < boost/checks/upc.hpp >, 67
- upc_weight
 - Header < boost/checks/upc.hpp >, 67

V

- validate_checksum
 - Header < boost/checks/amex.hpp >, 19, 21
 - Header < boost/checks/basic_check_algorithm.hpp >, 23, 24
 - Header < boost/checks/isbn.hpp >, 46, 48
 - Header < boost/checks/luhn.hpp >, 54, 55

Header < boost/checks/mastercard.hpp >, 56, 57
Header < boost/checks/modulus10.hpp >, 59, 60
Header < boost/checks/modulus11.hpp >, 61, 63
Header < boost/checks/modulus97.hpp >, 65, 66
Header < boost/checks/verhoeff.hpp >, 69, 70
Header < boost/checks/visa.hpp >, 71, 72
Header < boost/checks/weighted_sum.hpp >, 75, 76

Verhoeff

- Acknowledgements, 16
- Checksum algorithms, 14
- Error catching summary, 16
- Header < boost/checks/verhoeff.hpp >, 68, 69, 70
- Preface, 3
- References, 16
- Verhoeff algorithm, 15

Verhoeff algorithm

- C++, 15
- pre-conditions, 15
- Verhoeff, 15

verhoeff_algorithm

- Header < boost/checks/verhoeff.hpp >, 69

verhoeff_check_algorithm

- Header < boost/checks/verhoeff.hpp >, 68

verhoeff_compute_algorithm

- Header < boost/checks/verhoeff.hpp >, 68

verhoeff_iteration_sense

- Header < boost/checks/verhoeff.hpp >, 68

version

- Checks, 1
- Header < boost/checks/basic_checks.hpp >, 28
- Starting with Checks, 6
- Status, 4
- Version Info, 17

Version Info

- C++, 17
- Quickbook, 17
- version, 17

VISA

- Header < boost/checks/checks_fwd.hpp >, 38, 44
- Header < boost/checks/visa.hpp >, 70, 71, 72, 73
- Preface, 3
- Rationale, 17
- Starting with Checks, 6

visa_algorithm

- Header < boost/checks/visa.hpp >, 71

visa_check_algorithm

- Header < boost/checks/visa.hpp >, 70

visa_compute_algorithm

- Header < boost/checks/visa.hpp >, 70

VISA_SIZE

- Header < boost/checks/checks_fwd.hpp >, 38
- Header < boost/checks/visa.hpp >, 70, 72, 73

VISA_SIZE_WITHOUT_CHECKDIGIT

- Header < boost/checks/checks_fwd.hpp >, 44
- Header < boost/checks/visa.hpp >, 70, 73

W

weight

Header < boost/checks/weight.hpp >, 74

weighted_sum_algorithm

Header < boost/checks/modulus10.hpp >, 59

Header < boost/checks/modulus11.hpp >, 61

Header < boost/checks/modulus97.hpp >, 65

Header < boost/checks/weighted_sum.hpp >, 75

weight_associated_with_pos

Header < boost/checks/weight.hpp >, 74

DRAFT