

FAIR assessment

F-UJI version 4.0.0: Please note that the F-UJI website now uses software version 4.0.0 and [metric v0.8](#). More information about the changes and their effects can be found [here \(Zenodo\)](#) and [here \(github\)](#).

Disclaimer:

The test results shown here are based on preliminary data and code which still is under development.
F-UJI is rapidly evolving and not yet available in a productive environment.

 [Click here to assess another data set](#)

Assessment Results:

Evaluated Resource:

Replication package for Validación empírica de requisitos mediante prototipo en un sistema de gestión médica ecuatoriano

<https://doi.org/10.5281/zenodo.22236373>

✓ Save

↓ {JSON}

↗ New

FAIR level: ?

moderate

Resource PID/URL: <https://doi.org/10.5281/zenodo.22236373>


DataCite support: enabled

Metric Version: 0.8

Metric Specification: <https://doi.org/10.5281/zenodo.15045911>

Software version:	4.0.0
Download assessment results:	{JSON}
Save and share assessment results:	0
Harvested metadata:	show metadata

Summary:

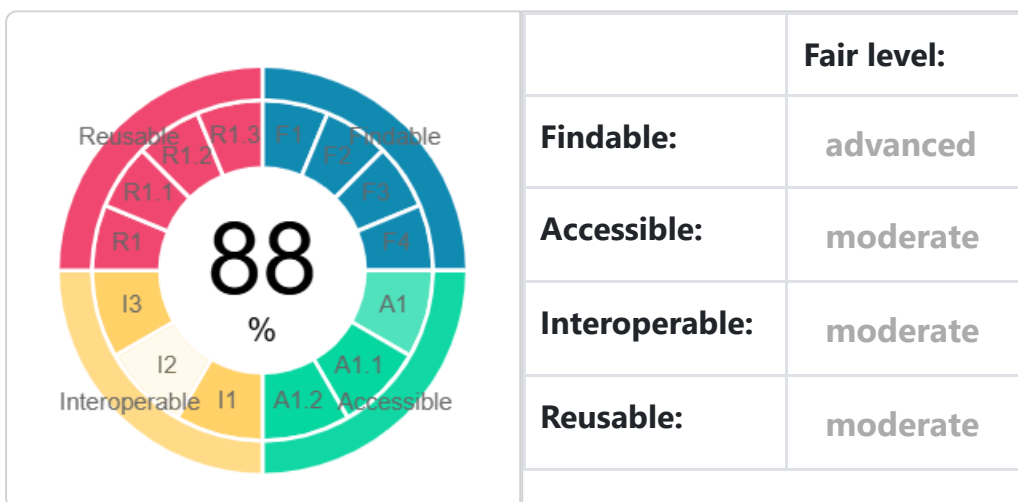

Report:

Findable

FsF-F1-01MD - Metadata and data are assigned a globally unique identifier.	☒
FsF-F1-02MD - Metadata and data are assigned a persistent identifier.	☒
FsF-F2-01M - Metadata includes descriptive core elements (creator, title, data identifier, publisher, publication date, summary and keywords) to support data findability.	☒

FsF-F3-01M - Metadata includes the identifier of the data it describes.



FsF-F4-01M - Metadata is offered in such a way that it can be registered or indexed by search engines.



Accessible

FsF-A1-01M - Metadata contains access level and access conditions of the data.



FsF-A1-02MD - Metadata and data are retrievable by their identifier



FsF-A1.1-01MD - A standardized communication protocol is used to access metadata and data.



FsF-A1.2-01MD - Metadata and data are accessible through a standardized communication protocol which supports authentication.



Interoperable

FsF-I1-01M - Metadata is represented using a formal knowledge representation language.



FsF-I2-01M - Metadata uses registered semantic resources



FsF-I3-01M - Metadata includes qualified references between the data and its related entities.



Reusable

FsF-R1-01M - Metadata specifies the content of the data.



FsF-R1.1-01M - Metadata includes license information under which data can be reused.



FsF-R1.2-01M - Metadata includes provenance information about data creation or generation.



FsF-R1.3-01M - Metadata follows a standard recommended by the target research community of the data.



FsF-R1.3-02D - Data is available in a file format recommended by the target research community.



[About](#)

[Feedback](#)

[Privacy Policy](#)

[Terms of Use](#)

[Legal Notice](#)

F-UJI is a result of the [FAIRsFAIR](#) “Fostering FAIR Data Practices In Europe” project which received funding from the European Union’s Horizon 2020 project call H2020-INFRAEOSC-2018-2020 (grant agreement 831558).