


Bimodal mixture DGP ($n = 600$, $K^* = 6$, $k^* = 7$): CRPS spans the gap; k -NN tracks each mode separately

CRPS score ($\varepsilon = 0.1$): one interval per bin



k -NN score ($k^* = 7$, $\varepsilon = 0.1$): intervals track each mode

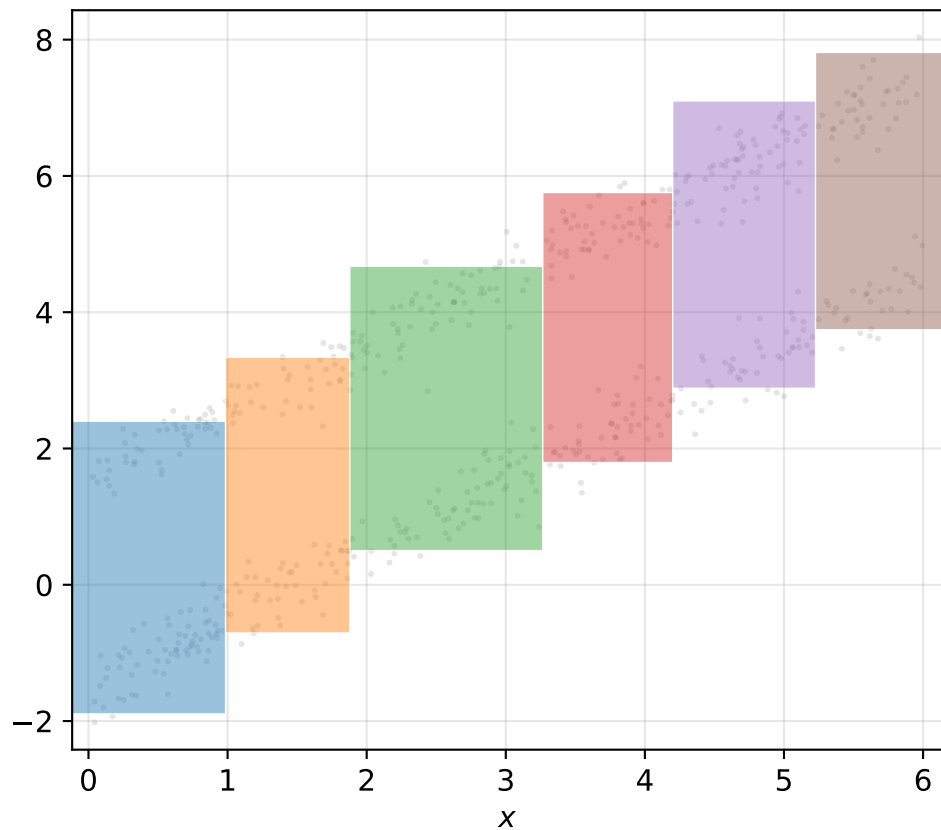