


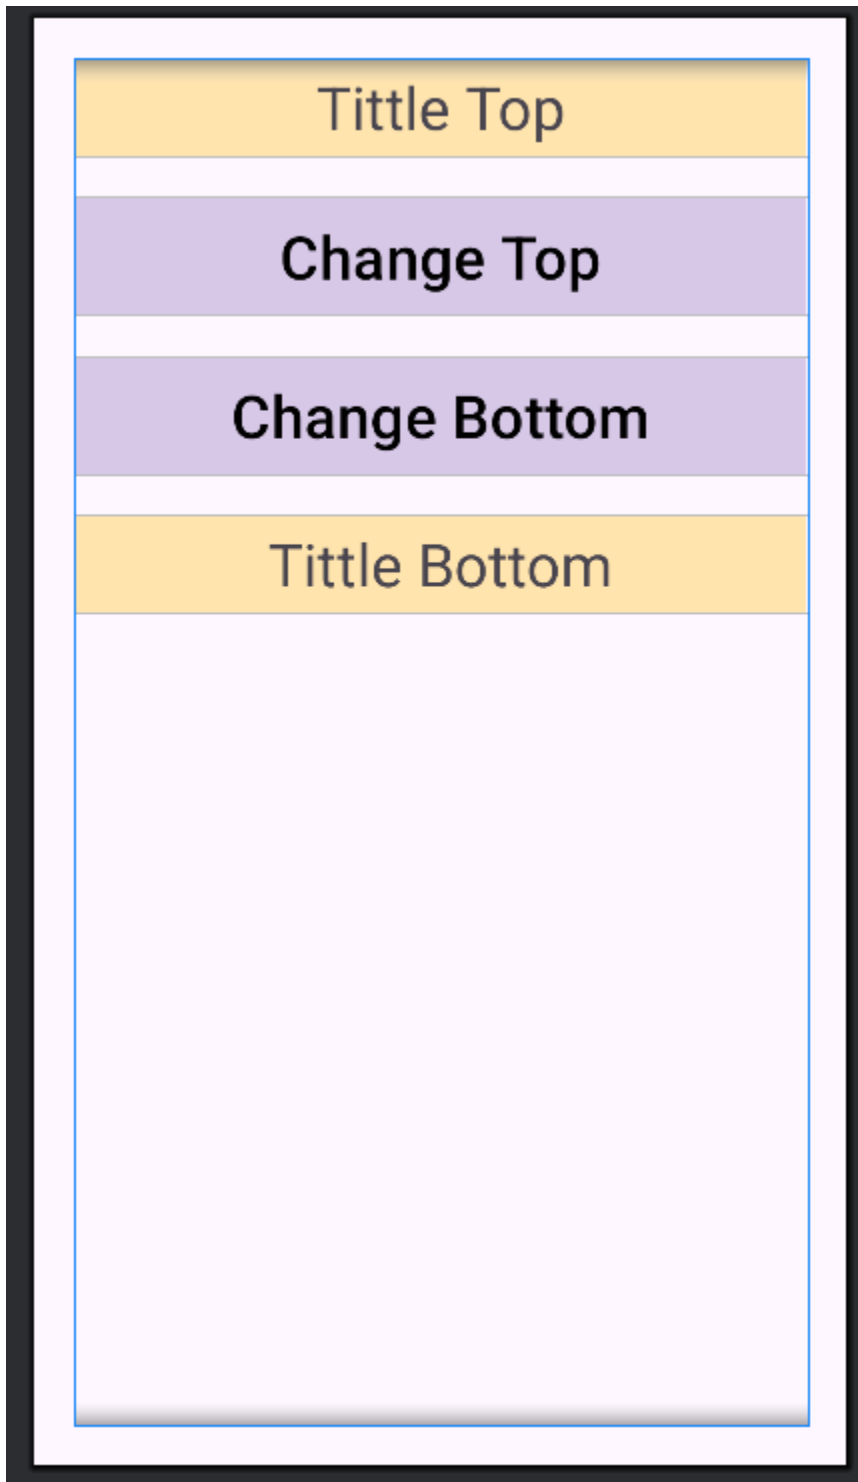

```
<LinearLayout xmlns:android="http://schemas.android.com/apk/res/android"
    xmlns:app="http://schemas.android.com/apk/res-auto"
    xmlns:tools="http://schemas.android.com/tools"
    android:layout_width="match_parent"
    android:layout_height="match_parent"
    android:orientation="vertical"
    android:layout_margin="20dp"
    tools:context=".MainActivity" >

    <TextView
        android:id="@+id/txtTittleTop"
        android:layout_width="match_parent"
```

```

        android:layout_height="50dp"
        android:gravity="center"
        android:textSize="30sp"
        android:background="#FFE4AE"
        android:text="Tittle Top" />

<Button
    android:id="@+id/btnChangeTop"
    android:layout_marginTop="20dp"
    android:layout_width="match_parent"
    android:layout_height="60dp"
    android:background="#D7C8E8"
    app:backgroundTint="@null"
    android:textColor="@color/black"
    android:textSize="30sp"
    android:text="Change Top" />

<Button
    android:id="@+id/btnChangeBottom"
    android:layout_width="match_parent"
    android:layout_height="60dp"
    android:layout_marginTop="20dp"
    android:background="#D7C8E8"
    android:text="Change Bottom"
    android:textColor="@color/black"
    android:textSize="30sp"
    app:backgroundTint="@null" />

<TextView
    android:id="@+id/txtTittleBottom"
    android:layout_width="match_parent"
    android:layout_height="50dp"
    android:layout_marginTop="20dp"
    android:gravity="center"
    android:textSize="30sp"
    android:background="#FFE4AE"
    android:text="Tittle Bottom" />

```

```
</LinearLayout>
```

MainActivity

```

public class MainActivity extends AppCompatActivity implements View.OnClickListener {
    private int[] listButtonID = { R.id.btnChangeBottom, R.id.btnChangeTop};
    TextView tvTop, tvBottom;
    public static final int REQUEST_CODE_TOP = 999;
    public static final int REQUEST_CODE_BOTTOM=998;
    public static final int RESULT_CODE_UPPER = 100;
    public static final int RESULT_CODE_LOWER= 101;
    @Override
    protected void onCreate(Bundle savedInstanceState) {
        super.onCreate(savedInstanceState);
        EdgeToEdge.enable(this);
        setContentView(R.layout.activity_main);
        init();
    }

    public void init(){
        tvTop = findViewById(R.id.txtTittleTop);
        tvBottom= findViewById(R.id.txtTittleBottom);
    }
}

```

```

        for(int id:listButtonID) {
            Button btnTemp = (Button) findViewById(id);
            btnTemp.setOnClickListener(this);
        }

    }

    public void showToast(String msg){
        Toast.makeText(getApplicationContext(),msg, Toast.LENGTH_LONG).show();
    }

    @Override
    public void onClick(View view) {
        switch (view.getId()){
            case R.id.btnChangeBottom:
                Intent intentChangeBottom = new Intent(MainActivity.this, ResultActivity.class);
                startActivityForResult(intentChangeBottom, REQUEST_CODE_BOTTOM);
                break;
            case R.id.btnChangeTop:
                Intent intentChangeTop = new Intent(MainActivity.this, ResultActivity.class);
                startActivityForResult(intentChangeTop, REQUEST_CODE_TOP);
                break;
        }
    }

    @Override
    protected void onActivityResult(int requestCode, int resultCode, @Nullable Intent data) {
        super.onActivityResult(requestCode, resultCode, data);
        String title = data.getStringExtra("yourTitle");
        if(requestCode == REQUEST_CODE_TOP) {
            if(resultCode == RESULT_CODE_UPPER)    tvTop.setText(title.toUpperCase());
            if(resultCode == RESULT_CODE_LOWER)    tvTop.setText(title.toLowerCase());
            //showToast("TOP");
        }
        if(requestCode == REQUEST_CODE_BOTTOM) {
            //showToast("BOTTOM");
            if(resultCode == RESULT_CODE_UPPER)    tvBottom.setText(title.toUpperCase());
            if(resultCode == RESULT_CODE_LOWER)    tvBottom.setText(title.toLowerCase());
        }
    }
}

```

activity_result.xml

Enter your title

Change Upper

Change Lower

```
<LinearLayout xmlns:android="http://schemas.android.com/apk/res/android"
    xmlns:app="http://schemas.android.com/apk/res-auto"
    xmlns:tools="http://schemas.android.com/tools"
    android:layout_width="match_parent"
    android:layout_height="match_parent"
    android:orientation="vertical"
    android:layout_margin="20dp"
    tools:context=".ResultActivity">
```

```

<EditText
    android:id="@+id/edtTitle"
    android:layout_width="match_parent"
    android:layout_height="50dp"

    android:ems="10"
    android:inputType="textPersonName"
    android:hint="Enter your title" />

<LinearLayout
    android:layout_width="match_parent"
    android:layout_height="match_parent"
    android:layout_marginTop="20dp"
    android:orientation="horizontal">

    <Button
        android:id="@+id/btnChangeUpper"
        android:layout_width="wrap_content"
        android:layout_height="wrap_content"
        android:layout_weight="1"
        android:layout_marginRight="10dp"
        android:text="Change Upper" />

    <Button
        android:id="@+id/btnChangeLower"
        android:layout_width="wrap_content"
        android:layout_height="wrap_content"
        android:layout_marginRight="10dp"
        android:layout_weight="1"
        android:text="Change Lower" />

</LinearLayout>
</LinearLayout>

```

ResultActivity.java

```

public class ResultActivity extends AppCompatActivity implements View.OnClickListener {
    private int[] listButtonID2 = {R.id.btnChangeLower, R.id.btnChangeUpper};
    EditText editText;
    @Override
    protected void onCreate(Bundle savedInstanceState) {
        super.onCreate(savedInstanceState);
        EdgeToEdge.enable(this);
        setContentView(R.layout.activity_result);
        init1();
    }
    public void init1() {
        editText = findViewById(R.id.edtTitle);
        for(int id:listButtonID2) {
            Button btnTemp1 = (Button) findViewById(id);
            btnTemp1.setOnClickListener(this);
        }
    }
    public void showToast(String msg){
        Toast.makeText(getApplicationContext(),msg, Toast.LENGTH_LONG).show();
    }
    @Override
    public void onClick(View view) {

```

```

Intent intent = getIntent();

if(TextUtils.isEmpty(editText.getText().toString()))
{
    showToast("Bạn chưa nhập dữ liệu");
}
else {
    switch (view.getId()) {
        case R.id.btnChangeLower:
            intent.putExtra("yourTitle", editText.getText().toString());
            setResult(MainActivity.RESULT_CODE_LOWER, intent);
            finish();
            break;
        case R.id.btnChangeUpper:
            intent.putExtra("yourTitle", editText.getText().toString());
            setResult(MainActivity.RESULT_CODE_UPPER, intent);
            finish();
            break;
    }
}
}
}

```

Cách 2:

Main Activity.java

```

public class MainActivity extends AppCompatActivity implements View.OnClickListener {
    private int[] listButtonID = { R.id.btnChangeBottom, R.id.btnChangeTop};
    TextView tvTop, tvBottom;
    public static final int REQUEST_CODE_TOP = 999;
    public static final int REQUEST_CODE_BOTTOM=998;
    public static final int RESULT_CODE_UPPER = 100;
    public static final int RESULT_CODE_LOWER= 101;

    ActivityResultLauncher<Intent> startActivityIntent = registerForActivityResult(
        new ActivityResultContracts.StartActivityForResult(), new
        ActivityResultCallback<ActivityResult>() {
            @Override
            public void onActivityResult(ActivityResult result) {
                Intent intent = result.getData();
                Log.e("ABC", String.valueOf(result.getResultCode()));

                String title = intent.getStringExtra("yourTitle");
                int requestCode = Integer.parseInt(intent.getStringExtra("requestCode"));
                if(requestCode == MainActivity.REQUEST_CODE_TOP) {
                    if(result.getResultCode() == MainActivity.RESULT_CODE_UPPER)
tvTop.setText(title.toUpperCase());
                    if(result.getResultCode() == MainActivity.RESULT_CODE_LOWER)
tvTop.setText(title.toLowerCase());
                    //showToast("TOP");
                }
                if(requestCode == MainActivity.REQUEST_CODE_BOTTOM) {
                    //showToast("BOTTOM");
                    if(result.getResultCode() == MainActivity.RESULT_CODE_UPPER)
tvBottom.setText(title.toUpperCase());
                    if(result.getResultCode() == MainActivity.RESULT_CODE_LOWER)
tvBottom.setText(title.toLowerCase());
                }
            }
        }
    );
}

```

```

    });
}

@Override
protected void onCreate(Bundle savedInstanceState) {
    super.onCreate(savedInstanceState);
    EdgeToEdge.enable(this);
    setContentView(R.layout.activity_main);
    init();
}

public void init(){
    tvTop = findViewById(R.id.txtTittleTop);
    tvBottom= findViewById(R.id.txtTittleBottom);
    for(int id:listButtonID) {
        Button btnTemp = (Button) findViewById(id);
        btnTemp.setOnClickListener(this);
    }
}

public void showToast(String msg){
    Toast.makeText(getApplicationContext(),msg, Toast.LENGTH_LONG).show();
}

@Override
public void onClick(View view) {
    switch (view.getId()){
        case R.id.btnChangeBottom:
            Intent intentChangeBottom = new Intent(MainActivity.this, ResultActivity.class);
            intentChangeBottom.putExtra("requestCode", String.valueOf(REQUEST_CODE_BOTTOM));
            startActivity(intentChangeBottom);
            break;
        case R.id.btnChangeTop:
            Intent intentChangeTop = new Intent(MainActivity.this, ResultActivity.class);
            intentChangeTop.putExtra("requestCode",String.valueOf(REQUEST_CODE_TOP));
            startActivity(intentChangeTop);
            break;
    }
}
}
}

```

ResultActivity

```

public class MainActivity extends AppCompatActivity implements View.OnClickListener {
    private int[] listButtonID = { R.id.btnChangeBottom, R.id.btnChangeTop};
    TextView tvTop, tvBottom;
    public static final int REQUEST_CODE_TOP = 999;
    public static final int REQUEST_CODE_BOTTOM=998;
    public static final int RESULT_CODE_UPPER = 100;
    public static final int RESULT_CODE_LOWER= 101;

    ActivityResultLauncher<Intent> startActivityIntent = registerForActivityResult(
        new ActivityResultContracts.StartActivityForResult(), new
        ActivityResultCallback<ActivityResult>() {
            @Override
            public void onActivityResult(ActivityResult result) {
                Intent intent = result.getData();
                Log.e("ABC", String.valueOf(result.getResultCode()));
            }
        }
    );
}

```

```

        String title = intent.getStringExtra("yourTitle");
        int requestCode = Integer.parseInt(intent.getStringExtra("requestCode"));
        if(requestCode == MainActivity.REQUEST_CODE_TOP) {
            if(result.getResultCode() == MainActivity.RESULT_CODE_UPPER)
tvTop.setText(title.toUpperCase());
            if(result.getResultCode() == MainActivity.RESULT_CODE_LOWER)
tvTop.setText(title.toLowerCase());
            //showToast("TOP");
        }
        if(requestCode == MainActivity.REQUEST_CODE_BOTTOM) {
            //showToast("BOTTOM");
            if(result.getResultCode() == MainActivity.RESULT_CODE_UPPER)
tvBottom.setText(title.toUpperCase());
            if(result.getResultCode() == MainActivity.RESULT_CODE_LOWER)
tvBottom.setText(title.toLowerCase());
        }
    }
});

@Override
protected void onCreate(Bundle savedInstanceState) {
    super.onCreate(savedInstanceState);
    EdgeToEdge.enable(this);
    setContentView(R.layout.activity_main);
    init();
}

public void init() {
    tvTop = findViewById(R.id.txtTittleTop);
    tvBottom= findViewById(R.id.txtTittleBottom);
    for(int id:listButtonID) {
        Button btnTemp = (Button) findViewById(id);
        btnTemp.setOnClickListener(this);
    }
}

public void showToast(String msg){
    Toast.makeText(getApplicationContext(),msg, Toast.LENGTH_LONG).show();
}

@Override
public void onClick(View view) {
    switch (view.getId()){
        case R.id.btnChangeBottom:
            Intent intentChangeBottom = new Intent(MainActivity.this, ResultActivity.class);
            intentChangeBottom.putExtra("requestCode", String.valueOf(REQUEST_CODE_BOTTOM));
            startActivity(intentChangeBottom);
            break;
        case R.id.btnChangeTop:
            Intent intentChangeTop = new Intent(MainActivity.this, ResultActivity.class);
            intentChangeTop.putExtra("requestCode",String.valueOf(REQUEST_CODE_TOP));
            startActivity(intentChangeTop);
            break;
    }
}
}
}

```