


al/žk fort

input array: 6, 1, 5, 2, 4, 3

pivot = 3.

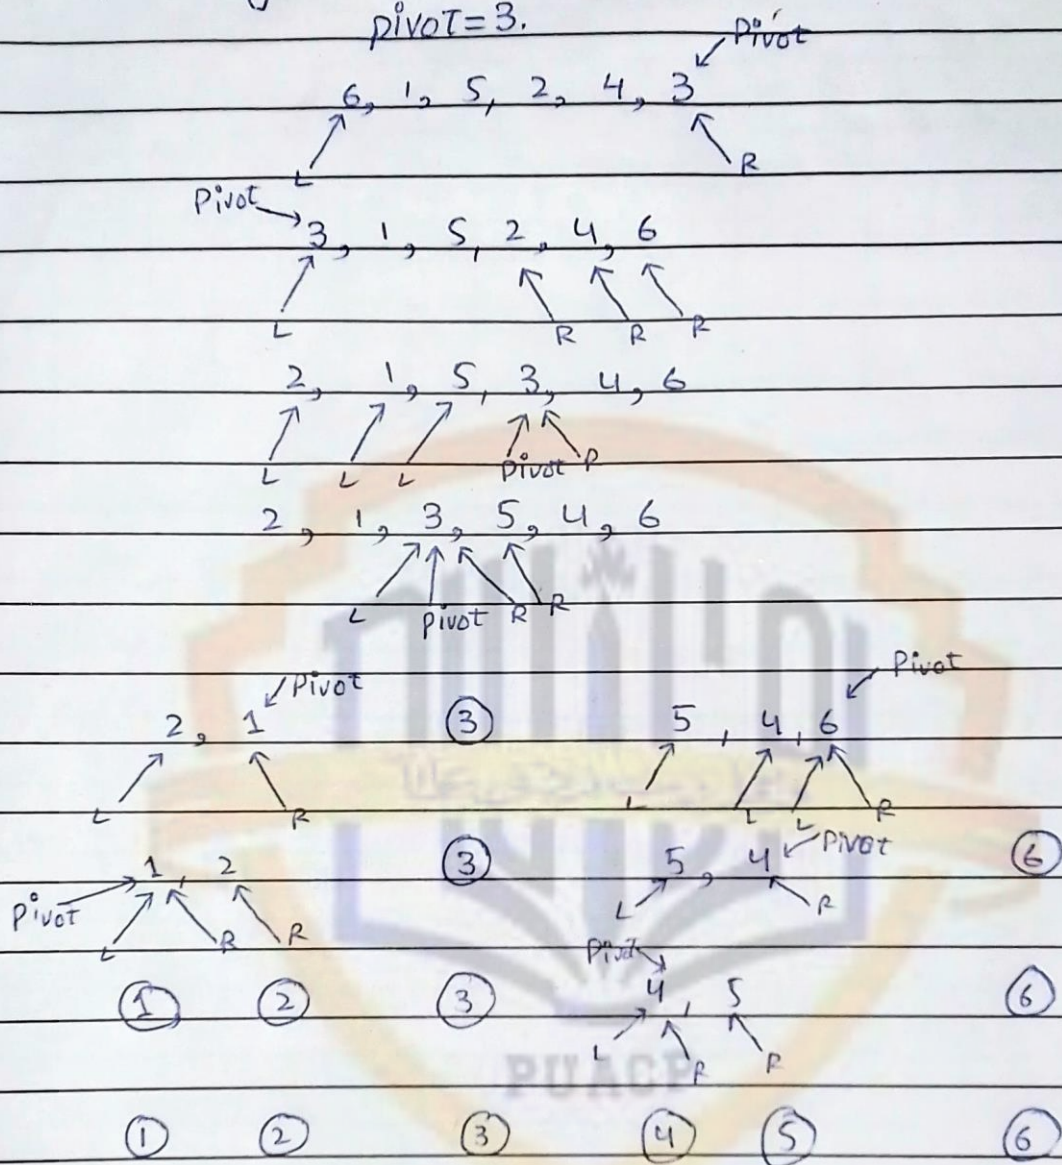

Properties:

- Divide & Conquer
- internal or inplace.
- Data Dependent
- Worst case: $O(n^2)$ for sorted array.

Best case: $O(n \log n)$ if pivot is correctly chosen.