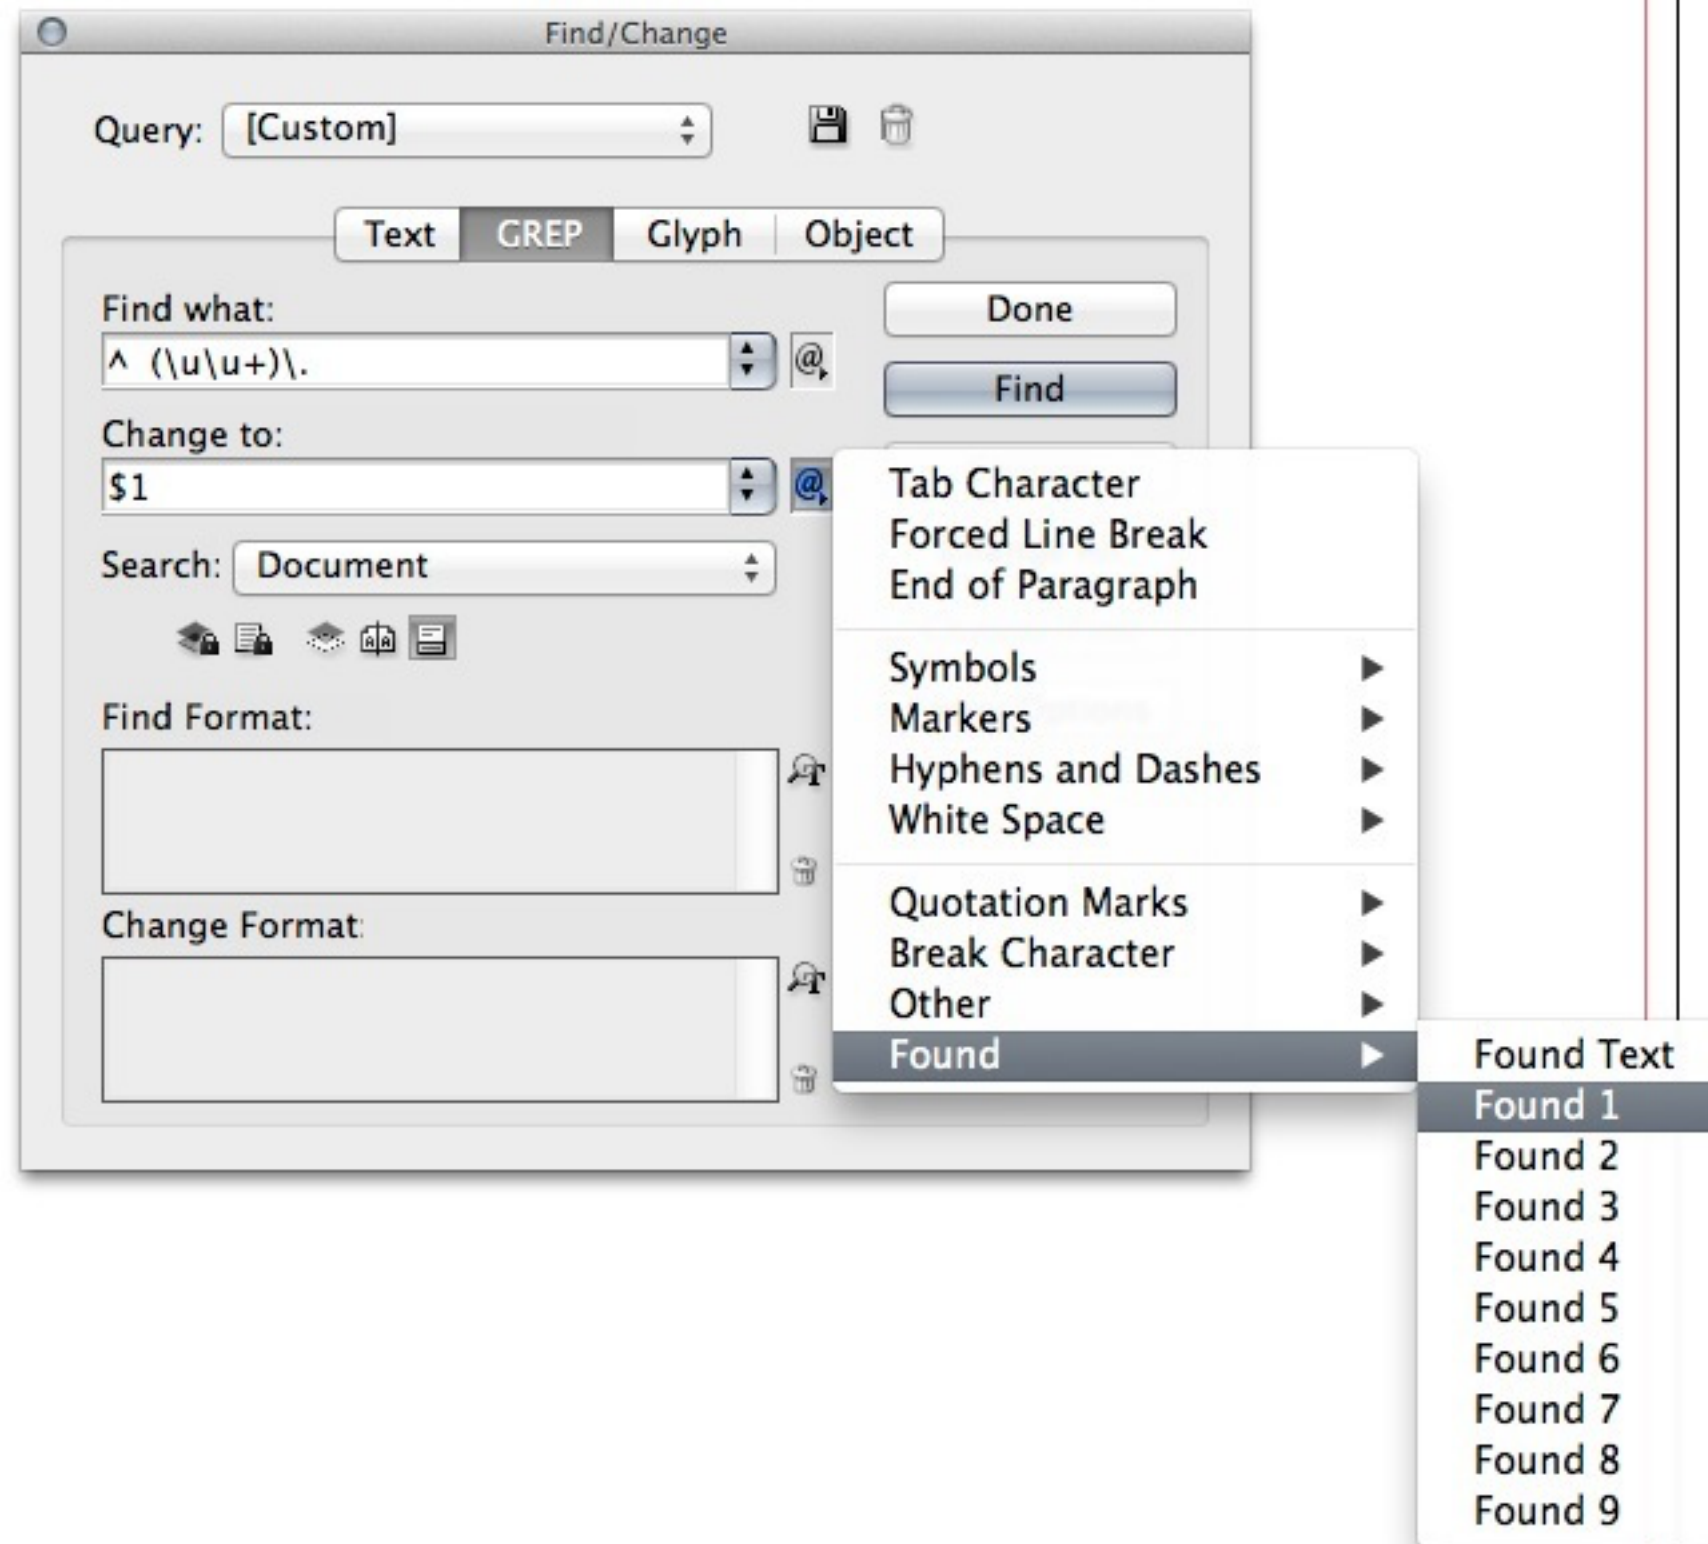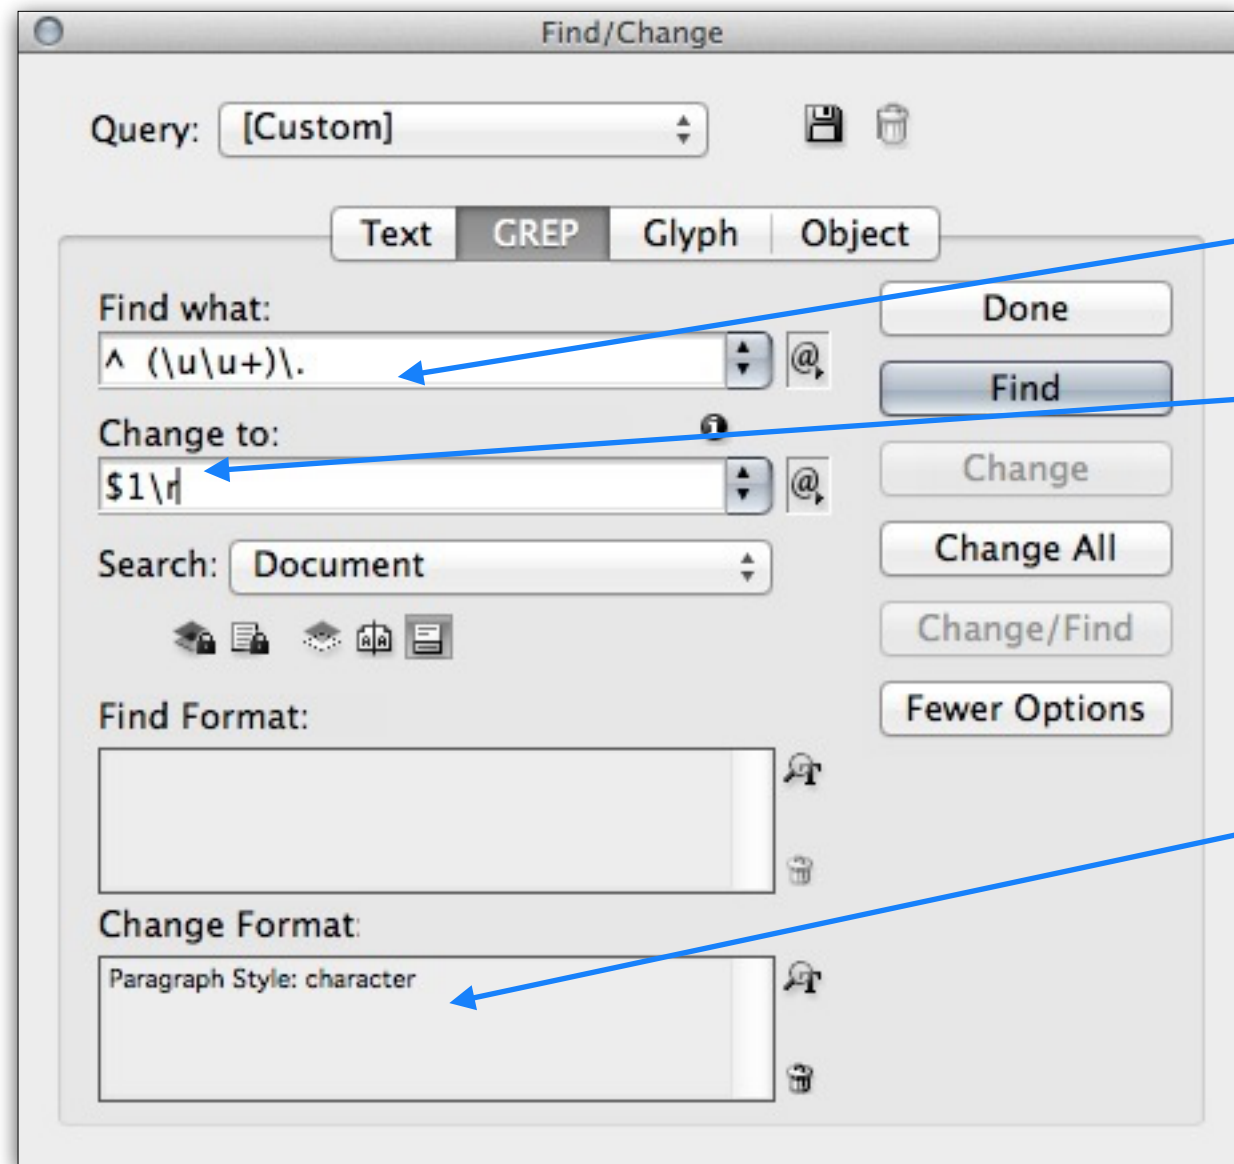# How do we use Change to ?

It may be a simple case of replacing with something else but often we want to subdivide what we have found or replace with a segment.

Here we are replacing with the found text in the brackets.

We can also change a style

Find/Change

Query: [Custom]

Text | **GREP** | Glyph | Object

Find what:
`^ (\u\u+)\.`

Change to:
`$1\r`

Search: Document

Find Format:

Change Format:
Paragraph Style: character

Done
Find
Change
Change All
Change/Find
Fewer Options

We are removing space and period – then we add a paragraph break.

We are then applying a paragraph style to this found text.