

Payment interface document v1.0

Document No.	GSWYIT-OPEN-API-02				
Number of pages		Modify state		Effective date	
Proposed		To examine		Approval	

(All rights reserved. Reproduction will be prosecuted)

Modify history


Version	Modify identificati on	Reason/content for modification	Modified by	Reviewer	Approver	Modify time
V1.0	New-built	Create original document	Cy zhao			2024-12-11
V2.0- 20250712	Upgrade	Modifie document	Cy zhao			2025-07-12

documents

1.business process diagram	3
2.Access requirements	4
2.1. Platform account information	4
2.1.1. The interface requests encryption configuration	4
2.2. Third party provider	5
3.interface design	5
3.1. Access guide	6
3.1.1. Request protocol rules	6
3.1.2. Data structure	6
3.1.3. Some of Reminders	6
3.2. Request public parameters	6
3.2.1. Public request header parameters	6
3.2.2. Public request return body	7
3.2. Third party provider	7
3.2.1. Card payment	7
3.2.2. Generate payment QR code	8
3.2.3. Third party query payment result	10
3.2.4. Third party refund	11
3.2.5 Third party refund query result	12
3.2.6 Third party notify payment result	13

3.2.7 Third party refund notify payment result	14
3.2.8 Beverage preparation processes notify Third party	16
3.2.9 Cancel payment notification third party	17
3.3. Request and response test examples	18
3.3.1 Third party receive example message	18

1.business process diagram

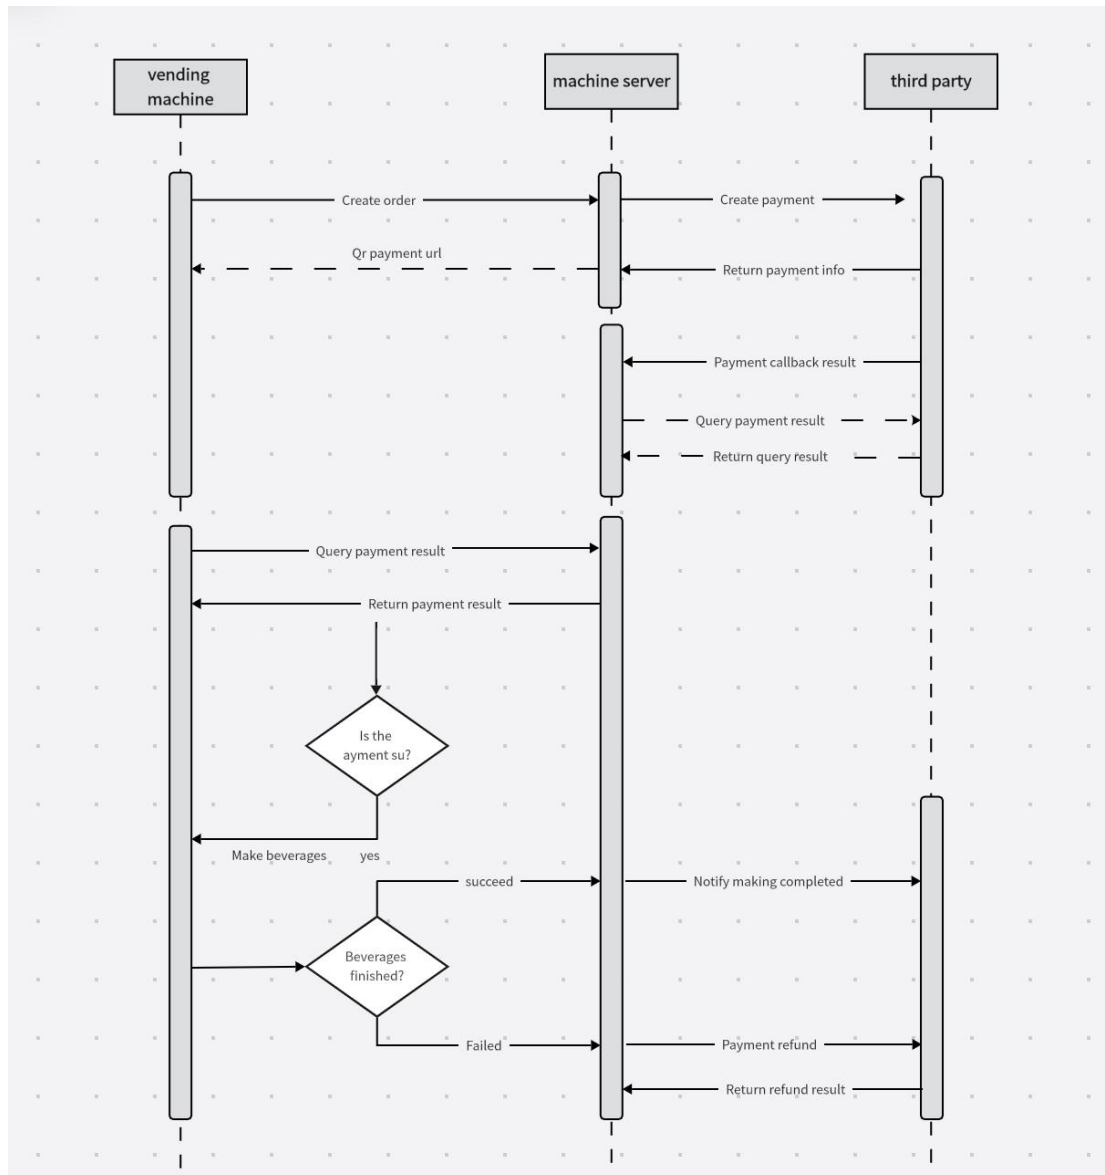

Description: GS provides Android and server-side services to facilitate order transactions and beverage preparation processes.

2. Access requirements


2.1. Platform account information

2.1.1. The interface requests encryption configuration


- Login to the Gs-vending Management platform
- Visit address: <https://gsvden.coffeeji.com>,

Login account provide by Gs-vending

- Switch to the user information page

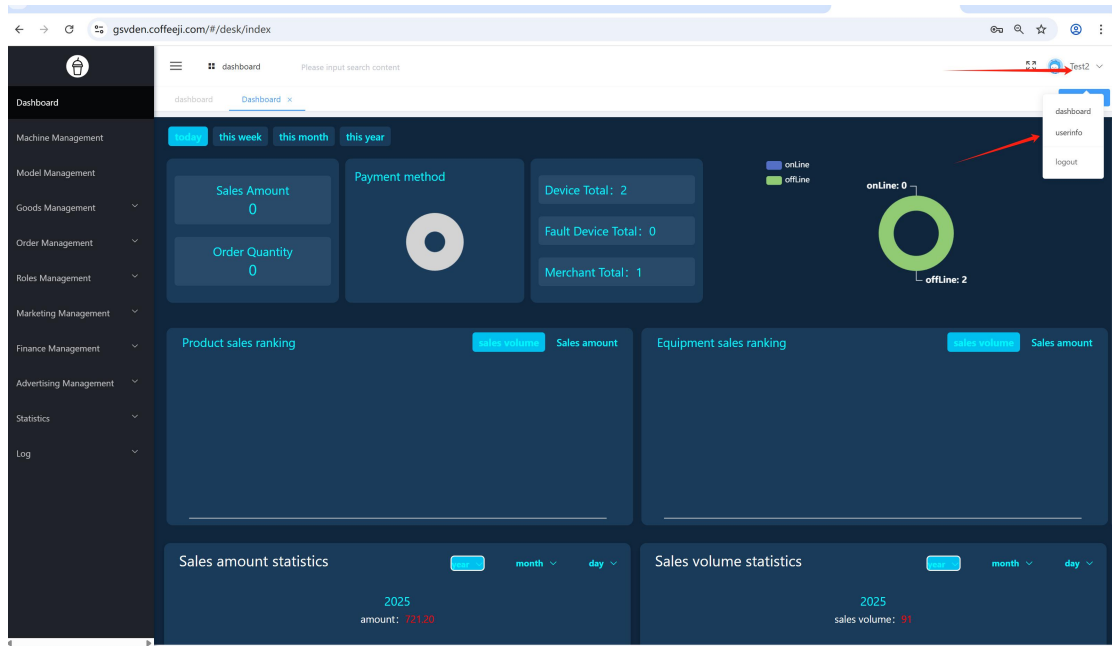

- Obtain the encryption configuration information of the interface request

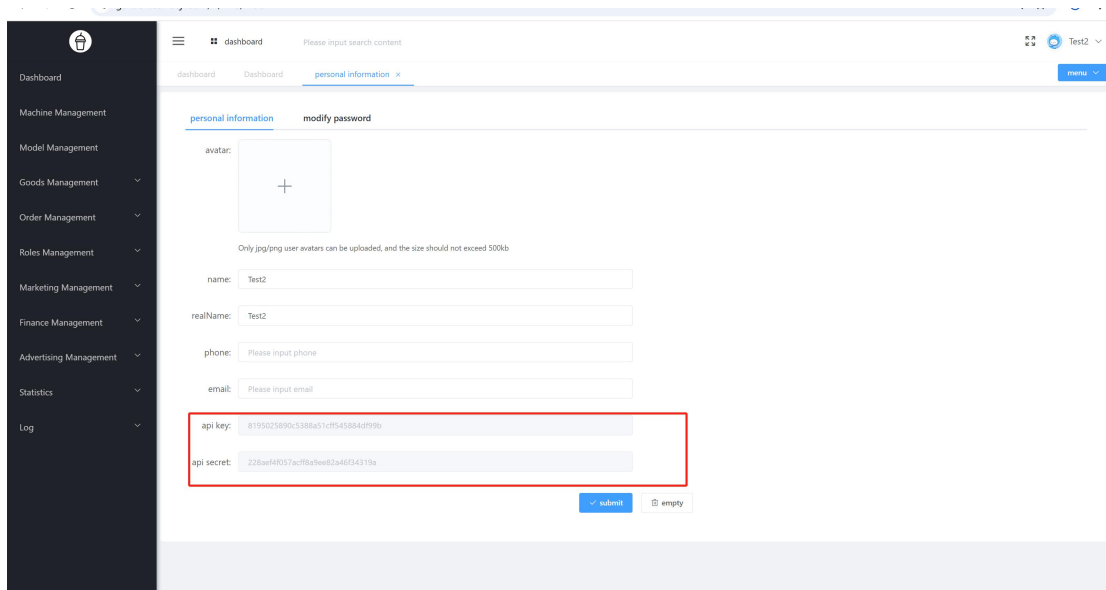

api key is the key used in 3.2.1,

api secret is the secret used in 3.2.1

2.2. Third party provider

3.interface design

3.1. Access guide

3.1.1. Request protocol rules

Transmission method: To ensure transaction security, the Content-type is all application/json

Request submission method: post

. 3.1.2. Data structure

Both the submitted and returned data are in JSON format
Uniformly adopt UTF-8 character encoding

. 3.1.3. Some of Reminders

The payment access party needs to interface with the interface under 2.2.
The request method and data attributes need to be transmitted and received in accordance with the document format requirements.

3.2. Request public parameters

3.2.1. Public request header parameters

Description: The request header of all requests must contain the following authentication information

Request header parameters

name	type	required	default	notes
key	String	required		key Can be generated in the management platform
key-md5	String	required		MD5(key + secret + timestamp), key and secret Can be generated in the management backend
timestamp	String	required		Timestamp of the Eastern 8th Time Zone(In milliseconds,Example:1752731459238)

3.2.2. Public request return body

Description: The response body of all requests must contain the following attributes

Requested response body attributes

name	type	required	default	notes
code	integer	required		The status code information of the requested response body
msg	String	required		The status message information of the requested response body
data	Object	required		Business attributes for requested response body

code description:

Status code	description	notes
200	Request Success	success
400	Business exception	Refer to the msg field for detailed exceptions

3.2. Third party provider

3.2.1. Card payment

Description: Card payment

Interface url: {{domain}}+/order/rcard

Sender of the request: Machine server

Receiver of the request: Third party

Request method: Post

request data:

name	type	required	default	notes
orderNo	String	required		Transaction serial no
objectId	String	optional		Trading commodity ID
subject	String	required		Order information subject
attach	String	optional		Custom parameters for device information, feedback(deviceNo=E00375&deviceId=7678242eba)
totalAmount	String	required		Payment amount
cardNo	String	required		Card no
terminalId	String	required		Transaction terminal ID: Card reader payment is required for payment
notifyUrl	String	required		Payment callback address interface

Response Data:

name	type	required	default	notes
orderStatus	int	required		payment status (1- Pending Payment 2- Payment Successful 3- Transaction Failed 4- Pending Refund 5- Refund Completed 6- Time Exceeded)
thirdOrderNo	String	required		Third party channel order number

3.2.2. Generate payment QR code

Description: Request address provided by the third party

Interface url: {{domain}}+/order/qr (You can also provide the completed request address)

Sender of the request: Machine server

Receiver of the request: Third party

Request method: Post

request data:

name	type	required	default	notes
orderNo	String	required		Transaction serial no
objectId	String	optional		Trading commodity ID
subject	String	required		Order information subject
attach	String	optional		Custom parameters for device information, feedback(deviceNo=E00375&deviceId=7678242eba)
totalAmount	String	required		Payment amount
notifyUrl	String	required		Payment callback address interface

Response Data:

name	type	required	default	notes
qrUrl	String	yes		QR code link
orderStatus	int	required		payment status (1- Pending Payment 2- Payment Successful 3- Transaction

				Failed 4- Pending Refund 5- Refund Completed 6- Time Exceeded)
thirdOrderNo	String	required		Third party channel order number

3.2.3. Third party query payment result

Description: Third party query payment result

Interface url: {{domain}}+/order/status (You can also provide the completed request address)

Sender of the request: Machine server

Receiver of the request: Third party

Request method: Post

Request method: Post

request data:

name	type	required	default	notes
orderNo	String	required		Transaction serial no
thirdOrderNo	String	required		Third party serial no

Response Data:

name	type	required	default	notes
orderNo	String	required		Transaction serial no
thirdOrderNo	String	required		Third party serial no
orderStatus	String	required		Payment status (1- Pending Payment 2- Payment Successful 3- Transaction Failed 4- Pending Refund 5- Refund Completed 6- Time Exceeded)

orderTime	String	required		Generate payment time
payTime	String	required		Actual payment time
totalAmount	String	required		Payment amount
channelUserId	String	optional		Payment user channel user ID, WeChat is openid, Alipay is userId, For card payment users, the card number is used

3.2.4. Third party refund

Description: Third party refund interface

Interface url: {{domain}}+/order/refund (You can also provide the completed request address)

Sender of the request: Machine server

Receiver of the request: Third party

Request method: Post

request data:

name	type	required	default	notes
refundNo	String	required		Refund Transaction serial no
orderNo	String	required		Transaction serial no
thirdOrderNo	String	required		Third party serial no
refundAmount	String	required		Refund transaction amount
refundReason	String	optional		Refund transaction reason
refundNotifyU	String	optional		Refund callback address



rl				interface
----	--	--	--	-----------

Response Data :

name	type	required	default	notes
refundNo	String	required		Refund serial no
orderNo	String	required		Interface return information
thirdOrderNo	String	required		Third party serial no
thirdRefundNo	String	optional		Third party refund serial no
refundStatus	String	required	success	Refund status(success ,waiting, fail)
refundTime	String	required		Refund time, Time format:yyyy-MM-dd HH:mm:ss
totalAmount	String	required		Original order amount
refundAmount	String	required		refund amount

3.2.5 Third party refund query result

Description:Third party refund interface

Interface url: {{domain}}+/order/refundStatus (You can also provide the completed request address)

Sender of the request: Machine server

Receiver of the request: Third party

Request method: Post

request data:

name	type	required	default	notes
refundNo	String	optional		Refund Transaction serial no

orderNo	String	required		Original Transaction serial no
thirdOrderNo	String	optional		Original Third party serial no

Response Data :

name	type	required	default	notes
refundNo	String	required		Refund status
orderNo	String	required		Original
thirdOrderNo	String	required		Third party serial no
thirdRefundNo	String	optional		Third party refund serial no
refundStatus	String	required	success	Refund status(pending,success or fail)
RefundMsg	String	required	success	Refund status detail(success or fail)
refundTime	String	required		Refund time, Time format:yyyy-MM-dd HH:mm:ss
totalAmount	String	required		Original order amount
refundAmount	String	required		refund amount

3.2.6 Third party notify payment result

Description:Third party notify payment result

Interface url: The field notifyUrl provided in section 3.3.1 or 3.3.2

Sender of the request: Machine server

Receiver of the request: Third party

Request method: Post



request data :

name	type	required	default	notes
orderNo	String	required		Transaction serial no
thirdOrderNo	String	required		Third party serial no
orderStatus	String	optional		Payment status (1- Pending Payment 2- Payment Successful 3- Transaction Failed 4- Pending Refund 5- Refund Completed 6- Time Exceeded)
orderTime				Generate payment time
payTime				Actual payment time
totalAmount				Payment amount
channelUserId				Payment user channel user ID, WeChat is openid, Alipay is userId, For card payment users, the card number is used

Response Data :

name	type	required	default	notes
orderNo	String	required		Original
thirdOrderNo	String	required		Third party serial no
returnCode	String	required	success	Notify status; success or fail

3.2.7 Third party refund notify payment result

Description: Third party notify payment result

Interface url: The field notifyUrl provided in section 2.3.1 or 2.3.2

Sender of the request: Third party

Receiver of the request: Machine server

Request method: Post

request data:

name	type	required	default	notes
refundNo	String	required		Refund Transaction serial no
orderNo	String	required		Transaction serial no
thirdRefundNo	String	optional		Third party refund serial no
refundAmount	String	required		Refund transaction amount
refundStatus	String	required	success	Refund Transaction status, success, waiting or fail
totalAmount	String	required		Payment amount
refundTime	String	required		Refund Transaction time, Time format: yyyy-MM-dd HH:mm:ss

Response Data:

name	type	required	default	notes
orderNo	String	required		Original
thirdRefundNo	String	required		Third party refund serial no
returnCode	String	required	success	Notify status; success or fail



3.2.8 Beverage preparation processes notify Third party

Description: Notify third parties upon completion of beverage preparation

Interface url: {{domain}} +/order/complete (You can also provide the completed request address)

Sender of the request: Machine server

Receiver of the request: Third party

Request method: Post

request data:

name	type	required	default	notes
orderNo	String	required		Transaction serial no
thirdOrderNo	String	required		Third party serial no
success	Boolean	required	true	The successful status of making beverages(true:making succeeded,false:making failed)
orderStatus	String	required		payment status (1- Pending Payment 2- Payment Successful 3- Transaction Failed 4- Pending Refund 5- Refund Completed 6- Time Exceeded)
outStockStatus	String	required		Delivery status for beverage preparation;1: Not shipped yet,2: Already shipped
outStockTime	String	optional		Delivery time for beverage preparation,Time format:yyyy-MM-dd HH:mm:ss

Response Data:

name	type	required	default	notes
orderNo	String	required		Transaction serial no
thirdOrderNo	String	required		Third party serial no
returnCode	String	required		Notify status; success or fail
returnMsg	String	required		Cancel payment reason

3.2.9 Cancel payment notification third party

Description: Notify third parties upon cancel of payment

Interface url: {{domain}} +/order/cancel (You can also provide the completed request address)

Sender of the request: Machine server

Receiver of the request: Third party

Request method: Post

request data:

name	type	required	default	notes
orderNo	String	required		Transaction serial no
thirdOrderNo	String	required		Third party serial no
orderStatus	String	required	0	payment status (0- Cancel Payment)
remark	String	optional		Cancel payment reason
cancelTime	String	required		Time time for cancel payment preparation,Time format:yyyy-MM-dd HH:mm:ss

Response Data:

name	type	required	default	notes
orderNo	String	required		Transaction serial no
thirdOrderNo	String	required		Third party serial no
returnCode	String	required		Cancel payment status; success or fail
returnMsg	String	required		Cancel payment reason

3.3. Request and response test examples

3.3.1 Third party receive example message

Request data:

```
curl --location --request POST '${url}' \
--header 'timestamp: 1733446562634' \
--header 'key-md5: 9827b8674497a8d3b3bc9596ecea7d1a' \
--header 'key: 8727908ea7jmq' \
--header 'Content-Type: application/json' \
--data-raw '{
  "objectType": 1,
  "objectId": "1826089106430550018",
  "price": 0.01,
  "deviceId": "1767740916185841665",
  "deviceNo": "1de2a9840e4f18ea",
  "merchantId": "1742482893377028098",
  "payMethod": "wxpay",
  "wayCode": "qr"
}'
```

Response data:

```
{
  "code": 200,
```

```
"success": true,
"data": {
  "id": "1864912228214394882",
  "paySettingMerchantId": "1123598821738675201",
  "deviceId": "1767740916185841665",
  "deviceNo": "1de2a9840e4f18ea",
  "objectType": 1,
  "objectId": "1826089106430550018",
  "objectNo": "P202408211049047538",
  "orderTime": "2024-12-06 13:58:18",
  "payTime": "2024-12-06 14:01:15",
  "currency": "CNY",
  "sellerId": "1261526701",
  "parentSellerId": "826539253110870",
  "orderNo": "A202412061358188410",
  "orderId": "1864912228214394883",
  "payAmt": 0.01,
  "receiveAmt": 0.01,
  "tradeNo": "4200002450202412063058717692",
  "status": 5,
  "payWay": 1,
  "outRequestNo": "RD202412061401042245",
  "refundReason": "",
  "refundSn": "",
  "returnAmt": 0,
  "payMethod": "wxpay",
  "wayCode": "qr",
  "refundNo": "RD202412061401042245",
  "refundStatus": "",
  "failRemark": ""
},
"msg": "success"
}
```