

4.7 Floating Point Representation

The two most common floating-point binary storage formats used by Intel processors were created for Intel and later standardized by the IEEE organization:

IEEE Short Real: 32 bits	1 bit for the sign, 8 bits for the exponent, and 23 bits for the mantissa. Also called <i>single precision</i> .
IEEE Long Real: 64 bits	1 bit for the sign, 11 bits for the exponent, and 52 bits for the mantissa. Also called <i>double precision</i> .

Both formats use essentially the same method for storing floating-point binary numbers, so we will use the Short Real as an example.

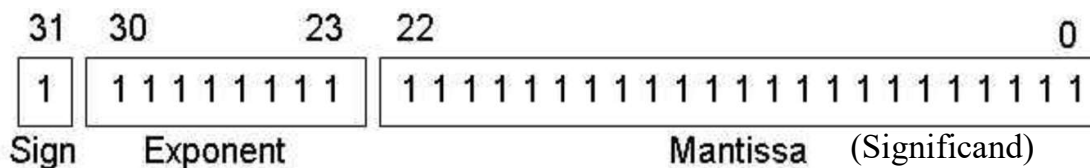


Fig 1: Floating point representation in IEEE Short Real: 32 bits

The Sign

The sign of a binary floating-point number is represented by a single bit. A 1 bit indicates a negative number, and a 0 bit indicates a positive number.

The Mantissa

In the number $+11.1011 \times 2^3$,

the sign is positive,

the mantissa is 11.1011,

and the exponent is 3.

The Exponent

IEEE Short Real exponents are stored as 8-bit unsigned integers with a bias of 127.

Let's use the number 1.101×2^5 as an example. The exponent (5) is added to 127 and the sum (132) is stored in binary as 10011000.

Here are some examples of exponents, first shown as decimal values, then as biased decimal, and finally as 8- bit unsigned binary:

Exponent (E)	Adjusted (E + 127)	Binary Representation
5	+132	10100010
0	+127	01111111
-10	+117	01110101
128	+255	11111111
-1	+126	01111110

Notice that the binary exponent is unsigned, so it cannot be negative. That is why the bias of 127 is used. The largest possible exponent is 128, because when added to 127, produces 255, the largest unsigned value represented by 8 bits. If the approximate range is from 1.0×2^{-127} to 1.0×2^{128} .

Normalizing the Mantissa

Before a floating-point binary number can be stored correctly, its mantissa must be normalized.

The floating-point binary value 1101.101 is normalized as 1.101101×2^3 by moving the decimal point 3 positions to the left, and multiplying by 2^3 .

Binary Value (Mantissa)	Normalized As	Exponent
1101.101	1.101101	3
.00101	1.01	-3
1.0001	1.0001	0
10000011.0	1.0000011	7

In a normalized mantissa, the digit 1 always appears to the left of the decimal point. In fact, the leading 1 is omitted from the mantissa's actual storage because it is redundant.

Putting it All Together

We have now reached the point where we can combine the sign, exponent, and normalized mantissa into the binary IEEE short real representation. Using Figure 1 as a reference, the value 1.101×2^0 would be stored as sign = 0 (positive), mantissa = 101, and exponent = 01111111 (the exponent value is added to 127). The leading "1." was dropped from the mantissa. Here are more examples:

Binary Value	Biased Exponent	Sign, Exponent, Mantissa
-1.11	127	1 01111111 110000000000000000000000
+1101.101	130	0 10000010 101101000000000000000000
-.00101	124	1 01111100 010000000000000000000000
+100111.0	132	0 10000100 001110000000000000000000
+.0000001101011	120	0 01111000 101011000000000000000000