
Experiment-10

10. To execute the following commands in Kali Linux Operating Systems:

Free command

Sort command

History command

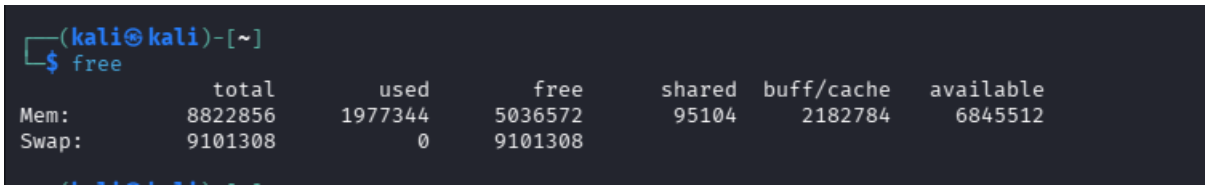



```
┌──(kali㉿kali)-[~]
└─$ history
    1  ls
    2  nmap -sV scanme.nmap.org
    3  nmap 192.168.1.1
    4  nmap 192.168.1.1 192.168.1.2
    5  nmap CIDR 192.168.1.1
    6  nmap -v 192.168.1.1
    7  nmap -iL 192.168.1.1
    8  nmap -p 80 192.168.1.1
    9  nmap -p 1-100 192.168.1.1
   10  nmap -p 192.168.1.1
   11  nmap -sS 192.168.1.2
   12  nmap -sV scanme.nmap.org
   13  nmap -A scanme.nmap.org
   14  nmap -O scanme.nmap.org
   15  theharvester -d example.com -b google
   16  theHarvester -d example.com -b google
   17  theHarvester -d example.com -b yaho
   18  theHarvester -d example.com -h google
   19  theHarvester -d example.com -b all
   20  theHarvester -d example.com -b -1 100
   21  theHarvester -d example.com -b 1-100
   22  theHarvester -d example.com -h 1-100
   23  theHarvester -d example.com -b bring -c
   24  theHarvester -d example.com -h bring -c
   25  theHarvester -d example.com -b google -n
   26  theHarvester -d example.com -h google -n
   27  theHarvester -d example.com -h all -v
   28  theHarvester -d example.com -h shadon
   29  theHarvester -d example.com -h all -s
   30  theHarvester -d example.com -h all -p
   31  theHarvester -d example.com -h all -f output
   32  theHarvester -d example.com -h all -f report
   33  theHarvester -d example.com -h google -e <proxy>
   34  theHarvester -d example.com -h google -e http://proxy:8080
   35  theHarvester -d example.com -h all -f report -h
   36  theHarvester -d example.com -h all -f report -b
   37  theHarvester -d example.com -b all -f report -h
   38  theHarvester -d example.com -b all
   39  nmap -sV scanme.nmap.org
   40  nmap -sn 192.168.1.10
   41  nmap -sn 192.168.1.0/24
   42  nmap -sn 192.168.1.1-50
   43  nmap -sn -iL targets.txt
   44  nmap -sn -iL 2.txt
```