

# **IT314: Software Engineering**

## **Course Project Lab 7**



Group: 15 Conference Management System

Pulkit Khandelwal

202001120

## **Section A:**

Consider a program for determining the previous date. Its input is triple of day, month and year with the following ranges  $1 \leq \text{month} \leq 12$ ,  $1 \leq \text{day} \leq 31$ ,  $1900 \leq \text{year} \leq 2015$ . The possible output dates would be previous date or invalid date. Design the equivalence class test cases?

Write a set of test cases (i.e., test suite) – specific set of data – to properly test the programs. Your test suite should include both correct and incorrect inputs.

1. Enlist which set of test cases have been identified using Equivalence Partitioning and Boundary Value Analysis separately.
2. Modify your programs such that it runs on eclipse IDE, and then execute your test suites on the program. While executing your input data in a program, check whether the identified expected outcome (mentioned by you) is correct or not.

### **Programs:**

Program 1 The function linearSearch searches for a value  $v$  in an array of integers  $a$ . If  $v$  appears in the array  $a$ , then the function returns the first index  $i$ , such that  $a[i] == v$ ; otherwise,  $-1$  is returned.

#### **▪ Equivalence Partitioning and Boundary Value Analysis**

Tester Action and Input Data	Expected Outcome
<b>Equivalence Partitioning</b>	
$a = [1, 2, 3, 4], v = 2$	1
$a = [5, 6, 7, 8], v = 10$	-1
$a = [1, 1, 2, 3], v = 1$	0
$a = \text{null}, v = 5$	An error message
<b>Boundary Value Analysis</b>	
Minimum array length: $a = [], v = 7$	-1
Maximum array length: $a = [1, 2, 3, 4, 5, 6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20], v = 3$ .	2
Minimum value of $v$ : $a = [5, 6, 7], v = 5$	0

Maximum value of v: a = [1, 2, 3], v = 3	2
--	---

Program 2: The function countItem returns the number of times a value v appears in an array of integers a.

Tester Action and Input Data	Expected Outcome
<b>Equivalence Partitioning</b>	
Invalid input: v is not an integer	An Error message
Empty array: a = []	0
Single item array: a = [v], v = a[0]	1
Multiple item array with v appearing:	
v appears once	1
v appears multiple times	count>1
Multiple item array with v not appearing	0
<b>Boundary Value Analysis</b>	
Minimum input values: v = a[0] = 1	count>0
Maximum input values: v = a[9999] = 10000	count>0
One occurrence of v: a = [1, 2, 3, ..., 9999, v-1, 10000]	1
All occurrences of v: a = [v, v, v, ..., v, v]	10000
<b>Tester Action and Input Data</b>	<b>Expected Outcome</b>
<b>Equivalence Partitioning</b>	
No occurrences of v: a = [1, 2, 3, ..., 9999]	0

Program 3: The function `binarySearch` searches for a value `v` in an ordered array of integers `a`. If `v` appears in the array `a`, then the function returns an index `i`, such that `a[i] == v`; otherwise, `-1` is returned.

### Equivalence Partitioning

Testcase for correct inputs:

Tester Action and Input data	Expected Outcome
<code>A = [1,2,3,4,5]</code> , <code>v = 3</code>	2
<code>A = [2,5,10,12,13]</code> , <code>v = 5</code>	1
<code>A = [1,3,4,4,5]</code> , <code>v = 5</code>	4
<code>A = [1,1,2,3]</code> , <code>v = 1</code>	0

Testcase for incorrect inputs

Tester Action and Input data	Expected Outcome
<code>A = [2,3,4,6]</code> , <code>v = 5</code>	-1
<code>A = []</code> , <code>v = 1</code>	-1
<code>A = [3,4,7,8]</code> , <code>v = 2</code>	-1

### Boundary value analysis:

Testcase for correct inputs:

Tester Action and Input data	Expected Outcome
Equivalence Partitioning	
<code>A = [2,5,4,3,6]</code> , <code>v = 5</code>	1

A = [6,3,4,2], v = 5	-1
A = [1,2,3,1] , v = 1	0
A = null, v = 1	An error message
Boundary value analysis	
Minimum length of array: A = [] , v = 5	-1
Maximum length of array: a = [2,3,4,1,5,3,6,5,7,45,34,23], v = 5	4
Minimum value of v: a = [1,2,3] , v = 1	0
Maximum value of v: a = [4,5,6], v = 6	2

Test Cases for Incorrect Inputs:

Tester Action and Input Data	Expected Outcome
v = 2, a = [1, 3, 5, 7, 9]	-1
v = 10, a = [1, 3, 5, 7, 9]	-1
v = 6, a = [1, 3, 5, 7, 9]	-1
v = 1, a = [2, 3, 4, 5, 6]	-1
v = 7, a = [2, 3, 4, 5, 6]	-1
v = 4, a = [5, 6, 7, 8, 9]	-1

Program 4: The following problem has been adapted from The Art of Software Testing, by G. Myers (1979). The function triangle takes three integer parameters that are interpreted as the lengths of the sides of a triangle. It returns whether the triangle is equilateral (three lengths equal), isosceles (two lengths equal), scalene (no lengths equal), or invalid (impossible lengths).

**Test Cases for Incorrect Inputs:**

Tester Action and Input Data	Expected Outcome
v = 2, a = [1, 3, 5, 7, 9]	-1
v = 10, a = [1, 3, 5, 7, 9]	-1
v = 6, a = []	-1

▪ **Boundary Value Analysis:**

Test Cases for Correct Inputs:

Tester Action and Input Data	Expected Outcome
v = 5, a = [5, 6, 7]	0
v = 6, a = [5, 6, 7]	1
v = 7, a = [5, 6, 7]	2
v = 5, a = [1, 5, 6, 7, 9]	1

Program 5 The function prefix (String s1, String s2) returns whether or not the string s1 is a prefix of string s2 (you may assume that neither s1 nor s2 is null).

Equivalence Partitioning and Boundary Value Analysis

Tester Action and Input Data	Expected Outcome
<b>Equivalence Partitioning:</b>	
s1 is empty, s2 is non-empty string	true
s1 is non-empty string, s2 is empty	false
s1 is a prefix of s2	true
s1 is not a prefix of s2	false
s1 has same characters as s2, but not a prefix	false
<b>Boundary Value Analysis:</b>	


s1 = "a", s2 = "ab"	true
s1 = "ab", s2 = "a"	false
s1 = "a", s2 = "a"	true
s1 = "a", s2 = "A"	false

**Modify your programs such that it runs on eclipse IDE, and then execute your test suites on the program. While executing your input data in a program, check whether the identified expected outcome (mentioned by you) is correct or not.**

I have taken 20 test cases (4 test cases per program). Where eight are wrong or invalid, and the other 12 are correct.

There are screenshots of code snippets with coverage of the code.

Tester Action and Input Data	Expected Outcome
s1 = "abcdefghijklmnopqrstuvwxyz", s2 = "abcdefghijklmnopqrstuvwxyz"	true
s1 = "abcdefghijklmnopqrstuvwxyz", s2 = "abcdefghijklmno"	true
s1 = "", s2 = ""	true

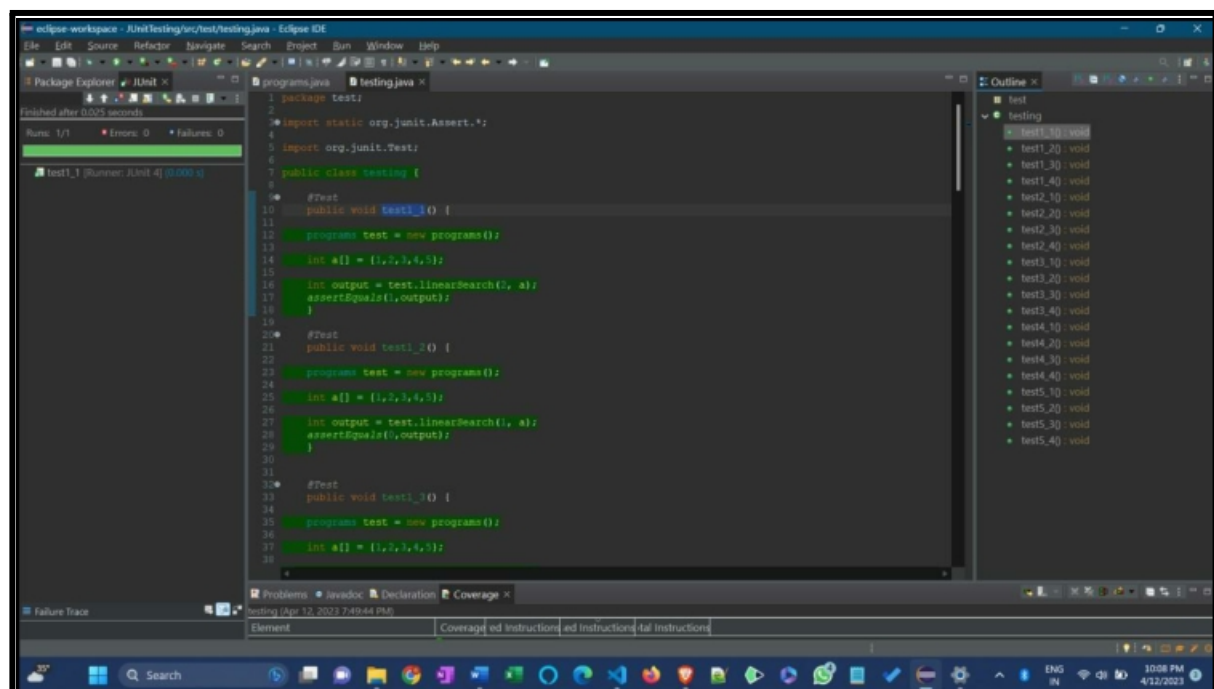



## Modified Java codes of given programs (P1 – P5)

```
package test;

public class programs {

    public int linearSearch(int v, int a[]) // p1
    {
        int i = 0;
        while (i < a.length)
        {
            if (a[i] == v)
                return(i);
            i++;
        }
        return (-1);
    }

    public int countItem(int v, int a[]) //p2
    {
        int count = 0;
        for (int i = 0; i < a.length; i++)
        {
            if (a[i] == v)
                count++;
        }
        return (count);
    }
}
```

```

    {
        int lo, mid, hi;

        lo = 0;

        hi = a.length-1;
        while (lo <= hi)
        {
            mid = (lo+hi)/2;

            if (v == a[mid])
                return (mid);

            else if (v < a[mid])

                hi = mid-1;

            else

                lo = mid+1;

        }

        return (-1);

    }

    final int EQUILATERAL = 0;
    final int ISOSCELES = 1;
    final int SCALENE = 2;
    final int INVALID = 3;
    public int triangle(int a, int b, int c) //p4
    {
        if (a >= b+c || b >= a+c || c >= a+b)
            return(INVALID);
        if (a == b && b == c)
            return(EQUILATERAL);
        if (a == b || a == c || b == c)
            return(ISOSCELES);
        return(SCALENE);

    }

    public boolean prefix(String s1, String s2) //p5
    {
        if (s1.length() > s2.length())
        {
            return false;
        }
        for (int i = 0; i < s1.length(); i++)
        {
            if (s1.charAt(i) != s2.charAt(i))
            {
                return false;
            }
        }
    }

```

```
public void test2_1() { // no of element p2
```

```
    programs test = new programs();
```

```
    int a[] = {1,2,3,4,5};
```

```
    int output = test.countItem(2, a);  
    assertEquals(2,output);  
}
```

```
@Test
```

```
public void test2_2() { //no of element p2
```

```
    programs test = new programs();
```

```
    int a[] = {1,2,3,4,5};
```

```
    int output = test.countItem(4, a);  
    assertEquals(2,output);  
}
```

```
@Test
```

```
public void test2_3() { //no of element p2
```

```
    programs test = new programs();
```

```
    int a[] = {1,2,3,4,5};
```

```
    int output = test.countItem(6, a);  
    assertEquals(0,output);  
}
```

```
@Test
```

```
public void test2_4() { //no of element p2
```

```
    programs test = new programs();
```

```
    int a[] = {1,2,3,4,5};
```

```
    int output = test.countItem(6, a);  
    assertEquals(-1,output);  
}
```

```
@Test
```

```
public void test3_1() { //binary search p3
```

```
    programs test = new programs();
```

```
    int a[] = {1,2,3,4,5};
```

```
    int output = test.binarySearch(2, a);  
    assertEquals(1,output);  
}
```

```
@Test
```

```
public void test3_2() { //binary search p3
```

```
    programs test = new programs();
```

```
int a[] = {1,2,3,4,5};
```

```
int output = test.binarySearch(3, a);  
assertEquals(3,output);  
}
```

```
@Test  
public void test3_3() { //binary search p3
```

```
programs test = new programs();
```

```
int a[] = {1,2,3,4,5};
```

```
int output = test.binarySearch(8, a);  
assertEquals(-1,output);  
}
```

```
@Test  
public void test3_4() { //binary search p3
```

```
programs test = new programs();
```

```
int a[] = {1,2,3,4,5};
```

```
int output = test.binarySearch(8, a);  
assertEquals(-1,output);  
}
```

```
@Test  
public void test4_1() {  
programs test = new programs();  
int output = test.triangle(8,8,8);  
assertEquals(0,output);  
}
```

```
@Test  
public void test4_2() {  
programs test = new programs();  
int output = test.triangle(8,8,10);  
assertEquals(2,output);  
}
```

```
@Test  
public void test4_3() {  
programs test = new programs();  
int output = test.triangle(0,0,0);  
assertEquals(1,output);  
}
```

```
@Test  
public void test4_4() {  
programs test = new programs();  
int output = test.triangle(0,0,0);  
assertEquals(3,output);  
}
```

```
@Test
```

```

    public void test5_1() {
        programs test = new programs();
        boolean output = test.prefix("", "nonEmpty");
        assertEquals(true, output);
    }

    @Test
    public void test5_2() { // example of s1 is prefix of s2
        programs test = new programs();
        boolean output = test.prefix("hello", "hello world");
        assertEquals(true, output);
    }

    @Test
    public void test5_3() { // example of s1 is not prefix of s2
        programs test = new programs();
        boolean output = test.prefix("hello", "world hello");
        assertEquals(false, output);
    }

    @Test
    public void test5_4() { // example of s1 is not prefix of s2
        programs test = new programs();
        boolean output = test.prefix("hello", "world hello");
        assertEquals(true, output);
    }
}

```

**P6: Consider again the triangle classification program (P4) with a slightly different specification: The program reads floating values from the standard input. The three values A, B, and C are interpreted as representing the lengths of the sides of a triangle. The program then prints a message to the standard output stating whether the triangle can be formed, is scalene, isosceles, equilateral, or right-angled. Determine the following for the above program:**

**a) Equivalence classes for the system are**

Class 1: Invalid inputs (negative or zero values)

Class 2: Non-triangle (sum of the two shorter sides is not greater than the longest side)

Class 3: Scalene triangle (no sides are equal)

Class 4: Isosceles triangle (two sides are equal)

Class 5: Equilateral triangle (all sides are equal)

Class 6: Right-angled triangle (satisfies the Pythagorean theorem)

**b) Test cases to cover the identified equivalence classes:**

Class 1: -1, 0

Class 2: 1, 2, 5

Class 3: 3, 4, 5

Class 4: 5, 5, 7

Class 5: 6, 6, 6

Class 6: 3, 4, 5

Test case 1 covers class 1, test case 2 covers class 2, test case 3 covers class 3, test case 4 covers class 4, test case 5 covers class 5, and test case 6 covers class 6.

**c) Test cases to verify the boundary condition  $A + B > C$  for the scalene triangle:**

(1) 2, 3, 6

(2) 3, 4, 8

Both test cases have two sides shorter than the third side and should not form a triangle.

**d) Test cases to verify the boundary condition  $A = C$  for the isosceles triangle:**

(1) 2, 3, 3

(2) 5, 6, 5

Both test cases have two equal sides and should form an isosceles triangle.

**e) Test cases to verify the boundary condition  $A = B = C$  for the equilateral triangle:**

(1) 5, 5, 5

(2) 9, 9, 9

Both test cases have all sides equal and should form an equilateral triangle.

**f) Test cases to verify the boundary condition  $A^2 + B^2 = C^2$  for the right-angled triangle:**

(1) 3, 4, 5

(2) 5, 12, 13

Both test cases satisfy the Pythagorean theorem and should form a right-angled triangle.

**g) For the non-triangle case, identify test cases to explore the boundary.**

(1) 2, 2, 4

(2) 3, 6, 9

Both test cases have two sides that add up to the third side and should not form a triangle.

**h) For non-positive input, identify test points.**


(1) 0, 1, 2

(2) -1, -2, -3

Both test cases have at least one non-positive value, which is an invalid input.

## Section B

Convert the Java code comprising the beginning of the doGraham method into a control flow graph (CFG).

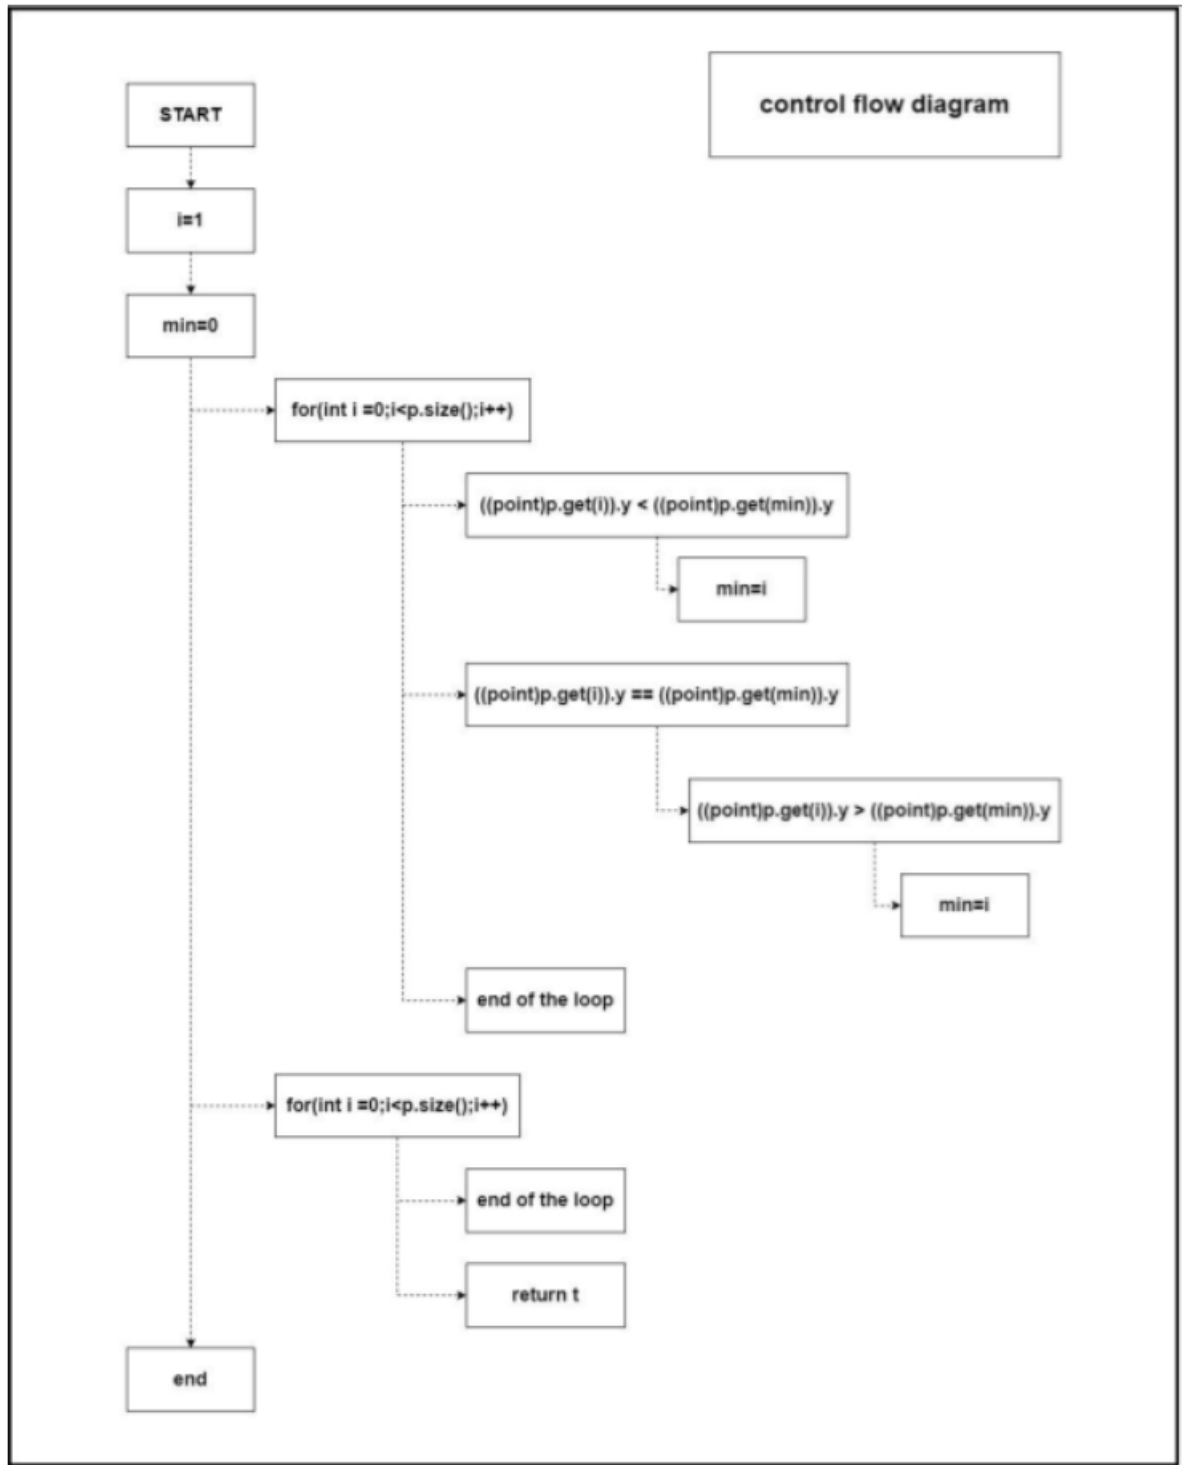



## **Construct test sets for your flow graph that are adequate for the following criteria:**

### **a. Statement Coverage:**

To satisfy statement coverage, we must ensure that each statement in the CFG is executed at least once. We can achieve this by providing a test case with a single point in the vector. In this case, both loops will not execute, and the return statement will be executed. A test set that satisfies statement coverage would be  $p = [\text{Point}(0,0)]$

### **b. Branch Coverage:**

To satisfy branch coverage, we need to ensure that each branch in the CFG is executed at least once. We can achieve this by providing a test case with two points such that one of the points has the minimum y-coordinate, and the other has a greater x-coordinate than the minimum. In this case, both loops will execute, and the second branch in the second loop will be taken. A test set that satisfies branch coverage would be

$p = [\text{Point}(0,0), \text{Point}(1,1)]$

### **c. Basic Condition Coverage:**

To satisfy basic condition coverage, we must ensure that each condition in the CFG is evaluated to be true and false at least once. We can achieve this by providing a test case with three points: two have the same y-coordinate, and the other has a greater x-coordinate than the minimum. In this case, both loops will execute, and the second condition in the second loop will be evaluated as true or false. A test set that satisfies basic condition coverage would be

$p = [\text{Point}(0,0), \text{Point}(1,1), \text{Point}(2,0)]$

