


0:00 – 1:00 · PROBLEM & APPROACH

Breaking Language Barriers

Online workshops run across languages every day. When facilitator and learner don't share one, a lost learner usually stays quiet — by the time anyone notices, the moment to help has passed.

We capture speech, translate it live, and have Claude track the goal, decisions, and blockers from the transcript — every insight linked back to the exact line it came from.

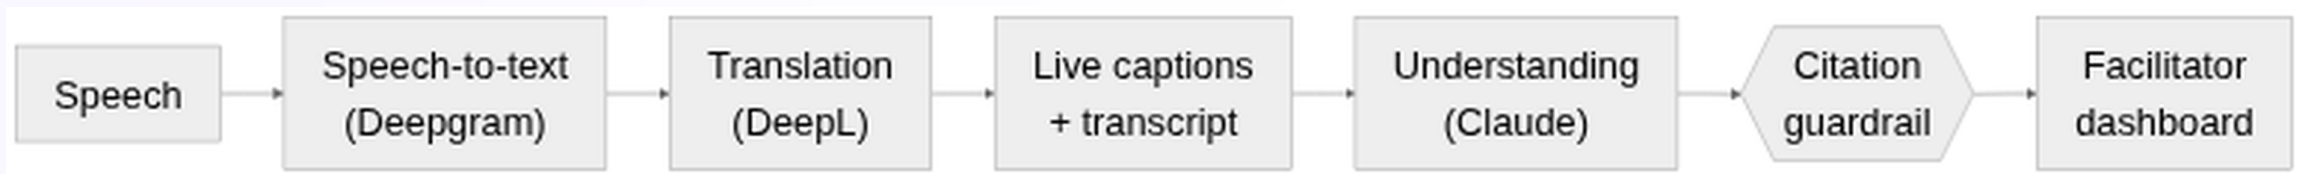

Facilitator dashboard

The goal comes from setup. Decision and blocker cards weren't typed by anyone — pulled live from the transcript, each linked to the exact line it came from.

Facilitator dashboard

GOAL

Implement a working REST endpoint for user signup, including input validation.

DECISIONS

Added an early return for a missing email field.

Learner B

MEDIUM CONFIDENCE

"We tried adding `if (!req.body.email) return res.status(400);` but it still errors."

CURRENT ACTIVITY

Debugging a 500 error thrown when the email field is empty.

BLOCKERS

Unclear whether `validateEmail()` throws on empty input.

Learner A

LOW CONFIDENCE

"It might be that the `validateEmail()` function itself is throwing."

Live demo · goal / decisions / blockers

2 / 5

1:45 – 3:15 · LIVE DEMO

Join as a learner, get a translated reply

Scan a QR code, no account setup. Captions translated live, original still visible. Learner questions land on the facilitator's side already translated — replies auto-translate back.

Facilitator messages

What the remote facilitator has said, in your language and the original.

Facilitator

HIGH CONFIDENCE

试着检查一下 `validateEmail()` 在传入空字符串时是否会抛出异常。

Try checking whether `validateEmail()` throws when given an empty string.

Facilitator

HIGH CONFIDENCE

发现得好——把那个调用包在 `try/catch` 里，并记录错误日志来确认。

Good catch — wrap that call in a `try/catch` and log the error to confirm.

Have a question?

Ask in your own language — the facilitator will see it translated.

Ask the facilitator

/learner — translated facilitator messages

Learner questions

Learner B high confidence

validateEmail() 是我们自己写的还是用的库？

Is validateEmail() something we wrote, or from a library? `code/jaargon` preserved

Transcript


Learner A high confidence

如果 email 是空的，会报 500 错误。


/dashboard — incoming learner question, translated

Quiet-learner nudges, code-aware translation & catch-up


When a learner goes quiet too long, both sides get nudged. Translation never mangles code — `validateEmail()` passes through untouched. And a late joiner gets a grounded catch-up summary instead of a wall of transcript.

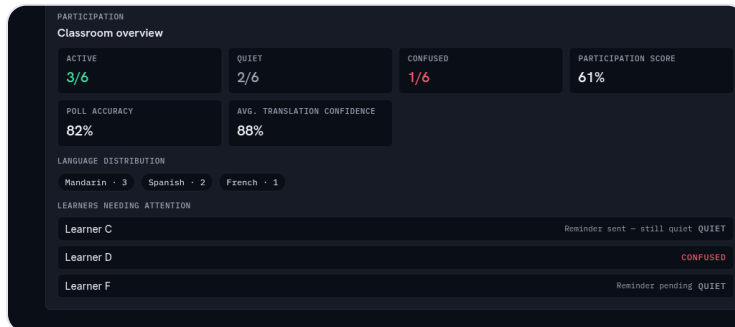

/dashboard — quiet-learner escalation

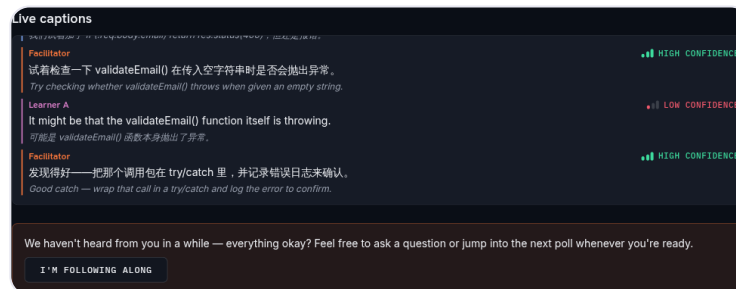

/learner — quiet-check nudge prompt

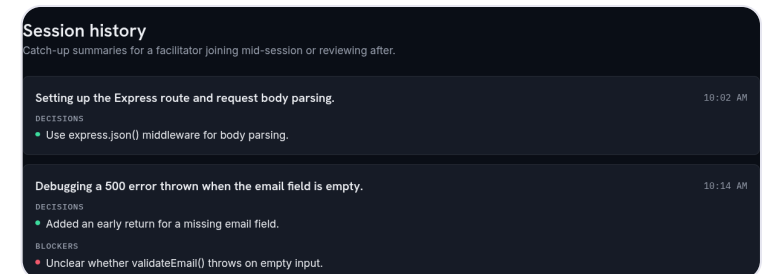

/history — session catch-up summary

Grounded by design, real today

Impact

A quiet learner used to be invisible. Now it's a card on the dashboard.

Prototype quality

Real Postgres sessions, role-scoped join tokens — not a slide.

Feasibility

A citation guardrail on top of Deepgram, DeepL, and Claude — APIs we can call today.

Thank you — live translation plus grounded understanding, so no one gets left behind in their own workshop.