


0:00 – 1:00 · PROBLEM & APPROACH

Breaking Language Barriers

Online workshops run across languages every day. When facilitator and learner don't share one, a lost learner usually stays quiet — by the time anyone notices, the moment to help has passed.

We capture speech, translate it live, and have Claude track the goal, decisions, and blockers from the transcript — every insight linked back to the exact line it came from.

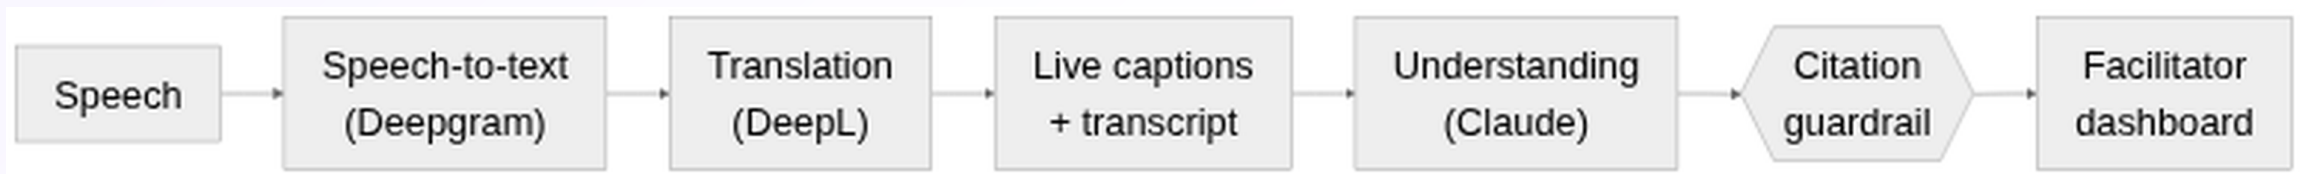

Facilitator dashboard

The goal comes from setup. Decision and blocker cards weren't typed by anyone — pulled live from the transcript, each linked to the exact line it came from.

Facilitator dashboard

GOAL

Implement a working REST endpoint for user signup, including input validation.

CURRENT ACTIVITY

Debugging a 500 error thrown when the email field is empty.

DECISIONS

Added an early return for a missing email field.

Learner B

MEDIUM CONFIDENCE

"We tried adding `if (!req.body.email) return res.status(400),` but it still errors."

BLOCKERS

Unclear whether `validateEmail()` throws on empty input.

Learner A

LOW CONFIDENCE

"It might be that the `validateEmail()` function itself is throwing."

Join as a learner, get a translated reply

Scan a QR code, no account setup. Captions translated live, original still visible. Learner questions land on the facilitator's side already translated — replies auto-translate back.

Facilitator messages

What the remote facilitator has said, in your language and the original.

Facilitator

试着检查一下 `validateEmail()` 在传入空字符串时是否会抛出异常。
Try checking whether `validateEmail()` throws when given an empty string.

Facilitator

发现得好——把那个调用包在 `try/catch` 里，并记录错误日志来确认。
Good catch — wrap that call in a `try/catch` and log the error to confirm.

Have a question?

Ask in your own language — the facilitator will see it translated.

Ask the facilitator

Learner questions


Learner B

validateEmail() 是我们自己写的还是用的库？
Is `validateEmail()` something we wrote, or from a library? `code/jargon` preserved

3:15 – 4:20 · LIVE DEMO

Quiet-learner nudges, code-aware translation & catch-up

When a learner goes quiet too long, both sides get nudged. Translation never mangles code — `validateEmail()` passes through untouched. And a late joiner gets a grounded catch-up summary instead of a wall of transcript.

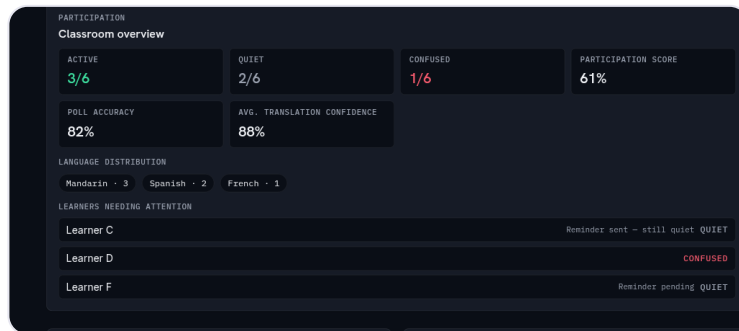

Live captions

Facilitator HIGH CONFIDENCE
试着检查一下 `validateEmail()` 在传入空字符串时是否会抛出异常。
Try checking whether `validateEmail()` throws when given an empty string.

Learner A LOW CONFIDENCE
It might be that the `validateEmail()` function itself is throwing.
可能是 `validateEmail()` 函数本身抛出了异常。

Facilitator HIGH CONFIDENCE
发现得好——把那个调用包在 `try/catch` 里，并记录错误日志来确认。
Good catch — wrap that call in a `try/catch` and log the error to confirm.

We haven't heard from you in a while — everything okay? Feel free to ask a question or jump into the next poll whenever you're ready.

I'M FOLLOWING ALONG

Session history
Catch-up summaries for a facilitator joining mid-session or reviewing after.

Setting up the Express route and request body parsing. 10:02 AM

DECISIONS

- Use `express.json()` middleware for body parsing.

Debugging a 500 error thrown when the email field is empty. 10:14 AM

DECISIONS

- Added an early return for a missing email field.

BLOCKERS

- Unclear whether `validateEmail()` throws on empty input.

Grounded by design, real today

Impact

A quiet learner used to be invisible. Now it's a card on the dashboard.

Prototype quality

Real Postgres sessions, role-scoped join tokens — not a slide.

Feasibility

A citation guardrail on top of Deepgram, DeepL, and Claude — APIs we can call today.

Thank you — live translation plus grounded understanding, so no one gets left behind in their own workshop.