

Java Servlets 3.0

Lesson 05: The Response
Object

Lesson Objectives

- In this lesson, we will learn:
 - Structure of a Response
 - Working with response headers



Copyright © Capgemini 2015. All Rights Reserved 2

Lesson Objectives:

This lesson introduces Servlet's Response object. The lesson contents are as follows:

Lesson 05: The response object


5.1: Structure of a Response

5.2: Working with Response Headers

5.1: Structure of a Response

Sending HTML Information

- The Structure of a Response:
 - A server can return three kinds of things to the client: Status code, any number of HTTP response headers, and a response body.
 - A status code is an integer value that describes the status of the response.
 - Response Header provides HTTP-specific functionality in sending a response. For example, it has methods to access HTTP headers and cookies
 - The response body is main content of the response. A response body can be of any type and of any length. The client knows what to expect by reading and interpreting the HTTP headers in the response.

 Capgemini
CONNECTING TECHNOLOGY OUTSOURCING

Copyright © Capgemini 2015. All Rights Reserved 3

Structure of a Response:

As part of Servlet lifecycle, we saw how response object is obtained. We saw examples of servlets where we used response object to set response type (`response.setContentType()`) and obtain the `PrintWriter` object to send response to browser (`response.getWriter()`). We shall see the `HttpServletResponse` object in more detail.

When a web server responds to a request, the response typically consists of a status line, some response headers and the response body itself.

The status line consists of HTTP version, a status code, and a very short textual message corresponding to the status code.

The response headers are optional except for “content-type” which specifies the MIME type of the document being sent.

The response body contains the actual response that the browser lays out.

Servlets can perform a number of important tasks by manipulating the status line and the response headers. For example, Servlets can redirect the user to other sites, indicate the document type (example: image, PDF) to browser and tell the user that authentication is required to access any pages, and so on.

More details on Response Headers are mentioned in next subsequent slides - notes page.

Response message	
Start line	HTTP/1.0 200 OK
Headers	Content-type: text/plain Content-length: 19
Body	Hi! I'm a message!

5.1: Structure of a Response

Concept of Status Code

- `public void HttpServletResponse.setStatus(int sc)`

It sets response status code

If a servlet sets a status code that indicates an error during the handling of the request, then it can `sendError()` instead of `setStatus()`

`public void HttpServletResponse.sendError(int sc)`

`public void HttpServletResponse.sendError(int sc, String message)`

- Demo: `ServletResponseCode.java`



Copyright © Capgemini 2015. All Rights Reserved 4

Concept of Status Codes:

As mentioned on the previous page, the status line consists of HTTP version, a status code, and a short textual message corresponding to the status code.

The HTTP version is set by server and message is directly associated with status code. Therefore a servlet needs to only set the status code.

HTTP status codes are returned by the server to the client to determine the outcome of a request. The status code can indicate success or failure, or it can tell the client software to take further action to finish the request. A status code works behind the scenes and is interpreted by the browser software. If a servlet does not specifically set the status code, the server steps in and sets its value to the default 200 "OK" status.

Status codes are three-digit integer values, the first digit of which specifies one of five classes of response. So we have 1xx: Informational, 2xx: Success, 3xx: Redirection, 4xx: Client Error, and 5xx: Server Error.

Status codes are defined as mnemonic constants in the `HttpServletResponse` interface. For example: `SC_OK` for status code 200 and `SC_NOT_FOUND` for status code 404! For a full list, refer the `HttpServletResponse` class in the Servlet 3.0 documentation.


A Servlet can use the `setStatus()` method to set response status code.

Remember, the `setStatus()` method should be called before the servlet returns any of its response body. A servlet can use `sendError(int sc)` (`sc` indicates the status code to indicate error during handling of request. In this case, the server generates and sends a server-specific page describing the error.)

5.2: Working with Response Headers

Setting an HTTP Header

- The HTTP response headers are as follows:
 - Cache-Control
 - Pragma
 - Refresh
 - Connection
 - Retry-After
 - Expires
 - Location
 - WWW-Authenticate
 - Content-Encoding

Capgemini
CONSULTING TECHNOLOGY OUTSOURCING

Copyright © Capgemini 2015. All Rights Reserved 5

Setting Response Headers:

In Lesson-4, we saw how client browser sends HTTP information in the form of request headers. Similarly, a servlet can set response headers to provide more information about its response. HTTP version 1.0 and 1.1 define a large number of request and response headers, description of which is beyond the scope of this course. Some of the most commonly used HTTP headers are listed below:

Cache-Control: It tells all caching mechanisms from server to client whether the browser may cache the object

For example: Cache-Control: no-cache

Pragma: The HTTP 1.0 equivalent of Cache-Control, with no-cache as its only possible value

Connection: It is used to indicate whether the server is willing to maintain an open connection to the client. If so, its value is set to keep-alive.

Retry-After: If an entity is temporarily unavailable, this instructs the client to try again after a specified period of time (in seconds)

For example: Retry-After: 120

Expires: It gives the date/time after which the response is considered stale. For example: Expires: Thu, 01 Dec 2009 16:00:00 GMT

Location: It is used in redirection, or when a new resource has been created. Its value must be a fully qualified URL

WWW-Authenticate: It indicates the authentication scheme that should be used to access the requested entity. WWW-Authenticate: Basic

Content-Encoding: The type of encoding used on the data.


For example: Content-Encoding: gzip

Refresh: It is used in redirection, or when a new resource has been created

5.2: Working with Response Headers

Setting an HTTP Header

- Methods for setting response headers:
 - void HttpServletResponse.setHeader(String name, String value)
 - void ServletResponse.setContentType(String type)
 - void ServletResponse.setContentLength(int len)
 - void HttpServletResponse.addCookie(Cookie cookie)
 - void HttpServletResponse.sendRedirect(String location)

 CONVERTING TECHNOLOGY INTO BUSINESS

Copyright © Capgemini 2015. All Rights Reserved 6

Setting Response Headers:

HTTP response headers can be used to give forwarding location, specify cookies, supply the page modification date, instruct the browser to reload the page after a designated interval, designate the type of document being generated, and so on.

Methods for setting arbitrary response headers are as follows:

The `setHeader(String name, String value)` method sets the value of the named header as a string. For example:

```
res.setHeader("Location", new_location);
```

Use the `setDateHeader(String name, long date)` method, if there is a need to specify a timestamp for a header. It sets the value of the named header with the given name and date-value

Use the `setIntHeader(String name, int value)` method to specify an integer value for a header

The `containsHeader()` method returns a boolean indicating whether the named response header has already been set

Other than these methods, there are some additional methods to set response headers:

`setContentType`: Sets the Content- Type header

`setContentLength`: Sets the Content- Length header

`addCookie`: Adds a value to the Set- Cookie header


`sendRedirect`: Changes status code to redirection i.e. 300 and a specifies the client to request another page

(Refer to Slide 6.2 – Client-side dispatch for further details on `sendRedirect`)

5.2: Working with Response Headers

Setting an HTTP Header

- Request can be redirected by either:
 - `response.setStatus(res.SC_MOVED_TEMPORARILY);`
`response.setHeader("Location", site);`
 - `response.sendRedirect(site);`
- `sendRedirect()` syntax:
 - `public void HttpServletResponse.sendRedirect(String location)`
 - This method creates a roundtrip to the client and hence a new request for server.

 Copyright © Capgemini 2015. All Rights Reserved 7

Redirecting a Request:

One of the useful things a servlet can do using status codes and a header is redirecting a request. This is done by sending instructions to the client, to use another URL in the response. Redirection is generally used when a document moves (to send the client to the new location), for load balancing (so one URL can distribute the load to several different machine), or for simple randomization (choosing a destination at random).

The actual redirection happens in two lines:

```
res.setStatus(res.SC_MOVED_TEMPORARILY);  
res.setHeader("Location", site);
```

The first line sets the status code to indicate a redirection is to take place, while the second line gives the new location.

These two lines can be simplified to one using the `sendRedirect()` convenience method:



```
public void HttpServletResponse.sendRedirect(String location)  
throws IOException.
```

This method redirects the response to the specified location, automatically setting the status code and location headers. For our example, the two lines simply become:

```
res.sendRedirect(site);
```

Demo

- Execute the SiteSelector servlet that performs a random redirect, sending a client to a random site selected from its site list.



Copyright © Capgemini 2015. All Rights Reserved 8

Note:

Refer to `com.igate.ch4.SiteSelector.java` class. A partial listing is shown below:

Invoke this servlet as:

`http://localhost:9090/RequestResponseDemoApp/SiteSelector`

The servlet randomly picking one site from the vector list and displays.

5.2: Working with Response Headers

Using the “Refresh” Response Header

■ ClientPull:

- `response.setHeader("Refresh", "3")` : This method tells the client(browser) to reload same servlet regularly for three seconds
- `response.setHeader("Refresh", "3;URL=url")` : This method tells client to load page at URL url after three seconds.



Copyright © Capgemini 2015. All Rights Reserved 9

ClientPull:

Client pull is similar to redirection, with one major difference – the browser actually displays the content from the first page and waits for some specified amount of time before retrieving and displaying the content from the next page. It is called client pull because the client is responsible for pulling the content from the next page.

There are two reasons for using client pull.

First, to communicate to the client that requested page has been moved before the next page is automatically loaded

Second, pages can be retrieved in sequence, making it possible to present a slow-motion page animation.

Client pull information is sent to the client using the Refresh HTTP header. This header's value specifies the number of seconds to display the page before pulling the next one, and it optionally includes a URL string that specifies the URL from which to pull. If no URL is given the same URL is used. Some examples follow:

A call to `setHeader()` that tells the client to reload this same servlet after showing its current content for three seconds:


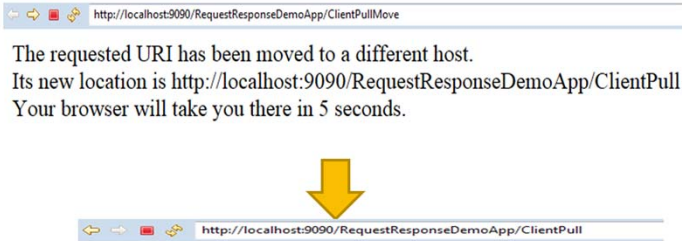

```
setHeader("Refresh", "3");
```

```
setHeader("Refresh", "3;URL=https://ispace.igate.com");
```

method call tells client to display IGATE's home page after three seconds.

Demo

- Execute the ClientPull servlet that uses client pull to display the current time, updated every 10 seconds.
- Use the ClientPullMove servlet to redirect request to another URL.



Capgemini
CONSULTING TECHNOLOGY OUTSOURCING

Copyright © Capgemini 2015. All Rights Reserved 10

Note:

Refer the following classes:

`com.igate.ch4.ClientPull.java`

`com.igate.ch4.ClientPullMove.java` classes.

A partial listing of both these servlets is shown below:

Invoke the ClientPullMove servlet as:

`http://localhost:9090/RequestResponseDemoApp/ClientPullMove`

See the servlet ClientPullMove redirecting to ClientPull servlet after 5 seconds. The ClientPull servlet displays updated time after every 10 seconds.

Summary

- In this lesson, we have learnt:
 - Structure of a Response
 - Setting response headers



Review Questions

- Question 1: The sendRedirect method defined in the HttpServlet class is equivalent to invoking the setStatus method with the following parameter and a Location header in the URL.
 - Option 1: SC_OK
 - Option 2: SC_MOVED_TEMPORARILY
 - Option 3: SC_NOT_FOUND
 - Option 4: SC_INTERNAL_SERVER_ERROR
 - Option 5: SC_BAD_REQUEST



Review Questions

- Question 2: Browsers that support content encoding feature, indicate that they do so by setting the ____ request header.
 - Option 1: Cache-Control
 - Option 2: Encoding=true
 - Option 3: Accept-Encoding
 - Option 4: Content-Encoding

