
Board Layer Stack

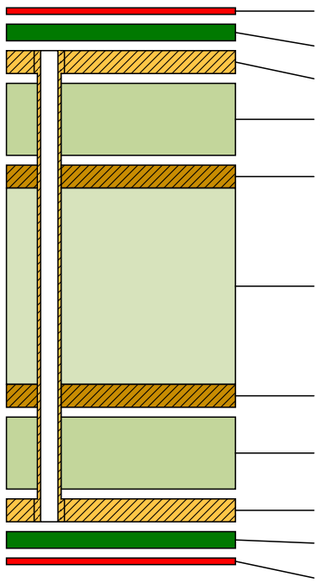


Material	Layer	Thickness	Dielectric Material	Type	Gerber
	Top Overlay			Legend	GTO
Surface Material	Top Solder	0.03mm	SM-001	Solder Mask	GTS
Copper	Top Layer	0.04mm		Signal	GTL
Prepreg		*0.11mm*	*PP-017*	*Dielectric*	
Copper	GND	0.04mm		Internal Plane	GP1
Core		*1.20mm*	*Core-039*	*Dielectric*	
Copper	PWR	0.04mm		Internal Plane	GP2
Prepreg		*0.11mm*	*PP-017*	*Dielectric*	
Copper	Bottom Layer	0.04mm		Signal	GBL
Surface Material	Bottom Solder	0.03mm	SM-001	Solder Mask	GBS
	Bottom Overlay			Legend	GBO

Total thickness: 1.61mm

Drill Table

Symbol	Count	Hole Size	Plated	Via / Pad
◇	73	0.20mm	Plated	Via
✡	210	0.30mm	Plated	Via
○	2	1.27mm	Non-Plated	Pad
□	2	3.20mm	Plated	Pad
	287 Total			

Drill Drawing View (Scale 3:2)

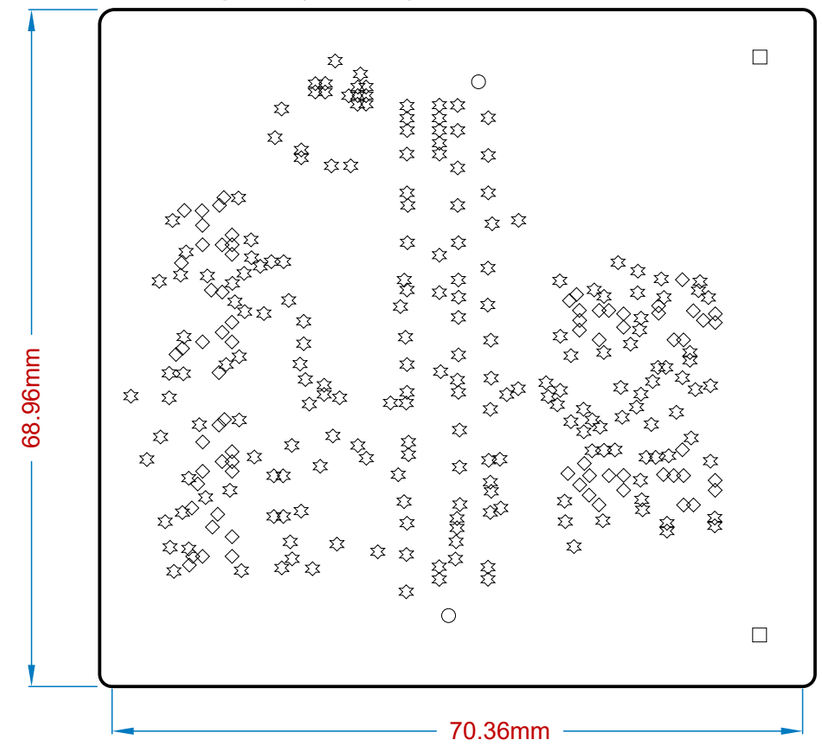

Eidgenössische Technische Hochschule Zürich
Swiss Federal Institute of Technology Zurich

Project: **Fabrication**

Drawing number: FAB_2 Rev: 1.0	Format: A3	Laboratory:*	Sheet: FMC_8X512Mbits_HyperR
Date: 1/27/2025 6:51 PM		Drawn by: *	Page 1number of 1
File: D:\Arya\Git_Repos\fmc_peripheral_boards\08_FMC_HyperRam_8X512Mbits\FMC_8X512Mbits_HyperRam_Fabrication.PCBDwf			