OpenAPI definition ^{v0} OAS 3.0
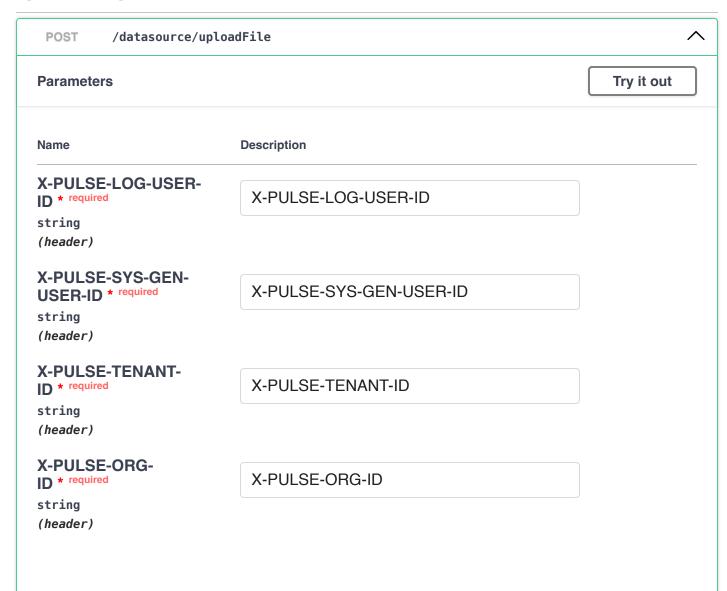
/be/papis/v3/api-docs

Servers

http://uat.pulsesg.com:443/be/papis - Generated server url

public-apis-controller

POST /datasource/uploadFile

Parameters

Try it out

Name	Description
X-PULSE-LOG-USER-ID * required string *(header)*	X-PULSE-LOG-USER-ID
X-PULSE-SYS-GEN-USER-ID * required string *(header)*	X-PULSE-SYS-GEN-USER-ID
X-PULSE-TENANT-ID * required string *(header)*	X-PULSE-TENANT-ID
X-PULSE-ORG-ID * required string *(header)*	X-PULSE-ORG-ID

Name	Description

X-PULSE-ROLES `*` required
string
(header)

> X-PULSE-ROLES

X-PULSE-TRACE-ID `*` required
string
(header)

> X-PULSE-TRACE-ID

dataSourceName `*` required
string
(query)

> dataSourceName

Request body   `multipart/form-data`

file `*` required
string($binary)

Responses

Code	Description	Links
200	OK	*No links*

Media type

> `*/*`

Controls `Accept` header.

Example Value Schema

string

GET /report/generate ⌃

Parameters `Try it out`

Name	Description
X-PULSE-LOG-USER-ID * required **string** *(header)*	X-PULSE-LOG-USER-ID
X-PULSE-SYS-GEN-USER-ID * required **string** *(header)*	X-PULSE-SYS-GEN-USER-ID
X-PULSE-TENANT-ID * required **string** *(header)*	X-PULSE-TENANT-ID
X-PULSE-ORG-ID * required **string** *(header)*	X-PULSE-ORG-ID
X-PULSE-ROLES * required **string** *(header)*	X-PULSE-ROLES
X-PULSE-TRACE-ID * required **string** *(header)*	X-PULSE-TRACE-ID
dataDestinationName * required **string** *(query)*	dataDestinationName
publishProfileName * required **string** *(query)*	publishProfileName
cycleId * required **string** *(query)*	cycleId
outputFormat * required **string** *(query)*	outputFormat

Responses

Code	Description	Links
200	OK	*No links*

Media type

```
*/*
```

Controls `Accept` header.

Example Value   Schema

```
[
  "string"
]
```